

BS EN 61290-1:2015



BSI Standards Publication

# Optical amplifiers — Test methods

Part 1: Power and gain parameters

**bsi.**

...making excellence a habit.™

### **National foreword**

This British Standard is the UK implementation of EN 61290-1:2015. It is identical to IEC 61290-1:2014.

The UK participation in its preparation was entrusted by Technical Committee GEL/86, Fibre optics, to Subcommittee GEL/86/3, Fibre optic systems and active devices.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.

Published by BSI Standards Limited 2015

ISBN 978 0 580 83420 2

ICS 33.180.30

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 28 February 2015.

### **Amendments/corrigenda issued since publication**

<b>Date</b>	<b>Text affected</b>
-------------	----------------------

---

ICS 33.180.30

English Version

Optical amplifiers - Test methods -  
Part 1: Power and gain parameters  
(IEC 61290-1:2014)

Amplificateurs optiques - Méthodes d'essai -  
Partie 1: Paramètres de puissance et de gain  
(IEC 61290-1:2014)

Prüfverfahren für Lichtwellenleiter-Verstärker -  
Teil 1: Optische Leistungs- und Verstärkungsparameter  
(IEC 61290-1:2014)

This European Standard was approved by CENELEC on 2015-01-20. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels**

## Foreword

The text of document 86C/1188/CDV, future edition 1 of IEC 61290-1, prepared by SC 86C "Fibre optic systems and active devices" of IEC/TC 86 "Fibre optics" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61290-1:2015.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2015-10-20
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2018-01-20

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

## Endorsement notice

The text of the International Standard IEC 61290-1:2014 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60793-1-1	NOTE	Harmonized as EN 60793-1-1.
IEC 60793-1-40	NOTE	Harmonized as EN 60793-1-40.
IEC 60825-1	NOTE	Harmonized as EN 60825-1.
IEC 60825-2	NOTE	Harmonized as EN 60825-2.
IEC 60874-1	NOTE	Harmonized as EN 60874-1.
IEC 61290-10	NOTE	Harmonized as EN 61290-10 series (not modified).

## Annex ZA (normative)

### Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: [www.cenelec.eu](http://www.cenelec.eu).

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61290-1-1	-	Optical amplifiers - Test methods - Part 1-1: Power and gain parameters - Optical spectrum analyzer method	EN 61290-1-1	-
IEC 61290-1-2	-	Optical amplifiers - Test methods - Part 1-2: Power and gain parameters - Electrical spectrum analyzer method	EN 61290-1-2	-
IEC 61290-1-3	-	Optical amplifiers - Test methods - Part 1-3: Power and gain parameters - Optical power meter method	EN 61290-1-3	-
IEC 61291-1	2012	Optical amplifiers - Part 1: Generic specification	EN 61291-1	2012

## CONTENTS

1	Scope and object.....	5
2	Normative references .....	5
3	Acronyms and abbreviations.....	6
4	Optical power and gain test method.....	6
5	Optical power and gain parameters .....	6
6	Test results .....	11
	Bibliography.....	14
	Figure 1 – Typical behaviour of the gain as a function of the input signal power.....	7
	Figure 2 – Typical behaviour of the gain as a function of the wavelength .....	7
	Figure 3 – Typical behaviour of the gain as a function of the temperature .....	8
	Figure 4 – Typical behaviour of the gain as a function of the wavelength .....	9
	Figure 5 – Typical behaviour of the gain fluctuation as a function of time.....	9
	Figure 6 – Typical behaviour of the output power fluctuation as a function of time .....	10
	Figure 7 – Typical behaviour of the gain as a function of the input signal power.....	11
	Figure 8 – Typical behaviour of the output power as a function of the input signal power .....	11

# OPTICAL AMPLIFIERS – TEST METHODS –

## Part 1: Power and gain parameters

### 1 Scope and object

This part of 61290 applies to all commercially available optical amplifiers (OAs) and optically amplified subsystems. It applies to OAs using optically pumped fibres (OFAs based on either rare-earth doped fibres or on the Raman effect), semiconductors (SOAs), and waveguides (POWAs).

NOTE 1 The applicability of the test methods described in the present standard to distributed Raman amplifiers is still under study.

The object of this standard is to establish uniform requirements for accurate and reliable measurements of the following OA parameters, as defined in Clause 3 of IEC 61291-1:2012:

- a) nominal output signal power;
- b) gain;
- c) reverse gain;
- d) maximum gain;
- e) maximum gain wavelength;
- f) maximum gain variation with temperature;
- g) gain wavelength band;
- h) gain wavelength variation;
- i) gain stability;
- j) polarization-dependent gain;
- k) large-signal output stability;
- l) saturation output power;
- m) maximum output signal power;
- n) maximum total output power.

NOTE 2 All numerical values followed by (‡) are suggested values for which the measurement is assured. Other values are acceptable if verified.

The object of this standard is specifically directed to single-channel amplifiers. For multichannel amplifiers, one should refer to the IEC 61290-10 series.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61290-1-1, *Optical amplifiers – Test methods – Part 1-1: Power and gain parameters – Optical spectrum analyzer method*

IEC 61290-1-2, *Optical amplifiers – Test methods – Part 1-2: Power and gain parameters – Electrical spectrum analyzer method*

IEC 61290-1-3, *Optical amplifiers – Test methods – Part 1-3: Power and gain parameters – Optical power meter method*

IEC 61291-1:2012, *Optical amplifiers – Part 1: Generic specification*

### 3 Acronyms and abbreviations

ASE	amplified spontaneous emission
OA	optical amplifier
OFA	optical fibre amplifier
SOA	semiconductor optical amplifier
FWHM	full width at half maximum
OSA	optical spectrum analyzer

### 4 Optical power and gain test method

Three commonly practised procedures for quantifying the optical power and gain of an OA are considered in this standard.

The aim of the first procedure (see IEC 61290-1-1) is to determine the optical power and gain by means of the optical spectrum analyzer test method.

The aim of the second procedure (see IEC 61290-1-2) is to determine the optical power and gain by means of an optical detector and an electrical spectrum analyzer.

The aim of the third procedure (see IEC 61290-1-3) is to determine the optical power and gain by means of an optical power meter and an optical bandpass filter.

### 5 Optical power and gain parameters

The parameters listed below are required for gain and power:

- a) *Nominal output signal power*: The nominal output signal power is given by the minimum output signal optical power, for an input signal optical power specified in the relevant detail specification, and under nominal operating conditions, given in the relevant detail specification. To find this minimum value, input and output signal power levels shall be continuously monitored for a given duration of time and in presence of changes in the state of polarization and other instabilities, as specified in the relevant detail specification. The measurement procedures and calculations are described in each test method.
- b) *Gain*: The measurement procedures and calculations are described in each test method.
- c) *Reverse gain*: As in b), but with the OA operating with the input port used as output port and vice-versa.
- d) *Maximum gain*: As in b), but use a wavelength-tuneable optical source, repeat all procedures at different wavelengths in a way to cover the wavelength range specified in the relevant detail specification.


Unless otherwise specified, the wavelength should be changed by steps smaller than 1 nm ( $\pm$ ) around the wavelength where the ASE spectral profile, observed (e.g. with an optical spectrum analyzer or a monochromator) without the input signal, takes its maximum value.

NOTE 1 A wavelength measurement accuracy of  $\pm 0,01$  nm, within the operating wavelength range of the OA, is attainable with commercially available wavelength meters based on interference-fringes counting techniques. Some tuneable external-cavity laser-diode instruments provide a wavelength measurement accuracy of  $\pm 0,2$  nm.

The gain values are measured at the different wavelengths as described in b) above. The maximum gain shall be given by the highest of all these gain values at nominal operating




condition. Figure 1 shows the typical behaviour of the gain as a function of the input signal power.

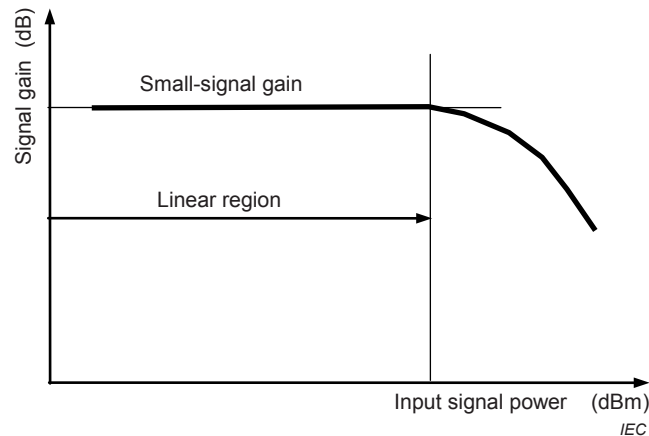

**Figure 1 – Typical behaviour of the gain as a function of the input signal power**

- e) *Maximum gain wavelength:* As in d) above, the maximum gain wavelength shall be the wavelength at which the maximum gain occurs. Refer to Figure 2 for typical gain behaviour for different wavelengths.

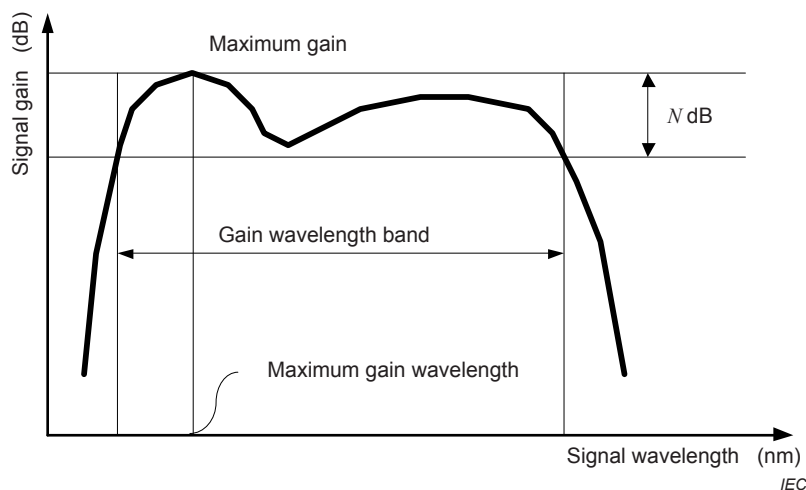

**Figure 2 – Typical behaviour of the gain as a function of the wavelength**


- f) *Maximum gain variation with temperature:* The maximum change of signal gain for a certain specified temperature range. The measurement procedures and calculations are described below shall be followed, with reference to the measurement set-up and procedure for each test method:

- 1) As described in b), measure the maximum gain  $G_{\max-Tmp}$  within the variation of temperature, as specified in the relevant detail specification.
- 2) As described in b), measure the minimum gain  $G_{\min-Tmp}$  within the variation of temperature, as specified in the relevant detail specification.
- 3) Maximum gain variation with temperature  $\Delta G_{tmp}$  is given by the following formula:

$$\Delta G_{tmp} = G_{\max-tmp} - G_{\min-tmp} \text{ (dB)} \quad [1]$$

Refer to Figure 3.

Gain variation with temperature may depend on the signal wavelength owing to its active fibre characteristics. The wavelength at which the parameter is specified and measured should be stated.

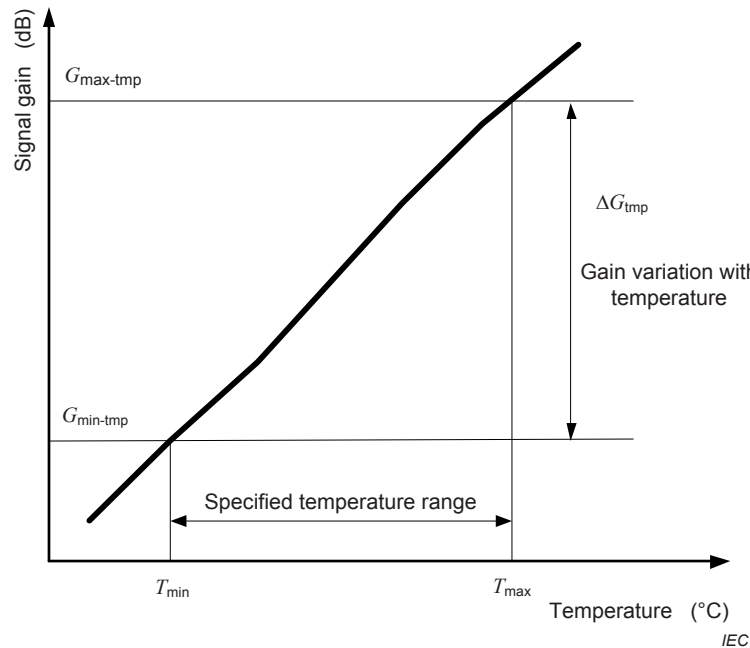

**Figure 3 – Typical behaviour of the gain as a function of the temperature**

g) *Gain wavelength band*: Measure the maximum gain as described in d). Identify those wavelengths at which the gain is  $N$  dB below the maximum gain. The gain wavelength band shall be given by the wavelength interval(s) comprised between those wavelengths within which the gain is comprised between the maximum gain value and a value  $N$  dB below the maximum gain. Calculations are processed according to the following procedure.


- 1) Plot the gain of each wavelength to the gains of adjacent wavelengths as shown in Figure 2.
- 2) Draw a horizontal line  $N$  -dB down from the maximum gain point.
- 3) The two or more intersection points define the gain wavelength band. The minimum difference in  $N$  -dB down wavelengths is gain wavelength band.

NOTE 2 A value of  $N = 3$  is typically applied.

h) *Gain wavelength variation*: Measure the maximum gain and minimum gain over the specified measurement wavelength range as described in d). The gain variation shall be the difference between the maximum and the minimum gain values. Calculations are processed according to the following procedure.

- 1) Plot the gain of each wavelength as shown in Figure 4.
- 2) Find the maximum gain,  $G_{\max-\lambda}$  (dB) within wavelength band.
- 3) Find the minimum gain,  $G_{\min-\lambda}$  (dB) within wavelength band.
- 4) Calculate the gain wavelength variation,  $\Delta G_{\lambda}$  (dB) by the following formula:


$$\Delta G_{\lambda} = G_{\max-\lambda} - G_{\min-\lambda} \text{ (dB)} \quad [2]$$

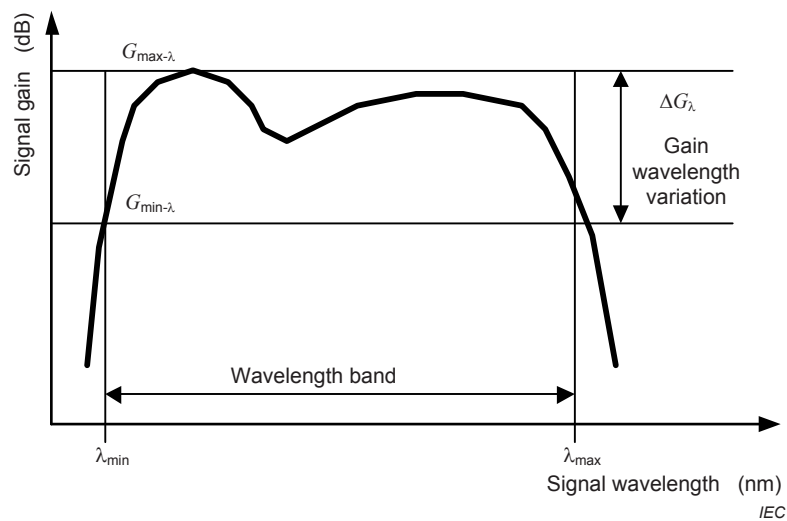

**Figure 4 – Typical behaviour of the gain as a function of the wavelength**

- i) **Gain stability:** The maximum degree of gain fluctuation of the maximum and minimum signal gain, for a certain specified test period, as specified in the relevant detail specification. The measurement procedure and calculations described below shall be followed with reference to the measurement set-up for each test method. Refer to Figure 5 for typical behaviour of the gain fluctuation.
- 1) As for b), measure the maximum gain  $G_{\text{max-stability}}$  for a certain specified test period, as specified in the relevant detail specification.
  - 2) As for b), measure the minimum gain  $G_{\text{min-stability}}$  for a certain specified test period, as specified in the relevant detail specification.
  - 3) Gain stability  $\Delta G_{\text{stability}}$  (dB) is given by the following formula:

$$\Delta G_{\text{stability}} = G_{\text{max-stability}} - G_{\text{min-stability}} \text{ (dB)} \quad [3]$$

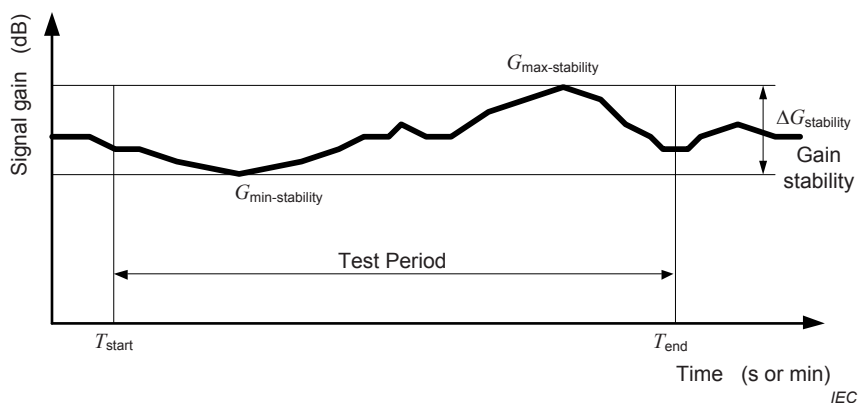


**Figure 5 – Typical behaviour of the gain fluctuation as a function of time**

- j) **Polarization-dependent gain:** Gain values at the different states of polarization as described in b). Procedure and calculations are described in each test method.
- k) **Large-signal output stability:** The maximum degree of gain fluctuation of the maximum and minimum output optical power, for a certain specified test period, as specified in the relevant detail specification. The measurement procedure and calculations described

below shall be followed, with reference to the measurement set-up for each test method. Refer to Figure 6 for typical behaviour of the output power fluctuation.

- 1) As described in a) above, measure the maximum output signal power  $P_{\text{max-stability}}$  for a certain specified test period, at a given wavelength and maximum signal input power, as specified in the relevant detail specification.
- 2) As described in a) above, measure the minimum output signal power  $P_{\text{min-stability}}$  for a certain specified test period, at a given wavelength and maximum signal input power, as specified in the relevant detail specification.
- 3) Compare  $P_{\text{max-stability}}$  with  $P_{\text{min-stability}}$ , and subtract  $P_{\text{min-stability}}$  from  $P_{\text{max-stability}}$  to obtain large signal output stability.
- 4) Large-signal output stability  $\Delta P_{\text{stability}}$  (dB) is given by the following formula:

$$\Delta P_{\text{stability}} = P_{\text{max-stability}} - P_{\text{min-stability}} \text{ (dB)} \quad [4]$$

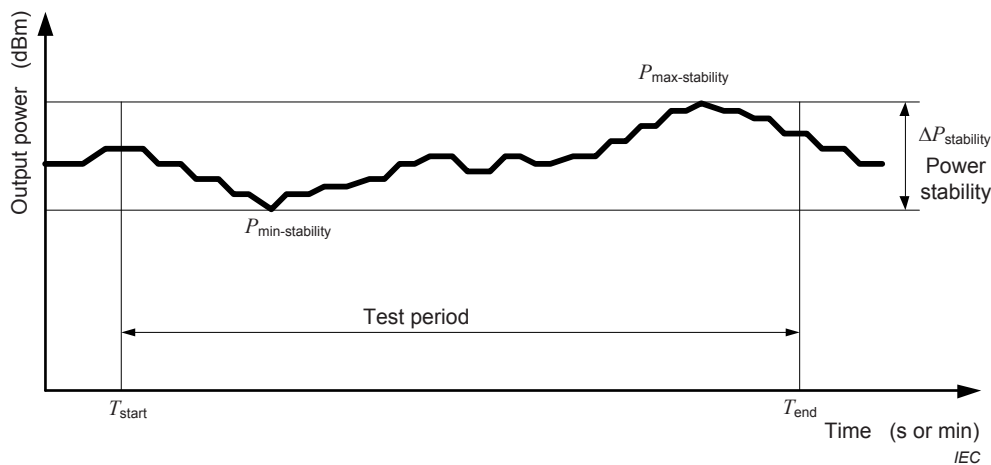

**Figure 6 – Typical behaviour of the output power fluctuation as a function of time**

- 1) **Saturation output power:** The measurement procedure described below shall be followed with reference to the measurement set-up for each test method. The saturation output power above which the gain is reduced by  $N$  dB (typically  $N = 3$ ) with respect to the small-signal gain at the signal wavelength. Calculations are processed according to the following procedure.
  - 1) Plot gain vs. input power as described in d). Refer to Figure 7 for typical behaviour of the gain.
  - 2) Plot the output power vs. input power. Refer to Figure 8 for typical behaviour of the output power.
  - 3) Find the gain  $G_{\text{sat}}$  (dB) which is  $N$ -dB smaller than small signal gain under linear gain region.
  - 4) Find the input power  $P_{\text{in-sat}}$  (dBm) which produce the gain  $G_{\text{sat}}$ .
  - 5) Find the output power  $P_{\text{out-sat}}$  (dBm) at the input power  $P_{\text{in-sat}}$ .
  - 6)  $P_{\text{out-sat}}$  gives the saturation output power.

NOTE 3 A value of  $N = 3$  is typically applied.

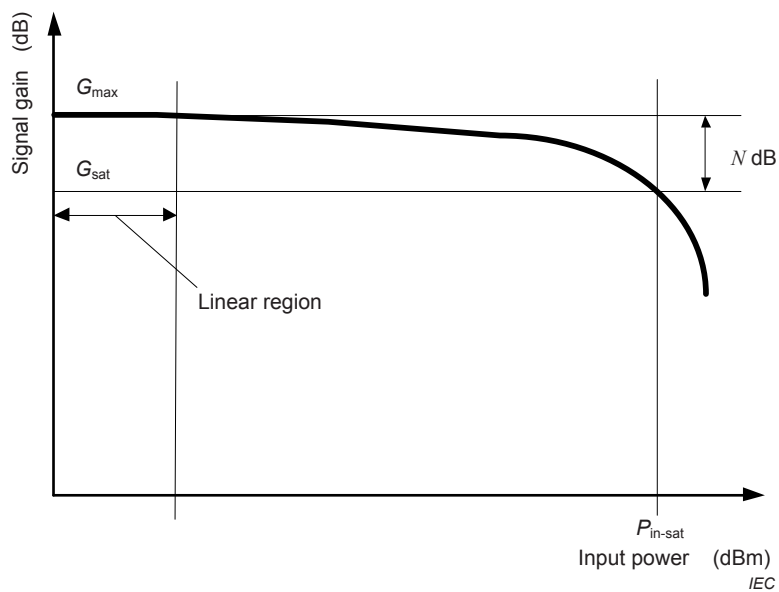


Figure 7 – Typical behaviour of the gain as a function of the input signal power

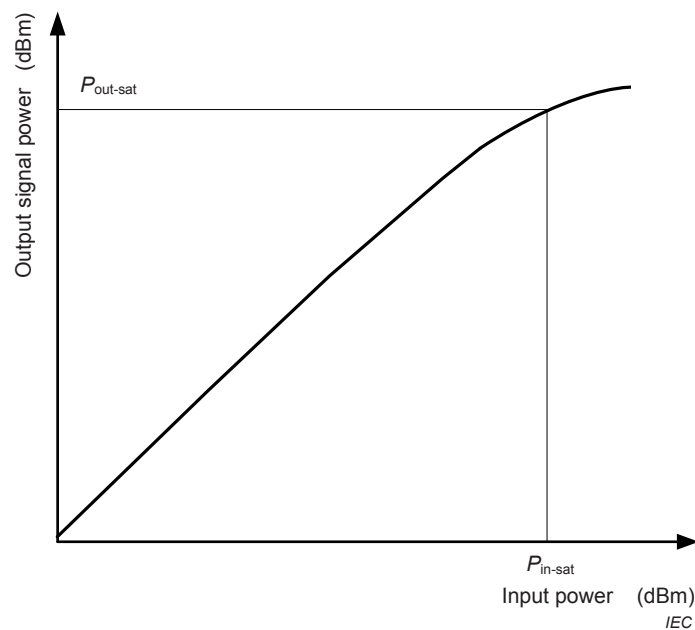


Figure 8 – Typical behaviour of the output power as a function of the input signal power

- m) *Maximum output signal power*: The measurement procedure and calculations are described in each test method.
- n) *Maximum total output power*: The measurement procedure and calculations are described in each test method.

## 6 Test results

Test results are as follows:

- a) *Nominal optical signal power*:

The following details shall be presented:

- 1) arrangement of the test set-up;
  - 2) spectral linewidth (FWHM) of the optical source;
  - 3) indication of the optical pump power and possibly driving current of pump lasers for OFAs, and injection current for SOAs (if applicable);
  - 4) operating temperature (if required);
  - 5) input signal optical power,  $P_{in}$ ;
  - 6) time-averaged input signal power (if applicable);
  - 7) resolution bandwidth of the optical spectrum analyzer (if applicable);
  - 8) resolution bandwidth of the electrical spectrum analyzer (if applicable);
  - 9) FWHM of the optical bandpass filter (if applicable);
  - 10) central wavelength of the optical bandpass filter (if applicable);
  - 11) wavelength of the measurement;
  - 12) nominal optical signal power levels,  $P$ ;
  - 13) change in the state of polarization given to the input signal light.
- b) *Gain*: Details 1) to 11), previously listed for nominal optical signal power levels, shall be presented and, in addition:
- 12) gain
- Parameters 5) and 12) may be replaced with the gain versus input optical signal power curve.
- c) *Reverse gain*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:
- 12) reverse gain
- Parameters 5) and 12) may be replaced with the reverse gain versus input optical signal power curve.
- d) *Maximum gain*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:
- 12) wavelength range of the measurement;
  - 13) maximum gain.
- Parameters 5) and 13) may be replaced with the maximum gain versus input optical signal power curve.
- e) *Maximum gain wavelength*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:
- 12) wavelength range of the measurement;
  - 13) wavelength measurement accuracy;
  - 14) maximum gain wavelength.
- Parameters 12) and 14) may be replaced with the gain versus input signal wavelength curve.
- f) *Maximum gain variation with temperature*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:
- 12) the maximum and minimum gain with temperature,  $G_{max-tmp}$  and  $G_{min-tmp}$
  - 13) maximum gain variation with temperature
- g) *Gain wavelength band*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:
- 12) wavelength range of the measurement;
  - 13) wavelength measurement accuracy;
  - 14) gain wavelength band;

15) the  $N$  value chosen for the determination of the wavelength bandwidth.

Parameters 12) and 14) and 15) may be replaced with the gain versus input signal wavelength curve.

h) *Gain wavelength variation*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:

- 12) wavelength range of the measurement;
- 13) wavelength measurement accuracy of the optical spectrum analyzer;
- 14) gain variation.

Parameters 12) and 14) may be replaced with the gain versus input signal wavelength curve.

i) *Gain stability*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:

- 12) the maximum and minimum gain,  $G_{\text{max-stability}}$  and  $G_{\text{min-stability}}$ ;
- 13) gain stability.

j) *Polarization-dependent gain*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:

- 12) polarization dependency of the apparatus for detecting optical power for each test method;
- 13) the maximum and minimum gain,  $G_{\text{max-pol}}$  and  $G_{\text{min-pol}}$ ;
- 14) polarization-dependent gain;
- 15) change in the state of polarization given to the input signal light.

k) *Large-signal output stability*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:

- 12) the maximum and minimum output power  $P_{\text{max-stability}}$  and  $P_{\text{min-stability}}$ ;
- 13) large-signal output stability.

l) *Saturation output power*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:

- 12) saturation figure  $N$ ;
- 13) saturation gain  $G_{\text{sat}}$ ;
- 14) saturation input power  $P_{\text{in-sat}}$ ;
- 15) saturation output power  $P_{\text{out-sat}}$ .

m) *Maximum output signal power*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:

- 12) maximum output signal power  $P_{\text{sig-out-max}}$ .

n) *Maximum total output power*: Details 1) to 11), previously listed for gain, shall be presented and, in addition:

- 12) maximum total output power  $P_{\text{out-max}}$ .

## Bibliography

IEC 60793-1-1, *Optical fibres – Part 1-1: Measurement methods and test procedures – General and guidance*

IEC 60793-1-40, *Optical fibres – Part 1-40: Measurement methods and test procedures – Attenuation*

IEC 60825-1, *Safety of laser products – Part 1: Equipment classification and requirements*

IEC 60825-2, *Safety of laser products – Part 2: Safety of optical fibre communication systems (OFCS)*

IEC 60874-1, *Fibre optic interconnecting devices and passive components – Connectors for optical fibres and cables – Part 1: Generic specification*

IEC 61290 (all parts 10), *Optical amplifiers – Test methods – Part 10: Multichannel parameters*

IEC TR 61931, *Fibre optic – Terminology*

---





# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™