

BS EN 62889:2015



BSI Standards Publication

Digital video interface — Gigabit video interface for multimedia systems

bsi.

...making excellence a habit.TM

National foreword

This British Standard is the UK implementation of EN 62889:2015.
It is identical to IEC 62889:2015.

The UK participation in its preparation was entrusted to Technical Committee EPL/100, Audio, video and multimedia systems and equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.
Published by BSI Standards Limited 2015

ISBN 978 0 580 84824 7
ICS 33.160.40; 33.160.60; 35.200

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 June 2015.

Amendments/corrigenda issued since publication

| Date | Text affected |
|------|---------------|
| | |

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 62889

June 2015

ICS 33.160.40; 33.160.60; 35.200

English Version

**Digital video interface - Gigabit video interface for multimedia systems
(IEC 62889:2015)**

Interface vidéo numérique - Interface vidéo Gigabit pour les systèmes multimédia
(IEC 62889:2015)

Digitale Videoschnittstelle - Gigabit Video Interface (GVIF) für Multimediasysteme
(IEC 62889:2015)

This European Standard was approved by CENELEC on 2015-05-27. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Foreword

The text of document 100/2193/CDV, future edition 1 of IEC 62889, prepared by technical area 4 "Digital system interfaces and protocols", of IEC/TC 100 "Audio, video and multimedia systems and equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62889:2015.

The following dates are fixed:

- latest date by which the document has to be implemented at (dop) 2016-02-27 national level by publication of an identical national standard or by endorsement
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2018-05-27

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62889:2015 was approved by CENELEC as a European Standard without any modification.

Annex ZA
(normative)**Normative references to international publications
with their corresponding European publications**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

| <u>Publication</u> | <u>Year</u> | <u>Title</u> | <u>EN/HD</u> | <u>Year</u> |
|--------------------|-------------|---|--------------|-------------|
| IEC 62315-1 | 2003 | DTV profiles for uncompressed digital video interfaces - Part 1: General | EN 62315-1 | 2003 |
| ITU-R BT.601-5 | - | Studio encoding parameters of digital television for standard 4:3 and wide-screen 16:9 aspect ratios | - | - |
| ITU-R BT.656-5 | - | Interface for digital component video signals in 525-line and 625-line television systems operating at the 4:2:2 level of Recommendation ITU-R BT.601 | - | - |

CONTENTS

| | |
|---|----|
| FOREWORD | 4 |
| INTRODUCTION | 6 |
| 1 Scope | 7 |
| 2 Normative references | 7 |
| 3 Terms, definitions and abbreviations | 7 |
| 3.1 Terms and definitions | 7 |
| 3.2 Abbreviations | 9 |
| 4 Architecture | 10 |
| 5 Electrical characteristics | 11 |
| 5.1 DC electrical specifications | 11 |
| 5.2 AC electrical specifications | 12 |
| 6 Front-end | 13 |
| 6.1 General | 13 |
| 6.2 TX front-end | 13 |
| 6.3 RX front-end | 13 |
| 7 Transition state link | 14 |
| 8 Protocol | 15 |
| 8.1 General | 15 |
| 8.2 Encoder | 15 |
| 8.3 Decoder | 17 |
| 9 Transmission system and transmission line of electrical characteristics | 17 |
| Annex A (informative) Multiple link application | 19 |
| A.1 Single link application example | 19 |
| A.1.1 Block diagram for single link transmission | 19 |
| A.1.2 Data mapping of single link transmission | 20 |
| A.2 Multiple link application example | 20 |
| A.2.1 Block diagram for 2-pair parallel transmission | 20 |
| A.2.2 Data mapping of 2-pair transmission | 21 |
| Bibliography | 22 |
| Figure 1 – Architecture of the GVIF | 10 |
| Figure 2 – VOD, VOS diagram | 11 |
| Figure 3 – Transmitter eye mask specifications (TP1) | 12 |
| Figure 4 – Front-end block diagram | 13 |
| Figure 5 – Transition state link | 14 |
| Figure 6 – Encoder output diagram | 15 |
| Figure 7 – C format word | 16 |
| Figure 8 – H format word | 16 |
| Figure 9 – Transmission system | 17 |
| Figure 10 – Transmission line tolerance impedance | 18 |
| Figure 11 – Transmission loss | 18 |
| Figure A.1 – Differential single link block diagram | 19 |
| Figure A.2 – Pixel configuration | 20 |

| | |
|--|----|
| Figure A.3 – Multiple link application block diagram | 20 |
| Figure A.4 – Pixel configuration when using 2-pairs | 21 |
| Table 1 – DC electrical specifications of the transmitter | 11 |
| Table 2 – DC electrical specifications of the receiver | 12 |
| Table 3 – AC electrical specifications of the transmitter | 12 |
| Table 4 – AC electrical specifications of the receiver | 12 |
| Table 5 – 4B5B conversion | 16 |
| Table 6 – VSYNC, HSYNC, DE, CNTL/AUX, SDA, TDA transition and the corresponding header | 17 |

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL VIDEO INTERFACE – GIGABIT VIDEO INTERFACE FOR MULTIMEDIA SYSTEMS

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62889 has been prepared by subcommittee technical area 4: Digital system interfaces and protocols, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

The text of this standard is based on the following documents:

| CDV | Report on voting |
|--------------|------------------|
| 100/2193/CDV | 100/2298/RVC |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This International Standard is based on a standard JEITA CP-6101: Digital monitor interface GVIF that was originally specified by the Japan Electronics and Information Technology Industries Association (JEITA).

The gigabit video interface (GVIF) is a serial point to point interface supporting uncompressed digital video links that was designed to address the needs of automotive navigation and entertainment systems, etc., to transport base band digital video information. The GVIF applies low voltage differential signaling (LVDS) technology and makes use of a thin cable consisting of a single shielded twisted pair of conductors that exhibits high noise immunity and low EMI, and is optimized for small size and low weight. The GVIF supports display resolutions ranging from WQVGA through WUXGA with maximum 24 bit per pixel colour video data, and can transmit base band video signal over cable lengths over 10 m. When paired with high bandwidth data content protection (HDCP), the GVIF's standard functions and features address all of the requirements for delivering content protected video from a source to a video display monitor. Optionally, the GVIF supports audio data transmission and user data transmission.

The Association of Radio Industry Business (ARIB) refers the GVIF in its standard ARIB STD-B21 as one of authorized digital video output interfaces.

DIGITAL VIDEO INTERFACE – GIGABIT VIDEO INTERFACE FOR MULTIMEDIA SYSTEMS

1 Scope

This International Standard describes a serial digital interface, gigabit video interface (GVIF) for the interconnection of digital video equipment. The GVIF is primarily intended to carry high-speed digital video data for general usage and is well suited for multimedia entertainment systems in a vehicle.

This International Standard specifies the physical layer of the interface including transmission line characteristics and electrical characteristics of transmitter and receiver. Mechanical and physical specifications of connectors are not included.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62315-1:2003, *DTV profiles for uncompressed digital video interfaces – Part 1: General*

ITU-R BT.601-5, *Studio encoding parameters of digital television for standard 4:3 and wide-screen 16:9 aspect ratios*

ITU-R BT.656-5, *Interface for digital component video signals in 525-line and 625-line television systems operating at the 4:2:2 level of Recommendation ITU-R BT.601*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1

DE

display enable signal given in IEC 62315-1

3.1.2

H SYNC

display horizontal synchronous signal given in IEC 62315-1

3.1.3

V SYNC

display vertical synchronous signal given in IEC 62315-1

3.1.4

RGB

display red, green, blue colour data input (TX) or output (RX) given in ITU-R BT.601-5 and ITU-R BT.656-5

3.1.5**YU(Cb)V(Cr)**

display Y, U (Cb), V (Cr) pixel data input (TX) or output (RX) given in ITU-R BT.601-5 and ITU-R BT.656-5

3.1.6**CNTL/AUX**

down-stream user defined signal or audio enable signal

3.1.7**P[23:0]**

digital signal data like a 24 bit colour video data such as RGB or YU (Cb) V (Cr) data input (TX) or output (RX)

3.1.8**GVIF RX**

circuit that receives the serial signal from a shielded-pair transmission line, decodes them and outputs to convert into the parallel video signal

3.1.9**GVIF TX**

circuit that receives the parallel video signal, the control signals, and encodes them into serial data to send a signal by driving a shielded-pair transmission line

3.1.10**LOS**

loss of signal

detection signal, asserted when the differential input signal at the receiver cannot receive

3.1.11**RX front-end**

front-end block of receiver side

3.1.12**SDA**

serial data

down-stream signal

3.1.13**SDATAP**

down-stream positive-phase side signal of the differential serial data

3.1.14**SDATAN**

down-stream negative-phase side signal of the differential serial data

3.1.15**REFRQP**

current source signal for reference clock request from Rx side

3.1.16**REFRQN**

current source signal for reference clock request from Rx side as well as REFRQP

3.1.17**SFTCLK**

pixel clock

clock for capture of the parallel video data per pixel

3.1.18**TDA**

transmit data

down-stream user defined signal

3.1.19**TX front-end**

front-end block of transmitter side

3.1.20**UDA**

user data

up-stream user defined signal

3.1.21**IRQ**

up-stream common-mode reference request current for REFRQP/N

3.1.22**VOS**

common-mode voltage amplitude of reference request

3.1.23**VOD**

differential voltage amplitude for SDATAP/N

3.1.24**VDD**

power supply on the transmitter side

3.1.25**V_SDATAP**

single-ended voltage of SDATAP

3.1.26**V_SDATAN**

single-ended voltage of SDATAN

3.1.27**TP1**

transmitter end point for eye mask specification

3.1.28**normalized differential voltage**

voltage of transmitter output point

3.1.29**UI**

normalized time unit interval of transmitter output point

3.2 Abbreviations

AC Alternating Current

DC Direct Current

EMI Electro-Magnetic Interference

GVIF Gigabit Video InterFace

LSB Least Significant Bit


LVDS Low Voltage Differential Signaling

MSB Most Significant Bit

4 Architecture

Figure 1 illustrates the architecture of the GVIF. The fundamental operation of the GVIF is a simultaneous bi-directional data transmission technology, in which the low voltage differential signal is transmitted down from the transmitter side to the receiver side, and the common-mode voltage signal is transmitted up from the receiver side to the transmitter side through a shielded twisted differential pair cable.

The shielded twisted pair transmission line has the characteristic impedance Z_0 (see Figure 10), the line is terminated to VDD by RT of $(50 \pm 15) \Omega$ on the transmitter side, and is terminated carrying differential data in RL of $(100 \pm 5) \Omega$ on the receiver side.

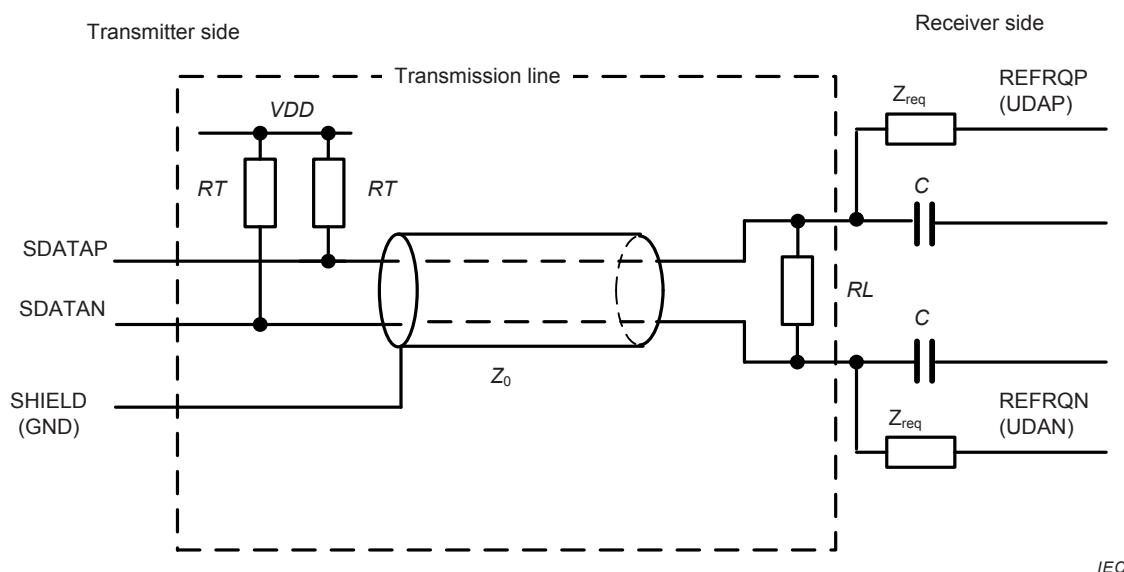

where

RT are the pull-up terminated load resistors on the transmitter side $(50 \pm 15) \Omega$;

Z_0 is the characteristic impedance of the shielded twisted pair transmission line;

RL is the terminated resistor between differential data lines on the receiver side $(100 \pm 5) \Omega$;

C are AC coupling capacitors.

$SDATAP/SDATAN$ are the down-stream positive and negative phases side signals carrying differential serial data.

$REFRQP$ (UDAP)/ $REFRQN$ (UDAN) is the up-stream $REFREQ$ common-mode current signal or UDA common-mode current user defined data signal. UDAP/UDAN are optional.

$SHIELD$ (GND) is the GND and shielded ground for cable.

Z_{req} is a blocking filter for the up-stream signal. It can use resistors or inductors depending on the system implementation.

Figure 1 – Architecture of the GVIF



5 Electrical characteristics

5.1 DC electrical specifications

The DC electrical specifications of the transmitter side are shown in Table 1, and the DC electrical specifications of the receiver side are shown in Table 2.

Table 1 – DC electrical specifications of the transmitter

| | Differential output peak to peak voltage (SDATAP/N) mV | Common mode voltage (SDATAP/N) V | Input REFRQ assert current (SDATAP/N) mA | Input REFRQ de-assert current (SDATAP/N) mA |
|---|--|--|---|--|
| Condition: $RT = 50 \Omega$ $RL = 100 \Omega$ $IRQ = 0 \text{ mA}$ | $RT = 50 \Omega$ $RL = 100 \Omega$ $IRQ = 11 \text{ mA}$ | $RT = 50 \Omega$ $RL = 100 \Omega$ $IRQ = 11 \text{ mA}$ | | |
| Minimum | 690 | $VDD - 0,55$ | $VDD - 1,2$ | -2,0 |
| Typical | 800 | | | |
| Maximum | 910 | $VDD - 0,35$ | $VDD - 0,8$ | -7,3 |

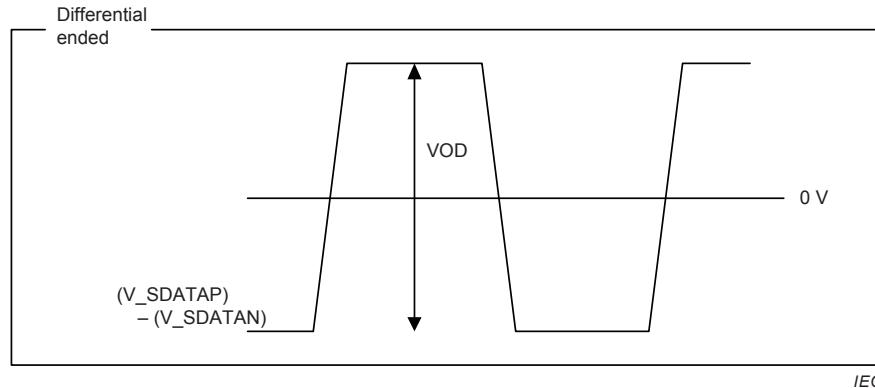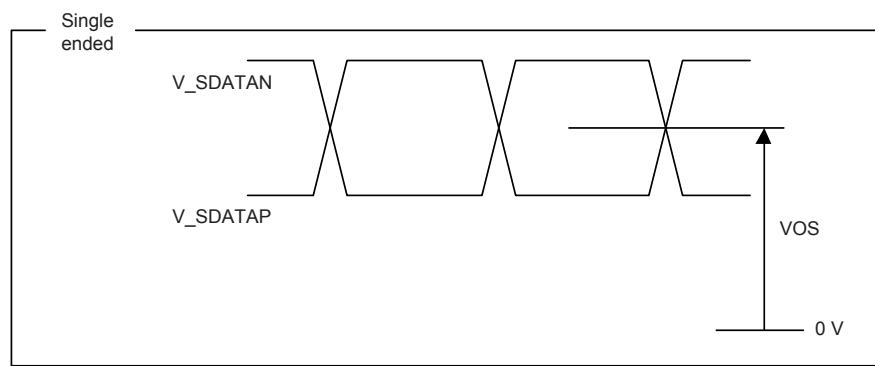

IEC

Figure 2 – VOD, VOS diagram

Table 2 – DC electrical specifications of the receiver


| | Output HIGH current (REFRQP/N) | Output LOW current (REFRQP/N) |
|---------|-----------------------------------|----------------------------------|
| | mA | mA |
| Minimum | -0,1 | 7,4 |
| Maximum | 0,1 | 11 |

5.2 AC electrical specifications

The AC electrical specifications of the transmitter side are shown in Table 3 and Figure 3 shows a transmitter end point eye specification (TP1). The AC electrical specifications of the receiver side are shown in Table 4.

Table 3 – AC electrical specifications of the transmitter

| | SFTCLK frequency MHz | UDA data rate (up-stream) Mbit/s | SFTCLK duty factor % |
|---------|-------------------------|-------------------------------------|-------------------------|
| Minimum | 7,6 | 0,01 | 40 |
| Maximum | 160 | 2,41 | 60 |

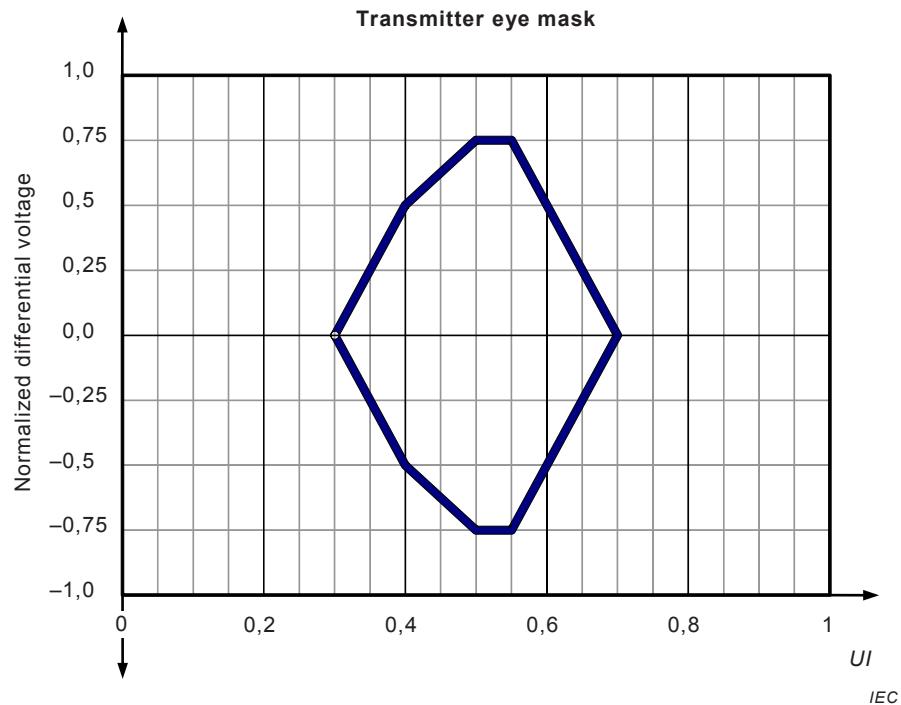
**Figure 3 – Transmitter eye mask specifications (TP1)****Table 4 – AC electrical specifications of the receiver**

| | SFTCLK frequency MHz | UDA data rate (up-stream) Mbit/s |
|---------|-------------------------|-------------------------------------|
| Minimum | 7,6 | 0,01 |
| Maximum | 160 | 2,41 |

6 Front-end

6.1 General

The front-end block diagram of GVIF is shown in Figure 4.

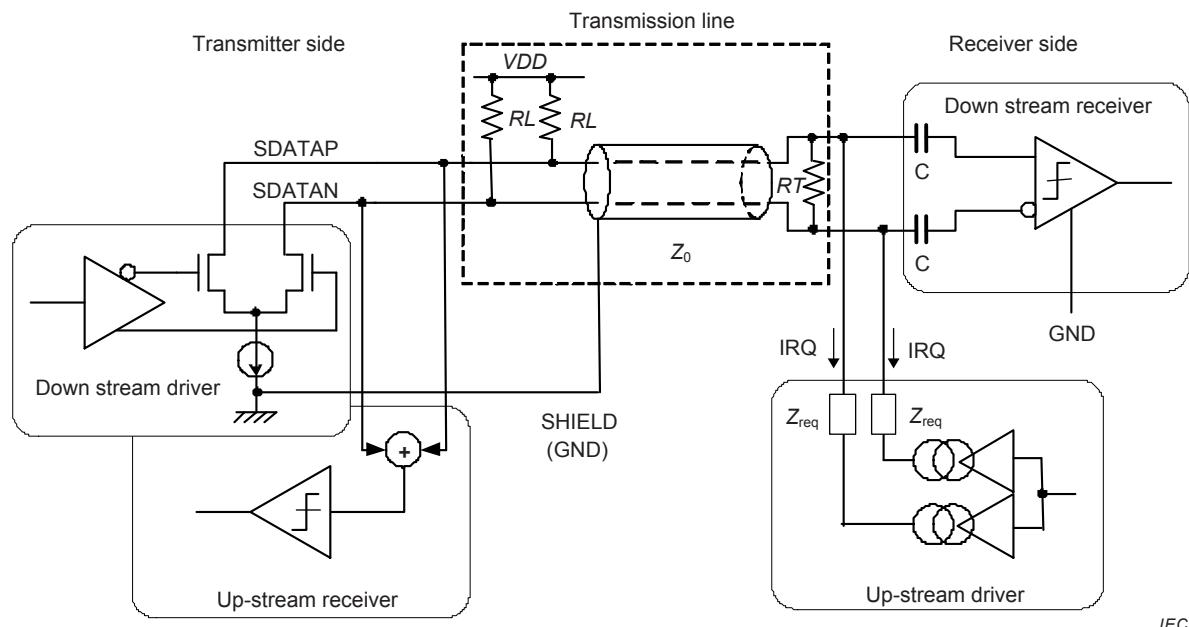

IEC

Figure 4 – Front-end block diagram

6.2 TX front-end

The TX front-end consists of a termination circuit, a down-stream driver and an up-stream receiver. The termination circuit consists of 2 resistors RL , and the SDATAP/N differential signal is pulled up to voltage reference (VDD) with a $(50 \pm 15) \Omega$ resistor. The down-stream driver consists of a differential current output circuit that is driven by the serial signal from the encoder. The up-stream receiver detects the common-mode signal which RX sends through the shielded twisted pair line. The input to the down-stream driver has two modes. One is the serialized actual encoded video data input mode and the other is the reference clock signal for REFREQ hand-shake input mode. These two modes activate depending on the common-mode signal level. The common-mode signal level is normally high. When a long low level pulse is detected, the up-stream receiver activates the REFREQ signal, and changes a mode of the encoder into the reference clock mode. In case of the optional up-stream user data transmission, the up-stream receiver outputs the common-mode voltage as an UDA signal by using binary digital data sent to the encoder. In this case, the upper limit of the low pulse time is 100 μs .


6.3 RX front-end

The Rx front-end consists of AC capacitors, a termination resistor RT (100 ± 5) Ω , a down-stream receiver and an up-stream driver. The down-stream receiver consists of a differential input detection circuit which receives the transmission potential differential signal through the shielded twisted pair line. The up-stream driver drives the up-stream transmission signal applying a current through the termination resistor Rx through the shielded twisted pair transmission line. (A recommended transmission system and transmission line for electrical characteristics is specified in Clause 5.)

7 Transition state link

The transition state link of GVIF shall meet the procedure described below.

There are two states in the connection link between GVIF TX and GVIF RX. One is the state transmitting differential signal with a reference clock, the other is the state transmitting the H format word or the C format word. In the former state, the TX encoder is in the reference clock output mode and the RX decoder is in the reference clock request mode. In the later state, the TX encoder changes into the encoder mode and the RX decoder changes into the decoder mode. The state transition switching diagram of the encoder and the decoder is shown in the Figure 5.

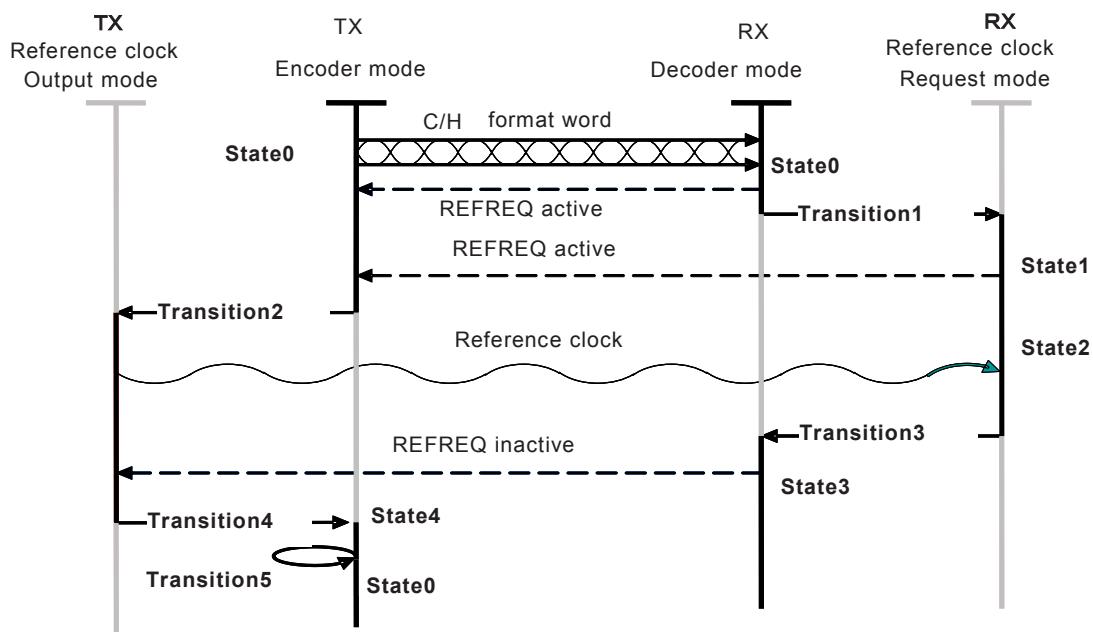

IEC

| | |
|-----------------|---|
| State0 (normal) | : The C/H format word is transmitted down from the TX in the encoder mode to the RX, and the deactivation signal REFREQ is transmitted p from the RX in the decoder mode to the TX. |
| Transition1 | : Transition to the reference clock request mode after finding an irregular HSYNC when the RX decodes. |
| State1 | : The RX transmits up the activate signal REFREQ. |
| Transition2 | : The TX transits to the reference clock output mode when the activate signal REFREQ is detected. |
| State2 | : The TX transmits down the reference clock, and the RX adjusts the internal sampling clock. |
| Transition3 | : The RX transits to the decoder mode after the internal sampling clock adjustment. |
| State3 | : The RX transmits up the inactivate signal REFREQ. |
| Transition4 | : The TX transits to the encoder mode when the inactivate signal REFREQ is detected. |
| State4 | : P[23:0] transmits continuously the H/C format word equivalent all zero until the TX transmits (VSYN, HSYNC) (1,1) → (1,0) 60 times. |
| Transition5 | : Return to normal when the signal has been transmitted 60 times. |

Figure 5 – Transition state link

8 Protocol

8.1 General

The encoder encodes the 30 bit of data (P[23:0], HSYNC, VSYNC, DE, CNTL, SDA and TDA) in synchronization with the input of SFTCLK, and outputs 1 bit of the serial signal S to the TX front-end.

To ensure the DC balance data and a reasonable transition, it is required to generate a synchronization pattern for each word in synchronization with the falling edge of HSYNC at the receiver.

8.2 Encoder

The encoder encodes the full 30 bit of input data (P[23:0], HSYNC, VSYNC, DE, CNTL, SDA and TDA) synchronized with SFTCLK, and outputs a 1 bit serial signal S to the TX front-end. The signal is coded after dividing into the following data.

- Broadband data P[23:0] (24 bits), no transition data.
- Time mark data HSYNC, VSYNC, DE, CNTL, SDA and TDA (6 bit).

Transition frequency of the signal is limited by the logical specification coding.

The broadband data are normally converted to 1 bit data, but in case of the time mark data, the transition is converted to 1 bit data. When there is no transition in the time mark data the broadband data are converted to the C format with 20 % overhead. When there is a time mark transition, the broadband data are converted to the H format with 6 bit header and 24 bit broadband data.

The broadband data and the time mark data are output as a serial signal S led by the MSB after conversion into a 30 bit length C format word or H format word.

The C format word is used when there is no time mark data transition at the previous pixel clock cycle, and the H format word is used when there is/are one or more time mark data transition(s) at the previous pixel clock cycle. (See Figure 6).

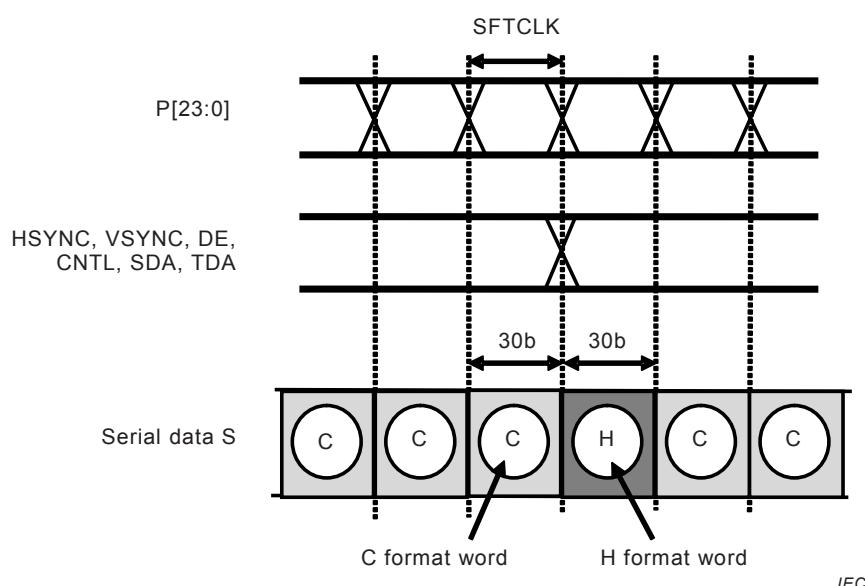


Figure 6 – Encoder output diagram

The C format word consists of the combined six codes of 5 bit which is generated by the 4B5B conversion braking the broadband data P[23:0] by 4bit. (See Figure 7).

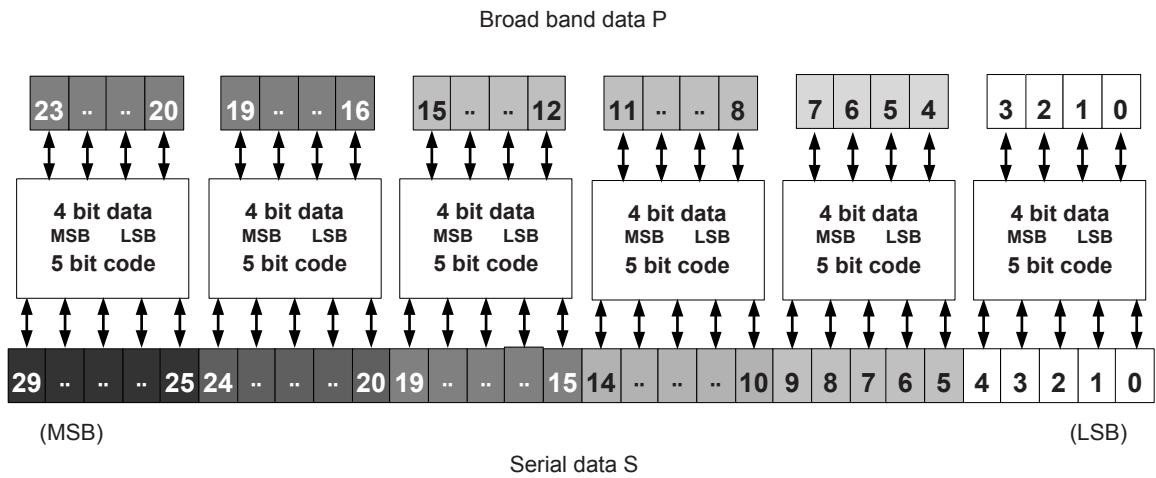


Figure 7 – C format word

Table 5 – 4B5B conversion

| 4 bit data MSB – LSB | 5 bit code MSB – LSB | 4 bit data MSB – LSB | 5 bit code MSB – LSB |
|-------------------------|-------------------------|-------------------------|-------------------------|
| “0 0 0 0” | “0 0 1 0 1” | “1 0 0 0” | “1 0 0 1 0” |
| “0 0 0 1” | “0 0 1 1 0” | “1 0 0 1” | “1 0 0 1 1” |
| “0 0 1 0” | “0 0 1 1 1” | “1 0 1 0” | “1 0 1 0 0” |
| “0 0 1 1” | “0 1 0 0 1” | “1 0 1 1” | “1 0 1 0 1” |
| “0 1 0 0” | “0 1 0 1 0” | “1 1 0 0” | “1 0 1 1 0” |
| “0 1 0 1” | “0 1 0 1 1” | “1 1 0 1” | “1 1 0 0 1” |
| “0 1 1 0” | “0 1 1 0 0” | “1 1 1 0” | “1 1 0 1 0” |
| “0 1 1 1” | “0 1 1 0 1” | “1 1 1 1” | “1 1 1 0 0” |

The H format is generated by a combination of the 24 bit broadband data P[23:0] with a 6 bit header that indicates the transition state of a time mark, see Figure 8. The positions of even numbers of the broadband data P are inverted in the serial data S. The structure of the header is shown in Table 6.

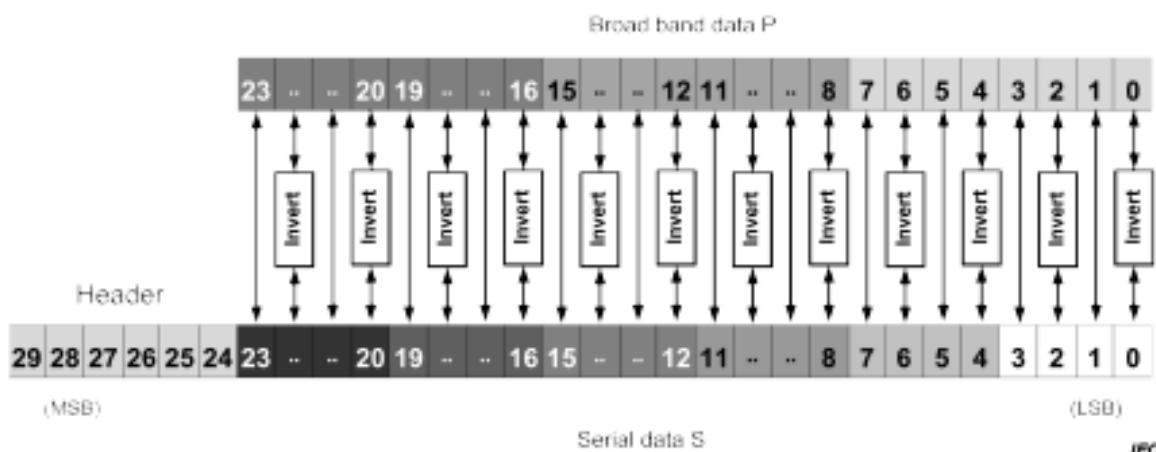


Figure 8 – H format word

Table 6 – VSYNC, HSYNC, DE, CNTL/AUX, SDA, TDA transition and the corresponding header

| | Transition signal | Header bit array | Remark |
|--|-------------------|------------------|---|
| a | VSYNC, HSYNC | "1 0 0 0 V H" | V and H are the VSYNC inversion value and the HSYNC value after transition. |
| b | DE, CNTL/AUX | "0 1 1 1 D C" | D and C are the DE and CNTL values after transition. |
| c | SDA, TDA | "1 1 1 1 S T" | S and T are the SDA and TDA values after transition. |
| Transition between the signals simultaneously among a, b and c shall not be permitted. | | | |

8.3 Decoder

The serial data S that comes from the RX front-end is converted as shown in Figure 7, Figure 8, Table 5 and Table 6.


9 Transmission system and transmission line of electrical characteristics

The transmission systems (see Figure 9) are required to meet the specifications below.

- The differential impedance shall meet the specification stated in Figure 10. A transmission line has a small and gradual attenuation.
- A transmission line loss on a cable shall be less than -15 dB at 1 GHz in accordance with \sqrt{f} attenuation. (See Figure 11).

The differential signal cable skew time shall be:

- less than 30 % of one bit time ($\text{SFTCLK} > 33 \text{ MHz}$);
- less than 24 % of one bit time ($\text{SFTCLK} \leq 33 \text{ MHz}$).

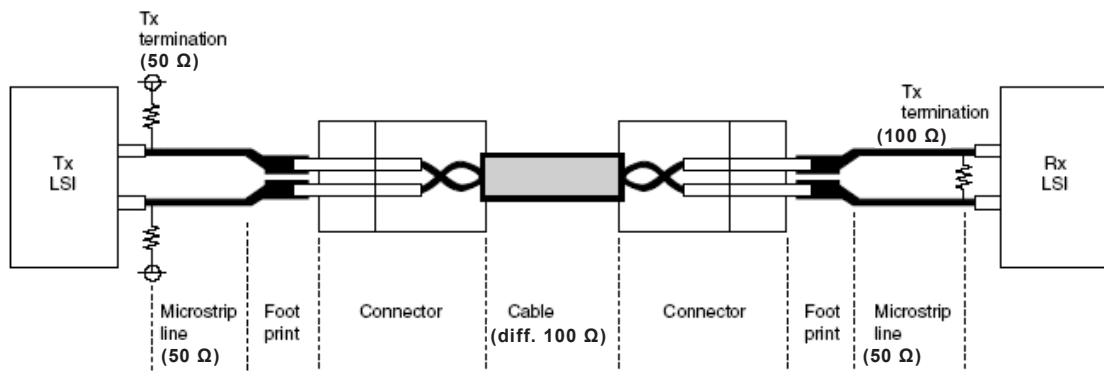

IEC

Figure 9 – Transmission system

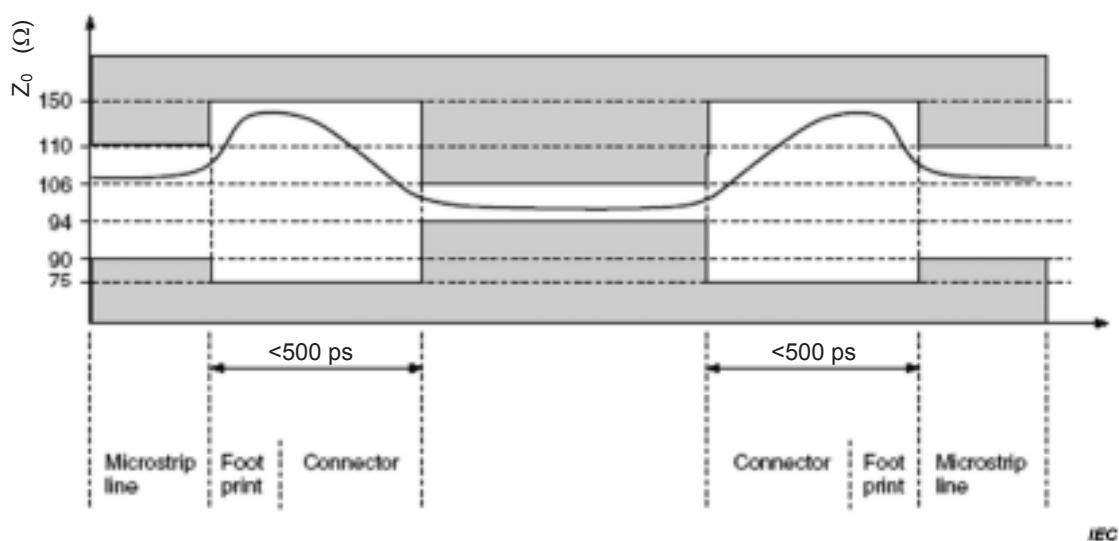


Figure 10 – Transmission line tolerance impedance

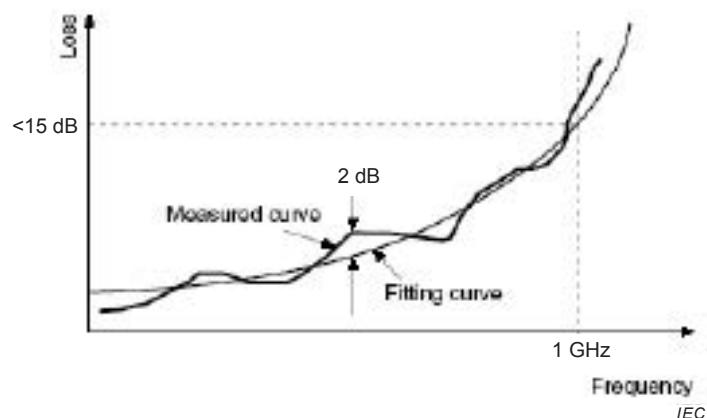


Figure 11 – Transmission loss


Annex A (informative)

Multiple link application

A.1 Single link application example

A.1.1 Block diagram for single link transmission

A block diagram of a differential single link is shown in Figure A.1.

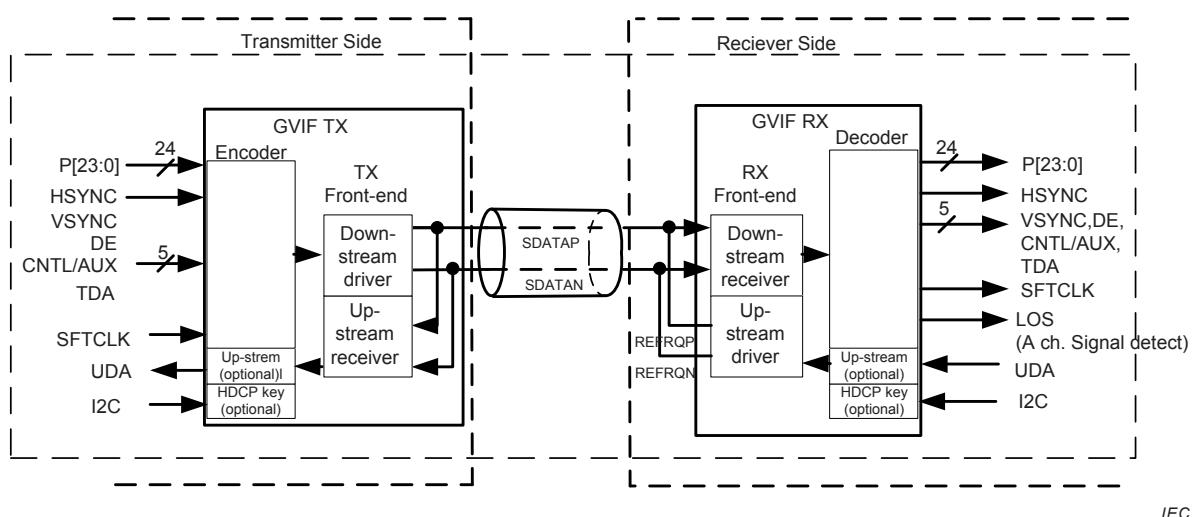

IEC

Figure A.1 – Differential single link block diagram

The down-stream transmission signal are the encoded serial P[23:0], HSYNC, VSYNC, DE, CNTL/AUX, SDA and TDA 30 bit data by the GVIF TX encoder. These data are in all of the SFTCLK domains, and they can be re-generated by the GVIF RX decoder. The encoder and decoder are performed in accordance with Clause 7.

The LOS signal output on the receiver side is asserted when GVIF RX receives no differential signal input or the clock and data recovery circuit in GVIF RX does not generate recovered SFTCLK (loss of lock).

There are optional functions for down-stream and up-stream user defined signal transmissions with terminal name CNTL/AUX and TDA for down-stream and UDA for up-stream as shown in Figure A.1. AUX can also optionally use an audio enable signal.

Additionally, HDCP (high-bandwidth digital contents protection) is also defined as an optional function. The I2C inputs for both GVIF TX and GVIF RX are input terminals to control the HDCP authentication function. The SDA (optional) is generated by an I2C signal order, i.e. a signal to exchange a HDCP key between GVIF TX and GVIF RX.

A.1.2 Data mapping of single link transmission

A data mapping array should be assigned pixel data of a LCD module as shown in Figure A.2.

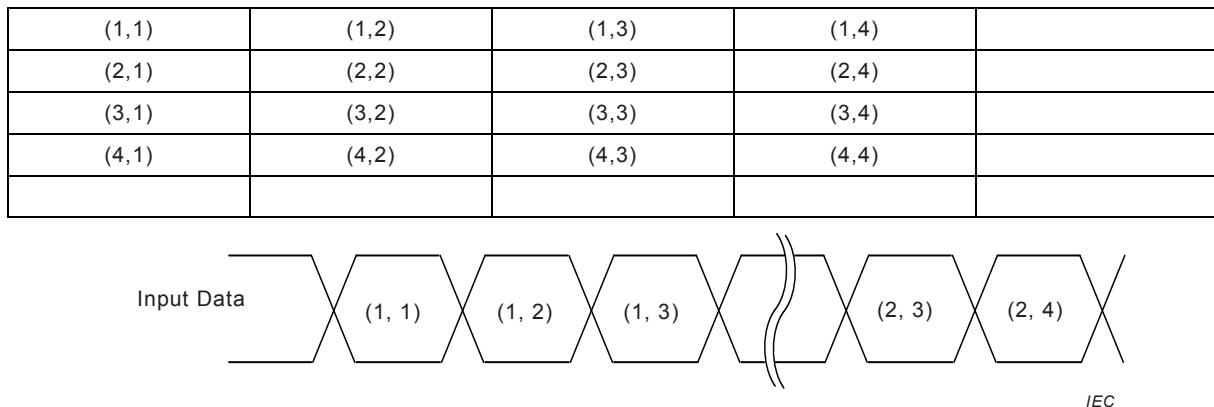


Figure A.2 – Pixel configuration

A.2 Multiple link application example

A.2.1 Block diagram for 2-pair parallel transmission

A block diagram of a multiple link system configuration is shown in Figure A.3. Each channel is called A-ch and B-ch.

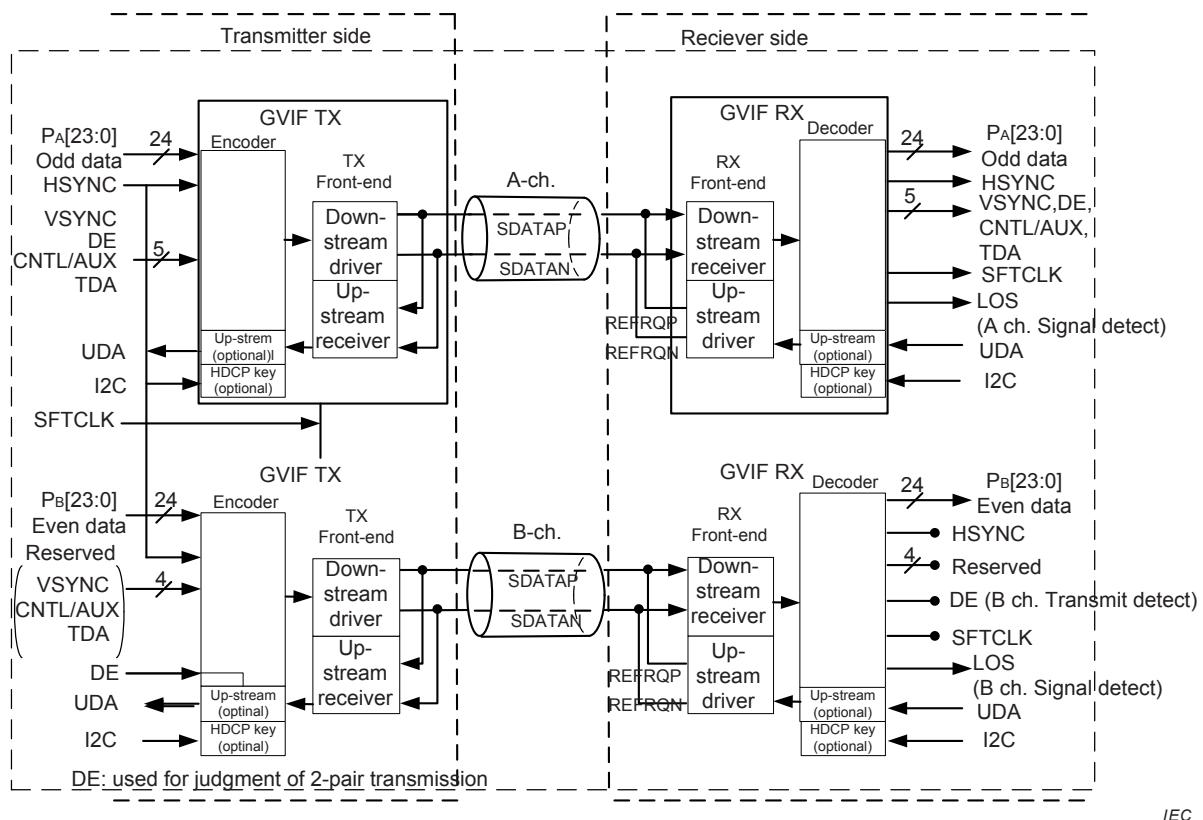


Figure A.3 – Multiple link application block diagram

In order to switch between a 1-pair transmission system and 2-pair transmission system, a detection circuit is necessary on the transmitter side. In case of a 2-pair transmission system,

the DE equivalent signal is input to the “DE” pin of B-ch, and in case of a 1-pair transmission system, the fixed signal is input to the “DE” pin of A-ch.

A.2.2 Data mapping of 2-pair transmission

Odd data should be assigned to A-ch, even data should be assigned to B-ch.

A data mapping array for a LCD module is shown in Figure A.4.

| | | | | |
|---------------|---------------|---------------|---------------|--|
| (1,1) | (1,2) | (1,3) | (1,4) | |
| (2,1) | (2,2) | (2,3) | (2,4) | |
| (3,1) | (3,2) | (3,3) | (3,4) | |
| (4,1) | (4,2) | (4,3) | (4,4) | |
| A-ch. data | B-ch. data | A-ch. data | B-ch. data | |

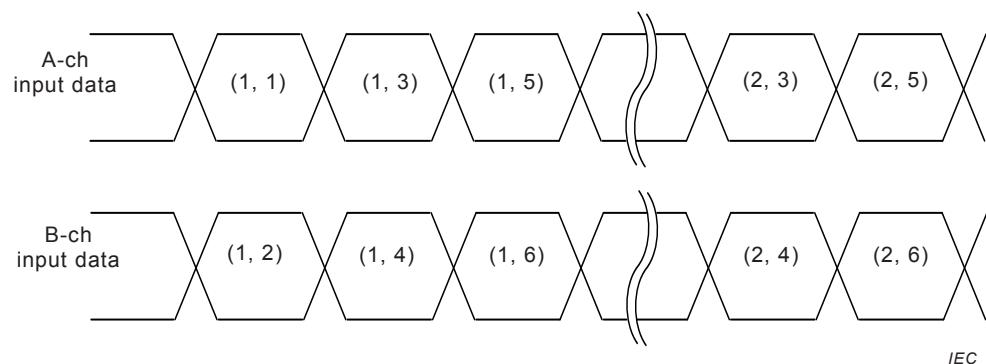


Figure A.4 – Pixel configuration when using 2-pairs

IEC

Bibliography

JEITA CP-6101, *Digital monitor interface GVIF*
http://www.jeita.or.jp/japanese/public_standard/

ARIB (Association of Radio Industry Business)
http://www.arib.or.jp/tyosakenkyu/kikaku_hoso/hoso_std-b021.html
http://www.arib.or.jp/tyosakenkyu/kikaku_hoso/hoso_tr-b014.html

Digital Content Protection LLC
<http://www.digital-cp.com/>

ANSI/TIA/EIA-644-1995, *Electrical Characteristics of Low Voltage Differential Signaling (LVDS) Interface Circuits, November 1995*
THE I²C-BUS SPECIFICATION VERSION2.1
http://www.nxp.com/documents/other/UM10204_v5.pdf

This page deliberately left blank

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Rewvisions

Our British Standards and other publications are updated by amendment or revision. We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.TM