



Standard Test Methods for Electrical Performance of Nonconcentrator Terrestrial Photovoltaic Modules and Arrays Using Reference Cells¹

This standard is issued under the fixed designation E1036; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 These test methods cover the electrical performance of photovoltaic modules and arrays under natural or simulated sunlight using a calibrated reference cell.

1.1.1 These test methods allow a reference module to be used instead of a reference cell provided the reference module has been calibrated using these test methods against a calibrated reference cell.

1.2 Measurements under a variety of conditions are allowed; results are reported under a select set of reporting conditions (RC) to facilitate comparison of results.

1.3 These test methods apply only to nonconcentrator terrestrial modules and arrays.

1.4 The performance parameters determined by these test methods apply only at the time of the test, and imply no past or future performance level.

1.5 These test methods apply to photovoltaic modules and arrays that do not contain series-connected photovoltaic multijunction devices; such module and arrays should be tested according to Test Methods E2236.

1.6 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.7 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

¹ These test methods are under the jurisdiction of ASTM Committee E44 on Solar, Geothermal and Other Alternative Energy Sources and are the direct responsibility of Subcommittee E44.09 on Photovoltaic Electric Power Conversion.

Current edition approved Feb. 1, 2015. Published March 2015. Originally approved in 1985. Last previous edition approved in 2012 as E1036 – 12. DOI: 10.1520/E1036-15.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

- E691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method
- E772 Terminology of Solar Energy Conversion
- E927 Specification for Solar Simulation for Photovoltaic Testing
- E941 Test Method for Calibration of Reference Pyranometers With Axis Tilted by the Shading Method (Withdrawn 2005)³
- E948 Test Method for Electrical Performance of Photovoltaic Cells Using Reference Cells Under Simulated Sunlight
- E973 Test Method for Determination of the Spectral Mismatch Parameter Between a Photovoltaic Device and a Photovoltaic Reference Cell
- E1021 Test Method for Spectral Responsivity Measurements of Photovoltaic Devices
- E1040 Specification for Physical Characteristics of Nonconcentrator Terrestrial Photovoltaic Reference Cells
- E1125 Test Method for Calibration of Primary Non-Concentrator Terrestrial Photovoltaic Reference Cells Using a Tabular Spectrum
- E1362 Test Method for Calibration of Non-Concentrator Photovoltaic Secondary Reference Cells
- E2236 Test Methods for Measurement of Electrical Performance and Spectral Response of Nonconcentrator Multijunction Photovoltaic Cells and Modules
- G173 Tables for Reference Solar Spectral Irradiances: Direct Normal and Hemispherical on 37° Tilted Surface

3. Terminology

3.1 *Definitions*—Definitions of terms used in these test methods may be found in Terminology E772.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *nominal operating cell temperature, NOCT, n*—the temperature of a solar cell inside a module operating at an ambient temperature of 20°C, an irradiance of 800 Wm⁻², and an average wind speed of 1 ms⁻¹.

3.2.2 *reporting conditions, RC, n*—the device temperature, total irradiance, and reference spectral irradiance conditions that module or array performance data are corrected to.

³ The last approved version of this historical standard is referenced on www.astm.org.

3.3 Symbols:

3.3.1 The following symbols and units are used in these test methods:

- α_r —temperature coefficient of reference cell I_{SC} , $^{\circ}\text{C}^{-1}$,
- α —current temperature coefficient of device under test, $^{\circ}\text{C}^{-1}$,
- $\beta(E)$ —voltage temperature function of device under test, $^{\circ}\text{C}^{-1}$,
- C —calibration constant of reference cell, Am^2W^{-1} ,
- C' —adjusted calibration constant of reference cell, Am^2W^{-1} ,
- C_f —NOCT Correction factor, $^{\circ}\text{C}$,
- $\delta(T)$ —voltage irradiance correction function of device under test, dimensionless,
- ΔT —NOCT cell-ambient temperature difference, $^{\circ}\text{C}$,
- E —irradiance, Wm^{-2} ,
- E_o —irradiance at RC, Wm^{-2} ,
- FF —fill factor, dimensionless,
- I —current, A,
- I_{mp} —current at maximum power, A,
- I_o —current at RC, A,
- I_r —short-circuit current of reference cell (or module, see 1.1.1 and 4.3.4), A,
- I_{sc} —short-circuit current, A,
- M —spectral mismatch parameter, dimensionless,
- P —electrical power, W,
- P_m —maximum power, W,
- T —temperature, $^{\circ}\text{C}$,
- T_a —ambient temperature, $^{\circ}\text{C}$,
- T_c —temperature of cell in module, $^{\circ}\text{C}$,
- T_o —temperature at RC, $^{\circ}\text{C}$,
- T_r —temperature of reference cell, $^{\circ}\text{C}$,
- v —wind speed, ms^{-1} ,
- V —voltage, V,
- V_{mp} —voltage at maximum power, V,
- V_o —voltage at RC, V, and
- V_{oc} —open-circuit voltage, V.

4. Summary of Test Methods

4.1 Measurement of the performance of a photovoltaic module or array illuminated by a light source consists of determining at least the following electrical characteristics: short-circuit current, open-circuit voltage, maximum power, and voltage at maximum power.

4.2 These parameters are derived by applying the procedure in Section 8 to a set of current-voltage data pairs (I - V data) recorded with the test module or array operating in the power-producing quadrant.

TABLE 1 Reporting Conditions

	Total Irradiance, Wm^{-2}	Spectral Irradiance	Device Temperature, $^{\circ}\text{C}$
Standard reporting conditions	1000	G173	25
Nominal operating conditions	800	...	NOCT

4.3 Testing the performance of a photovoltaic device involves the use of a calibrated photovoltaic reference cell to determine the total irradiance.

4.3.1 The reference cell is chosen according to the spectral distribution of the irradiance under which it was calibrated, for example, the direct normal or global spectrum. These spectra are defined by Tables G173. The reference cell therefore determines to which spectrum the test module or array performance is referred.

4.3.2 The reference cell must match the device under test such that the spectral mismatch parameter is 1.00 ± 0.05 , as determined in accordance with Test Method E973.

4.3.3 Recommended physical characteristics of reference cells are described in Specification E1040.

4.3.4 A reference module may be used instead of a reference cell throughout these test methods provided 4.3.2 is satisfied and the short-circuit current of the reference module has been determined according to the procedures in these test methods using a reference cell. The reference module must also meet the module package design requirements in Specification E1040, with the exception of the electrical connector requirement. Ideally, electrical connections to an individual cell in the reference module should be provided to allow for spectral responsivity measurement according to Test Method E1021.

4.4 The spectral response of the module or array is usually taken to be that of a representative cell from the module or array tested in accordance with Test Method E1021. The representative cell should be packaged such that the optical properties of the module or array packaging and the representative cell package are similar.

4.5 The tests are performed using either natural or simulated sunlight. Solar simulation requirements are stated in Specification E927.

4.5.1 If a pulsed solar simulator is used as a light source, the transient responses of the module or array and the reference cell must be compatible with the test equipment.

4.6 The data from the measurements are translated to a set of reporting conditions (see 5.3) selected by the user of these test methods. The actual test conditions, the test data (if available), and the translated data are then reported.

5. Significance and Use

5.1 It is the intent of these procedures to provide recognized methods for testing and reporting the electrical performance of photovoltaic modules and arrays.

5.2 The test results may be used for comparison of different modules or arrays among a group of similar items that might be encountered in testing a group of modules or arrays from a single source. They also may be used to compare diverse designs, such as products from different manufacturers. Repeated measurements of the same module or array may be used for the study of changes in device performance.

5.3 Measurements may be made over a range of test conditions. The measurement data are numerically translated from the test conditions to standard RC, to nominal operating conditions, or to optional user-specified reporting conditions. Recommended RC are defined in Table 1.

5.3.1 If the test conditions are such that the device temperature is within $\pm 2^{\circ}\text{C}$ of the RC temperature and the total irradiance is within $\pm 5\%$ of the RC irradiance, the numerical

translation consists of a correction to the measured device current based on the total irradiance during the *I-V* measurement.

5.3.2 If the provision in 5.3.1 is not met, performance at RC is obtained from four separate *I-V* measurements at temperature and irradiance conditions that bracket the desired RC using a bilinear interpolation method.⁴

5.3.2.1 There are a variety of methods that may be used to bracket the temperature and irradiance. One method involves cooling the module under test below the reference temperature and making repeated measurements of the *I-V* characteristics as the module warms up. The irradiance of pulsed light sources may be adjusted by using neutral density mesh filters of varying transmittance. If the distance between the simulator and the test plane can be varied then this adjustment can be used to change the irradiance. In natural sunlight, the irradiance will change with the time of day or if the solar incidence angle is adjusted.

5.4 These test methods are based on two requirements.

5.4.1 First, the reference cell (or module, see 1.1.1 and 4.3.4) is selected so that its spectral response is considered to be close to the module or array to be tested.

5.4.2 Second, the spectral response of a representative cell and the spectral distribution of the irradiance source must be known. The calibration constant of the reference cell is then corrected to account for the difference between the actual and the reference spectral irradiance distributions using the spectral mismatch parameter, which is defined in Test Method E973.

5.5 Terrestrial reference cells are calibrated with respect to a reference spectral irradiance distribution, for example, Tables G173.

5.6 A reference cell made and calibrated as described in 4.3 will indicate the total irradiance incident on a module or array whose spectral response is close to that of the reference cell.

5.7 With the performance data determined in accordance with these test methods, it becomes possible to predict module or array performance from measurements under any test light source in terms of any reference spectral irradiance distribution.

5.8 The reference conditions of 5.3.1 must be met if the measured *I-V* curve exhibits “kinks” or multiple inflection points.

6. Apparatus

6.1 *Photovoltaic Reference Cell*—A calibrated reference cell is used to determine the total irradiance during the electrical performance measurement.

6.1.1 The reference cell shall be matched in its spectral response to a representative cell of the test module or array such that the spectral mismatch parameter as determined by Test Method E973 is 1.00 ± 0.05 .

6.1.2 Specification E1040 provides recommended physical characteristics of reference cells.

6.1.3 Reference cells may be calibrated in accordance with Test Methods E1125 or E1362, as appropriate for a particular application.

6.1.4 A current measurement instrument (see 6.7) shall be used to determine the I_{sc} of the reference cell when illuminated with the light source (see 6.4).

6.2 *Test Fixture*—The device to be tested is mounted on a test fixture that facilitates temperature measurement and four-wire current-voltage measurements (Kelvin probe, see 6.3). The design of the test fixture shall prevent any increase or decrease of the device output due to reflections or shadowing. Arrays installed in the field shall be tested as installed. See 7.2.3 for additional restrictions and reporting requirements.

6.3 *Kelvin Probe*—An arrangement of contacts that consists of two pairs of wires attached to the two output terminals of the device under test. One pair of wires is used to conduct the current flowing through the device, and the other pair is used to measure the voltage across the device. A schematic diagram of an *I-V* measurement using a Kelvin Probe is given in Fig. 1 of Test Method E948.

6.4 *Light Source*—The light source shall be either natural sunlight or a solar simulator providing Class A, B, or C simulation as specified in Specification E927.

6.5 *Temperature Measurement Equipment*—The instrument or instruments used to measure the temperature of both the reference cell and the device under test shall have a resolution of at least 0.1°C, and shall have a total error of less than $\pm 1^\circ\text{C}$ of reading.

6.5.1 Temperature sensors, such as thermocouples or thermistors, suitable for the test temperature range shall be attached in a manner that allows measurement of the device temperature. Because module and array temperatures can vary spatially under continuous illumination, multiple sensors distributed over the device should be used, and the results averaged to obtain the device temperature.

6.5.2 When testing modules or arrays for which direct measurement of the cell temperature inside the package is not feasible, sensors can be attached to the rear side of the devices. The error due to temperature gradients will depend on the thermal characteristics of the packaging, especially under continuous illumination. Modules with glass back sheets will have higher gradients than modules with thin polymer backs, for example.

6.6 *Variable Load*—An electronic load, such as a variable resistor, a programmable power supply, or a capacitive sweep circuit, used to operate the device to be tested at different points along its *I-V* characteristic.

6.6.1 The variable load should be capable of operating the device to be tested at an *I-V* point where the voltage is within 1 % of V_{oc} in the power-producing quadrant.

6.6.2 The variable load should be capable of operating the device to be tested at an *I-V* point where the current is within 1 % of I_{sc} in the power-producing quadrant.

6.6.3 The variable load should allow the device output power (the product of device current and device voltage) to be varied in increments as small as 0.2 % of the maximum power.

⁴ Marion, B., Rummel, S., and Anderberg, A., “Current-Voltage Curve Translation by Bilinear Interpolation,” Prog. Photovolt: Res. Appl. 2004, 12:593–607.

6.6.4 The electrical response time of the variable load should be fast enough to sweep the required range of I - V operating points during the measurement period. It is possible that the response time of the device under test may limit how fast the range of I - V points can be swept, especially when pulsed simulators are used. For these cases, it may be necessary to make multiple measurements over smaller portions of the I - V curve to obtain the entire recommended range.

6.7 *Current Measurement Equipment*—The instrument or instruments used to measure the current through the device under test and the I_{sc} of the reference cell shall have a resolution of at least 0.05 % of the maximum current encountered, and shall have a total error of less than 0.2 % of the maximum current encountered.

6.8 *Voltage Measurement Equipment*—The instrument or instruments used to measure the voltage across the device under test shall have a resolution of at least 0.05 % of the maximum voltage encountered, and shall have a total error of less than 0.2 % of the maximum voltage encountered.

7. Procedures

7.1 *Momentary Illumination Technique:*

7.1.1 This technique is valid for use with pulsed solar simulators, shuttered continuous solar simulators, or shuttered sunlight. For testing under continuous illumination see 7.2.

7.1.2 Determine the spectral mismatch parameter, M , using Test Method E973.

7.1.3 Mount the reference cell and the device to be tested in the test fixture coplanar within $\pm 2^\circ$, and normal to the illumination source within $\pm 10^\circ$. If an array or module cannot be aligned to within $\pm 10^\circ$, the solar angle of incidence, the device orientation and its tilt angle must be reported with the data.

7.1.4 Connect the four-wire Kelvin probe to the module or array output terminals.

7.1.5 Expose the module or array to the light source.

7.1.6 If the temporal instability of the light source (as defined in Specification E927) is less than 0.1 %, the total irradiance may be determined with the reference cell prior to the performance measurement. In this case, measure the short-circuit current of the reference cell, I_r .

7.1.7 Measure the I - V characteristic of the test device by changing the operating point with the variable load so that the provisions of 6.6 are met. At each operating point along the I - V characteristic, measure the device voltage, the device current, and I_r .

7.1.7.1 If the provision of 7.1.6 is met, it is not necessary to measure I_r at each operating point.

7.1.8 Measure the temperature of the reference cell, T_r , and the temperature of the test device, T_c . Temperature changes during the test shall be less than 2°C .

7.2 *Continuous Illumination Technique:*

7.2.1 This technique is valid for testing in continuous solar simulators or natural sunlight.

7.2.2 Determine the spectral mismatch parameter, M , using Test Method E973.

7.2.3 Mount the reference cell and the device to be tested in the test fixture coplanar within $\pm 2^\circ$, and normal to the illumination source within $\pm 10^\circ$. If an array or module cannot be aligned to within $\pm 10^\circ$, the solar angle of incidence, the device orientation and its tilt angle must be reported with the data.

7.2.4 Connect the four-wire Kelvin probe to the module or array output terminals.

7.2.5 Expose the test device to the illumination source for a period of time sufficient for the device to achieve thermal equilibrium.

7.2.6 If the temporal instability of the light source (as defined in Specification E927) is less than 0.1 %, the total irradiance may be determined with the reference cell prior to the performance measurement. In this case, measure the short-circuit current of the reference cell, I_r .

7.2.7 Obtain the average temperature, T_c , of a cell in the module or array using one of the following two methods:

7.2.7.1 For outdoor measurements in natural sunlight if the NOCT correction factors are known (see Annex A1), measure the ambient air temperature and the wind speed. The average wind speed for 5 min preceding the test and during the test should not exceed 1.75 ms^{-1} .

7.2.7.2 Measure the temperature of the sensors, following the provisions of 6.5.

7.2.8 Measure the reference cell temperature, T_r .

7.2.9 Measure the I - V characteristic of the test device by changing the operating point with the variable load so that the provisions of 6.6 are met. At each operating point along the I - V characteristic, measure the device voltage, the device current, and I_r .

7.2.9.1 If the provision of 7.2.6 is met, it is not necessary to measure I_r at each operating point.

7.2.10 Immediately following the I - V recording, repeat the temperature measurements and verify that temperature changes during the test were less than 2°C .

7.3 If the provision of 5.3.1 is not met, repeat 7.1 or 7.2 three times to obtain a total of four I - V characteristics as required by 5.3.2.

8. Calculation of Results

8.1 Adjust the reference cell calibration constant using:

$$C' = \frac{C}{M} [1 + \alpha_r(T_r - T_o)] \quad (1)$$

8.2 Calculate the total irradiance during the performance measurement(s) using the following equation (if I_r was measured at each operating point, use the average value of I_r):

$$E = \frac{I_r}{C'} \quad (2)$$

8.3 If the provision in 5.3.1 is met, correct the current at each point of the I - V data for irradiance using the following equation:

$$I = I_m \frac{E_o}{E} \quad (3)$$

8.4 If the provision in 5.3 is not met, use the bilinear interpolation method specified in 5.3.2 to calculate the I - V characteristic at RC using the four I - V curves obtained in 7.3.

8.5 Determine the short-circuit current, I_{sc} , from the I - V data using one of the following procedures:

8.5.1 If an I - V data pair exists where V is $0.0 \pm 0.005 V_{oc}$, I from this pair may be considered to be the short-circuit current.

8.5.2 If the condition in 8.5.1 is not met, calculate the short-circuit current from several I - V data pairs where V is closest to zero using linear interpolation or extrapolation.

8.6 Determine the open-circuit voltage, V_{oc} , from the I - V data measured in Section 7 using one of the following procedures:

8.6.1 If an I - V data pair exists where I is $0.0 \pm 0.001 I_{sc}$, V from this pair may be considered to be the open-circuit voltage.

8.6.2 If the condition in 8.6.1 is not met, calculate the open-circuit voltage from several I - V data pairs where I is closest to zero using linear interpolation or extrapolation.

8.7 If the provision in 5.3.1 is not met, use the bilinear interpolation method specified in 5.3.2 to calculate the I - V characteristic at RC.

8.8 Form a table of P versus V_o values by multiplying I_o by V_o .

8.9 Find the maximum power point P_m , and the corresponding V_{mp} , in the P versus V_o table. Because of random fluctuations and the probability that one point in the tabular I_o - V_o data will not be exactly on the maximum power point, it is recommended that the following procedure be used to calculate the maximum power point, especially for devices with fill factors greater than 80 %.

8.9.1 Perform a fourth-order polynomial least-squares fit to the P versus V_o data that are within the following limits:

$$0.751I_{mp} \leq I_o \leq 1.15I_{mp} \quad (4)$$

and:

$$0.75V_{mp} \leq V_o \leq 1.15V_{mp} \quad (5)$$

These limits are guidelines that have been found to be useful for this procedure and need not be followed precisely. This results in a polynomial representation of P as a function of V_o .

8.9.1.1 It is recommended that a plot of the I_o - V_o data and the polynomial fit be made to visually assess the reliability of the fit.

8.9.1.2 Fewer data points used for the polynomial fit may require the polynomial order to be reduced.

8.9.2 Calculate the derivative polynomial of the polynomial obtained from 8.9.1.

8.9.3 Find a root of the derivative polynomial obtained from 8.9.2 using V_{mp} as an initial guess. An appropriate numerical procedure is the Newton-Horner method with deflation.⁵ This root now becomes V_{mp} .

8.9.4 Calculate P_m by substituting the new V_{mp} into the original polynomial from 8.9.1.

8.10 Calculate the fill factor, FF , using the following equation:

$$FF = \frac{P_m}{V_{oc}I_{sc}} \quad (6)$$

9. Report

9.1 The end user ultimately determines the amount of information to be reported. Listed below are the minimum mandatory reporting requirements.

9.2 Test Module or Array Description:

9.2.1 Identification,

9.2.2 Physical description,

9.2.3 Area,

9.2.4 Voltage temperature functions, if known,

9.2.5 Current temperature functions, if known,

9.2.6 Voltage irradiance functions coefficient, if known,

9.2.7 Spectral response of the representative cell, in plotted or tabular form, as required for Test Methods E1021, and

9.2.8 NOCT, C_p , and ΔT functional dependence, if known.

9.3 Reference Cell (or Module, see 1.1.1 and 4.3.4) Description:

9.3.1 Identification,

9.3.2 Physical description,

9.3.3 Calibration laboratory,

9.3.4 Calibration procedure (see 6.1.3),

9.3.5 Date of calibration,

9.3.6 Reference spectral irradiance distribution (see 4.3.1),

9.3.7 Spectral response, in plotted or tabular form, as required for Test Methods E1021, and

9.3.8 Calibration constant.

9.3.9 Uncertainty of calibration.

9.4 Test Conditions:

9.4.1 Reporting conditions,

9.4.2 Description and classification of light source (for solar simulators) or ambient temperature, wind speed, solar incidence angle, and geographical location (for outdoor measurements),

9.4.3 Date and time of test,

9.4.4 Spectral mismatch parameter,

9.4.5 Irradiance,

9.4.5.1 Average irradiance measured with reference cell if 5.3.1 is met, or

9.4.5.2 The four average irradiance measured for the bilinear interpolation.

9.4.6 Device temperature,

9.4.6.1 T_c , if the provision in 5.3.1 is met, or

9.4.6.2 The four temperatures measured for the bilinear interpolation.

9.5 Test Results:

9.5.1 Short-circuit current,

9.5.2 Open-circuit voltage,

9.5.3 Maximum power,

9.5.4 Voltage at maximum power,

9.5.5 Fill factor, and

9.5.6 Tabulated and plotted I_o - V_o data.

10. Precision and Bias

10.1 *Interlaboratory Test Program*—An interlaboratory study of module performance measurements was conducted in

⁵ Burden, R. L., and Faires, J. D., *Numerical Analysis*, 3rd ed., Prindle, Weber & Schmidt, Boston, MA, 1985, p. 42 ff.

1992 through 1994. Seven laboratories performed three repetitions on each of six modules circulated among the participants. The design of the experiment, similar to that of Practice E691, and a within-between analysis of the data are given in ASTM Research Report No. RR:E44 – 1005.

10.2 *Test Result*— Because *I-V* measurements produce a table of current versus voltage points rather than a single numeric result, the precision analysis was performed on the maximum power point data submitted by the participants. The precision information given below is in percentage points of the maximum power in watts.

10.3 *Precision:*

95 % repeatability limit (within laboratory)	0.7 %
95 % reproducibility limit (between laboratory)	6.7 %

10.4 *Bias*—The contribution of bias to the total error will depend upon the bias of each individual parameter used for the determination of the device performance.

10.4.1 It has been shown that the total bias tends to be dominated by three sources: the reference cell calibration, the spatial uniformity of the light source, and, for efficiency determinations, the area measurement.⁶ Bias contributions from instrumentation tend to be, at most, a few tenths of a

⁶ Emery, K. A., Osterwald, C. R., and Wells, C. V., "Uncertainty Analysis of Photovoltaic Efficiency Measurements," *Proceedings of the 19th IEEE Photovoltaics Specialists Conference—1987*, Institute of Electrical and Electronics Engineers, New York, NY, 1987, pp. 153–159.

percent, while bias from the three sources listed here can be as much as ten times greater if the bias is not minimized.

10.4.2 Another source of bias can be hysteresis in the *I-V* data caused by rapid sweeping through the *I-V* curve. This effect, which can result in a value for the maximum power that is either too high or too low, is especially evident in pulsed solar simulator systems.

10.4.3 Loading of the reference cell by the current measurement equipment, that is, non-zero input impedance, can result in measured values of irradiance that are too small. The magnitude of this error will depend on the voltage across the reference cell during the measurements, and the slope of its *I-V* curve near the short-circuit current point.

10.4.4 Measurement of the cell temperature at the back of the device can give a value that is lower than the junction temperature during exposure of the module to the test irradiation. This may result in a value for the voltage slightly too low when translated to RC.

10.4.5 Angular misalignment between the reference cell and the device under test can introduce a bias error. As the angle of incidence of the light source increases, the error due to misalignment increases. The magnitude of this error is equal to the percent difference between $\cos(\theta_i)$ and $\cos(\theta_i + \theta_e)$, where θ_i is the angle of incidence and θ_e is the misalignment angle. If the limits specified in 7.1.3 and 7.2.3 are met, the maximum error is 0.7 %.

11. **Keywords**

11.1 arrays; modules; performance; photovoltaic; testing

ANNEX

(Mandatory Information)

A1. METHOD OF DETERMINING THE NOMINAL OPERATING CELL TEMPERATURE (NOCT) OF AN ARRAY OR MODULE

A1.1 **Commentary**

A1.1.1 The temperature of a solar cell, T_c , is primarily a function of the air temperature, T_a , the average wind velocity, v , the configuration of the module mounting, and the total solar irradiance, E , impinging on the active side of the device. NOCT is defined as the temperature of a device at the conditions of the Nominal Terrestrial Environmental (NTE):

Air temperature	$T_a = 20^\circ\text{C}$
Average wind speed	$v = 1 \text{ ms}^{-1}$
Additional conditions are:	
Irradiance	$E = 800 \text{ Wm}^{-2}$
Mounting	oriented normal to solar noon, back either open or closed
Electrical load	open circuit

A1.1.2 The approach for determining NOCT is based on the fact that the temperature difference $(T_c - T_a) = \Delta T$ is largely independent of air temperature and is essentially linearly proportional to the irradiance level. Therefore, a graph of ΔT as

a function of E should approximate a straight line. The data can be linearly regressed to obtain a slope and intercept equation of the form:

$$(T_c - T_a) = m \cdot E + b \tag{A1.1}$$

where:

- m = the slope, and
- b = the ΔT intercept.

Setting $E = 800 \text{ Wm}^{-2}$ and $T_a = 20^\circ\text{C}$ in this equation, and solving for T_c will yield an uncorrected NOCT value:

$$T_c = \text{NOCT} = m \cdot (800 \text{ Wm}^{-2}) + b + (20^\circ\text{C}) \tag{A1.2}$$

A1.1.3 This uncorrected NOCT value is then corrected for wind speed in accordance with Fig. A1.1 to yield the final NOCT value.

A1.1.4 The NOCT test procedure is based on measuring T_c through temperature sensors attached directly to the individual

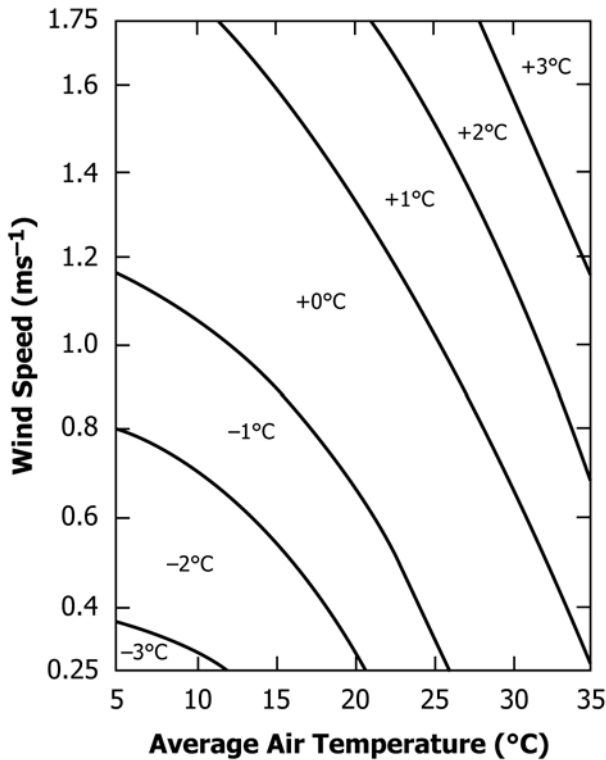


FIG. A1.1 NOCT Correction Factor

cells in the module over a range of environmental conditions similar to the NTE. The device is tested in a rack so as to simulate use conditions. A plot of ΔT versus E is obtained from a minimum of two field tests in accordance with the following test procedure.

A1.2 Apparatus

A1.2.1 *Pyranometer*— A reference pyranometer, as defined by Test Method E941.

A1.2.2 *Wind Transducer*— Records both the wind direction and the wind speed.

A1.2.3 *Temperature Sensors*—Record air and cell temperatures to within $\pm 1^\circ\text{C}$.

A1.2.4 *Mountings*—The device must be mounted in a manner similar to the application in which it is to be used, including exposure to or isolation from the wind.

A1.2.5 *Data Recording Equipment*—The response time and scale ranges shall be compatible with the transducers being used.

A1.3 Preparation

A1.3.1 Locate the module to be tested in the interior of a subarray. Black aluminum panels or other modules of the same design must be used to fill in any remaining open area of the subarray structure. Position the plane of the module so that it is normal to the sun within $\pm 5^\circ$ at solar noon.

A1.3.2 Mount the pyranometer in the same plane as the module and in close proximity to the test module.

A1.3.3 Locate the wind transducer at the approximate height of the module and as near to one of the sides of the module as feasible.

A1.3.4 For ambient air temperature measurement, the temperature sensor must be located at the approximate height of the module. The measurement is made in the shadow of the module.

A1.3.5 For cell temperature measurement, the sensor probes are directly attached to the back of the monitored cells. At least one cell in each quadrant of the module must be measured. Ensure that these cells are not operating in reverse bias.

A1.3.6 Ensure there are no obstructions to prevent full irradiation of the module for a period beginning a minimum of 4 h before and 4 h after solar noon. The ground surrounding the module must not have a high solar reflectance and should be flat or sloping, or both, away from the test fixture. Grass and various types of ground covers, blacktop, and dirt are recommended for the local surrounding area. Buildings having highly reflective surfaces should not be present in the immediate vicinity. Good engineering judgment shall be exercised to ensure that the module front and back sides are receiving a minimum of reflected solar energy from the surrounding area.

A1.3.7 The wind must be predominantly either northerly or southerly; flow parallel to the plane of the array is not acceptable and can result in a low value of NOCT.

A1.3.8 The module terminals are left in an open-circuit condition.

A1.3.9 Clean the active side of the module and the pyranometer bulb before the start of each test. Dirt must not be allowed to build up during the measurement. Cleaning with mild soap solution followed by a rinse with distilled water has proven to be effective.

A1.3.10 A calibration check should be made for all the equipment prior to the start of the test.

A1.4 Procedure

A1.4.1 Acquire a semicontinuous record of ΔT over a one- or two-day period. In addition, irradiance, wind speed, wind direction, and air temperature must be continuously recorded. Record all data approximately every 5 min. Acceptable data consists of measurements made when the average wind speed is $1.0 \pm 0.75 \text{ ms}^{-1}$ and with gusts less than 4 ms^{-1} for a period of 5 min prior and up to the time of measurement. Local air temperature during the test period shall be $20 \pm 15^\circ\text{C}$.

A1.4.2 Construct a plot from a set of measurements made either prior to solar noon or after solar noon that defines the relationship between ΔT and E .

A1.4.3 Using the plot of ΔT versus E , the value of ΔT at the NTE is determined by interpolating the average value of ΔT for $E = 800 \text{ Wm}^{-2}$. Use Eq A1.1 to interpolate.

A1.4.4 A correction factor, C_f , to the uncorrected NOCT for average air temperature and wind velocity is determined from Fig. A1.1. This value is added to the uncorrected NOCT and corrects the data to 20°C and 1 ms^{-1} .

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; <http://www.copyright.com/>