



BSI Standards Publication

**Road vehicles — Round,
sheathed, 60 V and 600 V
screened and unshielded
single- or multi-core cables
— Test methods and
requirements for basic- and
high-performance cables**

National foreword

This British Standard is the UK implementation of ISO 14572:2011. It supersedes BS ISO 14572:2006 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee AUE/16, Electrical and electronic equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2011

ISBN 978 0 580 66253 9

ICS 43.040.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2011.

Amendments issued since publication

Date	Text affected
------	---------------

**Road vehicles — Round, sheathed, 60 V
and 600 V screened and unscreened
single- or multi-core cables — Test
methods and requirements for basic- and
high-performance cables**

*Véhicules routiers — Câbles monoconducteurs ou multiconducteurs
ronds, sous gaine, blindés et non blindés de 60 V et 600 V — Méthodes
d'essai et exigences pour les câbles à performances de base et à
hautes performances*





COPYRIGHT PROTECTED DOCUMENT

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General requirements	2
4.1 Safety concerns	2
4.2 Rating of cables	2
4.3 600 volt cables	2
4.4 Tests	2
4.5 General test conditions	3
4.6 Ovens	3
4.7 Visual appearance	3
5 Tests and requirements	4
5.1 Outside cable diameter	4
5.2 Ovality of sheath	4
5.3 Thickness of sheath	5
5.4 Electrical continuity	5
5.5 Withstand voltage	5
5.6 Screening effectiveness	6
5.7 Pressure test at high temperature	7
5.8 Adhesion of sheath	8
5.9 Cyclic bending	8
5.10 Winding at low temperature	9
5.11 Impact at low temperature	10
5.12 Resistance to abrasion	11
5.13 Long-term heat ageing, 3 000 h	12
5.14 Short-term heat ageing, 240 h	12
5.15 Thermal overload	13
5.16 Shrinkage by heat of sheath	13
5.17 Fluid compatibility	14
5.18 Durability of sheath marking	14
5.19 Resistance to ozone	14
5.20 Temperature and humidity cycling	15
5.21 Resistance to flame propagation	15
5.22 Artificial weathering	15
Annex A (informative) Source for reference material	17

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14572 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This third edition cancels and replaces the second edition (ISO 14572:2006), which has been technically revised.

Road vehicles — Round, sheathed, 60 V and 600 V screened and unscreened single- or multi-core cables — Test methods and requirements for basic- and high-performance cables

WARNING — The use of this International Standard may involve hazardous materials, operations, and equipment. This International Standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this International Standard to establish appropriate safety practices and determine the applicability of regulatory limitations prior to use.

1 Scope

This International Standard specifies test methods and requirements for basic- and high-performance round, single- or multi-core sheathed cables intended for use in road vehicle applications where the nominal system voltage is \leq (60 V d.c. or 25 V a.c.). It also specifies additional test methods and/or requirements for 600 V cables intended for use in road vehicle applications where the nominal system voltage is $>$ (60 V d.c. or 25 V a.c.) and \leq (600 V d.c. or 600 V a.c.).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4892-2, *Plastics — Methods of exposure to laboratory light sources — Part 2: Xenon-arc lamps*

ISO 6722-1, *Road vehicles — 60 V and 600 V single-core cables — Part 1: Dimensions, test methods and requirements for copper conductor cables*

IEC 60811-1-1, *Common test methods for insulating and sheathing materials of electric cables and optical cables — Part 1-1: Methods for general application — Measurement of thickness and overall dimensions — Tests for determining the mechanical properties*

IEC 62153-4-3, *Metallic communication cable test methods — Part 4-3: Electromagnetic compatibility (EMC) — Surface transfer impedance — Triaxial method*

IEC 62153-4-5, *Metallic communication cable test methods — Part 4-5: Electromagnetic compatibility (EMC) — Coupling or screening attenuation — Absorbing clamp method*

IEC 62153-4-6, *Metallic communication cable test methods — Part 4-6: Electromagnetic compatibility (EMC) — Surface transfer impedance — Line injection method*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

NOTE Whenever a.c. voltage is specified throughout this International Standard, a.c. rms value shall be used.

3.1

basic-performance (cable)

(cable) meeting basic requirements for general automotive applications

3.2

core

assembly comprising a conductor with its own insulation (and screens if any)

3.3 high-performance (cable)
(cable) meeting all basic requirements plus enhanced mechanical and/or environmental performance (as defined by the customer)

3.4 screen
conductive material intended to reduce the penetration and/or radiation of a varying electromagnetic field into an assigned region

3.5 unscreened
without a screen

3.6 60 volt (V) cable
cable intended for use in road vehicle applications where the nominal system voltage is equal to or less than (60 V d.c. or 25 V a.c.)

3.7 600 volt (V) cable
cable intended for use in road vehicle applications where the nominal system voltage greater than (60 V d.c. or 25 V a.c.) and less than or equal to (600 V d.c. or 600 V a.c.)

3.8 nominal (value)
suitable approximate value used to designate or identify a component

4 General requirements

4.1 Safety concerns

See "Warning" at the beginning of this International Standard.

4.2 Rating of cables

4.2.1 Voltage rating

The voltage rating is established by the rating of the cores. 60 V and 600 V cores shall not be mixed in the same multi-core cable.

4.2.2 Temperature class rating

The temperature class rating is established by the rating(s) of the cores and sheath. The rating of the cable shall be equal to the lowest rating of the individual cores and sheath. For details on temperature classes see ISO 6722-1.

4.3 600 volt cables

Special care shall be taken for cables used for voltages above 60 V d.c. to protect them from mechanical stress to avoid shock hazard.

The 600 V cable sheath shall be visually identified with permanent orange colour.

4.4 Tests

The cables shall be subjected to the tests as specified in Table 1.

Table 1 — Tests

Clause	Test description	In-progress tests ^a	Certification		If required ^c	
			Initial	Periodic ^b	Initial	Periodic ^b
4.7	Visual appearance	—	X	X	—	—
5.1	Outside cable diameter	—	X	X	—	—
5.2	Ovality of sheath	—	—	—	X	X
5.3	Thickness of sheath	—	X	X	—	—
5.4	Electrical continuity	X	X	X	—	—
5.5	Withstand voltage	X	X	X	—	—
5.6	Screening effectiveness	—	—	—	X	X
5.7	Pressure test at high temperature	—	X	X	—	—
5.8	Adhesion of sheath	—	—	—	X	X
5.9	Cyclic bending	—	—	—	X	—
5.10	Winding at low temperature	—	X	X	—	—
5.11	Impact at low temperature	—	—	—	X	X
5.12	Resistance to abrasion	—	—	—	X	X
5.13	Long-term heat ageing, 3 000 h	—	X	—	—	—
5.14	Short-term heat ageing, 240 h	—	X	X	—	—
5.15	Thermal overload	—	—	—	X	X
5.16	Shrinkage by heat of sheath	—	X	X	—	—
5.17	Fluid compatibility		Note	Note		
5.18	Durability of sheath marking	—	—	—	X	X
5.19	Resistance to ozone	—	—	—	X	—
5.20	Temperature and humidity cycling	—	—	—	X	—
5.21	Resistance to flame propagation	—	X	X	—	—
5.22	Artificial weathering	—	—	—	X	—

NOTE Some fluids are for “certification” and others are “if required” (see 5.17 for details).

^a A test made on all cables during or after manufacture.

^b The frequency of periodic testing shall be established by agreement between customer and supplier.

^c The usage of “if required” tests shall be established by agreement between customer and supplier.

4.5 General test conditions

If not otherwise specified, the device under test (DUT) shall be preconditioned for at least 16 h at a room temperature (RT) of $(23 \pm 5) ^\circ\text{C}$ and a relative humidity (RH) of 45 % to 75 %. Unless otherwise specified, all tests other than in-progress tests shall be conducted at these conditions.

Where no tolerance is specified, all values shall be considered to be approximate.

When a.c. tests are performed, they shall be at 50 Hz or 60 Hz. Applications at higher frequencies may require additional testing.

4.6 Ovens

The procedure should be followed according to ISO 6722-1.

4.7 Visual appearance

On visual examination, the sheath shall be smooth, even and free from surface imperfections such as lumps, voids, particles, or other imperfections.

5 Tests and requirements

5.1 Outside cable diameter

5.1.1 Purpose

This test is intended to verify that the cable outside diameter is within the required tolerances to fit seal and harness dimension requirements.

Due to the variety of constructions, the requirements for dimensions shall be established by agreement between customer and supplier.

5.1.2 Test

Perform the test according to ISO 6722-1.

5.1.3 Requirement

The outside cable diameter shall be within the limits established by agreement between customer and supplier.

5.2 Ovality of sheath

5.2.1 General test usage

The usage of this test shall be established by agreement between customer and supplier.

Due to the variety of constructions, the requirements for dimensions shall be established by agreement between customer and supplier.

5.2.2 Purpose

This test is intended to verify that the cable ovality is within the required tolerances to fit seal and harness dimension requirements.

5.2.3 Test

Measure the maximum (d_{\max}) and the minimum (d_{\min}) outside cable diameters according to ISO 6722-1. Then calculate the ovality, O , in Equation (1) as follows:

$$O = \frac{(d_{\max} - d_{\min})}{0,5 \times (d_{\max} + d_{\min})} \times 100 \quad (1)$$

where

O is the amount the sheath is "out of round" in %;

d_{\max} is the maximum outside cable diameter in mm;

d_{\min} is the minimum outside cable diameter in mm.

5.2.4 Requirement

Ovality shall be within the limits established by agreement between customer and supplier.

5.3 Thickness of sheath

5.3.1 Purpose

This test is intended to verify that the cable sheath thickness is within the required tolerances.

Due to the variety of constructions, the requirements for dimensions shall be established by agreement between customer and supplier.

5.3.2 Test

Perform the test according to “insulation thickness” as specified in ISO 6722-1.

5.3.3 Requirement

The thickness of sheath shall be within the limits established by agreement between customer and supplier.

5.4 Electrical continuity

5.4.1 Test sample

Remove 100 mm of sheath from each end of a complete cable and 25 mm of insulation from each end of the cores.

5.4.2 Test

Use an appropriate source connected in series with an indicator such as an ohmmeter, light, or buzzer.

Connect the apparatus to one of the cores. Repeat the procedure until all cores have been tested. If a screen is present, test the continuity using the same procedure for a core. As an alternative, all of the cores shall be tested at once by connecting them in series. Take care to select a current which shall not damage the individual conductors.

5.4.3 Requirement

The indicator shall show continuity.

5.5 Withstand voltage

5.5.1 General

Unscreened single-core cables shall be tested according to ISO 6722-1.

5.5.2 Purpose

This test is intended to find electrical defects of the final product in accordance with this International Standard.

5.5.3 Test sample

Remove 100 mm of sheath from one end of the cable and remove 25 mm of insulation from each core. For the test, connect the conductors of all the cores together at one end, except for the core being tested. If a screen is present, it shall be connected in the same manner as a core.

5.5.4 Test

Use a 50 Hz or 60 Hz voltage source capable of applying 2 kV a.c. for a minimum of 3 s.

Apply 2 kV a.c. between the core to be tested and the remaining core(s) for a minimum of 3 s. Repeat the procedure until all cores have been tested. If a screen is present, it shall be tested as one of the cores.

5.5.5 Requirement

Breakdown shall not occur between core(s). If a screen is present, breakdown shall not occur between the core(s) and screen.

5.6 Screening effectiveness

5.6.1 General

This test is only used for screened cables. The usage of this test shall be established by agreement between customer and supplier.

5.6.2 d.c. Resistance of the screen

5.6.2.1 Purpose

This test is intended for cables working at frequencies equal to or less than 1 MHz.

5.6.2.2 Test sample

Prepare the test sample according to "Conductor resistance" as specified in ISO 6722-1. Remove 100 mm of sheath from each end of a complete cable.

5.6.2.3 Test

Perform the test according to "Conductor resistance" as specified in ISO 6722-1.

5.6.2.4 Requirement

The requirements for d.c. resistance of the screen shall be established by agreement between customer and supplier.

5.6.3 Surface transfer impedance — Line injection method

5.6.3.1 General

Allowable frequencies for testing should be according to "Surface transfer impedance, Line injection method" of IEC 62153-4-6.

5.6.3.2 Test sample

Prepare the test sample according to "Surface transfer impedance, Line injection method" of IEC 62153-4-6.

5.6.3.3 Test

Perform the test according to "Surface transfer impedance, Line injection method" as specified in IEC 62153-4-6.

5.6.3.4 Requirement

The requirements for surface transfer impedance shall be established by agreements between customer and supplier.

5.6.4 Surface transfer impedance — Tri-axial method

5.6.4.1 General

Allowable frequencies for testing should be according to "Surface transfer impedance, Tri-axial method" of IEC 62153-4-3.

5.6.4.2 Test sample

Prepare the test sample according to “Surface transfer impedance, Tri-axial method” as specified in IEC 62153-4-3.

5.6.4.3 Test

Perform the test according to “Surface transfer impedance, Tri-axial method” as specified in IEC 62153-4-3.

5.6.4.4 Requirement

The requirements for surface transfer impedance shall be established by agreements between customer and supplier.

5.6.5 Screening attenuation — Absorbing clamp method

5.6.5.1 General

Allowable frequencies for testing should be according to “Screening attenuation, Absorbing clamp method” of IEC 62153-4-5.

5.6.5.2 Test sample

Prepare the test sample according to “Screening attenuation, Absorbing clamp method” as specified in IEC 62153-4-5.

5.6.5.3 Test

Perform the test according to “Screening attenuation, Absorbing clamp method” as specified in IEC 62153-4-5.

5.6.5.4 Requirement

The requirements for screening attenuation shall be established by agreements between customer and supplier.

5.7 Pressure test at high temperature

5.7.1 Test samples

Prepare three test samples, each of 100 mm length.

5.7.2 Test

Perform the test in accordance with ISO 6722-1 and the following.

Apply force F by the blade to the test sample as given by Equation (2):

$$F = 0,8x\sqrt{i(2 \times D - i)} \quad (2)$$

where

F is the total vertical force exerted on the test sample in N;

D is the appropriate maximum outside cable diameter in mm as agreed between customer and supplier;

i is the appropriate nominal value of the sheath thickness in mm as agreed between customer and supplier;

0,8 is a coefficient in N/mm.

The calculated force may be rounded off at the lower digit, but not beyond 3 %.

Measure the thickness of the sheath immediately after cooling, at the point of indentation, and at points 10 mm to both sides of the impression, by means of a measuring device that does not cause deformation. Omit the withstand voltage test.

5.7.3 Requirement

For basic-performance cables, the thickness within the area of the indentation shall not be less than 40 % of the mean of the other two values.

For high-performance cables, the thickness within the area of the indentation shall not be less than 60 % of the mean of the other two values.

5.8 Adhesion of sheath

5.8.1 General

This test shall be agreed between customer and supplier.

5.8.2 Test sample

Prepare the test sample according to ISO 6722-1 "Strip force". Prepare three test samples of 150 mm from a cable sample 3 m in length. Take the test samples at 1 m intervals. The undisturbed length of sheath shall be 100 mm.

5.8.3 Test

Perform the test according to ISO 6722-1. A metal plate is provided with a round hole equal to the approximate inside diameter of the sheath.

If the 100 mm section of sheath buckles when sliding, prepare new test samples with the undisturbed length of sheath equal to 50 mm and repeat the procedure.

5.8.4 Requirement

The undisturbed section of sheath shall be able to be removed without damage to the interior cores. The strip force shall be within the limits as agreed between customer and supplier.

5.9 Cyclic bending

5.9.1 General

This test shall be agreed between customer and supplier.

5.9.2 Test samples

Take two test samples of 600 mm in length from points separated by at least 1 m.

5.9.3 Test

The apparatus shall be similar to the one shown in Figure 1. Any apparatus is acceptable as long as it meets the following conditions:


- Bend radius $r = 2,5 \times$ outside cable diameter;
- A force, F , which produces a tension of 5 N/mm^2 in the conductors;

- A fixture that bends the test sample $\pm 90^\circ$ at a rate of 15 cycles/min;
- If a mass is used, a guide may be applied to stop the mass from swinging.

Mount the test sample with one end attached to the flexing member and the other end loaded by the force, F . Flex the test sample at a speed of 15 cycles/min for the number of cycles as agreed between customer and supplier. Repeat the procedure for the other test sample.

Interruption of electrical conduction shall be detected by an appropriated method, sampling rate ≤ 10 ms.

Dimensions in millimetres

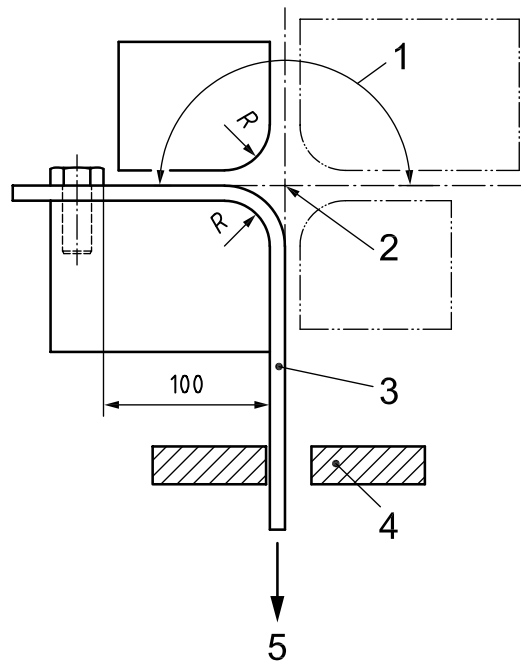

Key

- 1 1 cycle (90° to each side)
- 2 pivot
- 3 cable
- 4 fixed guide (optional)
- 5 force, F

Figure 1 — Apparatus for cyclic bending

5.9.4 Requirement

The requirement(s) for the cyclical bending shall be established by agreement between customer and supplier.

5.10 Winding at low temperature

5.10.1 Test sample

Prepare the test sample according to ISO 6722-1. Remove 100 mm of sheath from one end of the cable and remove 25 mm of insulation from each core.

5.10.2 Test

Perform the test according to ISO 6722-1. Use a freezing chamber at $(-40 \pm 2)^\circ\text{C}$.

$(-25 \pm 2)^\circ\text{C}$ may be used when agreed between customer and supplier.

See Table 2 for mandrel diameter.

Table 2 — Winding

Outside cable diameter mm	Mandrel diameter mm	Mass, if rotating mandrel is used kg	Minimum number of turns
$D \leq 2,5$	≤ 5 times "Outside cable diameter"	0,5	3
$2,5 < D \leq 5$		2,5	3
$5 < D \leq 10$		5	2
$10 < D \leq 15$		10	0,5
$15 < D \leq 25$		20	0,5
$25 < D$		30	0,5

Apply for this test a winding speed of $0,2 \text{ s}^{-1}$ for all cable sizes and a number of turns according to Table 2. After winding, the outer sheath shall be visually examined. If there is no sign of cracks in the sheath, perform the withstand voltage test according to 5.5.

If required by the customer, strip the sheath without damage to the inner cores, visually examine them, and if there is no sign of cracks, perform a 1 kV a.c. withstand voltage test with the separate cores as in ISO 6722-1.

5.10.3 Requirements

The test samples shall show no signs of cracks. Breakdown shall not occur during the different withstand voltage tests.

5.11 Impact at low temperature

5.11.1 General

This test shall be agreed between customer and supplier.

5.11.2 Test samples

Prepare three samples of a minimum length of 150 mm. Unless otherwise specified, a sample shall contain the complete sheath including any existing multiple layers.

5.11.3 Test

Perform the test according ISO 6722-1. The mass of the hammer is specified in Table 3.

Table 3 — Impact

Cable outside diameter mm	Mass of the hammer g
$D \leq 15$	300
$15 < D \leq 25$	400
$25 < D \leq 35$	500
$35 < D$	600

After impact, allow the test samples to return to RT, and make a visual examination of the sheath.

If a screen is present, perform the withstand voltage test between the screen and salt water bath; however, make the following changes to the procedure specified in ISO 6722-1:

- Immerse the test sample in the salt water bath for a minimum of 10 min prior to the application of the voltage.
- Apply the 1 kV a.c. voltage for 1 min.
- Do not “ramp up” the voltage after the application of the 1 kV a.c. voltage.

5.11.4 Requirement

The test sample shall show no sign of cracks. If a screen is present during the withstand voltage test, breakdown shall not occur.

5.12 Resistance to abrasion

5.12.1 General

This test shall be agreed between customer and supplier.

5.12.2 Test sample

Prepare a sample of 1 m length. Remove 100 mm of sheath from each end of the cable and 25 mm of the insulation from each core. Twist stripped ends of the cores together. If a screen is present, it shall be twisted together with the cores.


5.12.3 Test

Measure the resistance to abrasion using 80J garnet sandpaper with 5 mm to 10 mm conductive strips perpendicular to the edge of the sandpaper, spaced a maximum of every 75 mm. Mount a suitable bracket to the pivoting arm (see Figure 2) to maintain the test sample position over an unused portion of the sandpaper. Exert a force of $(0,63 \pm 0,05)$ N on the test sample by the combination of the bracket, support rod, and pivoting arm. The total vertical force exerted on the test sample shall be the combination of the force exerted by the bracket, pivoting arm, support rod and additional mass. A 2 kg mass may substitute the 4 kg mass if found necessary.

Mount the cable in a horizontal position as shown in Figure 2. Use an area of the abrasion tape not previously used. Place the mass and bracket on top of the cable. Draw the sandpaper under the specimen at a rate of $(1\ 500 \pm 75)$ mm/min and record the length of sandpaper necessary to expose a conductor or screen. Move the test sample 20 mm and rotate the test sample clockwise 90° . Repeat the procedure for a total of 4 readings. The mean of the readings shall determine the resistance to abrasion.

5.12.4 Requirement

The resistance to abrasion shall meet the requirements as agreed between customer and supplier.

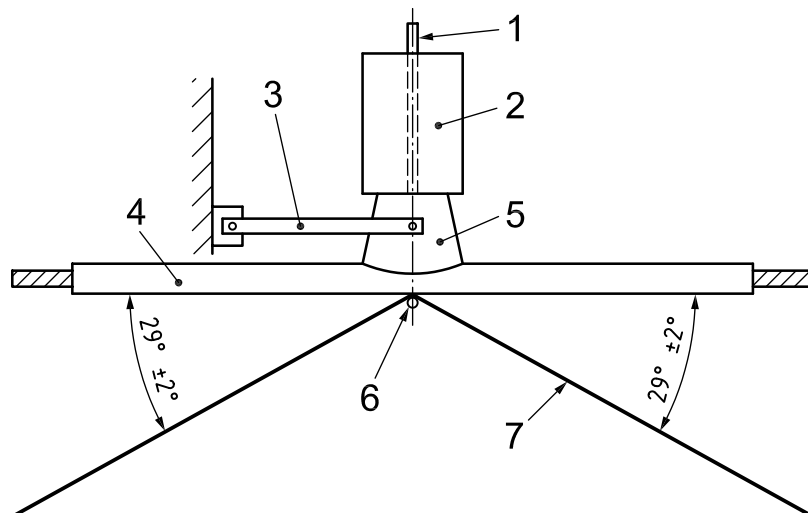

Key

- | | |
|------------------------|--|
| 1 support rod | 5 bracket |
| 2 4 kg additional mass | 6 tape supporting pin, diameter = 6,9 mm |
| 3 pivoting arm | 7 80J, garnet sandpaper abrasion tape |
| 4 test sample | |

Figure 2 — Apparatus for “Sandpaper abrasion”

5.13 Long-term heat ageing, 3 000 h

5.13.1 Purpose

This test is intended to confirm the temperature class rating.

5.13.2 Test samples

Prepare the test samples according to ISO 6722-1. Remove 25 mm of sheath from each end of the cable.

5.13.3 Test

Perform the test according to ISO 6722-1. See Table 2 for mandrel diameter and mass.

After winding, visually examine the outer sheath. If there is no sign of cracks in the sheath, perform the withstand voltage test as in 5.5.

If required by the customer, strip the sheath without damage to the inner cores, visually examine them, and if there is no sign of cracks, perform a 1 kV a.c. withstand voltage test with the separate cores as specified in ISO 6722-1.

5.13.4 Requirements

According to ISO 6722-1. The test samples shall show no signs of cracks. Breakdown shall not occur during the different withstand voltage tests.

5.14 Short-term heat ageing, 240 h

5.14.1 Purpose

This test is intended to simulate thermal excursions.

5.14.2 Test samples

Prepare the test samples according to ISO 6722-1. Remove 25 mm of sheath from each end of the cable.

5.14.3 Test

Perform the test according to ISO 6722-1. See Table 2 for mandrel diameter and mass.

After winding, visually examine the outer sheath. If there is no sign of cracks in the sheath, perform the withstand voltage test as in 5.5.

If agreed between customer and supplier, strip the sheath without damage to the inner cores, visually examine them, and if there is no sign of cracks, perform a 1 kV a.c. withstand voltage test with the separate cores as specified in ISO 6722-1.

5.14.4 Requirements

The test samples shall show no signs of cracks. Breakdown shall not occur during the different withstand voltage tests.

5.15 Thermal overload

5.15.1 Purpose

This test is intended to simulate thermal overload conditions of the cable.

5.15.2 Test samples

Prepare the test samples according to ISO 6722-1. Remove 25 mm of sheath from each end of the cable.

5.15.3 Test

Perform the test according to ISO 6722-1. See Table 2 for mandrel diameter and mass.

After winding, visually examine the outer sheath. If there is no sign of cracks in the sheath, perform the withstand voltage test according to 5.5.

If agreed between customer and supplier, strip the sheath without damage to the inner cores, visually examine them, and if there is no sign of cracks, perform a 1 kV a.c. withstand voltage test with the separate cores as specified in ISO 6722-1.

5.15.4 Requirements

The test samples shall show no signs of cracks. Breakdown shall not occur during the different withstand voltage tests.

5.16 Shrinkage by heat of sheath

5.16.1 Test sample

Prepare three test samples of 200 mm in length.

5.16.2 Test

Perform the test according to ISO 6722-1. Measure the shrinkage of the sheath.

5.16.3 Requirement

The requirement shall be as agreed between customer and supplier.

5.17 Fluid compatibility

5.17.1 General

The applicability of this test should be according to ISO 6722-1, "Fluid compatibility".

5.17.2 Test samples

According to ISO 6722-1.

5.17.3 Test

Perform the test according to ISO 6722-1. During immersion, the bend diameter of the cable shall be a minimum of ten times its outside diameter. See Table 2 for mandrel diameter and mass. Omit the withstand voltage test.

NOTE Sources for reference materials are shown in Table A.1. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by ISO of the source. Equivalent products may be used if they can be shown to lead to the same results.

5.17.4 Requirements

After winding, the sample shall show no cracks. Other requirements shall be as agreed between customer and supplier.

5.18 Durability of sheath marking

This test, according to ISO 6722-1, shall be agreed between customer and supplier.

5.19 Resistance to ozone

5.19.1 General

This test shall be carried out as agreed between customer and supplier.

5.19.2 Test sample

Prepare the test sample according to ISO 6722-1.

5.19.3 Test

Perform the test according to ISO 6722-1. See Table 2 for mandrel diameter and mass.

Wind samples equal to or less than 10 mm in diameter 3 turns, and samples greater than 10 mm half a turn around the mandrel.

5.19.4 Requirement

The requirements shall be according to ISO 6722-1. Only the outer sheath shall be examined.

5.20 Temperature and humidity cycling

5.20.1 General

This test shall be carried out as agreed between customer and supplier.

5.20.2 Test samples

Prepare two samples, each of approximately 600 mm in length.

5.20.3 Test

Use the test chamber according to ISO 6722-1. See Table 2 for mandrel diameter.

Wind samples equal to or less than 10 mm in diameter 3 turns, and samples greater than 10 mm half a turn around the mandrel and secure the ends. See ISO 6722-1 for the procedure to condition the test samples. Make a visual examination of the sheath. Ignore any damage caused by the clamps which secure the ends.

5.20.4 Requirement

The test samples shall show no cracks.

5.21 Resistance to flame propagation

5.21.1 Test sample

Prepare the test sample according to ISO 6722-1.

5.21.2 Test

Perform the test according to ISO 6722-1. Apply the flame until the conductor becomes visible or for 30 s, for all cables, whichever comes first.

5.21.3 Requirement

The requirements shall be according to ISO 6722-1.

5.22 Artificial weathering

5.22.1 General

This test shall be carried out as agreed between customer and supplier.

5.22.2 Test sample

Take ten tensile test samples according to IEC 60811-1-1 from the sheath of the cable to be tested.

5.22.3 Test

Use an ultraviolet radiation cabinet according to ISO 4892-2 with a xenon arc lamp at (55 ± 3) °C, water spray cycles (5 min water spray and 25 min dry interval, or 12 min and 180 min respectively) and a relative humidity of (50 ± 5) % for the dry intervals.

Condition five of the samples in the test cabinet for 750 h. After removal from the test cabinet, allow the samples to attain room temperature and then subject them to the tensile test according to IEC 60811-1-1 together with the remaining five samples.

5.22.4 Requirement

After exposure to the artificial weathering, the elongation shall not be less than 50 % of the original measured value.

Annex A (informative)

Source for reference material

Table A.1 — Materials and sources

Reference material	Supplier
Engine Oil ASTM D471, IRM 902 Oil ISO 1817, Oil No. 2 and Power Steering ASTM D471, IRM 903 Oil ISO 1817, Oil No. 3	R.E. Carroll, Inc. PO Box 5806 Trenton, NJ 08638-0806 USA Phone: +1 800-257-9365 Fax: +1 609-695-0102 URL: http://www.recarroll.com
	Penreco 4426 East Washington Boulevard Los Angeles, CA 90023 USA Phone: +1 888-227-5448 Fax: +1 323-268-7972 URL: http://www.penreco.com
	SP Technical Research Institute of Sweden Box 857 SE-501 15 Borås Sweden Phone: +46 10 516 50 00 Fax: +46 33 10 33 88 URL: http://www.sp.se/en
Automatic Trans Fluid SAE J311, Dexron III and VI Citgo Part No. 33123	Citgo Petroleum 699 Heights Road Lake Orion, MI 48362 USA Phone: +1 800-331-4068 URL: http://www.citgo.com
Sandpaper Abrasion Tape and Sandpaper Abrasion Tester	Tech Services Group PO Box 538 2202 Niles Cortland Road Cortland, OH 44410-9404 USA Phone: +1 (330) 638-5088

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™