

PD CLC/TR 50481:2009



BSI British Standards

Recommendations on filters for shielded enclosures

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

raising standards worldwide™

BSI
British Standards

National foreword

This Published Document is the UK implementation of CLC/TR 50481:2009.

The UK participation in its preparation was entrusted by Technical Committee GEL/210, EMC - Policy committee, to Subcommittee GEL/210/12, EMC basic, generic and low frequency phenomena Standardization.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2009

ISBN 978 0 580 64194 7

ICS 31.160; 33.100.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 31 July 2009

Amendments issued since publication

| Amd. No. | Date | Text affected |
|-----------------|-------------|----------------------|
|-----------------|-------------|----------------------|

TECHNICAL REPORT
RAPPORT TECHNIQUE
TECHNISCHER BERICHT

CLC/TR 50481

April 2009

ICS 33.100.10; 31.160

Supersedes R210-004:1999

English version

Recommendations on filters for shielded enclosures

This Technical Report was approved by CENELEC on 2009-03-20.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: avenue Marnix 17, B - 1000 Brussels

Foreword

This Technical Report was prepared by the Technical Committee CENELEC TC 210, Electromagnetic compatibility (EMC).

The text of the draft was submitted to vote in accordance with the Internal Regulations, Part 2, Subclause 11.4.3.2 (simple majority) and was approved by CENELEC as CLC/TR 50481 on 2009-03-20.

This document supersedes R210-004:1999.

Contents

| | | |
|----------|--|----------|
| 1 | Scope | 4 |
| 2 | Normative references | 4 |
| 3 | Definitions | 4 |
| 4 | General recommendations on filters | 4 |
| 5 | Insertion loss..... | 4 |
| | 5.1 Insertion loss of filters..... | 4 |
| | 5.2 Insertion loss values | 5 |
| 6 | Filter selection..... | 5 |
| | 6.1 Choice of filter..... | 5 |
| | 6.2 Power line filters | 6 |
| | 6.3 Signal line filters (including telecom lines)..... | 6 |
| 7 | Electrical safety..... | 6 |
| 8 | Installation of filters..... | 7 |

Figures

| | |
|---|---|
| Figure 1 – Filter insertion loss value a_e (typical performance for shielded enclosures)..... | 5 |
| Figure 2 – Filter installations schematic | 7 |

1 Scope

This document was prepared to give users general advices on filtering solutions adopted in shielded enclosures. It is mainly a collection of hints derived from practical experience.

This document is coordinated with EN 50147-1 and EN 50417-2.

The document covers the frequency range DC to 40 GHz. The range above 40 GHz and up to 400 GHz is under consideration.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050(161), *International Electrotechnical Vocabulary (IEV) – Chapter 161: Electromagnetic compatibility*

CISPR 17:1981, *Methods of measurement of the suppression characteristics of passive radio interference filters and suppression components*

3 Definitions

For the purposes of this document, the terms and definitions given in CISPR 17:1981 apply.

4 General recommendations on filters

To prevent interference or over-voltages from being fed into, or out of the shielded enclosure via lines, all lines passing through the shielding must be filtered. In many cases it is not only necessary to protect equipment from broadband interfering signals, but also to limit pulsed type interference (effects of lightning and any man made pulse type phenomena e.g. industrial process). The filter shall not degrade the shielding attenuation of the shielded enclosure. Filters that meet the requirements of the referenced specification below should not be retested after installation because the testing of filters is done in 50 Ω system and shielding is a measure of transmission loss performed with antennas. If cables that penetrate a shielded enclosure cannot be filtered, they shall have adequate shielding effectiveness and termination on both sides so as to avoid degradation of the shielding effectiveness of the whole installation.

Filters are required at each point where an unshielded wire or cable passes through the shielding material of a shielded enclosure. This is to prevent uncontrolled transfer of electromagnetic energy into, or out of, shielded enclosure.


5 Insertion loss

5.1 Insertion loss of filters

Practical experience has shown that the insertion loss value of the filters shall be at least as great as the required shield attenuation values of the enclosure. The insertion loss of the filters shall be carefully selected keeping in mind that in the low frequency range (say < 100 kHz), the interference is mainly propagated over lines (conducted interference). The shielding effectiveness of the filter housing shall not reduce that of the shielded enclosure.

5.2 Insertion loss values

The insertion loss of the filter is characterised by the lowest attenuation value recorded by three measuring circuits (balanced, unbalanced, asymmetrical) described in CISPR 17. The specified insertion loss value shall be met with the full current load over the entire specified frequency range. During approval measurement of the shielded room, all the cabling of the filters should be noticed and taken into account during the measurement of the shielding attenuation of the enclosure. The filter is expected to attenuate all current lines and neutral by frequency dependent factor while the power frequency attenuation should approach zero. Signal filters shall behave in the same manner as above and particular attention is to be paid to the low band, pass band and high band (e.g. of shielded cables).

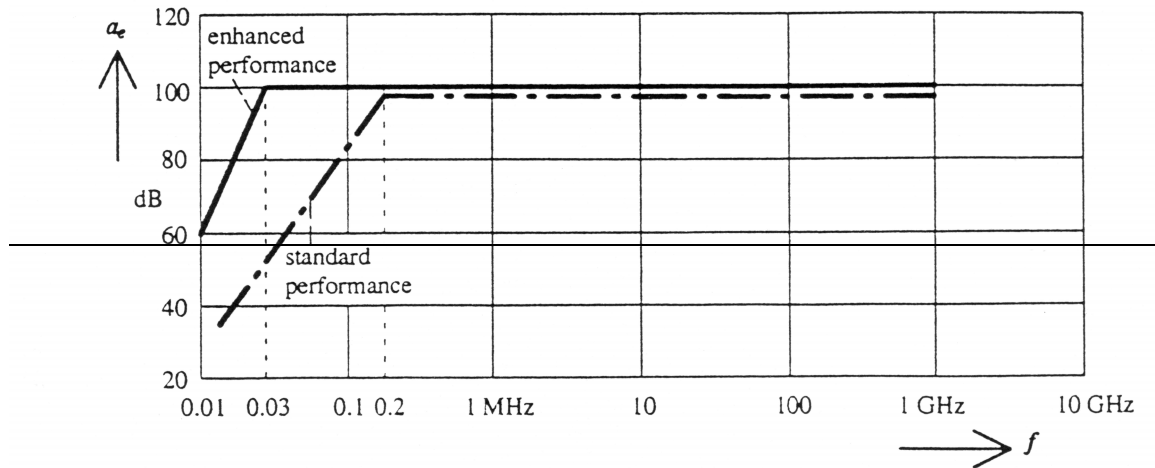

Measurement configuration B3 and B4 of CISPR 17.

Figure 1 – Filter insertion loss value a_e (typical performance for shielded enclosures)

6 Filter selection

In the case of filters with current compensated chokes, steps should be taken to ensure that the outgoing and return lines are routed through the same filter. If artificial mains networks (according to EN 55016 series) or coupling/decoupling networks for immunity tests are installed in shielded rooms, the use of filters with current compensated chokes is not recommended, because of saturation of the core. A considerable reactive current flows in that artificial network and does not ensure compensation of the current in the chokes. In these cases filters with non-saturated coils shall be used. Balanced telecommunications lines shall be routed via a special filter.

6.1 Choice of filter

Basic designs are available for power, control and telecommunications filters:

- filter to suppress interference
Interference suppression filters are configured as reflective low pass filters, i.e. they always reach their maximum stop band attenuation if they are mismatched to the impedance of the interfering source or interfering sink, as well as the line impedance;
- filter to suppress over voltage
Over voltage protection filters are configured using non linear devices, e. g. gas arrestors SVP (surge voltage protector), varistors and suppression diodes TAZ (= Transient Absorption Zener), for which the switching characteristics (speed, threshold level are fundamental to the function of the filter).

Both filters may be combined.

6.2 Power line filters

The user of the enclosure determines his filter requirements in terms of power frequency and current rating, any power line filter for DC, 50 Hz, 60 Hz and 400 Hz (or any other required frequency) supply shall be used within its specification.

Line filters at higher frequencies (max. 400 Hz) may also be used for lower frequency applications. The current rating of the filter should always be higher than the maximum operating current.

6.3 Signal line filters (including telecom lines)

A signal line filter shall be adequate for the application (e.g. correct pass band, for example: Fire protection system).

7 Electrical safety

For safety reasons all metallic parts of the shield must be connected to protective earth. The relevant parts of HD 60364 series, Low-voltage electrical installations, should be observed.

All RF suppressor filters contain a continuous line for the protective earth (PE) conductor. The PE conductor is in contact with the housing, although the filter housing is fixed on the shielded wall and is in good electrical contact with it. Safety reasons require that it will be connected to the ground bolt of the shielded wall via a conductor from the ground terminal of the RF suppressor filter. The protective ground is connected to the ground bolt.

Power line filter may have high leakage current adequate protection may be ensured using a combination of ELCB (Earth leakage circuit breaker) and transformer.

In certain cases isolation of the shield from the host building is necessary. To meet this requirement care must be taken that no electrical connection exists between the shield and conductors like metal reinforcing bars in concrete walls, gas and water supply tubes, ground conductors of fluorescent lamps outside the shielded room, and other metallic materials. In this case it is essential that the ground connection of the entire shielding structure is made at one, carefully selected point (single point grounding). Moreover for EMC reasons it is also essential, that this ground connection has an impedance as low as possible and is frequently checked.

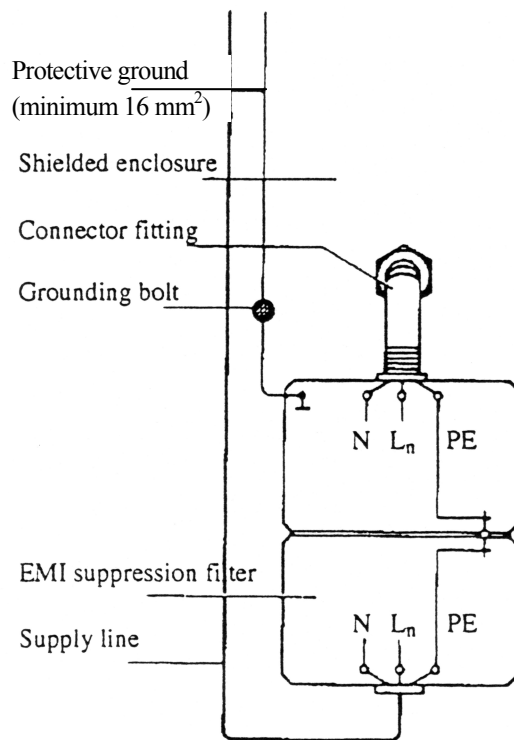


Figure 2 – Filter installations schematic

8 Installation of filters

Whenever possible, the filters shall be bonded directly to the shield and shall be located in close proximity to each other.

The bond impedance shall be as low as practicable. If the bonding is established by conduit between the shielded enclosure and the filters, then the conduit shall be metal with welded seam or equivalent and the connection of the conduit to the filter and the shielding shall be welded, soldered or bolted to achieve the lowest practicable bond impedance.

In the case of filters with current compensated chokes, the appropriate steps should be taken to ensure that the outgoing and return lines are routed through the same filter.

Bibliography

EN 50147-1, *Anechoic chambers – Part 1: Shield attenuation measurement*

EN 50147-2, *Anechoic chambers – Part 2: Alternative test site suitability with respect to site attenuation*

EN 55016-1 series, *Specification for radio disturbance and immunity measuring apparatus and methods* (CISPR 16-1 series)

HD 60364 series, *Low-voltage electrical installations* (IEC 60364 series, mod.)

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level.

It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.

Tel: +44 (0)20 8996 9000 Fax: +44 (0)20 8996 7400

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001
Email: orders@bsigroup.com

You may also buy directly using a debit/credit card from the BSI Shop on the website www.bsigroup.com/shop

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library.

Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.

Tel: +44 (0)20 8996 7111

Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at www.bsigroup.com/BSOL

Further information about BSI is available on the BSI website at www.bsigroup.com

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Manager.

Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001

Fax +44 (0)20 8996 7001

www.bsigroup.com/standards

raising standards worldwide™

