



Standard Test Method for Water Vapor Content of Gaseous Fuels by Measurement of Dew-Point Temperature¹

This standard is issued under the fixed designation D1142; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

This standard has been approved for use by agencies of the U.S. Department of Defense.

1. Scope

1.1 This test method covers the determination of the water vapor content of gaseous fuels by measurement of the dew-point temperature and the calculation therefrom of the water vapor content.

NOTE 1—Some gaseous fuels contain vapors of hydrocarbons or other components that easily condense into liquid and sometimes interfere with or mask the water dew point. When this occurs, it is sometimes very helpful to supplement the apparatus in Fig. 1 with an optical attachment that uniformly illuminates the dew-point mirror and also magnifies the condensate on the mirror. With this attachment it is possible, in some cases, to observe separate condensation points of water vapor, hydrocarbons, and glycolamines as well as ice points. However, if the dew point of the condensable hydrocarbons is higher than the water vapor dew point, when such hydrocarbons are present in large amounts, they may flood the mirror and obscure or wash off the water dew point. Best results in distinguishing multiple component dew points are obtained when they are not too closely spaced.

NOTE 2—Condensation of water vapor on the dew-point mirror may appear as liquid water at temperatures as low as 0 to -10°F (-18 to -23°C). At lower temperatures an ice point rather than a water dew point likely will be observed. The minimum dew point of any vapor that can be observed is limited by the mechanical parts of the equipment. Mirror temperatures as low as -150°F (-100°C) have been measured, using liquid nitrogen as the coolant with a thermocouple attached to the mirror, instead of a thermometer well.

1.2 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Terminology

2.1 Definitions of Terms Specific to This Standard:

2.1.1 *saturated water vapor or equilibrium water-vapor content*—the water vapor concentration in a gas mixture that is in equilibrium with a liquid phase of pure water that is

¹ This test method is under the jurisdiction of ASTM Committee D03 on Gaseous Fuels and is the direct responsibility of Subcommittee D03.05 on Determination of Special Constituents of Gaseous Fuels.

Current edition approved Nov. 1, 2012. Published December 2012. Originally approved in 1950. Last previous edition approved in 2006 as D1142 – 95(2006). DOI: 10.1520/D1142-95R12.

saturated with the gas mixture. When a gas containing water vapor is at the water dew-point temperature, it is said to be saturated at the existing pressure.

2.1.2 *specific volume*—of a gaseous fuel, the volume of the gas in cubic feet per pound.

2.1.3 *water dew-point temperature*— of a gaseous fuel, the temperature at which the gas is saturated with water vapor at the existing pressure.

3. Significance and Use

3.1 Generally, contracts governing the pipeline transmission of natural gas contain specifications limiting the maximum concentration of water vapor allowed. Excess water vapor can cause corrosive conditions, degrading pipelines and equipment. It can also condense and freeze or form methane hydrates causing blockages. Water-vapor content also affects the heating value of natural gas, thus influencing the quality of the gas. This test method permits the determination of water content of natural gas.

4. Apparatus

4.1 Any properly constructed dew-point apparatus may be used that satisfies the basic requirements that means must be provided:

4.1.1 To permit a controlled flow of gas to enter and leave the apparatus while the apparatus is at a temperature at least 3°F above the dew point of the gas.

4.1.2 To cool and control the cooling rate of a portion (preferably a small portion) of the apparatus, with which the flowing gas comes in contact, to a temperature low enough to cause vapor to condense from the gas.

4.1.3 To observe the deposition of dew on the cold portion of the apparatus.

4.1.4 To measure the temperature of the cold portion on the apparatus on which the dew is deposited, and

4.1.5 To measure the pressure of the gas within the apparatus or the deviation from the known existing barometric pressure.

4.1.6 The apparatus should be constructed so that the “cold spot,” that is, the cold portion of the apparatus on which dew

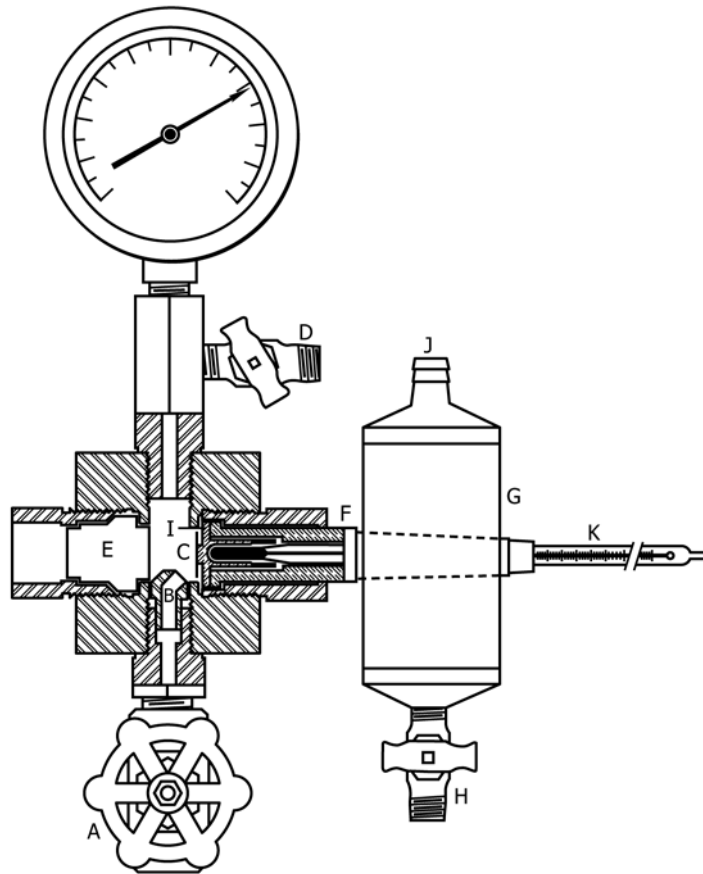


FIG. 1 Bureau of Mines Dew-Point Apparatus

is deposited, is protected from all gases other than the gas under test. The apparatus may or may not be designed for use under pressure.

4.2 The Bureau of Mines type of dew-point apparatus² shown in Fig. 1 fulfills the requirements specified in 4.1. Within the range of conditions in Section 1, this apparatus is satisfactory for determining the dew point of gaseous fuels. Briefly, this apparatus consists of a metal chamber into and out of which the test gas is permitted to flow through control valves A and D. Gas entering the apparatus through valve A is deflected by nozzle B towards the cold portion of the apparatus, C. The gas flows across the face of C and out of the apparatus through valve D. Part C is a highly polished stainless steel “target mirror,” cooled by means of a copper cooling rod, F. The mirror, C, is silver-soldered to a nib on the copper thermometer well fitting, I, which is soft-soldered to the cooling rod, F. The thermometer well is integral with the fitting, I. Cooling of rod F is accomplished by vaporizing a refrigerant such as liquid butane, propane, carbon dioxide, or some other liquefied gas in the chiller, G. The refrigerant is throttled into the chiller through valve H and passes out at J. The chiller body is made of copper and has brass headers on either end. The lower header is connected with the upper

header by numerous small holes drilled in the copper body through which the vaporized refrigerant passes. The chiller is attached to the cooling rod, F, by means of a taper joint. The temperature of the target mirror, C, is indicated by a calibrated mercury-in-glass thermometer, K, whose bulb fits snugly into the thermometer well. Observation of the dew deposit is made through the pressure-resisting transparent window, E.

4.2.1 Note that only the central portion of the stainless steel target mirror, C, is thermally bonded to the fitting, I, through which C is cooled. Since stainless steel is a relatively poor thermal conductor, the central portion of the mirror is thus maintained at a slightly lower temperature than the outer portion, with the result that the dew first appears on the central portion of the mirror and its detection is aided materially by the contrast afforded. The arrangement for measuring the temperature of the target mirror, C, also should be noted. The temperature is read with a thermometer or RTD, K, inserted in the cooling rod, F, so that the bulb of the temperature measuring device is entirely within the thermometer well in fitting, I. The stud to which the stainless steel mirror is silver-soldered is a part of the base of the thermometer well, and as there is no metallic contact between the thermometer well and the cooling tube, other than through its base, the thermometer or RTD indicates the temperature of the mirror rather than some compromise temperature influenced by the temperature gradient along the cooling tube as would be the

²Deaton, W. M., and Frost, E. M., Jr., “Bureau of Mines Apparatus for Determining the Dew Point of Gases Under Pressure,” *Bureau of Mines Report of Investigation 3399*, May 1938.

case if this type of construction were not used. The RTD will include suitable electronics and display.

4.2.2 Tests with the Bureau of Mines type of dew-point apparatus are reported² to permit a determination with a precision (reproducibility) of $\pm 0.2^\circ\text{F}$ ($\pm 0.1^\circ\text{C}$) and with an accuracy of $\pm 0.2^\circ\text{F}$ ($\pm 0.1^\circ\text{C}$) when the dew-point temperatures range from room temperature to a temperature of 32°F (0°C). It is estimated that water dew points may be determined with an accuracy of $\pm 0.5^\circ\text{F}$ (0.3°C) when they are below 32°F (0°C) and not lower than 0°F (-17.8°C), provided ice crystals do not form during the determination.

5. Procedure

5.1 *General Considerations*—Take the specimen so as to be representative of the gas at the source. Do not take at a point where isolation would permit condensate to collect or would otherwise allow a vapor content to exist that is not in equilibrium with the main stream or supply of gas, such as the sorption or desorption of vapors from the sampling line or from deposits therein. The temperature of the pipelines leading the specimen directly from the gas source to the dew-point apparatus, and also the temperature of the apparatus, shall be at least 3°F (1.7°C) higher than the observed dew point. The determination may be made at any pressure, but the gas pressure within the dew-point apparatus must be known with an accuracy appropriate to the accuracy requirements of the test. The pressure may be read on a calibrated bourdon-type pressure gage; for very low pressures or more accurate measurements, a mercury-filled manometer or a dead-weight gage should be used.

5.2 *Detailed Procedure for Operation of Bureau of Mines Dew-Point Apparatus*—Introduce the gas specimen through valve A (Fig. 1), opening this valve wide if the test is to be made under full source pressure (Note 3), and controlling the flow by the small outlet valve, D. The rate of flow is not critical but should not be so great that there is a measurable or objectionable drop in pressure through the connecting lines and dew-point apparatus. A flow of 0.05 to 0.5 ft³/min (1.4 to 14 L/min) (measured at atmospheric pressure) usually will be satisfactory. With liquefied refrigerant gas piped to the chiller throttle valve, H, “crack” the valve momentarily, allowing the refrigerant to vaporize in the chiller to produce suitable lowering in temperature of the chiller tube, F, and target mirror, C, as indicated by the thermometer, K. The rate of cooling may be as rapid as desired in making a preliminary test. After estimating the dew-point temperature, either by a preliminary test or from other knowledge, control the cooling or warming rate so that it does not exceed $1^\circ\text{F}/\text{min}$ ($0.5^\circ\text{C}/\text{min}$) when this temperature is approached. For accurate results, the cooling and warming rates should approximate isothermal conditions as nearly as possible. The most satisfactory method is to cool or warm the target mirror stepwise. Steps of about

0.2°F (0.1°C) allow equilibrium conditions to be approached closely and favor an accurate determination. When dew has been deposited, allow the target mirror to warm up at a rate comparable to the recommended rate of cooling. The normal warming rate usually will be faster than desired. To reduce the rate, “crack” valve H momentarily at intervals to supply cooling to the cooling tube, F. Repeat the cooling and warming cycles several times. The arithmetic average of the temperatures at which dew is observed to appear and disappear is considered to be the observed dew point.

NOTE 3—If the water-vapor content is to be calculated as described in 6.2, the gas specimen should be throttled at the inlet valve, A, to a pressure within the apparatus approximately equal to atmospheric pressure. The outlet valve may be left wide open or restricted, as desired. The pressure existing within the apparatus must, however, be known to the required accuracy.

6. Calculation

6.1 If an acceptable chart showing the variation of water-vapor content with saturation or water dew-point temperatures over a suitable range of pressures for the gas being tested is available, the water-vapor content may be read directly, using the observed water dew-point temperature and the pressure at which the determination was made.

6.2 If such a chart is not available, the water-vapor content of the gas may be calculated from the water dew-point temperature and the pressure at which it was determined (see Note 3), as follows:

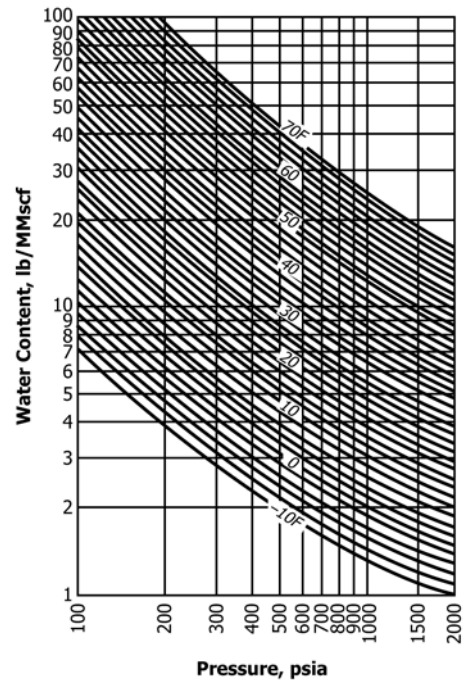


FIG. 2 Equilibrium Water Vapor Content of Natural Gases

$$W = w \times 10^6 \times (P_b/P \times (T/T_b)) \quad (1)$$

where:

- W = lb of water/million ft³ of gaseous mixture at pressure P_b and temperature T_b ;
 w = weight of saturated water vapor, lb/ft³, at the water dew-point temperature, that is, the reciprocal of the specific volume of saturated vapor (see Table 1);
 P_b = pressure-base of gas measurement, psia;
 P = pressure at which the water dew point of gas was determined, psia;
 t = observed water dew-point temperature, °F;
 T = Rankine (absolute Fahrenheit scale) water dew point, $t + 460$, at pressure P ; and
 T_b = base temperature of gas measurement, $t_b + 460$.

NOTE 4—*Example 1:*

Given: Water dew point = 37°F at 15.0-psia pressure.

What is the water–vapor content million ft³ of gas (gas measurement base of 60°F and 14.7-psia pressure)?

From Table 1 the specific volume of saturated water at 37°F is 2731.9 ft³/lb, from which:

$$w = (1/2731.9) = 0.000\ 366\ 0\ \text{lb/ft}^3$$

and

$$W = 0.000\ 366\ 0 \times 10^6 \times (14.7/15.0) \times [(460 + 37)/(460 + 60)] = 342.8\ \text{lb/million ft}^3$$

Example 2:

Given: Water dew point = 5°F at 14.4 psia.

From Table 2, the specific volume of saturated water vapor with respect to ice at 5°F is 11 550 ft³/lb from which $W_{\text{ice}, 5\text{F}} = 0.000\ 086\ 6$, but the observed water dew point was in equilibrium with subcooled liquid water at 5°F. From Table 2 (data from International Critical Tables³), the vapor pressures of subcooled liquid water and of ice at 5°F (–15°C) are 1.436 mm and 1.241 mm Hg, respectively.

Since the vapor pressure of subcooled liquid water is greater than ice at the same temperature, the weight per cubic foot of water vapor in equilibrium with liquid water will be proportionately larger than the value calculated from the specific volume read from the table, which is for equilibrium with ice.

Hence,

$$W_{\text{liq}, 5\text{F}} = W_{\text{ice}, 5\text{F}} \times (1.436/1.241)$$

$$= 0.000\ 086\ 6 \times 1.157$$

$$= 0.000\ 100\ 2\ \text{and}$$

$$W = 0.000\ 100\ 2 \times 10^6 \times (14.7/14.4) \times [(460 + 5)/(460 + 60)] = 91.5\ \text{lb/million ft}^3$$

6.3 A correlation of the available data on the equilibrium water content of natural gases has been reported by Bukacek.⁴ This correlation is believed to be accurate enough for the requirements of the gaseous fuels industry, except for unusual situations where the dew point is measured at conditions close to the critical temperature of the gas. The correlation is a modified form of Raoult's law having the following form:

$$W = (A/P) + B \quad (2)$$

where:

W = water–vapor content, lb/million ft³;

P = total pressure, psia;

A = a constant proportional to the vapor pressure of water; and

B = a constant depending on temperature and gas composition.

NOTE 5—Values of B were computed from available data on methane, methane-ethane mixtures, and natural gases.

6.3.1 Table 2 lists values of the constants A and B for natural gases in the temperature range from –40 to 460°F (–40 to 238°C).

6.3.2 Tables 3-5 list values of water–vapor content from –40 to 250°F (–40° to 121°C) and from 14.7 to 5000 psia (101 to 34 475 kPa), covering the range of most natural gas processing applications.

6.3.3 A convenient graphical representation of the data in Tables 3-5 is illustrated in Fig. 2.⁵ The moisture content values given can be corrected to base conditions other than 14.7 psia (101 kPa) and 60°F (15.5°C) by the same equations given in Table 2.

7. Precision and Bias

7.1 No precision data is available for this test method, however, the Committee is interested in conducting an inter-laboratory test program and encourages interested parties to contact the Staff Manager, Committee D03, ASTM Headquarters.

8. Keywords

8.1 gaseous fuels; natural gas

⁴ Bukacek, R. F., "Equilibrium Moisture Content of Natural Gases," *Research Bulletin 8*, Institute of Gas Technology, 1955. Reports work sponsored by the Pipeline Research Committee of the American Gas Association.

⁵ Complete sets of these charts covering the entire range of pressures and temperatures of Tables 3-5 may be purchased from the Institute of Gas Technology, 1700 S. Mount Prospect Rd., Des Plaines, IL 60018.

³ *International Critical Tables*, Vol III, National Research Council, McGraw-Hill Book Co., Inc., New York, 1928, pp. 210–211.

TABLE 1 Vapor Pressures and Specific Volumes of Saturated Water Vapor at Various Temperatures^A

Temperature, °F	Vapor Pressure of Liquid Water		Vapor Pressure of Ice		Specific Volume of Saturated Water Vapor ft ³ /lb	Temperature, °F	Vapor Pressure of Liquid Water, psia	Specific Volume of Saturated Water Vapor, ft ³ /lb
	mm Hg	psia	mm Hg	psia				
0	1.139	0.022 02	0.958	0.018 52	14 810			
1	1.195	0.023 11	1.010	0.019 53	14 080	51	0.184 85	1 644.2
2	1.251	0.024 19	1.063	0.020 56	13 400	52	0.191 82	1 587.6
3	1.310	0.025 33	1.120	0.021 66	12 750	53	0.199 01	1 533.2
4	1.373	0.026 55	1.180	0.022 82	12 140	54	0.206 44	1 480.9
5	1.436	0.027 77	1.241	0.024 00	11 550	55	0.214 11	1 430.6
6	1.505	0.029 10	1.308	0.025 29	11 000	56	0.222 03	1 382.2
7	1.573	0.030 42	1.374	0.026 57	10 480	57	0.230 21	1 335.6
8	1.647	0.031 85	1.446	0.027 96	9 979	58	0.238 65	1 290.9
9	1.723	0.033 32	1.521	0.029 41	9 507	59	0.247 36	1 247.8
10	1.807	0.034 94	1.599	0.030 92	9 060	60	0.256 35	1 206.3
11	1.883	0.036 41	1.681	0.032 51	8 636	61	0.265 62	1 166.4
12	1.970	0.038 09	1.767	0.034 17	8 234	62	0.275 19	1 128.0
13	2.057	0.039 78	1.856	0.035 89	7 851	63	0.285 06	1 091.0
14	2.149	0.041 56	1.950	0.037 71	7 489	64	0.295 24	1 055.4
15	2.247	0.043 45	2.050	0.039 64	7 144	65	0.305 73	1 021.1
16	2.345	0.045 35	2.151	0.041 59	6 817	66	0.316 55	988.03
17	2.450	0.047 37	2.260	0.043 70	6 505	67	0.327 70	956.19
18	2.557	0.049 44	2.373	0.045 89	6 210	68	0.339 20	925.51
19	2.607	0.051 63	2.489	0.048 13	5 929	69	0.351 05	895.94
20	2.785	0.053 85	2.610	0.050 47	5 662	70	0.363 26	867.44
21	2.907	0.056 21	2.740	0.052 98	5 408	71	0.375 84	839.97
22	3.032	0.058 63	2.872	0.055 54	5 166	72	0.388 79	813.48
23	3.163	0.061 16	3.013	0.058 26	4 936	73	0.402 14	787.94
24	3.299	0.063 79	3.160	0.061 10	4 717	74	0.415 88	763.31
25	3.433	0.066 38	3.310	0.064 01	4 509	75	0.430 04	739.55
26	3.585	0.069 32	3.471	0.067 12	4 311	76	0.444 61	716.62
27	3.735	0.072 22	3.636	0.070 31	4 122	77	0.459 61	694.51
28	3.893	0.075 28	3.810	0.073 67	3 943	78	0.475 05	673.16
29	4.054	0.078 39	3.989	0.077 14	3 771	79	0.490 94	652.56
30	4.224	0.081 68	4.178	0.080 79	3 608	80	0.507 29	632.68
31	4.397	0.085 02	4.373	0.084 56	3 453	81	0.524 11	613.48
32	4.579	0.088 66	4.579	0.088 54	3 301.9	82	0.541 42	594.95
33	...	0.092 30	3 178.0	83	0.559 22	577.05
34	...	0.096 07	3 059.2	84	0.577 53	559.76
35	...	0.099 98	2 945.5	85	0.596 36	543.07
36	...	0.104 04	2 836.4	86	0.615 73	526.94
37	...	0.108 23	2 731.9	87	0.635 63	511.35
38	...	0.112 58	2 631.7	88	0.656 09	496.29
39	...	0.117 08	2 535.7	89	0.677 13	481.73
40	...	0.121 73	2 443.5	90	0.698 74	467.66
41	...	0.126 55	2 355.1	91	0.720 95	454.06
42	...	0.131 54	2 270.3	92	0.743 77	440.91
43	...	0.136 70	2 188.9	93	0.767 22	428.19
44	...	0.142 04	2 110.8	94	0.791 30	415.89
45	...	0.147 56	2 035.8	95	0.816 04	403.99
46	...	0.153 28	1 963.8	96	0.841 44	392.48
47	...	0.159 18	1 894.6	97	0.867 53	381.35
48	...	0.165 28	1 828.2	98	0.894 31	370.58
49	...	0.171 59	1 764.4	99	0.921 80	360.15
50	...	0.178 12	1 703.1	100	0.950 03	350.06

^AThe values for vapor pressure, from 0 to 32°F, were calculated from data in the International Critical Tables.³ All other values were taken from Harr, Gallagher, and Kell, "NBS/NRC Steam Tables," National Standard Reference Data System, 1984, p. 9. Data on specific volumes of saturated water vapor from 0 to 32°F were obtained from Goff, J. A., and Gratch, S., "Low-Pressure Properties of Water from -160 to 212°F," *Heating, Piping, and Air Conditioning*, Vol 18, No. 2, Feb. 1946, pp. 125-136.

TABLE 2 Values of Constants A and B
 (Base Conditions = 14.7 psia, 60°F)

Temperature, °F	A	B	Temperature, °F	A	B	Temperature, °F	A	B
-40	131	0.22	70	17 200	7.17	180	357 000	74.8
-38	147	0.24	72	18 500	7.85	182	372 000	77.2
-36	165	0.26	74	19 700	8.25	184	390 000	79.9
-34	184	0.28	76	21 100	8.67	186	407 000	82.7
-32	206	0.30	78	22 500	9.11	188	425 000	85.8
-30	230	0.33	80	24 100	9.57	190	443 000	88.4
-28	256	0.36	82	25 700	10.0	192	463 000	91.4
-26	285	0.39	84	27 400	10.5	194	483 000	94.8
-24	317	0.42	86	29 200	11.1	196	504 000	97.7
-22	352	0.45	88	31 100	11.6	198	525 000	101
-20	390	0.48	90	33 200	12.2	200	547 000	104
-18	434	0.52	92	35 300	12.7	202	570 000	108
-16	479	0.56	94	37 500	13.3	204	594 000	111
-14	530	0.60	96	39 900	14.0	206	619 000	115
-12	586	0.64	98	42 400	14.6	208	644 000	119
-10	648	0.69	100	45 100	15.3	210	671 000	122
-8	714	0.74	102	47 900	16.0	212	698 000	126
-6	786	0.79	104	50 800	16.7	214	725 000	130
-4	866	0.85	106	53 900	17.5	216	754 000	134
-2	950	0.91	108	57 100	18.3	218	785 000	139
0	1 050	0.97	110	60 500	19.1	220	816 000	143
2	1 150	1.04	112	64 100	20.0	222	848 000	148
4	1 260	1.11	114	67 900	20.9	224	881 000	152
6	1 380	1.19	116	71 800	21.8	226	915 000	157
8	1 510	1.27	118	76 000	22.7	228	950 000	162
10	1 650	1.35	120	80 400	23.7	230	987 000	166
12	1 810	1.44	122	84 900	24.7	232	1 020 000	171
14	1 970	1.54	124	89 700	25.8	234	1 060 000	177
16	2 150	1.64	126	94 700	26.9	236	1 100 000	182
18	2 350	1.74	128	100 000	28.0	238	1 140 000	187
20	2 560	1.85	130	106 000	29.1	240	1 190 000	192
22	2 780	1.97	132	111 000	30.3	242	1 230 000	198
24	3 030	2.09	134	117 000	31.6	244	1 270 000	204
26	3 290	2.22	136	124 000	32.9	246	1 320 000	210
28	3 570	2.36	138	130 000	34.2	248	1 370 000	216
30	3 880	2.50	140	137 000	35.6	250	1 420 000	222
32	4 210	2.65	142	144 000	37.0	252	1 470 000	229
34	4 560	2.81	144	152 000	38.5	254	1 520 000	235
36	4 940	2.98	146	160 000	40.0	256	1 570 000	242
38	5 350	3.16	148	168 000	41.6	258	1 630 000	248
40	5 780	3.34	150	177 000	43.2	260	1 680 000	255
42	6 240	3.54	152	186 000	44.9	280	2 340 000	333
44	6 740	3.74	154	195 000	46.6	300	3 180 000	430
46	7 280	3.96	156	205 000	48.4	320	4 260 000	548
48	7 850	4.18	158	215 000	50.2	340	5 610 000	692
50	8 460	4.42	160	225 000	52.1	360	7 270 000	869
52	9 110	4.66	162	236 000	54.1	380	9 300 000	1090
54	9 800	4.92	164	248 000	56.1	400	11 700 000	1360
56	10 500	5.19	166	259 000	58.2	420	14 700 000	1700
58	11 300	5.48	168	272 000	60.3	440	18 100 000	2130
60	12 200	5.77	170	285 000	62.5	460	22 200 000	
62	13 100	6.08	172	298 000	64.8			
64	14 000	6.41	174	312 000	67.1			
66	15 000	6.74	176	326 000	69.5			
68	16 100	7.10	178	341 000	72.0			

NOTE 1—To correct A and B to other base conditions, multiply each by:

$$(P_b/14.7) \times [519.6/(t_b + 459.6)] \times (0.998/Z_b)$$

where:

P_b = absolute base pressure, psia;

t_b = base temperature, °F; and

Z_b = compressibility factor under base conditions.

TABLE 3 Equilibrium Water Vapor Contents of Natural Gases Above the Critical Temperatures
 (lb/million ft³ where $P_b = 14.7$ psia, $t_b = 60^\circ\text{F}$)

Temperature, °F	Total Pressure, psia										
	14.7	100	200	300	400	500	600	700	800	900	1000
-40	9.1	1.5	0.88	0.66	0.55	0.49	0.44	0.41	0.39	0.37	0.36
-38	10.2	1.7	0.98	0.73	0.61	0.54	0.49	0.45	0.43	0.41	0.39
-36	11.5	1.9	1.1	0.80	0.68	0.59	0.54	0.50	0.47	0.45	0.43
-34	12.8	2.1	1.2	0.90	0.74	0.65	0.59	0.55	0.51	0.49	0.47
-32	14.4	2.4	1.3	0.99	0.82	0.72	0.65	0.60	0.57	0.54	0.51
-30	16.0	2.6	1.5	1.1	0.91	0.79	0.72	0.66	0.62	0.59	0.56
-28	17.8	2.9	1.6	1.2	1.0	0.87	0.79	0.72	0.68	0.64	0.61
-26	19.8	3.2	1.8	1.3	1.1	0.96	0.86	0.79	0.74	0.70	0.67
-24	22.0	3.6	2.0	1.5	1.2	1.1	0.95	0.87	0.81	0.77	0.73
-22	24.4	4.0	2.2	1.6	1.3	1.2	1.0	0.95	0.89	0.84	0.80
-20	27.0	4.4	2.4	1.8	1.5	1.3	1.1	1.0	0.97	0.92	0.87
-18	30.0	4.9	2.7	2.0	1.6	1.4	1.2	1.1	1.1	1.0	0.95
-16	33.1	5.4	3.0	2.2	1.8	1.5	1.4	1.2	1.2	1.1	1.0
-14	36.7	5.9	3.3	2.4	1.9	1.7	1.5	1.4	1.3	1.2	1.1
-12	40.5	6.5	3.6	2.6	2.1	1.8	1.6	1.5	1.4	1.3	1.2
-10	44.8	7.2	4.0	2.9	2.3	2.0	1.8	1.6	1.5	1.4	1.3
-8	49.3	7.9	4.3	3.1	2.5	2.2	1.9	1.8	1.6	1.5	1.5
-6	54.6	8.7	4.7	3.4	2.8	2.4	2.1	1.9	1.8	1.7	1.6
-4	59.8	9.5	5.2	3.7	3.0	2.6	2.3	2.1	1.9	1.8	1.7
-2	65.7	10.4	5.7	4.1	3.3	2.8	2.5	2.3	2.1	2.0	1.9
0	72.1	11.4	6.2	4.5	3.6	3.1	2.7	2.5	2.3	2.1	2.0
2	79.1	12.5	6.8	4.9	3.9	3.3	3.0	2.7	2.5	2.3	2.2
4	86.8	13.7	7.4	5.3	4.3	3.6	3.2	2.9	2.7	2.5	2.4
6	95.1	15.0	8.1	5.8	4.6	4.0	3.5	3.2	2.9	2.7	2.6
8	104	16.4	8.8	6.3	5.1	4.3	3.8	3.4	3.2	3.0	2.8
10	114	17.9	9.6	6.9	5.5	4.7	4.1	3.7	3.4	3.2	3.0
12	124	19.5	10.5	7.5	6.0	5.1	4.5	4.0	3.7	3.5	3.3
14	136	21.3	11.4	8.1	6.5	5.5	4.8	4.5	4.0	3.7	3.5
16	148	23.2	12.4	8.8	7.0	5.9	5.2	4.7	4.3	4.0	3.8
18	161	25.2	13.5	9.6	7.6	6.4	5.7	5.1	4.7	4.4	4.1
20	176	27.4	14.6	10.4	8.2	7.0	6.1	5.5	5.1	4.7	4.4
22	191	29.8	15.9	11.3	8.9	7.5	6.6	5.9	5.5	5.1	4.8
24	208	32.4	17.2	12.2	9.7	8.2	7.2	6.4	5.9	5.5	5.1
26	226	35.1	18.7	13.2	10.5	8.8	7.7	6.9	6.3	5.9	5.5
28	246	38.1	20.2	14.3	11.3	9.5	8.3	7.5	6.8	6.3	5.9
30	276	41.3	21.9	15.4	12.2	10.3	9.0	8.0	7.4	6.8	6.4
32	289	44.7	23.7	16.7	13.2	11.1	9.7	8.7	7.9	7.3	6.9
34	313	48.4	25.6	18.0	14.2	11.9	10.4	9.3	8.5	7.9	7.4
36	339	52.4	27.7	19.4	15.3	12.9	11.2	10.0	9.2	8.5	7.9
38	367	56.6	29.9	20.1	16.5	13.9	12.1	10.8	9.8	9.1	8.5
40	396	61.1	32.2	22.6	17.8	14.9	13.0	11.6	10.6	9.8	9.1
42	428	66.0	34.8	24.4	19.2	16.0	13.9	12.5	11.3	10.5	9.8
44	462	71.2	37.5	26.2	20.6	17.2	15.0	13.4	12.2	11.2	10.5
46	499	76.7	40.3	28.2	22.2	18.5	16.1	14.4	13.1	12.0	11.2
48	538	82.6	43.4	30.3	23.8	19.9	17.3	15.4	14.0	12.9	12.0
50	80	89.0	46.7	32.6	25.6	21.3	18.5	16.5	15.0	13.8	12.9
52	624	95.7	50.2	35.0	27.4	22.9	19.8	17.7	16.1	14.8	13.8
54	672	103	54.0	37.6	29.4	24.5	21.3	18.9	17.2	15.8	14.7
56	721	111	57.9	40.3	31.5	26.7	22.8	20.3	18.3	16.9	15.7
58	776	119	62.1	43.2	33.8	28.1	24.4	21.7	19.6	18.0	16.8
60	834	128	66.6	46.3	36.2	30.1	26.1	23.2	21.0	19.3	17.9
62	895	137	71.4	49.6	38.7	32.2	27.9	24.7	22.4	20.6	19.1
64	960	147	76.5	53.1	41.4	34.4	29.8	26.4	23.9	22.0	20.4
66	1030	157	81.8	56.8	44.3	36.8	31.8	28.2	25.5	23.4	21.8
68	1100	168	87.6	60.7	47.3	39.3	33.9	30.1	27.2	25.0	23.2
70	1180	180	93.7	65.0	50.6	42.0	36.2	32.1	29.0	26.6	24.7
72	1260	192	100	69.4	54.0	44.8	38.6	34.2	30.9	28.4	26.3
74	1350	206	107	74.0	57.6	47.7	41.1	36.4	32.9	30.2	28.0
76	1440	220	114	79.0	61.4	50.9	43.8	38.8	35.0	32.1	29.8
78	1540	235	122	84.2	65.5	54.2	46.7	41.3	37.3	34.2	31.7
80	1650	250	130	89.8	69.7	57.5	49.7	44.0	39.7	36.3	33.6
82	1760	267	138	95.6	74.2	61.4	52.8	46.7	42.1	38.6	36.7
84	1870	285	148	102	79.0	65.3	56.2	49.7	44.8	41.0	37.9

TABLE 3 *Continued*

Temperature, °F	Total Pressure, psia										
	14.7	100	200	300	400	500	600	700	800	900	1000
86	2000	303	157	108	84.1	69.5	59.7	52.8	47.6	43.5	40.3
88	2130	323	167	115	89.4	73.8	63.5	56.1	50.5	46.2	42.7
90	2270	344	178	123	95.0	78.5	67.4	59.5	53.6	49.0	45.3
92	2410	366	189	130	101	83.3	71.5	63.1	56.8	51.9	48.0
94	2570	389	201	138	107	88.4	75.9	67.0	60.3	55.0	50.9
96	2730	413	214	147	114	93.8	80.5	71.0	63.9	58.3	53.9
98	2900	439	227	156	121	99.5	85.3	75.2	67.6	61.8	57.0
100	3080	466	241	166	128	105	90.4	79.7	71.6	65.4	...
102	3270	495	256	176	136	112	95.8	84.4	75.9	69.2	...
104	3470	525	271	186	144	118	101	89.3	80.2	73.1	...
106	3680	557	287	197	152	125	107	94.5	84.9	77.4	...
108	3900	589	304	209	161	133	114	99.9	89.7	81.7	...
110	4130	624	322	221	170	140	120	106	94.7	86.3	...
112	4380	661	341	234	180	148	127	112	100	91.2	...
114	4640	700	360	247	191	157	134	118	106	96.2	...
116	4910	740	381	261	201	165	142	124	112	102	...
118	5190	783	403	276	213	175	149	131	118	107	...
120	5490	828	426	292	225	185	158	139	124	113	...
122	5800	874	449	308	237	195	166	146	131	119	...
124	6130	923	474	325	250	205	175	154	138	125	...
126	6470	974	500	343	264	216	185	162	145	132	...
128	6830	1030	528	361	278	228	195	171	153	139	...
130	7240	1090	559	382	294	241	206	181	162	147	...
132	7580	1140	585	400	308	252	215	189	169	154	...
134	7990	1200	617	422	324	266	227	199	178	162	...
136	8470	1270	653	446	343	281	240	210	188	171	...
138	8880	1330	684	468	359	294	251	220	197	179	...
140	9360	1410	721	492	378	310	264	231	207	188	...
142	9830	1480	757	517	397	325	277	243	217	197	...
144	10 400	1560	799	545	419	343	292	256	229	207	...
146	10 900	1640	840	573	440	360	307	269	240	218	...
148	11 500	1720	882	602	462	378	322	282	252	229	...

TABLE 4 Equilibrium Water Vapor Contents of Natural Gases Above the Critical Temperatures
(lb/million ft³ where $P_b = 14.7$ psia, $t_b = 60^\circ\text{F}$)

Temperature, °F	Total Pressure, psia									
	14.7	100	200	300	400	500	600	700	800	900
150	12 100	1810	928	633	486	397	338	296	264	240
152	12 700	1910	975	665	510	417	355	311	277	252
154	13 300	2000	1020	697	534	437	372	325	290	263
156	14 000	2100	1070	732	561	458	390	341	305	276
158	14 700	2200	1130	767	588	480	409	357	319	289
160	15 400	2300	1180	802	615	502	427	374	333	302
162	...	2410	1230	841	644	526	447	391	349	316
164	...	2540	1300	883	676	552	469	410	366	332
166	...	2650	1350	922	706	576	490	428	382	346
168	...	2780	1420	967	740	604	514	449	400	363
170	...	2910	1490	1010	775	633	538	470	419	379
172	...	3040	1550	1060	810	661	562	491	437	396
174	...	3190	1630	1110	847	691	587	513	457	414
176	...	3330	1700	1160	885	722	613	535	477	432
178	...	3480	1780	1210	925	754	640	559	498	451
180	...	3640	1860	1260	967	789	670	585	521	471
182	...	3800	1940	1320	1010	821	697	609	542	491
184	...	3980	2030	1380	1060	860	730	637	567	513
186	...	4150	2120	1440	1100	897	761	664	591	535
188	...	4340	2210	1500	1150	936	794	693	617	558
190	...	4520	2300	1570	1200	974	827	721	642	581
192	...	4720	2410	1630	1250	1020	863	753	670	606
194	...	4920	2510	1700	1300	1060	900	785	698	631
196	...	5140	2620	1780	1360	1110	938	818	728	658
198	...	5350	2730	1850	1410	1150	976	851	757	684
200	...	5570	2840	1930	1470	1200	1020	885	788	712
202	...	5810	2960	2010	1530	1250	1060	922	821	741
204	...	6050	3080	2090	1600	1300	1100	960	854	771
206	...	6310	3210	2180	1660	1350	1150	999	889	803
208	3340	2270	1730	1400	1190	1040	924	835
210	3480	2360	1800	1460	1240	1080	961	868
212	3620	2450	1870	1520	1290	1120	999	902
214	3760	2550	1950	1580	1340	1160	1040	937
216	3910	2650	2020	1640	1390	1210	1080	973
218	4060	2760	2100	1710	1450	1260	1120	1010
220	4220	2860	2180	1780	1500	1310	1160	1050
222	4390	2980	2270	1840	1560	1360	1200	1090
224	4560	3090	2350	1910	1620	1410	1250	1130
226	4730	3200	2440	1990	1680	1460	1300	1170
228	4910	3330	2540	2060	1750	1520	1350	1220
230	5100	3460	2630	2140	1810	1580	1400	1260
240	4160	3170	2570	2180	1890	1680	1510
250	3770	3060	2590	2250	2000	1800

TABLE 5 Equilibrium Water Vapor Contents of Natural Gases Above the Critical Temperatures
(lb/million ft³ where $P_b = 14.7$ psia, $t_b = 60^\circ\text{F}$)

Temperature, °F	Total Pressure, psia																	
	1000		1500		2000		2500		3000		3500		4000		4500		5000	
100	60	.4	45	.4	37	.9	33	.3	30	.3	28	.2	26	.6	25	.3	24	.3
102	63	.9	47	.9	40	.0	35	.5	32	.0	29	.7	28	.0	26	.6	25	.6
104	67	.5	50	.6	42	.1	37	.0	33	.6	31	.2	29	.4	28	.0	26	.9
106	71	.4	53	.4	44	.5	39	.1	35	.5	32	.9	31	.0	29	.5	28	.3
108	75	.4	56	.4	46	.9	41	.1	37	.3	34	.6	32	.6	31	.0	29	.7
110	79	.6	59	.4	49	.4	43	.3	39	.3	36	.4	34	.2	32	.5	31	.2
112	84	.1	62	.7	52	.1	45	.6	41	.4	38	.3	36	.0	34	.2	32	.8
114	88	.7	66	.1	54	.8	48	.0	43	.4	40	.2	37	.8	35	.9	34	.4
116	93	.6	69	.7	57	.7	50	.5	45	.7	42	.3	39	.8	37	.8	36	.2
118	98	.7	73	.4	60	.7	53	.1	48	.0	44	.4	41	.7	39	.6	37	.9
120	104		77	.3	63	.9	55	.9	50	.5	46	.7	43	.8	41	.6	39	.8
122	110		81	.3	67	.2	58	.7	53	.0	49	.0	45	.9	43	.6	41	.7
124	116		85	.6	70	.7	61	.7	55	.7	51	.4	48	.2	45	.7	43	.7
126	122		89	.9	74	.2	64	.7	58	.4	53	.9	50	.5	47	.8	45	.7
128	128		94	.7	78	.0	68	.0	61	.3	56	.6	53	.0	50	.2	48	.0
130	135		99	.8	82	.1	71	.5	64	.4	59	.4	55	.6	52	.6	50	.3
132	141		104		85	.8	74	.7	67	.3	62	.0	58	.1	55	.0	52	.5
134	149		110		90	.1	78	.4	70	.6	65	.0	60	.9	57	.6	55	.0
136	157		116		94	.9	82	.5	74	.2	68	.3	63	.9	60	.3	57	.7
138	164		121		99	.2	86	.2	77	.5	71	.3	66	.7	63	.1	60	.2
140	173		127		104		90	.4	81	.3	74	.7	69	.9	66	.0	63	.0
142	181		133		109		94	.6	85	.0	78	.1	73	.0	69	.0	65	.8
144	191		140		115		99	.3	89	.2	81	.9	76	.5	72	.3	68	.9
146	200		147		120		104		93	.0	85	.7	80	.0	75	.6	72	.0
148	210		154		126		109		97	.6	89	.6	83	.6	78	.9	75	.6
150	220		161		132		114		102		93	.8	87	.5	82	.5	78	.6
152	231		169		138		119		107		98	.0	91	.4	86	.2	82	.1
154	242		177		144		125		112		102		95	.4	89	.9	85	.6
156	253		185		151		130		117		107		100		94	.0	89	.4
158	265		194		158		136		122		112		104		98	.0	93	.2
160	277		202		165		142		127		116		108		102		97	.1
162	290		211		172		149		133		122		113		107		101	
164	304		221		180		155		139		127		118		111		106	
166	317		231		188		162		145		132		123		116		110	
168	332		242		196		169		151		138		128		121		115	
170	348		253		205		177		158		144		134		126		120	
172	363		263		214		184		165		150		139		131		124	
174	379		275		223		192		171		156		145		136		130	
176	396		287		233		200		178		163		151		142		135	
178	413		299		243		208		186		169		157		148		140	
180	432		313		253		217		194		177		164		154		146	
182	449		325		263		226		201		184		170		160		152	
184	470		340		275		236		210		191		177		167		158	
186	490		354		286		245		218		199		184		173		164	
188	511		369		298		256		227		207		192		180		171	
190	531		384		310		266		236		215		199		187		177	
192	554		400		323		277		246		224		207		194		184	
194	578		417		336		288		256		233		215		202		191	
196	602		434		350		299		266		242		224		210		199	
198	626		451		364		311		276		251		232		218		206	
200	651		469		378		323		286		260		241		226		213	
202	678		488		393		336		298		271		251		235		222	
204	705		507		408		349		309		281		260		243		230	
206	734		528		425		363		321		292		270		253		238	
208	763		548		441		377		334		303		280		262		248	
210	793		569		458		390		346		314		290		271		256	
212	824		591		475		405		359		325		301		281		266	
214	856		614		493		420		372		337		312		291		275	
216	889		637		512		436		386		350		323		302		285	
218	924		662		532		453		401		363		335		313		296	
220	959		687		551		469		415		376		347		324		306	
222	996		713		572		487		431		390		360		336		318	

TABLE 5 *Continued*

Temperature, °F	Total Pressure, psia								
	1000	1500	2000	2500	3000	3500	4000	4500	5000
224	1030	739	593	504	446	404	372	348	328
226	1070	767	615	523	462	418	386	360	340
228	1110	795	637	542	479	433	400	373	352
230	1150	824	660	561	495	448	413	385	363
240	1380	985	787	668	589	532	490	456	430
250	1640	1170	932	790	695	628	577	538	506

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; <http://www.copyright.com/>