



# Standard Test Method for Estimation of Hydrogen Content of Aviation Fuels<sup>1</sup>

This standard is issued under the fixed designation D3343; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

*This standard has been approved for use by agencies of the U.S. Department of Defense.*

## 1. Scope\*

1.1 This test method covers the estimation of the hydrogen content (mass percent) of aviation gasolines and aircraft turbine and jet engine fuels.

1.2 This test method is empirical and is applicable to liquid hydrocarbon fuels that conform to the requirements of specifications for aviation gasolines or aircraft turbine and jet engine fuels of types Jet A, Jet A-1, Jet B, JP-4, JP-5, JP-7, and JP-8.

NOTE 1—The procedure for the experimental determination of hydrogen in petroleum fractions is described in Test Methods D1018, D3701, D5291, and D7171.

NOTE 2—The estimation of the hydrogen content of a hydrocarbon fuel is justifiable only when the fuel belongs to a well-defined class for which a relationship among the hydrogen content and the distillation range, density, and aromatic content has been derived from accurate experimental measurements on representative samples of that class. Even in this case, the possibility that the estimates may be in error by large amounts for individual fuels should be recognized. The fuels used to establish the correlation presented in this test method are defined by the following specifications:

Fuel	Specification
Aviation gasolines	D910
Aircraft turbine and jet engine fuels	
JP-4 and JP-5	MIL-DTL-5624
JP-7	MIL-DTL-38219
JP-8	MIL-DTL-83133
Jet A and Jet A-1	D1655
Miscellaneous hydrocarbons	
No. 2 Diesel fuel	
Kerosene distillates (similar to Jet A)	
Miscellaneous (includes thinners, gasoline fractions, and unidentified blends)	
Special production fuels (commercial products of nearly pure hydrocarbons and special high-temperature fuels (HTF) produced for Air Force tests.	
Pure hydrocarbons	

1.3 The values stated in SI units are to be regarded as the standard.

1.3.1 *Exception*—The values given in parentheses are for information only.

1.4 *This standard does not purport to address the safety concerns, if any, associated with its use. It is the responsibility*

*of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

## 2. Referenced Documents

### 2.1 ASTM Standards:<sup>2</sup>

- D86 Test Method for Distillation of Petroleum Products and Liquid Fuels at Atmospheric Pressure
- D910 Specification for Leaded Aviation Gasolines
- D1018 Test Method for Hydrogen In Petroleum Fractions
- D1298 Test Method for Density, Relative Density, or API Gravity of Crude Petroleum and Liquid Petroleum Products by Hydrometer Method
- D1319 Test Method for Hydrocarbon Types in Liquid Petroleum Products by Fluorescent Indicator Adsorption
- D1655 Specification for Aviation Turbine Fuels
- D2887 Test Method for Boiling Range Distribution of Petroleum Fractions by Gas Chromatography
- D3701 Test Method for Hydrogen Content of Aviation Turbine Fuels by Low Resolution Nuclear Magnetic Resonance Spectrometry
- D5291 Test Methods for Instrumental Determination of Carbon, Hydrogen, and Nitrogen in Petroleum Products and Lubricants
- D7171 Test Method for Hydrogen Content of Middle Distillate Petroleum Products by Low-Resolution Pulsed Nuclear Magnetic Resonance Spectroscopy

### 2.2 Military Specifications:<sup>3</sup>

- MIL-DTL-5624 Turbine Fuel, Aviation, Grade JP-4 and JP-5
- MIL-DTL-38219 Turbine Fuel, Low Volatility, JP-7
- MIL-DTL-83133 Turbine Fuel, Aviation, Kerosene Type, JP-8 (NATO F-34), NATO F-35, and JP-8+100 (NATO F-37)

<sup>1</sup> This test method is under the jurisdiction of ASTM Committee D02 on Petroleum Products, Liquid Fuels, and Lubricants and is the direct responsibility of Subcommittee D02.04.0K on Correlative Methods.

Current edition approved Jan. 1, 2016. Published February 2016. Originally approved in 1974. Last previous edition approved in 2015 as D3343 – 05 (2015). DOI: 10.1520/D3343-16.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>3</sup> Copies of these documents are available online at <http://www.quicksearch.dla.mil>.

\*A Summary of Changes section appears at the end of this standard

**TABLE 1 Mean and Standard Deviation of the Variables**

Variable	Mean	Standard Deviation
Aromatics, volume, %	14.1	21.6
Density, kg/m <sup>3</sup> (°API)	783 (49.1)	54 (12.4)
Volatility, °C (°F)	178 (352)	53 (96)
Mass percent hydrogen	14.1	1.3

### 3. Summary of Test Method

3.1 A correlation<sup>4</sup> has been established between the hydrogen content of a fuel and its distillation range, API gravity, and aromatic content. This relationship is given by the following equations:

*Type fuel*—All aviation gasolines and aircraft turbine fuels

$$\% H = 0.06317G - 0.041089A + 0.000072135AV \quad (1)$$

$$+ 0.00005684GV - 0.0004960GA + 10.56$$

or in SI Units,<sup>5</sup>

$$\% H = (9201.2 + 14.49T - 70.22A)/D \quad (2)$$

$$+ 0.02652A + 0.0001298AT -$$

$$0.01347T + 2.003$$

where:

% H = mass percent hydrogen;

G = gravity, °API;

A = volume percent aromatics;

V = average of 10 %, 50 %, and 90 % distillation data, °F (using Test Method D86);

T = average of 10 %, 50 %, and 90 % distillation data, °C; and

D = density in kg/m<sup>3</sup> at 15 °C.

3.2 Eq 1 was empirically derived for the mass percent hydrogen by the method of least squares from accurate data on fuels using inch-pound units of measurement. Eq 2 was derived directly from Eq 1 by simply converting from inch-pound to SI units of measurement.

### 4. Significance and Use

4.1 This test method is intended for use as a guide in cases in which an experimental determination of hydrogen content is not available. Table 1 shows a summary for the range of each variable used in developing the correlation. The mean value and its distribution about the mean, namely the standard deviation, is shown. This indicates, for example, that the mean density for all fuels used in developing the correlation was 783.5 kg/m<sup>3</sup> and that two thirds of the samples had a density between 733.2 kg/m<sup>3</sup> and 841.3 kg/m<sup>3</sup>, that is, plus and minus one standard deviation. The correlation is most accurate when the values of the variables to be used in the equation are within one standard deviation of the mean, but is useful up to two standard deviations of the mean. The use of this correlation

may be applicable to other hydrocarbon distillates similar to aviation fuels, but only limited data on nonaviation fuels were included in the correlation.

4.2 Hydrogen content is required to correct gross heat of combustion to net heat of combustion. Net heat is used in aircraft calculation because all combustion products are in the gaseous state, but experimental methods measure gross heat.

### 5. Procedure

5.1 Determine the density or the API gravity of the fuel sample as described in Practice D1298—API 2547—IP 160.

5.2 Determine the temperatures at which 10 %, 50 %, and 90 % of the fuel are recovered using Test Method D86—IP 123 or Test Method D2887—IP 406. Average these three temperatures to obtain the *T* value (in °C) or the *V* value (in °F) used in the equations of 3.1.

NOTE 3—Distillation data (10 %, 50 %, and 90 %) obtained by Test Method D2887 are not equivalent to the same data obtained by Test Method D86. However, as the 50 % temperatures are approximately equal, and the 90 % delta is similar in magnitude and opposite in sign to the 10 % delta, the average of the 10 %, 50 %, and 90 % temperatures by either test method may be used to estimate hydrogen content by Test Method D3343.

5.3 Determine the aromatic volume percent of the sample using Test Method D1319—IP 156.

### 6. Calculation and Report

6.1 *Inch-Pound Units*—Calculate the percent hydrogen of the sample using Eq 1 in 3.1. Round the value obtained to the nearest 0.01 %.

*Example: Sample:* Aviation kerosene fuel

*Determined Values:*

API gravity, *G* = 44

Aromatic volume percent, *A* = 12

Average distillation temperature, *V* = 400 °F (10 % = 350 °F, 50 % = 390 °F, 90 % = 460 °F; *V* = (350 + 390 + 460)/3 = 400 °F

*Using Eq 1 in 3.1:*

$$\% H = 0.06317(44) - 0.041089(12) + \quad (3)$$

$$0.000072135(12)(400) + 0.00005684(44)(400) -$$

$$0.0004960(44)(12) + 10.56$$

$$\% H = 13.9311 = 13.93$$

6.2 *SI Units*—Calculate the percent hydrogen of the sample using Eq 2 of 3.1. Round the value obtained to the nearest 0.01 %.

*Example: Sample:* Aviation kerosene fuel

*Determined Values:*


Density, *D* = 805.9 kg/m<sup>3</sup>

Aromatics, volume %, *A* = 12

Average distillation temperature, *T* = 205 °C (10 % = 178 °C, 50 % = 200 °C, 90 % = 237 °C, *T* = (178 + 200 + 237)/3 = 205 °C)

<sup>4</sup> Bert, J. A., and Painter, L. J., "Method for Calculating Hydrogen Content of Aviation Fuels," Chevron Research Co., Richmond, CA, Jan. 12, 1973.

<sup>5</sup> Supporting data (conversion of Eq 1 to SI units) have been filed at ASTM International Headquarters and may be obtained by requesting Research Report RR:D02-1266.

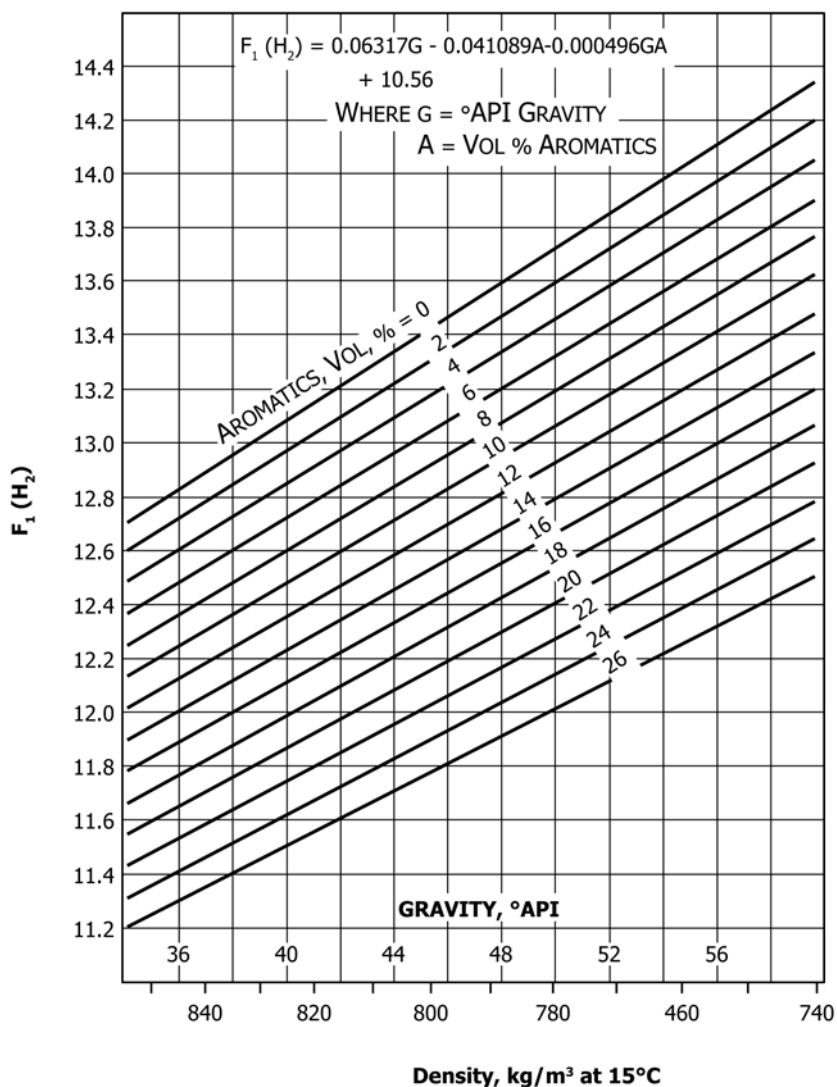

Using Eq 2 in 3.1:

$$\begin{aligned}
 \% H = & [9201.2 + 14.49 (205) - \\
 & 70.22 (12)] / 805.9 + 0.02652(12) + \\
 & 0.0001298(12) (205) - 0.01347(205) + \\
 & 2.003 \\
 \% H = & 13.9367 = 13.94
 \end{aligned}
 \tag{4}$$

6.3 An alternative method for calculating the percent hydrogen is by summing the values of  $F_1(H_2)$  and  $F_2(H_2)$  determined from the nomographs in Fig. 1 and Fig. 2, respectively.

6.3.1 Determine the  $F_1(H_2)$  value using the nomograph of Fig. 1. Enter the nomograph at the abscissa with the density or the API gravity value, then move vertically upward to the volume percent aromatics line, and then move horizontally to the left and read off the value of  $F_1(H_2)$ .

6.3.2 Determine the  $F_2(H_2)$  value using the nomograph of Fig. 2. Enter the nomograph at the left ordinate using the

density or the API gravity. Move horizontally to the right to the volume percent aromatics line, then vertically downward to the average boiling point line (average of the 10 %, 50 %, and 90 % distillation temperatures) using either °F or °C, and then horizontally to the right ordinate and read the  $F_2(H_2)$  value.

6.3.3 Sum the  $F_1(H_2)$  and the  $F_2(H_2)$  values to obtain the estimated hydrogen content in mass percent.

6.4 Report the result from 6.1, 6.2, or 6.3 to the nearest 0.01 % as weight percent of hydrogen of the fuel sample.

## 7. Precision and Bias<sup>6</sup>

7.1 The following criteria should be used for judging the acceptability of estimated hydrogen content results (95 % confidence):

7.1.1 *Repeatability*—Duplicate results by the same operator (using a second set of measured values for aromatics content,

<sup>6</sup> Supporting data have been filed at ASTM International Headquarters and may be obtained by requesting Research Report RR:D02-1184.

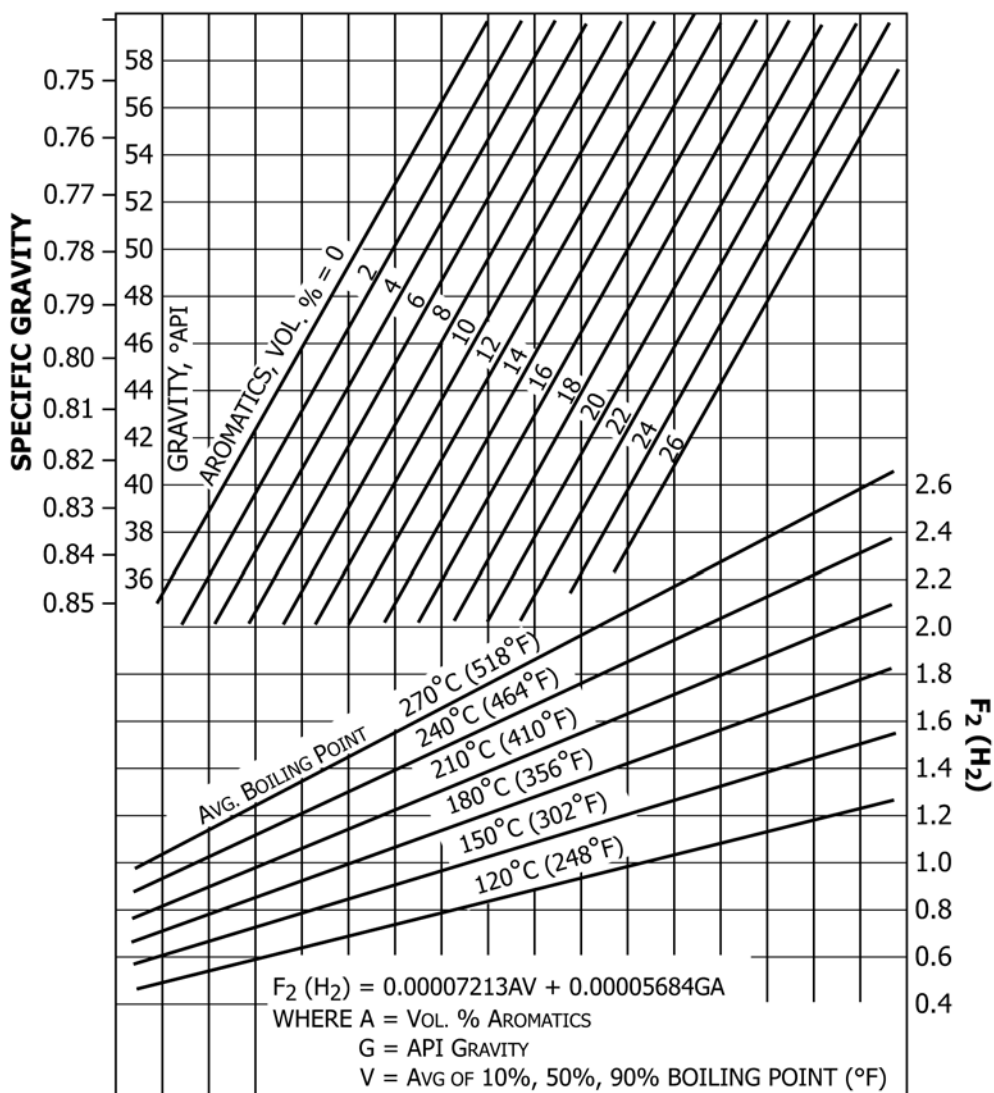


FIG. 2 Nomogram for Determining  $F_2(H_2)$

density, and distillation data) should be considered suspect if the calculated hydrogen content values differ by more than the following amount:

$$\text{Repeatability} = 0.03\% \quad (5)$$

7.1.2 *Reproducibility*—With two independent laboratories making independent measurements of the density, aromatics content, and distillation data for an identical fuel sample, the calculated hydrogen content values should not be considered suspect unless they differ by more than the following amount:

$$\text{Reproducibility} = 0.10\% \quad (6)$$

7.2 *Bias*—The correlation equation was developed using 331 fuels, 247 of which were aviation fuels (or similar thereto)

and 84 of which were pure hydrocarbons, commercial products of nearly pure hydrocarbons, and special high-temperature fuels (HTF) produced for Air Force tests. The standard error of estimate for the hydrogen content of all fuels is 0.20 % and for aviation type fuels is 0.16 %.

NOTE 4—The repeatability and reproducibility stated in this section is based on the summation of the repeatability and reproducibility of the test methods used in the calculations. It does not include the effect of the scatter of the original data about the regression line, described by Eq 1 and Eq 2. Therefore, the possibility that individual estimates may be in error in excess of the precision discussed in this section should be recognized.

## 8. Keywords

8.1 aviation fuels; hydrogen content

**SUMMARY OF CHANGES**

Subcommittee D02.04 has identified the location of selected changes to this standard since the last issue (D3343 – 05 (2015)) that may impact the use of this standard. (Approved Jan. 1, 2016.)

- (1) Revised **Note 2** in Scope.
- (2) Revised subsection **2.1** and **2.2** with new/updated Referenced Documents.
- (3) Changed “kerosine” to “kerosene” throughout.

*ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.*

*This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.*

*This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or [service@astm.org](mailto:service@astm.org) (e-mail); or through the ASTM website ([www.astm.org](http://www.astm.org)). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; <http://www.copyright.com/>*