



Designation: D4043 – 17

Standard Guide for Selection of Aquifer Test Method in Determining Hydraulic Properties by Well Techniques¹

This standard is issued under the fixed designation D4043; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

1. Scope*

1.1 This guide covers an integral part of a series of standards that are being prepared on the in situ determination of hydraulic properties of aquifer systems by single- or multiple-well tests. This guide provides guidance for development of a conceptual model of a field site and selection of an analytical test method for determination of hydraulic properties. This guide does not establish a fixed procedure for determination of hydrologic properties.

1.2 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.3 *Limitations*—Well techniques have limitations in the determination of hydraulic properties of groundwater flow systems. These limitations are related primarily to the simplifying assumptions that are implicit in each test method. The response of an aquifer system to stress is not unique; therefore, the system must be known sufficiently to select the proper analytical method.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This guide offers an organized collection of information or a series of options and does not recommend a specific course of action. This document cannot replace education or experience and should be used in conjunction with professional judgment. Not all aspects of this guide may be applicable in all circumstances. This ASTM standard is not intended to represent or replace the standard of care by which the adequacy of a given professional service must be judged, nor should this document be applied without consideration of a project's many unique aspects. The word "Standard" in the title of this*

document means only that the document has been approved through the ASTM consensus process.

2. Referenced Documents

2.1 ASTM Standards:²

- D653 Terminology Relating to Soil, Rock, and Contained Fluids
- D4044 Test Method for (Field Procedure) for Instantaneous Change in Head (Slug) Tests for Determining Hydraulic Properties of Aquifers
- D4104 Test Method (Analytical Procedure) for Determining Transmissivity of Nonleaky Confined Aquifers by Overdamped Well Response to Instantaneous Change in Head (Slug Tests)
- D4105 Test Method for (Analytical Procedure) for Determining Transmissivity and Storage Coefficient of Nonleaky Confined Aquifers by the Modified Theis Nonequilibrium Method
- D4106 Test Method for (Analytical Procedure) for Determining Transmissivity and Storage Coefficient of Nonleaky Confined Aquifers by the Theis Nonequilibrium Method
- D4630 Test Method for Determining Transmissivity and Storage Coefficient of Low-Permeability Rocks by In Situ Measurements Using the Constant Head Injection Test
- D5269 Test Method for Determining Transmissivity of Nonleaky Confined Aquifers by the Theis Recovery Method
- D5270 Test Method for Determining Transmissivity and Storage Coefficient of Bounded, Nonleaky, Confined Aquifers
- D5472 Test Method for Determining Specific Capacity and Estimating Transmissivity at the Control Well
- D5473 Test Method for (Analytical Procedure for) Analyzing the Effects of Partial Penetration of Control Well and Determining the Horizontal and Vertical Hydraulic Conductivity in a Nonleaky Confined Aquifer
- D5716 Test Method for Measuring the Rate of Well Discharge by Circular Orifice Weir

¹ This guide is under the jurisdiction of ASTM Committee D18 on Soil and Rock and is the direct responsibility of Subcommittee D18.21 on Groundwater and Vadose Zone Investigations.

Current edition approved Jan. 1, 2017. Published January 2017. Originally approved in 1991. Last previous edition approved in 2010 as D4043–96(2010)^{ε1}. DOI: 10.1520/D4043-17.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

*A Summary of Changes section appears at the end of this standard

D5785 Test Method for (Analytical Procedure) for Determining Transmissivity of Confined Nonleaky Aquifers by Underdamped Well Response to Instantaneous Change in Head (Slug Test)

D5786 Practice for (Field Procedure) for Constant Drawdown Tests in Flowing Wells for Determining Hydraulic Properties of Aquifer Systems

D5850 Test Method for (Analytical Procedure) Determining Transmissivity, Storage Coefficient, and Anisotropy Ratio from a Network of Partially Penetrating Wells

D5881 Test Method for (Analytical Procedure) Determining Transmissivity of Confined Nonleaky Aquifers by Critically Damped Well Response to Instantaneous Change in Head (Slug)

D5912 Test Method for (Analytical Procedure) Determining Hydraulic Conductivity of an Unconfined Aquifer by Overdamped Well Response to Instantaneous Change in Head (Slug) (Withdrawn 2013)³

D5920 Test Method (Analytical Procedure) for Tests of Anisotropic Unconfined Aquifers by Neuman Method

3. Terminology

3.1 *Definitions*—For definitions of common terms used in this test method, see Terminology **D653**.

4. Significance and Use

4.1 An aquifer test method is a controlled field experiment made to determine the approximate hydraulic properties of water-bearing material. The hydraulic properties that can be determined are specific to the test method. The hydraulic properties that can be determined are also dependent upon the instrumentation of the field test, the knowledge of the aquifer system at the field site, and conformance of the hydrogeologic conditions at the field site to the assumptions of the test method. Hydraulic conductivity and storage coefficient of the aquifer are the basic properties determined by most test methods. Test methods can be designed also to determine vertical and horizontal anisotropy, aquifer discontinuities, vertical hydraulic conductivity of confining beds, well efficiency, turbulent flow, and specific storage and vertical permeability of confining beds.

5. Procedure

5.1 The procedure for selection of an aquifer test method or methods is primarily based on selection of a test method that is compatible with the hydrogeology of the proposed test site. Secondly, the test method is selected on the basis of the testing conditions specified by the test method, such as the method of stressing or causing water-level changes in the aquifer and the requirements of a test method for observations of water level response in the aquifer. The decision tree in **Table 1** is designed to assist, first, in selecting test methods applicable to specific hydrogeologic site characteristics. Secondly, the decision tree will assist in selecting a test method on the basis of the nature of the stress on the aquifer imposed

by the control well. The decision tree references the sections in this guide where the test methods are cited.

5.2 *Pretest-Selection Procedures*—Aquifer test methods are highly specific to the assumptions of the analytical solution of the test method. Reliability of determination of hydraulic properties depends upon conformance of the hydrologic site characteristics to the assumptions of the test method. A prerequisite for selecting an aquifer test method is knowledge of the hydrogeology of the test site. A conceptual understanding of the hydrogeology of the aquifer system at the prospective test site should be gained in as much detail as practicable from existing literature and data, and a site reconnaissance. In developing a site characterization, incorporate geologic mapping, driller's logs, geophysical logs, records of existing wells, water-level and water-quality data, and results of geophysical surveys. Include information on the thickness, lithology, stratification, depth, attitude, continuity, and extent of the aquifer and confining beds.

5.3 *Select Applicable Aquifer Test Methods*—Select a test method based on conformation of the site hydrogeology to assumptions of the test model and the parameters to be determined. A summary of principal aquifer test methods and their applicability to hydrogeologic site conditions is given in the following paragraphs. The decision tree for aquifer test selection, **Table 1**, provides a graphic display of the hydrogeologic site conditions for each test method and references to the section where each test method is cited.

5.3.1 *Extensive, Isotropic, Homogeneous, Confined, Non-leaky Aquifer:*


5.3.1.1 *Constant Discharge*—Test method in which the discharge or injection rate in the control well is constant are given by the nonequilibrium method of Theis (**1**)⁴ for the drawdown and recovery phases. The Theis test method is the most widely referenced and applied aquifer test method and is the basis for the solution to other more complicated boundary condition problems. The Theis test method for the pumping or injection phase is given in Test Method **D4106**. Cooper and Jacob (**2**) and Jacob (**3**) recognized that for large values of time and small values of distance from the control well, the Theis solution yields a straight line on semilogarithmic plots of various combinations of drawdown and distance from the control well. The solution of the Theis equation can therefore be simplified by the use of semilogarithmic plots. The modified Theis nonequilibrium test method is given in Test Method **D4105**. A test method for estimating transmissivity from specific capacity by the Theis method is given in Test Method **D5472**. Test Method **D5716** provides a means of means of measuring discharge from high capacity wells. Test Method **D5269** provides a method of determining transmissivity in a non-leaky aquifer.

5.3.1.2 *Variable Discharge*—Test methods for a variably discharging control well have been presented by Stallman (**4**) and Moench (**5**) and Birsoy and Summers (**6**). These test methods simulate pumpage as a sequence of constant-rate stepped changes in discharge. The test methods utilize the

³ The last approved version of this historical standard is referenced on www.astm.org.

⁴ The boldface numbers in parentheses refer to the list of references at the end of this guide.

TABLE 1 Decision Tree for Selection of Aquifer Test Method

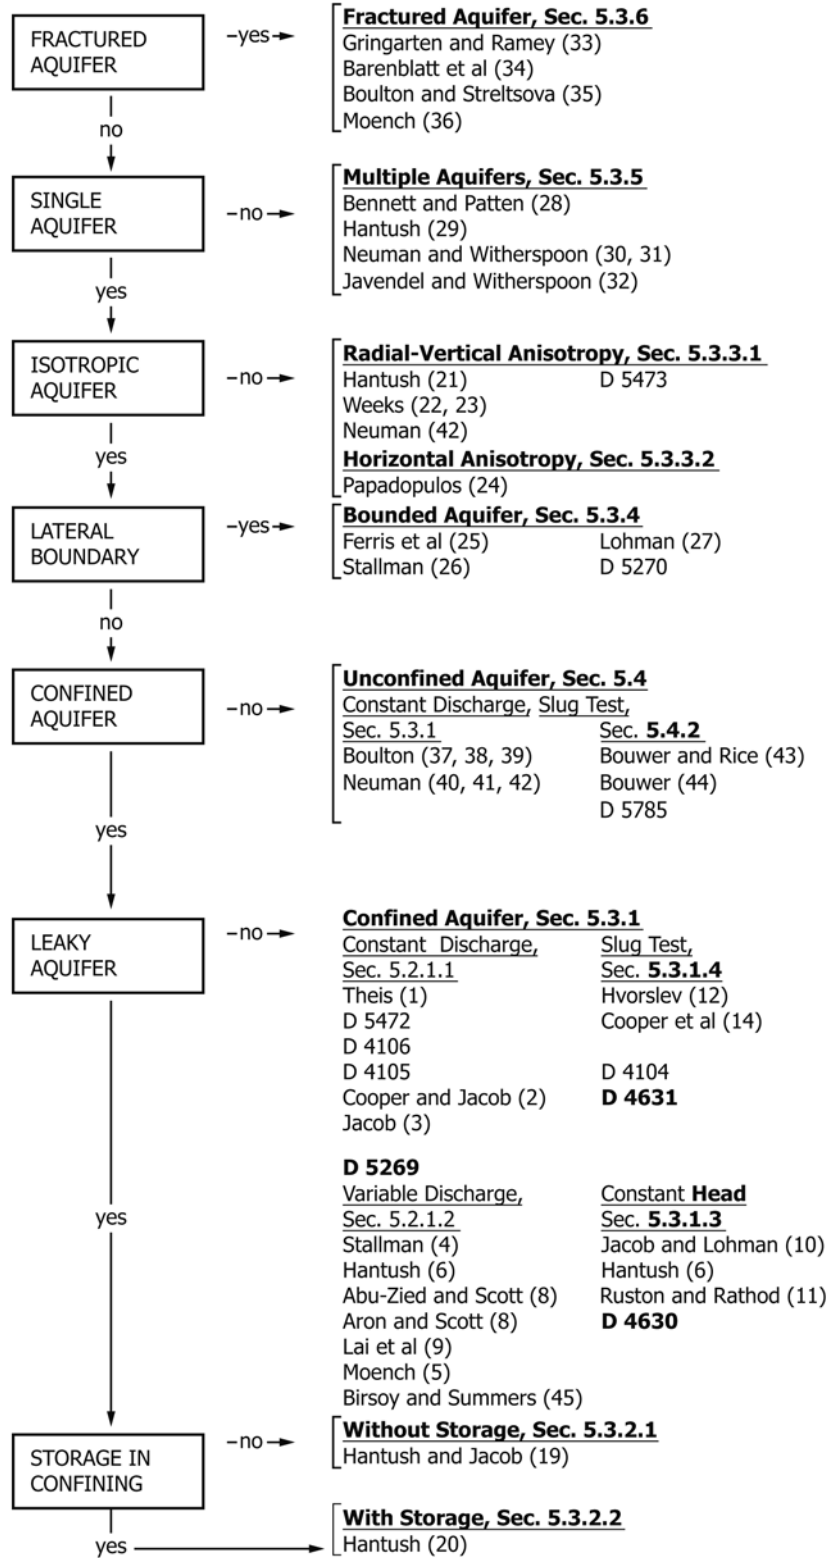

principle of superposition in constructing type curves by summing the effects of successive changes in discharge. The type curves may be derived for control wells discharging from

extensive, leaky, and nonleaky confined aquifers or situations where the response to a unit stress is known. Hantush (7) developed drawdown functions for three types of decreases in

control-well discharge. Abu-Zied and Scott (8) presented a general solution for drawdown in an extensive confined aquifer in which the discharge of the control well decreases at an exponential rate. Aron and Scott (9) proposed an approximate test method of determining transmissivity and storage from an aquifer test in which discharge decreases with time during the early part of the test. Lai et al (10) presented test methods for determining the drawdown in an aquifer taking into account storage in the control well and having an exponentially and linearly decreasing discharge.

5.3.1.3 *Constant Drawdown*—Test methods have been presented to determine hydraulic-head distribution around a discharging well in a confined aquifer with near constant drawdown. Such conditions are most commonly achieved by shutting in a flowing well long enough for the head to fully recover, then opening the well. The solutions of Jacob and Lohman (11) and Hantush (7) apply to aerially extensive, nonleaky aquifers. Rushton and Rathod (12) used a numerical model to analyze aquifer-test data. Reed (13) presents a computer program that includes some of the above procedures and also includes discharge as a fifth-degree polynomial of time. Practice D5786 provides information on performing constant drawdown tests in flowing wells.

5.3.1.4 *Slug Test Methods*—Test methods for estimating transmissivity by injecting a given quantity or *slug* of water into a well were introduced by Hvorslev (14) and Ferris and Knowles (15). Solutions to overdamped well response to slug tests have also been presented by Cooper et al (16). The solution presented by Cooper et al (16) is given in Test Method D4104. Solutions for slug tests in wells that exhibit oscillatory water-level fluctuations caused by a sudden injection or removal of a volume of water have been presented by Krauss (17), van der Kamp (18), and Shinohara and Ramey (19). The van der Kamp (18) solution is given in Test Method D5785. Kipp (20) analyzed the range of response of wells ranging from those having negligible inertial effects through full oscillatory behavior and developed type curves for the analysis of slug test data. The procedure given by Kipp (20) for analysis of critically damped response is given in Test Method D5881. The field procedure for slug test methods is given in Test Method D4044. Analytical procedures for analysis of slug test data are given in Test Methods D5785, D4104, D5881, and D5912.

5.3.2 *Extensive, Isotropic, Homogeneous, Confined, Leaky Aquifers*—Confining beds above or below the aquifer commonly allow transmission of water to the aquifer by leakage. Test methods that account for this source of water have been presented for several aquifer-confining bed situations.

5.3.2.1 *Leaky Confining Bed, Without Storage*—Hantush and Jacob (21) presented a solution for the situation in which a confined aquifer is overlain, or underlain, by a leaky confining layer having uniform properties. Radial flow is assumed in a uniform aquifer. The hydraulic properties of the aquifer and confining bed are determined by matching logarithmic plots of aquifer test data to a family of type curves.

5.3.2.2 *Leaky Confining Bed, With Storage*—Solutions for determining the response of a leaky confined aquifer where the release of water in the confining bed is taken into account were presented by Hantush (22). Flow in the uniform confined

aquifer is assumed to be radial, and flow in the leaky confining beds is assumed to be vertical.

5.3.3 *Extensive, Confined, Anisotropic Aquifer:*

5.3.3.1 *Radial-Vertical Anisotropy*—Solutions to the head distribution in a homogeneous confined aquifer with radial-vertical anisotropy in response to constant discharge of a partially penetrating well are presented by Hantush (23). Weeks (24, 25) presented test methods to determine the ratio of horizontal to vertical hydraulic conductivity. Methods for analysis of a pumping test in a radial-vertical anisotropic aquifer are given in Test Methods D5473 and D5850.

5.3.3.2 *Horizontal Anisotropy*—Papadopoulos (26) presented a test method for determination of horizontal plane anisotropy in an aerially extensive homogeneous confined aquifer.

5.3.4 *Areally Bounded Aquifers*—Aquifer test methods discussed previously are based on the assumption that the aquifer is extensive. Effects of limitations in the extent of aquifers by impermeable boundaries or by source boundaries, such as hydraulically connected streams, may preclude the direct application of an aquifer test method. The method of images, described by Ferris et al (27), Stallman (28) and Lohman (29), provide solutions to head distribution in finite aquifers. The theory of images for determination of transmissivity and storage coefficient in bounded aquifers is given in Test Method D5270.

5.3.5 *Multiple Aquifers*—Test methods for multiple aquifers, that is, two or more aquifers separated by a leaky confining bed and penetrated by a control well, require special methods for analysis. Bennett and Patten (30) presented a method for testing a multi-aquifer system using downhole metering and constant drawdown. Hantush (31) presented solutions for two aquifers separated by a leaky confining bed. Neuman and Witherspoon (32) provided solutions for drawdown in leaky confining beds above and below an aquifer being pumped. Neuman and Witherspoon (33) developed an analytical solution for the flow in a leaky confined system of two aquifers separated by a leaky confining bed with storage. Javandel and Witherspoon (34) presented a finite-element method of analyzing anisotropic multi-aquifer systems.

5.3.6 *Fractured Media*—Solutions for the flow in a single finite fracture are presented by Gringarten and Ramey (35). Barenblatt et al (36) presented a test method for solving a double-porosity model. Boulton and Streltsova (37) presented a solution for a system of porous layers separated by fractures. Moench (38) developed type curves for a double-porosity model with a fracture skin that may be present at the fracture-block interface as a result of mineral deposition or alteration.

5.4 *Extensive, Isotropic, Homogeneous, Unconfined Aquifer*—Conditions governing drawdown due to discharge from an unconfined aquifer differ markedly from those due to discharge from a nonleaky confined aquifer. Difficulties in deriving analytical solutions to the hydraulic-head distribution in an unconfined aquifer result from the following characteristics: (1) transmissivity varies in space and time as the water table is drawn down and the aquifer is dewatered, (2) water is derived from storage in an unconfined aquifer mainly at the free water surface and, to a lesser degree, from each discrete point within the aquifer, and (3) vertical components of flow

exist in the aquifer in response to withdrawal of water from a well in an unconfined aquifer.

5.4.1 Boulton (39, 40, 41) introduced a mathematical solution to the head distribution in response to discharge at a constant rate from an unconfined aquifer. Boulton's solution invokes the use of a semi-empirical delay index that was not defined on a physical basis. Neuman (42, 43, 44) presented solutions for unconfined aquifer tests utilizing fully penetrating and partially penetrating control and observation wells hypothesized on well-defined physical properties of the aquifer. The Neuman solution is given in Test Method D5920.

5.4.2 A procedure for analysis of the water-level response in an unconfined aquifer given by Bouwer and Rice and is presented in Test Method D5785. Bouwer and Rice, and Bouwer present a slug test method for unconfined aquifer conditions.

6. Keywords

6.1 aquifers; aquifer tests; confining beds; control wells; discharging wells; hydraulic conductivity; observation wells; piezometers; storage coefficient; transmissivity

REFERENCES

- (1) Theis, C. V., "The Relation Between The Lowering of the Piezometric Surface and the Rate and Duration of Discharge of a Well Using Ground-Water Storage," *American Geophysical Union Transactions*, Vol 16, Part 2, 1935, pp. 519–524.
- (2) Cooper, H. H., Jr., and Jacob, C. E., "Generalized Graphical Method for Evaluating Formation Constants and Summarizing Well-Field History," *American Geophysical Union Transactions*, Vol 27, No. 4, 1946, pp. 526–534.
- (3) Jacob, C. E., "Flow of Ground Water," *Engineering Hydraulics*, Proceedings of the Fourth Hydraulics Conference, June 12–15, 1949, John Wiley & Sons, Inc., New York, NY, 1950, pp. 321–386.
- (4) Stallman, R. W., "Variable Discharge Without Vertical Leakage (Continuously Varying Discharge)," *Theory of Aquifer Tests, U. S. Geological Survey Water-Supply Paper 1536-E*, 1962, pp. 118–122.
- (5) Moench, A. E., "Ground-Water Fluctuations in Response to Arbitrary Pumpage," *Ground Water* Vol 9, No. 2, 1971, pp. 4–8.
- (6) Birsoy, Y. K., and Summers, W. K., "Determination of Aquifer Parameters from Step Tests and Intermittent Pumping Data," *Ground Water*, Vol 18, 1980, pp. 137–146.
- (7) Hantush, M. S., "Hydraulics of Wells," *Advances in Hydroscience*, Vol 1, Academic Press, Inc., New York, 1964, pp. 281–442.
- (8) Abu-Zied, M., and Scott, V. H., "Nonsteady Flow for Wells with Decreasing Discharge," *Proceedings*, American Society of Civil Engineers, Vol 89, No. HY3, 1963, pp. 119–132.
- (9) Aron, G., and Scott, V. H., "Simplified Solutions for Decreasing Flow in Wells," *Proceedings*, American Society of Civil Engineers Vol 91, No. HY5, 1965, pp. 1–12.
- (10) Lai, R. Y., Karadi, G. M., and Williams, R. A., "Drawdown at Time-Dependent Flowrate," *Water Resources Bulletin*, Vol 9, No. 5, 1973, pp. 854–859.
- (11) Jacob, C. E., and Lohman, S. W., "Nonsteady Flow to a Well of Constant Drawdown in an Extensive Aquifer," *American Geophysical Union Transactions*, Vol 33, No. 4, 1952, pp. 552–569.
- (12) Rushton, K. R., and Rathod, K. S., "Overflow Tests Analyzed by Theoretical and Numerical Methods," *Ground Water*, Vol 18, No. 1, 1980, pp. 61–69.
- (13) Reed, J. E., "Type Curves for Selected Problems of Flow to Wells in Confined Aquifers," *Techniques of Water Resources Investigations of the United States Geological Survey*, Chapter B3, 1980, p. 105.
- (14) Hvorslev, M. J., "Time Lag and Soil Permeability in Ground-Water Observations," U. S. Army Corps of Engineers, 1951, p. 49.
- (15) Ferris, J. G., and Knowles, D. B., "The Slug Test for Estimating Transmissibility," *Ground Water Note 26*, U. S. Geological Survey, 1954, p. 26.
- (16) Cooper, H. H., Jr., Bredehoeft, J. D., and Papadopoulos, I. S., "Response of a Finite-Diameter Well to an Instantaneous Charge of Water," *Water Resources Research*, Vol 3, 1967, pp. 263–269.
- (17) Krauss, I., "Die Bestimmung der Transmissivitat von Grundwasserleitern aus dem Einschwingverhalten des Brunnen-Grundwasserleitersystems," *Journal of Geophysics*, Vol 40, 1974, pp. 381–400.
- (18) van der Kamp, G., "Determining Aquifer Transmissivity by Means of Well Response Tests—The Underdamped Case," *Water Resources Research*, Vol 12, No. 1, 1976, pp. 71–77.
- (19) Shinohara, K., and Ramey, H. J., "Slug Test Data Analysis, Including the Inertial Effect of the Fluid in the Well Bore," *54th Annual Fall Conference and Exhibition of the Society of Petroleum Engineers*, 1979.
- (20) Kipp, K. L., "Type Curve Analysis of Inertial Effects in the Response of a Well to a Slug Test," *Water Resources Research*, Vol 21, No. 9, 1985, pp. 1399–1408.
- (21) Hantush, M. S., and Jacob, C. E., "Non-Steady Radial Flow in an Infinite Leaky Aquifer," *American Geophysical Union Transactions*, Vol 36, No. 1, 1955, pp. 95–100.
- (22) Hantush, M. S., "Modification of the Theory of Leaky Aquifers," *Journal of Geophysical Research*, Vol 65, No. 11, 1960, pp. 3713–3725.
- (23) Hantush, M. S., "Drawdown Around a Partially Penetrating Well," *Proceedings*, American Society of Civil Engineers, Vol 87, No. HY4, 1961, pp. 83–98.
- (24) Weeks, E. P., "Field Methods for Determining Vertical Permeability and Aquifer Anisotropy," *U.S. Geological Survey Professional Paper 501-D*, 1964, pp. D193–D198.
- (25) Weeks, E. P., "Determining the Ratio of Horizontal to Vertical Permeability by Aquifer-Test Analysis" *Water Resources Research*, Vol 5, No. 1, 1969, pp. 196–214.
- (26) Papadopoulos, I. S., "Nonsteady Flow to a Well in an Infinite Anisotropic Aquifer," *Symposium of Dubrovnik*, International Association of Scientific Hydrology, 1965, pp. 21–31.
- (27) Ferris, J. G., Knowles, D. B., Brown, R. H., and Stallman, R. W., "Theory of Aquifer Tests," *U.S. Geological Survey Water-Supply Paper 1536-E*, 1962, pp. 69–174.
- (28) Stallman, R. W., "Type Curves for the Solution of Single-Bound Problems," Bentall, Ray, Compiler, *Short Cuts and Special Problems in Aquifer Tests, U. S. Geological Survey Water-Supply Paper 1545-C*, 1963, pp. 45–47.
- (29) Lohman, S. W., "Ground-Water Hydraulics," *Professional Paper 708*, U.S. Geological Survey, 1972, p. 70.
- (30) Bennett, G. D., and Patten, E. P., Jr., "Constant-Head Pumping Test of a Multiaquifer Well to Determine Characteristics of Individual Aquifers," *U.S. Geological Survey Water-Supply Paper 1536-G*, 1962, p. 203.
- (31) Hantush, M. S., "Flow to Wells Separated by Semipervious Layer," *Journal of Geophysical Research*, Vol 72, No. 6, 1967, pp. 1709–1720.
- (32) Neuman, S. P., and Witherspoon, P. A., "Field Determination of the

- Hydraulic Properties of Leaky Multiple Aquifer Systems,” *Water Resources Research*, Vol 8, No. 5, 1972, pp. 1284–1298.
- (33) Neuman, S. P., and Witherspoon, P. A., “Theory of Flow in a Confined Two Aquifer System,” *Water Resources Research*, Vol 5, No. 4, 1969, pp. 803–816.
- (34) Javandel, I., and Witherspoon, P. A., “Method of Analyzing Transient Fluid Flow in Multilayered Aquifers,” *Water Resources Research*, Vol 5, No. 4, 1969, pp. 856–869.
- (35) Gringarten, A. C., and Ramey, H. J., Jr., “Unsteady-State Pressure Distributions Created by a Well with a Single Horizontal Fracture, Partial Penetration, or Restricted Entry,” *Society of Petroleum Engineers Journal*, Vol 14, No. 4, 1974, pp. 413–426.
- (36) Barenblatt, G. I., Zheltov, I. P., and Kochina, I. N., “Basic Concepts in the Theory of Seepage of Homogeneous Liquids in Fissured Rocks [Strata],” *Journal of Applied Mathematics and Mechanics*, Vol 24, 1960, pp. 1286–1301.
- (37) Boulton, N. S., and Streltsova, T. D., “Unsteady Flow to a Pumped Well in a Fissured Water-Bearing Formation,” *Journal of Hydrology*, Vol 35, 1977, pp. 257–269.
- (38) Moench, A. F., “Double Porosity Model for a Fissured Groundwater Reservoir with Fracture Skin,” *Water Resources Research*, Vol 20, No. 7, 1984, pp. 831–846.
- (39) Boulton, N. S., “Drawdown of the Water Table Under Non-Steady Conditions Near a Pumped Well in an Unconfined Formation,” *Proceedings, Institution of Civil Engineers*, Vol 3, Part. 3, 1954, pp. 564–579.
- (40) Boulton, N. S., “Unsteady Flow to a Pumped Well Allowing for Delayed Yield from Storage,” *International Association of Scientific Hydrology, Publication 37*, 1954, pp. 472–477.
- (41) Boulton, N. S., “Analysis of Data from Non-Equilibrium Pumping Tests Allowing for Delayed Yield from Storage,” *Proceedings, Institution of Civil Engineers*, Vol 26, 1963, pp. 469–482.
- (42) Neuman, S. P., “Theory of Flow in Unconfined Aquifers Considering Delayed Response of the Water Table,” *Water Resources Research*, Vol 8, No. 4, 1972, pp. 1031–1045.
- (43) Neuman, S. P., “Supplementary Comments on ‘Theory of Flow in Unconfined Aquifers Considering Delayed Response of the Water Table’,” *Water Resources Research*, Vol 9, No. 4, 1973, pp. 1102.
- (44) Neuman, S. P., “Analysis of Pumping Test Data from Anisotropic Unconfined Aquifers Considering Delayed Gravity Response,” *Water Resources Research*, Vol 11, No. 2, 1975, pp. 329–342.

SUMMARY OF CHANGES

In accordance with Committee D18 policy, this section identifies the location of changes to this standard since the last edition (D4043–96(2010)^{e1}) that may impact the use of this standard. (January 1, 2017)

- (1) Removed definitions that were not used in the text or are already in D653. Updated wording to D18 procedures.
- (2) Identified Referenced Documents that were not cited in the text – added them to the text.
- (3) Removed obsolete place-keepers for Table 1.
- (4) Removed/revised jargon.

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; http://www.copyright.com/