



Standard Test Method for Permeability of Rocks by Flowing Air¹

This standard is issued under the fixed designation D4525; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

^{ε1} NOTE—Editorial corrections were made throughout in February 2014.

1. Scope*

1.1 This test method covers the determination of the coefficient of specific permeability for the flow of air through rocks. The method establishes representative values of the coefficient of permeability of rocks or well-indurated soils.

1.2 This test method is limited to permeability values greater than $9.869 \times 10^{-18} \text{ m}^2$ (0.01 millidarcy), and is limited to rocks free of oil or unctuous matter.

1.3 *Units*—The values stated in SI units are to be regarded as the standard. The values given in parentheses are mathematical conversions to inch-pound units that are provided for information only and are not considered standard. Reporting of test results in units other than SI shall not be regarded as nonconformance with this test method.

1.4 All observed and calculated values shall conform to the guidelines for significant digits and rounding established in Practice D6026.

1.4.1 The procedures used to specify how data are collected/recorded or calculated, in this standard are regarded as the industry standard. In addition, they are representative of the significant digits that generally should be retained. The procedures used do not consider material variation, purpose for obtaining the data, special purpose studies, or any considerations for the user's objectives; and it is common practice to increase or reduce significant digits of reported data to be commensurate with these considerations. It is beyond the scope of this standard to consider significant digits used in analytical methods for engineering design.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

¹ This test method is under the jurisdiction of ASTM Committee D18 on Soil and Rock and is the direct responsibility of Subcommittee D18.12 on Rock Mechanics.

Current edition approved Nov. 1, 2013. Published December 2013. Originally approved in 1985. Last previous edition approved in 2008 as D4525 – 08. DOI: 10.1520/D4525-13E01.

2. Referenced Documents

2.1 *ASTM Standards*:²

D653 Terminology Relating to Soil, Rock, and Contained Fluids

D3740 Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction

D6026 Practice for Using Significant Digits in Geotechnical Data

2.2 *American Petroleum Institute Standard*:³

RP-40 Recommended Practice for Core Analysis Procedure

3. Terminology

3.1 *Definitions*—For definitions of common technical terms in this standard, refer to Terminology D653.

4. Summary of Test Method

4.1 The permeability of a rock sample is measured by flowing dry air through the specimen and measuring the absolute pressure, the flow rate, and absolute pressure differential of the air. Three or more tests are performed on a sample at different mean air pressure values. The permeability values are plotted as a function of the reciprocal mean absolute pressure; those points lying on a straight line are extrapolated to a value corresponding to an infinite mean air pressure to obtain an equivalent permeability value for liquids.

5. Significance and Use

5.1 This test method is designed to measure the permeability to air of a small sample of rock. By extrapolation, this test method also determines an equivalent of the liquid permeability. This parameter is used to calculate the flow through rock of fluids subjected to a pressure differential.

NOTE 1—The quality of the result produced by this standard is dependent on the competence of the personnel performing it, and the

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For Annual Book of ASTM Standards volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from American Petroleum Institute (API), 1220 L. St., NW, Washington, DC 20005-4070, http://www.api.org.

*A Summary of Changes section appears at the end of this standard

suitability of the equipment and facilities used. Agencies that meet the criteria of Practice D3740 are generally considered capable of competent and objective testing. Users of this standard are cautioned that compliance with Practice D3740 does not in itself assure reliable results. Reliable results depend on many factors; Practice D3740 provides a means of evaluating some of those factors.

6. Apparatus

6.1 *Permeameter*—The permeameter shall have a specimen holder; a pressure transducer or gauge, or manometers, for measuring the air pressure differential across the ends of the specimen; a means for measuring the flow rate of the air; and a means for providing dry air to the flow stream (see Fig. 1).

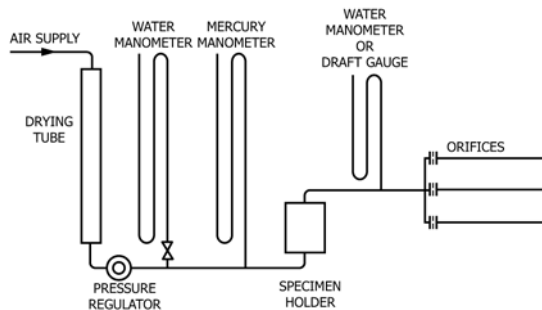


FIG. 1 Air Permeameter (Reproduced from RP-40)

6.1.1 *Specimen Holder*—The specimen holder shall have a diameter of at least ten times the diameter of the largest particle of the specimen. Where suitable, the preferred diameter is 2.54 cm (1 in.). The entrance and exit flow ports shall be sufficiently large to prevent pressure loss at maximum flow rate. The length shall be 1.3 to 1.7 times the diameter.

6.1.2 *Preferred Apparatus*—In the preferred form, the specimen holder shall be an elastomer sleeve and have means for confining the sleeve and compressing it against the specimen so as to prevent bypassing of air under pressure between the sleeve and the specimen. The holder shall also have a means for confining the ends of the sample. In the preferred form, the end confining plugs will have two ports each, one for the flow of air, and the other for a static pressure line to measure pressure at the end faces of the specimen, as in Fig. 2. This type of holder is suitable for many types of flowing fluids and allows the simulation of overburden stress on the specimen.

6.1.3 *Alternative Apparatus*—An elastomer bushing may be used to confine the specimen, as in Fig. 3. This holder is suitable for confining well-indurated specimens of a fine to moderate texture. This holder allows rapid operation; it cannot be used for simulating overburden stress.

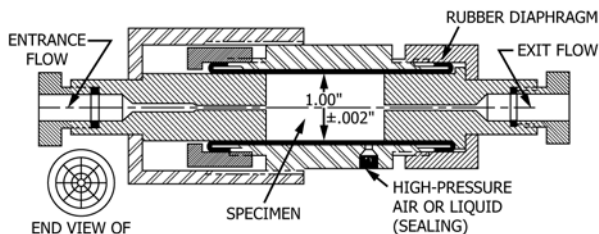


FIG. 2 Hassler Type Specimen Holder

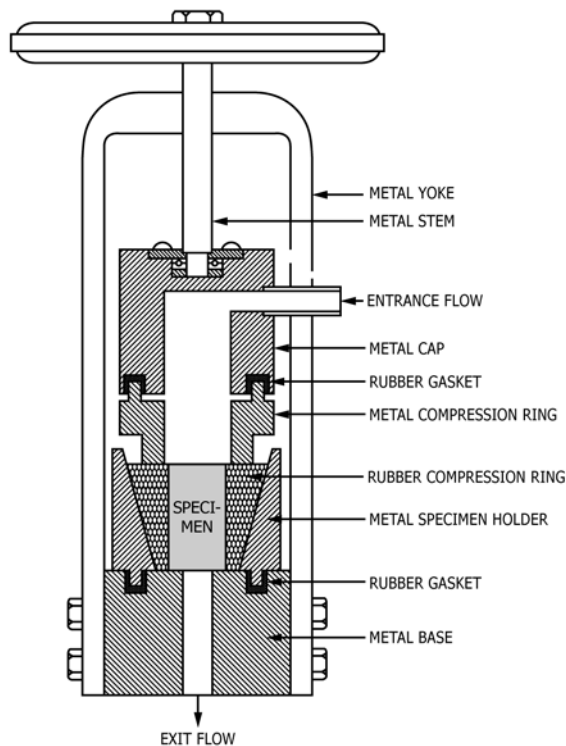


FIG. 3 Fancher-Type Specimen Holder

6.1.3.1 Alternatively, a rigid bushing may be cast around the specimen (see Fig. 4). The casting material shall be one that will adhere well to both the specimen and the bushing, without penetration of the specimen beyond the superficial pores. Epoxies, polyesters, and sealing wax are suitable for this purpose. This method of mounting samples is particularly well suited for testing less well-indurated specimens. This technique is not applicable for tests requiring the simulation of overburden stress.

6.1.4 The flow rate of the air shall be sensed downstream from the specimen by means of calibrated orifices (Fig. 1), rotameters (Fig. 5), or a bubble meter (Fig. 6).

6.1.5 The preferred method of sensing absolute pressure to obtain the pressure differential across the specimen is by means of absolute pressure transducers located at the ends of the specimen. The transducers must operate over a range of 0 to 50 kPa (0 to 7.3 psi) with a resolution of 250 Pa (0.036 psi) or better. Alternatively, the sensors may be connected to the end

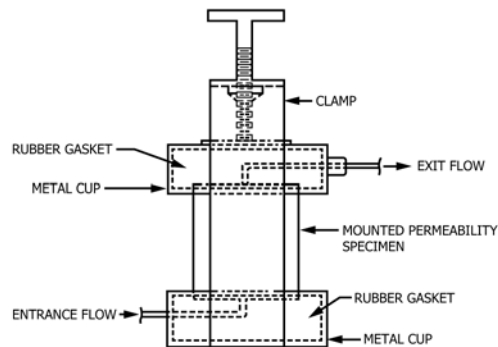


FIG. 4 Compression Cell for Ring-Mounted Specimens




FIG. 5 Shielded Microflowmeter

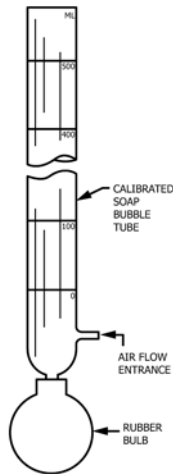


FIG. 6 Bubble Meter

faces of the specimen with static lines, or placed in sufficiently large flow lines to cause less than 250 Pa (0.036 psi) loss of head at maximum flow rate. Pressure must be sensed between the downstream end of the specimen and the orifice if such a flow sensor is utilized.

6.1.5.1 Manometers may be utilized to measure the pressures of the flowing air. Both mercury and water manometers must be provided with a high-pressure cutoff valve to the water manometer as in Fig. 1, to provide the range of differential pressures required. The manometers must be 20 cm (7.9 in.) or more in height.

6.1.5.2 Alternatively, absolute pressure gages with a range of 0 to 50 kPa (0 to 7.3 psi) and a resolution of 250 Pa (0.036 psi) may be used to measure the pressure of the flowing air.

6.1.6 The dimensions of the column for drying the flowing air shall be a 2.54 cm (1 in.) inside diameter by a 30 cm (11.8 in.) or more length. The columns shall be filled with silica gel or anhydrous calcium sulfate, with indicator. There shall be a screen of 50 mesh on the downstream end of the filter to prevent particulate matter from reaching the specimen under test.

6.1.7 *Compressed Air Source*—A source with a regulator and gauge that shall supply air pressure up to 50 kPa (7.3 psi) for the flow system.

6.1.7.1 The air shall be clean and free of particles that can plug the pores of the sample.

6.1.7.2 A compressed air supply with a separate regulator and gauge, or a hydraulic pressure source with gauge, shall supply pressure for seating the sleeve when that option for holding the specimen is used. A seating pressure of 700 kPa (101.5 psi) or more shall be used for seating. Pressures up to 100 MPa (14503.8 psi) may be required for simulating in situ stress.

6.1.8 *Small Vacuum Source*—Used for expanding the sleeve-type holder is required for specimen insertion when that holder option is utilized.

6.2 *Drilling Machine*—A machine with a diamond bit and coolant circulating system to drill specimens from rock samples.

6.3 *Required Miscellaneous Implements*—Items including a stop watch for use with bubble meter, a metric scale graduated in millimetres for manometers, and a thermometer with divisions of 0.5°C (1°F) or better for measuring room temperature.

6.4 *Specimen Size Measurement Devices*—Devices used to measure the length and diameter of the specimen shall be capable of measuring the desired dimension to within 0.1 % of its actual length.

7. Hazards

7.1 **Warning**—Mercury has been designated by many regulatory agencies as a hazardous material that can cause serious medical issues. Mercury, or its vapor, may be hazardous to health and corrosive to materials. Caution should be taken when handling mercury containing products. See the applicable product Safety Data Sheet (SDS) for additional information. Users should be aware that selling mercury or mercury containing products into your state or country may be prohibited by law.

8. Sampling

8.1 An adequate supply of homogeneous material is necessary. A selection of samples shall be made using visual examination of the site of evaluation to provide a representative array of permeability values. Attention should be given to the in situ orientation of the sample when visual inspection indicates anisotropy is present. Dip and strike of bedding planes, if any, should be noted.

9. Test Specimens

9.1 Drill cylindrical specimens from the rock samples in orientations dictated by the in situ conditions and test goals, for example, parallel and perpendicular to the bedding planes. Drill the samples to a length between 1.3 and 1.7 times the diameter of the specimen.

9.2 The ends of the specimen shall be faced with a diamond saw to be approximately perpendicular to the axis of the specimen. Wash the end faces with clear water.

9.3 *Drying Specimens:*

9.3.1 If the specimen is free of swelling clay, dry in a conventional oven at a temperature of approximately 100°C until an equilibrium weight is obtained. Before weighing, cool specimens to room temperature in a desiccator. Drying time varies with specimen size and permeability; 4 h is generally sufficient for a permeable specimen of 2.54 cm (1 in.) in diameter.

9.3.2 If the specimen contains swelling clays, dry in a controlled humidity oven at 45% relative humidity at 63°C until weight equilibrium is obtained. Drying time under these conditions is usually two to four days.

9.4 If necessary, clean engrained fines from the end faces of the specimen by mild wire brushing and air jetting.

10. Procedure

10.1 Measure and record the length and diameter of the specimen to the nearest 0.1 mm (0.004 in.). Take a minimum of three length measurements 120° apart and at least three diameter measurements one at the each end and one at the mid-point of the height. Determine the average length and diameter of the specimen.

10.2 Place the specimen in the specimen holder and add end pieces to the holder as necessary. Turn the wheel of the compression apparatus of the bushing-type holder, or increase the annulus pressure of the sleeve-type holder, until a seal against the periphery of the specimen is obtained. A pressure of 700 kPa (101.5 psi) is usually found sufficient for sealing the sleeve-type holder. Apply additional pressure to the core holder if the simulation of in situ stress is required.

10.3 Open the entrance flow valve, allowing air to flow to the specimen. Adjust the entrance pressure upward until a suitable flow of air occurs, but do not exceed the critical velocity beyond which turbulent flow occurs or inertial effects become significant. Flow rates less than 2 cm³/s per 1 cm² of specimen end face area usually are found to be satisfactory. Observe the flow rate until an equilibrium value is attained. Measure and record the flow rate and pressure differential across the specimen.

10.4 Lower the flowing pressure used in 10.3 to about two-thirds of the value and repeat the test and record.

10.5 Lower the flowing pressure used in 10.4 to about one-half of the value and repeat the test and record.

10.6 Make preliminary calculations of the flow rate divided by pressure differential of each step: 10.3 – 10.5. If the values are linearly related, proceed to Section 11. If the values are not linearly related, reduce the flowing pressure in 10.5, repeat the test, and record.

10.7 Repeat the procedures of 10.3 – 10.6 until a linear set of data is obtained.

11. Calculation

11.1 Calculate the coefficient of permeability, *k*, at each mean pressure, as follows:

$$k = [(2Q_e P_e \mu L) / (P_i^2 - P_e^2) A] \tag{1}$$

where:

- k* = coefficient of permeability, m²
- Q_e* = exit flow rate of air, m³/s
- P_e* = exit absolute pressure of air, Pa
- L* = length of specimen, m
- A* = cross-section area of specimen, m²
- P_i* = entrance absolute pressure of air, Pa
- μ* = viscosity of air at temperature of test, Pa·s

11.2 Compute the mean pressure of each test for each specimen in Pa (psi) to the nearest 1 Pa, and then calculate the reciprocal of each mean pressure, as follows:

$$2 / (P_i + P_e) \tag{2}$$

11.3 Plot the coefficient of permeability versus the reciprocal of the mean pressure for each test of a specimen, see Fig. 7. Draw a straight line through at least three points (this will be at the lower values of reciprocal mean pressure) and extrapolate the line to intersect the ordinate line at zero reciprocal mean pressure. The value of *k* at the intersection is the equivalent liquid permeability of the specimen. If a straight line cannot be established through the data points, another test at a lower mean pressure may be required, or the complete test should be repeated.

12. Report: Test Data Sheet(s)/Form(s)

12.1 The methodology used to specify how data are recorded on the test data sheet(s)/form(s) as given below, is covered in 1.4 and Practice D6026.

12.2 Record as a minimum the following general information (data):

12.2.1 Source of test specimen, including project name and location, as well as other pertinent data that help identify the specimen.

12.2.2 Date test is performed.

12.2.3 Physical description of the test specimen, including: rock type; location and orientation of inherent rock structural features; any discontinuities; and large inclusions or inhomogeneities, if any.

12.2.4 Name of person(s) who performed the test.

12.3 Record as a minimum the following test information:

12.3.1 Average length and diameter of the specimen.

12.3.2 The flowing pressure during the test.

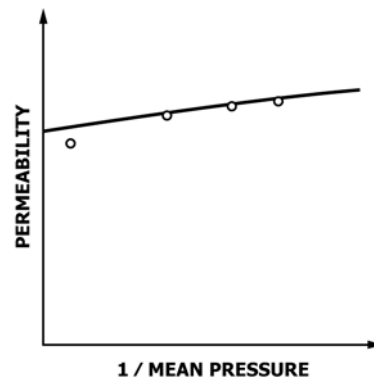


FIG. 7 Permeability versus Reciprocal Mean Pressure

12.3.3 The coefficient of permeability at each mean pressure.

12.3.4 The mean pressure of each test in Pa (psi).

12.3.5 The reciprocal of each mean pressure, 1/Pa (1/psi).

12.3.6 The coefficient of permeability versus the reciprocal mean pressure plot for each test of a specimen.

13. Precision and Bias

13.1 *Precision*—Test data on precision is not presented due to the nature of the rock materials tested by this test method. It is either not feasible or too costly at this time to have ten or more agencies participate in an in situ testing program at a

given site. Also, it is either not feasible or too costly to produce multiple specimens that have uniform physical properties. Any variation observed in the data is just as likely to be due to specimen variation as to operator or laboratory testing variation. Subcommittee D18.12 is seeking any data from the users of this test method that might be used to make a limited statement on precision.

13.2 *Bias*—There is no accepted reference value for this test method; therefore, bias cannot be determined.

14. Keywords

14.1 air flow; flow; flow rate; permeability; rock

SUMMARY OF CHANGES

Committee D18 has identified the location of selected changes to this standard since the last issue (D4525 – 08) that may impact the use of this standard. (Approved Nov. 1, 2013.)

(1) Revised standard throughout.

(2) Added 1.4, 1.4.1, 6.4, and Section 7.

(3) Rewrote Section 12.

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; <http://www.copyright.com/>