



# Standard Practice for Defining the Viscosity Characteristics of Hydraulic Fluids<sup>1</sup>

This standard is issued under the fixed designation D6080; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reappraisal.

## 1. Scope\*

1.1 This practice covers all hydraulic fluids based either on petroleum, synthetic, or naturally-occurring base stocks. It is not intended for water-containing hydraulic fluids.

1.2 For determination of viscosities at low temperature, this practice uses millipascal-second (mPa·s) as the unit of viscosity. For reference, 1 mPa·s is equivalent to 1 centipoise (cP). For determination of viscosities at high temperature, this practice uses millimetre squared per second ( $\text{mm}^2/\text{s}$ ) as the unit of kinematic viscosity. For reference, 1  $\text{mm}^2/\text{s}$  is equivalent to 1 centistoke (cSt).

1.3 This practice is applicable to fluids ranging in kinematic viscosity from about 4 to 150  $\text{mm}^2/\text{s}$  as measured at a reference temperature of 40°C and to temperatures from -50 to +16°C for a fluid viscosity of 750 mPa·s.

NOTE 1—Fluids of lesser or greater viscosity than the range described in 1.3 are seldom used as hydraulic fluids. Any mathematical extrapolation of the system to either higher or lower viscosity grades may not be appropriate. Any need to expand the system should be evaluated on its own merit.

1.4 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

## 2. Referenced Documents

### 2.1 ASTM Standards:<sup>2</sup>

D445 Test Method for Kinematic Viscosity of Transparent and Opaque Liquids (and Calculation of Dynamic Viscosity)

D2270 Practice for Calculating Viscosity Index from Kinematic Viscosity at 40 and 100°C

D2422 Classification of Industrial Fluid Lubricants by Viscosity System

<sup>1</sup> This practice is under the jurisdiction of ASTM Committee D02 on Petroleum Products, Liquid Fuels, and Lubricants and is the direct responsibility of Subcommittee D02.N0.10 on Specifications.

Current edition approved Nov. 1, 2012. Published February 2013. Originally approved in 1997. Last previous edition approved in 2012 as D6080-12. DOI: 10.1520/D6080-12A.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, [www.astm.org](http://www.astm.org), or contact ASTM Customer Service at [service@astm.org](mailto:service@astm.org). For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

D2983 Test Method for Low-Temperature Viscosity of Lubricants Measured by Brookfield Viscometer

D5621 Test Method for Sonic Shear Stability of Hydraulic Fluids

E29 Practice for Using Significant Digits in Test Data to Determine Conformance with Specifications

2.2 Society of Automotive Engineers (SAE) Standards:<sup>3</sup>

J300 Engine Oil Viscosity Classification

J306 Axle and Manual Transmission Lubricant Viscosity Classification

## 3. Terminology

### 3.1 Definitions:

3.1.1 *hydraulic fluid, n*—a liquid used in hydraulic systems for lubrication and transmission of power.

3.1.2 *kinematic viscosity, n*—the ratio of the dynamic viscosity to the density of a liquid.

3.1.2.1 *Discussion*—For gravity flow under a given hydrostatic head, the pressure head of a liquid is proportional to its density. Therefore, kinematic viscosity is a measure of the resistance to flow of a liquid under gravity.

3.1.3 *Newtonian oil or fluid, n*—an oil or fluid that at a given temperature exhibits a constant viscosity at all shear rates or shear stresses.

3.1.4 *non-Newtonian oil or fluid, n*—an oil or fluid that at a given temperature exhibits a viscosity that varies with changing shear stress or shear rate.

3.1.5 *shear degradation, n*—the decrease in molecular weight of a polymeric thickener (VI improver) as a result of exposure to high shear stress.

3.1.6 *shear rate, n*—the velocity gradient in fluid flow.

3.1.7 *shear stability, n*—the resistance of a polymer-thickened fluid to shear degradation.

3.1.8 *shear stress, n*—the motivating force per unit area for fluid flow.

3.1.9 *viscosity, n*—the ratio between the applied shear stress and the rate of shear.

<sup>3</sup> Available from Society of Automotive Engineers (SAE), 400 Commonwealth Dr., Warrendale, PA 15096-0001, <http://www.sae.org>.

\*A Summary of Changes section appears at the end of this standard

3.1.9.1 *Discussion*—Viscosity is sometimes called the coefficient of dynamic viscosity. This coefficient is a measure of the resistance to flow of the liquid.

3.1.10 *viscosity index (VI), n*—an arbitrary number used to characterize the variation of the kinematic viscosity of a fluid with temperature.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *in-service viscosity, n*—the viscosity of fluid during operation of a hydraulic pump or circuit components.

#### 4. Summary of Practice

4.1 High VI hydraulic fluids often contain high molecular weight thickeners, called viscosity index (VI) improvers, which impart non-Newtonian characteristics to the fluid. These polymers may shear degrade with use, and reduce the in-service viscosity of the fluids.

4.2 This practice provides uniform guidelines for characterizing oils in terms of both their high and low temperature viscosities before and after exposure to high shear stress.

4.2.1 Since the performance of fluids at temperatures higher than 40°C is determined in the worst case, that is, most severe situation, by the sheared oil viscosity, the viscosity and viscosity index used to characterize fluids in this practice are those of the sheared fluid.

4.2.2 This practice classifies oils at low temperature by their new oil properties. Low temperature viscosities do not decrease greatly, if at all, with polymer shear degradation. Furthermore, this approach ensures that the fluid will be properly classified under the worst-case conditions, that is, when the fluid is new.

4.3 This practice may be used with either Newtonian or non-Newtonian hydraulic fluids. This provides the user with a more reasonable basis to compare fluids than previous practices.

#### 5. Significance and Use

5.1 The purpose of this practice is to establish viscosity designations derived from viscosities measured by test methods which have a meaningful relationship to hydraulic fluid performance. This permits lubricant suppliers, lubricant users, and equipment designers to have a uniform and common basis for designating, specifying, or selecting the viscosity characteristics of hydraulic fluids.

5.2 This practice is not intended to be a replacement for Classification **D2422**. Rather, it is an enhancement intended to provide a better description of the viscosity characteristics of lubricants used as hydraulic fluids.

5.3 This practice implies no evaluation of hydraulic oil quality other than its viscosity and shear stability under the conditions specified.

5.4 While it is not intended for other functional fluids, this practice may be useful in high-shear-stress applications where viscosity index (VI) improvers are used to extend the useful operating temperature range of the fluid.

5.5 This practice does not apply to other lubricants for which viscosity classification systems already exist, for

example, SAE J300 for automotive engine oils and SAE J306 for axle and manual transmission lubricants.

#### 6. Procedure

6.1 The low temperature viscosity grade of a fluid is based on the viscosity of new oil measured using a Brookfield viscometer, Test Method **D2983**.

6.1.1 The viscosity shall be interpolated from measurements at three temperatures spanning the temperature at which the viscosity is 750 mPa·s. A smooth graph of these data (log viscosity versus temperature) determines the temperature at which the oil has a viscosity of 750 mPa·s.

6.1.2 The temperature determined in **6.1.1** shall be rounded to a whole number in accordance with Practice **E29**.

6.1.3 The low temperature viscosity grade is determined by matching the temperature determined in **6.1.2** with the requirements shown in **Table 1**.

6.2 The high temperature viscosity designation of a fluid is the 40°C kinematic viscosity (Test Method **D445**) of a fluid which has been sheared using Test Method **D5621**.

6.2.1 The kinematic viscosity determined in **6.2** shall be rounded to a whole number in accordance with Practice **E29**.

6.2.2 For a fluid known to contain no polymeric components which will shear degrade, the high temperature viscosity designation is the 40°C kinematic viscosity (Test Method **D445**) of the new fluid, rounded per **6.2.1**.

6.2.3 If the 40°C kinematic viscosity from **6.2.1** fails to meet the same designation consistently (for example, it varies because of spread in base stock or component specifications, or variability in kinematic viscosity or shear stability measurements), the lower designation must be used to ensure conformance with **6.5** below.

6.3 The viscosity index designation of the fluid is based on the viscosity index as determined using Practice **D2270** on fluid which has been sheared using Test Method **D5621**.

6.3.1 The viscosity index determined in **6.3** shall be rounded to the nearest ten units in accordance with Practice **E29**. This value is the viscosity index designation.

6.3.2 For fluids which do not contain polymeric components, the viscosity index is determined on the new fluid

**TABLE 1 Low Temperature Viscosity Grades for Hydraulic Fluid Classifications**

Viscosity Grade	Temperature, °C, for Brookfield Viscosity of 750 mPa·s <sup>A</sup>	
	min	max
L5	...	-50
L7	-49	-42
L10	-41	-33
L15	-32	-23
L22	-22	-15
L32	-14	-8
L46	-7	-2
L68	-1	4
L100	5	10
L150	11	16

<sup>A</sup> The temperature range for a given L-grade is approximately equivalent to that for an ISO grade of the same numerical designation and having a viscosity index of 100, that is, the temperature range for the L10 grade is approximately the same as that for an ISO VG 10 grade with a viscosity index of 100.

using Practice **D2270**. The viscosity index designation for the fluid is established by rounding this viscosity index to the nearest ten units in accordance with Practice **E29**.

NOTE 2—The guidelines for rounding viscosity in **6.2.1** and **6.2.2** and viscosity index in **6.3.1** and **6.3.2** are specific to this practice and should not be confused with the larger number of significant figures that can be reported when Test Methods **D445** and **D2270** are used for other purposes.

6.3.3 If the viscosity index fails to meet the same designation consistently, that is, it varies between the lower values for one designation and the higher values for the next lower designation (for example, it varies because of spread in base stock or component specifications, or variability in kinematic viscosity or shear stability measurements), the lower designation must be used to ensure conformance with **6.5** below.

6.4 For the sake of uniformity of nomenclature in identifying the viscosity characteristics of hydraulic fluids, the following designation shall be used:

ISO VG xx  
Lyy-zz (VI)

where xx is the new oil viscosity grade as determined by Classification **D2422** (**Table 2**); Lyy is the low temperature viscosity grade as determined in **6.1**; zz is the high temperature sheared viscosity designation as determined in **6.2**; and VI is the viscosity index designation as determined in **6.3**.

6.4.1 If the new oil viscosity does not meet a grade described by Classification **D2422**, the ISO VG xx portion of the designation does not apply. In such cases, the Lyy-zz (VI) designation may still be used, and the use of any other descriptors for the new oil is at the discretion of the fluid marketer.

6.4.2 Examples of use of this practice are shown in **Table 3**.

6.5 An oil blender may use any manufacturing control that seems appropriate to his operation. However, it is the responsibility of the blender to ensure that all production fully meets the requirements for the viscosity designation on the container.

## 7. Interpretation of Results

7.1 The designation determined for a hydraulic fluid as described in **6.4** may be used in combination with a manufacturer's viscosity recommendations for specific equipment to estimate an acceptable temperature range over which that fluid may be used in that equipment.

7.2 The low temperature grade determined in **6.1**, Lyy, defines the lowest recommended fluid temperature at which the fluid may be used in equipment with a start-up, under load limit of 750 mPa·s, max.

7.2.1 The low temperature limit is determined by comparing the Lyy designation with the corresponding temperature in **Table 1**.

7.2.2 *Example 1a*—For an oil with the designation:

ISO VG 46  
L32-40 ,

the low temperature grade is defined by L32. Reference to **Table 1** indicates that this oil has a viscosity of 750 mPa·s at a temperature between  $-8$  and  $-14^{\circ}\text{C}$ . Hence, in equipment which has a low temperature start-up viscosity limit of 750 mPa·s, the oil in this example may be used down to at least  $-8^{\circ}\text{C}$ .

7.2.3 *Example 2a*—For an oil with the designation:

ISO VG 68  
L46-57

the low temperature grade is defined by L46. Reference to **Table 1** indicates that this oil has a viscosity of 750 mPa·s at a temperature between  $-2$  and  $-7^{\circ}\text{C}$ . Hence, in equipment which has a low temperature start-up viscosity limit of 750 mPa·s, the oil in this example may be used down to at least  $-2^{\circ}\text{C}$ .

7.2.4 This practice is not quantitative when a manufacturer specifies lower or higher start-up viscosity limits. However, the process described in **6.1** can be used to determine low temperature limitations corresponding to any start-up viscosity.

7.3 The high temperature designation determined in **6.2** and the viscosity index determined in **6.3**, zz (VI), can be used in combination with the data in **Figs. 1-4** to estimate high temperature operating limits (**Fig. 1** and **Fig. 2**) and optimum operating temperatures (**Fig. 3** and **Fig. 4**) for the fluid.

7.3.1 **Fig. 1** and **Fig. 2** apply directly to equipment which has minimum operating kinematic viscosity limits of 10 and 13  $\text{mm}^2/\text{s}$ , respectively.

7.3.1.1 Find the value zz on the horizontal axis labeled High Temperature Viscosity Designation.

7.3.1.2 Read vertically from the point defined by **7.3.1.1** to the curve corresponding to the viscosity index, VI, interpolating, if necessary.

7.3.1.3 Read horizontally from the point defined by **7.3.1.2** to the vertical axis labeled Temperature,  $^{\circ}\text{C}$ , for a Kinematic Viscosity of 10 (or 13)  $\text{mm}^2/\text{s}$ . This is the upper temperature limit for fluid operation.

7.3.1.4 *Example 1b*—For the oil in Example 1a in **7.2.2**, the high temperature designation and VI are 40 and 150, respectively. Assume that the equipment of interest has a recommended kinematic viscosity minimum of 13  $\text{mm}^2/\text{s}$ ; hence, **Fig. 2** should be used. As described in **7.3.1.1**, find the value 40 on the horizontal axis labeled High Temperature Viscosity Designation. As described in **7.3.1.2**, read vertically from 40 until intersecting the curve labeled VI = 150. Finally, as described in **7.3.1.3**, read horizontally to the vertical axis labeled Temperature,  $^{\circ}\text{C}$ , for a Kinematic Viscosity of 13  $\text{mm}^2/\text{s}$ . The value corresponding to a high temperature viscosity designation of 40 and a viscosity index of 150 is  $75^{\circ}\text{C}$ . Hence, in equipment which has a recommended kinematic viscosity

**TABLE 2 ISO Viscosity System for Hydraulic Fluids**


Viscosity Grade Identification	Mid-Point Viscosity, $\text{mm}^2/\text{s}$ at $40^{\circ}\text{C}$	Kinematic Viscosity Limits, $\text{mm}^2/\text{s}$ at $40^{\circ}\text{C}$	
		min	max
ISO 5	4.6	4.14	5.06
ISO 7	6.8	6.12	7.48
ISO 10	10	9.00	11.0
ISO 15	15	13.5	16.5
ISO 22	22	19.8	24.2
ISO 32	32	28.8	35.2
ISO 46	46	41.4	50.6
ISO 68	68	61.2	74.8
ISO 100	100	90.0	110
ISO 150	150	135	165

**TABLE 3 Examples of Using Viscosity Designation**


NOTE 1—The examples in Tables 3 and 4 are not intended to be all inclusive. While some of the examples are common, that is not the intention.

40°C Kinematic Viscosity, mm <sup>2</sup> /s		Sheared Fluid Viscosity Index	Temperature, °C, Measured for Brookfield Viscosity of 750 mPa·s	Viscosity Designation
New Fluid	Sheared Fluid			
22.3	21.3	158	-23	ISO 22 L15-21 (160)
30.8	29.52	145	-15	ISO 32 L22-30 (150)
31.8	24.4	105	-11	ISO 32 L32-24 (110)
36.4	20.9	117	-13	<sup>A</sup> L32-21 (120)
38.3	31.8	138	-12	<sup>A</sup> L32-32 (140)
45.8	42.7	140	-5	ISO 46 L46-43 (140)
48.0	43.49	148	-8	ISO 46 L32-43 (150)
57.8	53.4	149	-4	<sup>A</sup> L46-53 (150)
69.0	67.0	116	0	ISO 68 L68-67 (120)
69.5	40.7	120	+1	ISO 68 L68-41 (120)
99.9	95.8	113	0	ISO 100 L68-96 (110)

<sup>A</sup> Viscosity of new fluid does not conform to ISO grade in accordance with Classification D2422.

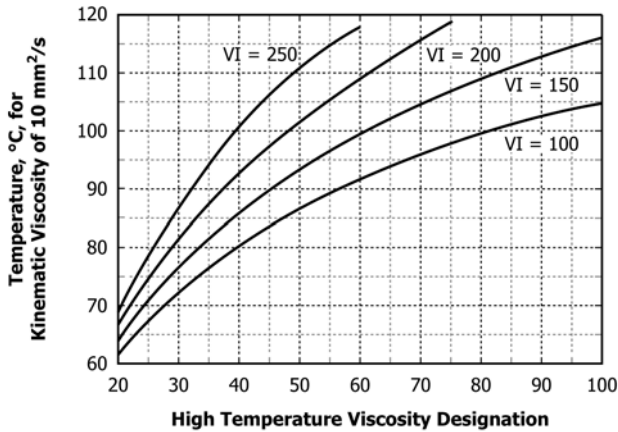

**FIG. 1** Temperatures for a Kinematic Viscosity of 10 mm<sup>2</sup>/s

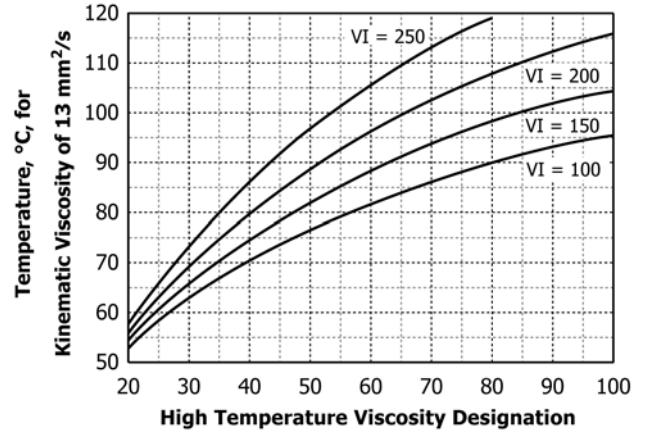

**FIG. 2** Temperatures for a Kinematic Viscosity of 13 mm<sup>2</sup>/s

minimum of 13 mm<sup>2</sup>/s, fluid temperature for the oil in this example should not exceed 75°C.

7.3.1.5 *Example 2b*—For the oil in Example 2a in 7.2.3, the high temperature designation and VI are 57 and 170, respectively. Assume that the equipment of interest has a recommended kinematic viscosity minimum of 10 mm<sup>2</sup>/s; hence, Fig. 1 should be used. Find the value 57 on the horizontal axis labeled High Temperature Viscosity Designation. Read vertically from 57 until intersecting the curves labeled VI = 150 and VI = 200. Interpolate between the curves to a value of VI = 170 and read horizontally to the vertical axis labeled Temperature, °C, for a Kinematic Viscosity of 10 mm<sup>2</sup>/s. The value corresponding to a high temperature viscosity designation of 57 and a viscosity index of 170 is 102°C. Hence, in equipment which has a recommended kinematic viscosity minimum of 10 mm<sup>2</sup>/s, fluid temperature for the oil in this example should not exceed 102°C.


7.3.1.6 Approximate maximum fluid operating temperature can also be estimated for other minimum operating viscosities in the range of 10 to 13 mm<sup>2</sup>/s by interpolation between Fig. 1 and Fig. 2.

7.3.2 Fig. 3 and Fig. 4 apply directly to equipment which has optimum operating viscosities of either 24 or 32 mm<sup>2</sup>/s, respectively.


7.3.2.1 Find the value *zz* on the horizontal axis labeled High Temperature Viscosity Designation.

7.3.2.2 Read vertically from the point defined by 7.3.2.1 to the curve corresponding to the viscosity index, VI, interpolating, if necessary.

7.3.2.3 Read horizontally from the point defined by 7.3.2.2 to the vertical axis labeled Temperature, °C, for a Kinematic Viscosity of 24 (or 32) mm<sup>2</sup>/s. This is the optimum temperature for fluid operation.

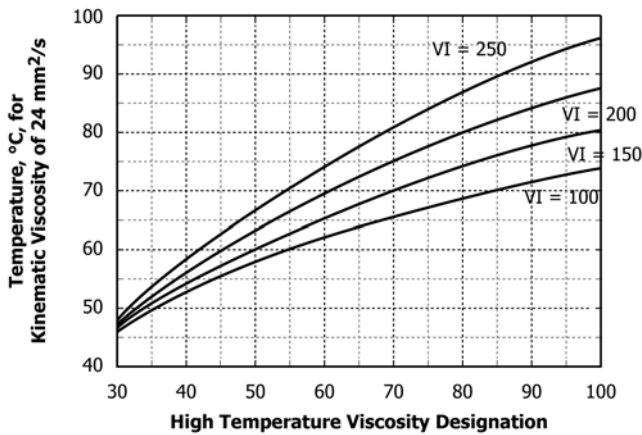

**FIG. 3** Temperatures for a Kinematic Viscosity of 24 mm<sup>2</sup>/s

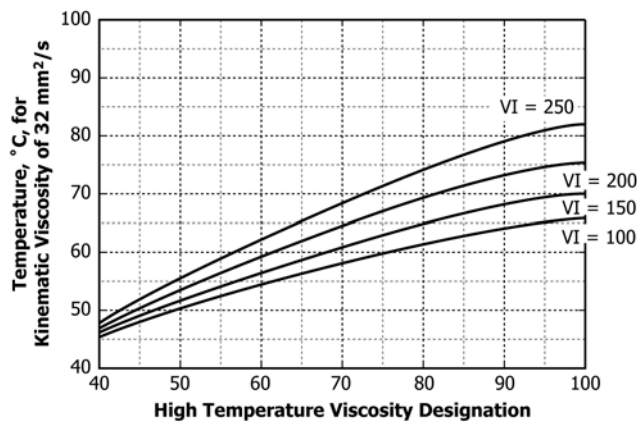

**FIG. 4** Temperatures for a Kinematic Viscosity of 32 mm<sup>2</sup>/s

7.3.2.4 *Example 1c*—For the oil in Example 1a in 7.2.2, the high temperature designation and VI are 40 and 150, respectively. Assume that the equipment of interest has a recommended optimum operating kinematic viscosity of 24 mm<sup>2</sup>/s; hence, Fig. 3 should be used. As described in 7.3.2.1, find the value 40 on the horizontal axis labeled High Temperature Viscosity Designation. As described in 7.3.2.2, read vertically from 40 until intersecting the curve labeled VI = 150. Finally, as described in 7.3.2.3, read horizontally to the vertical axis labeled Temperature, °C, for a Kinematic Viscosity of 24 mm<sup>2</sup>/s. The value corresponding to a high temperature viscosity designation of 40 and a viscosity index of 150 is 54 to 55°C. Hence, in equipment which has a recommended optimum

operating kinematic viscosity of 24 mm<sup>2</sup>/s, fluid temperature for the oil in this example should be maintained at about 54 to 55°C.

7.3.2.5 *Example 2c*—For the oil in Example 2a in 7.2.3, the high temperature designation and VI are 57 and 170, respectively. Assume that the equipment of interest has a recommended optimum operating kinematic viscosity of 32 mm<sup>2</sup>/s; hence, Fig. 4 should be used. Find the value 57 on the horizontal axis labeled High Temperature Viscosity Designation. Read vertically from 57 until intersecting the curves labeled VI = 150 and VI = 200. Interpolate between the curves to a value of VI = 170 and read horizontally to the vertical axis labeled Temperature, °C, for a Kinematic Viscosity of 32 mm<sup>2</sup>/s. The value corresponding to a high temperature viscosity designation of 57 and a viscosity index of 170 is 56°C. Hence, in equipment which has a recommended optimum operating kinematic viscosity of 32 mm<sup>2</sup>/s, fluid temperature for the oil in this example should be maintained at about 56°C.

7.3.2.6 Approximate optimum fluid operating temperature can also be estimated for other optimum operating viscosities in the range of 24 to 32 mm<sup>2</sup>/s by interpolation between Fig. 3 and Fig. 4.

7.4 Examples of the application of Fig. 2 and Fig. 3 to the oils described in Table 3 (6.4.2) are shown in Table 4.

## 8. Adoption of Practice

8.1 Adoption of this practice is voluntary for all persons or organizations. The practice will be effective only when used widely by designers, producers, and consumers. There is nothing to prohibit the use of a viscosity grade or designation not listed in this practice if the producer and consumer mutually agree. It may be expected that hydraulic fluids with viscosity designations not in accordance with this practice will be less readily available to the purchaser than those products which do conform.

8.2 The establishment of standardized viscosity designations as described here shall not imply nor require that a full range of viscosities be made available by all lubricant suppliers for each and every type of hydraulic fluid which the supplier markets. Availability will be dictated by local demand.

## 9. Keywords

9.1 Brookfield viscosity; hydraulic fluid; shear stability; viscosity; viscosity classification

**TABLE 4 Examples of Interpreting Viscosity Designation Using Figs. 2 and 3 to Estimate Operating Temperature Limits for Fluids**

Viscosity Designation	Low <sup>A</sup> Temperature Limit °C	Temperature, °C, for Kinematic Viscosity	
		13 mm <sup>2</sup> /s	24 mm <sup>2</sup> /s
ISO 22 L15-21 (160)	-23	55	<45
ISO 32 L22-30 (150)	-15	66	47
ISO 32 L32-24 (110)	-8	58	<45
L32-21 (120)	-8	55	<45
L32-32 (140)	-8	67	48
ISO 46 L46-43 (140)	-2	77	57
ISO 46 L32-43 (150)	-8	78	56
L46-53 (150)	-2	84	62
ISO 68 L68-67 (120)	+4	87	66
ISO 68 L68-41 (120)	+4	73	54
ISO 100 L100-96 (110)	+10	96	75

<sup>A</sup> Low temperature operating limit, as designated from Table 1, based on 750 mPa's temperature measurement.

## SUMMARY OF CHANGES

Subcommittee D02.N0 has identified the location of selected changes to this standard since the last issue (D6080–12) that may impact the use of this standard. (Approved Nov. 1, 2012.)

(1) Revised Section 3.

Subcommittee D02.N0 has identified the location of selected changes to this standard since the last issue (D6080–10) that may impact the use of this standard. (Approved June 1, 2012.)

(1) Deleted original 6.1.2 and renumbered remaining subsections.

*ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.*

*This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.*

*This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; http://www.copyright.com/*