



# Standard Guide for Determination of the Bioaccumulation of Sediment-Associated Contaminants by Benthic Invertebrates<sup>1</sup>

This standard is issued under the fixed designation E1688; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

## 1. Scope\*

1.1 This guide covers procedures for measuring the bioaccumulation of sediment-associated contaminants by infaunal invertebrates. Marine, estuarine, and freshwater sediments are a major sink for chemicals that sorb preferentially to particles, such as organic compounds with high octanol-water-partitioning coefficients ( $K_{ow}$ ) (for example, polychlorinated biphenyls (PCBs) and dichlorodiphenyltrichloroethane (DDT)) and many metals. The accumulation of chemicals into whole or bedded sediments (that is, consolidated rather than suspended sediments) reduces their direct bioavailability to pelagic organisms but increases the exposure of benthic organisms. Feeding of pelagic organisms on benthic prey can reintroduce sediment-associated contaminants into pelagic food webs. The bioaccumulation of sediment-associated contaminants by sediment-dwelling organisms can therefore result in ecological impacts on benthic and pelagic communities and human health from the consumption of contaminated shellfish or pelagic fish.

1.2 Methods of measuring bioaccumulation by infaunal organisms from marine, estuarine, and freshwater sediments containing organic or metal contaminants will be discussed. The procedures are designed to generate quantitative estimates of steady-state tissue residues because data from bioaccumulation tests are often used in ecological or human health risk assessments. Eighty percent of steady-state is used as the general criterion. Because the results from a single or few species are often extrapolated to other species, the procedures are designed to maximize exposure to sediment-associated contaminants so that residues in untested species are not underestimated systematically. A 28-day exposure with sediment-ingesting invertebrates and no supplemental food is recommended as the standard single sampling procedure. Procedures for long-term and kinetic tests are provided for use when 80 % of steady-state will not be obtained within 28 days or when more precise estimates of steady-state tissue residues

are required. The procedures are adaptable to shorter exposures and different feeding types. Exposures shorter than 28 days may be used to identify which compounds are bioavailable (that is, bioaccumulation potential) or for testing species that do not live for 28 days in the sediment (for example, certain *Chironomus*). Non-sediment-ingestors or species requiring supplementary food may be used if the goal is to determine uptake in these particular species because of their importance in ecological or human health risk assessments. However, the results from such species should not be extrapolated to other species.

1.3 Standard test methods are still under development, and much of this guide is based on techniques used in successful studies and expert opinion rather than experimental comparisons of different techniques. Also, relatively few marine/estuarine (for example, *Nereis* and *Macoma*), freshwater (for example, *Diporeia* and *Lumbriculus variegatus*) species, and primarily neutral organic compounds provide a substantial portion of the basis for the guide. Nonetheless, sufficient progress has been made in conducting experiments and understanding the factors regulating sediment bioavailability to establish general guidelines for sediment bioaccumulation tests.

1.4 This guide is arranged as follows:

Scope	1
Referenced Documents	2
Terminology	3
Summary of Guide	4
Significance and Use	5
Interferences	6
Apparatus	7
Safety Precautions	8
Overlying Water	9
Sediment	10
Test Organisms	11
Experimental Design	12
Procedure	13
Analytical Methodology	14
Data Analysis and Interpretation	15
Keywords	

### Annexes

Additional Methods for Predicting Bioaccumulation	Annex A1
Determining the Number of Replicates	Annex A2
Adequacy of 10-Day and 28-Day Exposures	Annex A3
Alternative Test Designs	Annex A4
Calculation of Time to Steady-State	Annex A5
Special Purpose Exposure Chambers	Annex A6

<sup>1</sup> This guide is under the jurisdiction of ASTM Committee E50 on Environmental Assessment, Risk Management and Corrective Action and is the direct responsibility of Subcommittee E50.47 on Biological Effects and Environmental Fate.

Current edition approved Feb. 1, 2016. Published May 2016. Originally approved in 1995. Last previous edition approved in 2000 as E1688 – 10. DOI: 10.1520/E1688-10R16.

\*A Summary of Changes section appears at the end of this standard

1.5 Field-collected sediments may contain toxic materials, including pathogens, and should be treated with caution to minimize exposure to workers. Worker safety must also be considered when using laboratory-dosed sediments containing toxic compounds.

1.6 This guide may involve the use of non-indigenous test species. The accidental establishment of non-indigenous species has resulted in substantial harm to both estuarine and freshwater ecosystems. Adequate precautions must therefore be taken against the accidental release of any non-indigenous test species or associated flora or fauna.

1.7 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.8 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.* Specific precautionary statements are given in Section 8.

## 2. Referenced Documents

### 2.1 ASTM Standards:<sup>2</sup>

**D1129** Terminology Relating to Water

**D4387** Guide for Selecting Grab Sampling Devices for Collecting Benthic Macroinvertebrates (Withdrawn 2003)<sup>3</sup>

**E729** Guide for Conducting Acute Toxicity Tests on Test Materials with Fishes, Macroinvertebrates, and Amphibians

**E943** Terminology Relating to Biological Effects and Environmental Fate

**E1022** Guide for Conducting Bioconcentration Tests with Fishes and Saltwater Bivalve Mollusks

**E1367** Test Method for Measuring the Toxicity of Sediment-Associated Contaminants with Estuarine and Marine Invertebrates

**E1383** Guide for Conducting Sediment Toxicity Tests with Freshwater Invertebrates (Withdrawn 1995)<sup>3</sup>

**E1391** Guide for Collection, Storage, Characterization, and Manipulation of Sediments for Toxicological Testing and for Selection of Samplers Used to Collect Benthic Invertebrates

**E1525** Guide for Designing Biological Tests with Sediments

**E1706** Test Method for Measuring the Toxicity of Sediment-Associated Contaminants with Freshwater Invertebrates

**SI10-02 IEEE/ASTM SI 10** American National Standard for Use of the International System of Units (SI): The Modern Metric System

### 2.2 Federal Documents:<sup>4</sup>

**CFR, Title 21, Food and Drugs, Chapter I Food and Drug Administration, Department of Health and Human Services, Part 177, Indirect Food Additives: Polymers**

**CFR, Title 49, Transportation Chapter 1 Research and Special Programs Administration, Department of Transportation Parts 100–177, Subchapter A—Hazardous Materials Transportation, Oil Transportation and Pipeline Safety, Subchapter B—Oil Transportation and Subchapter C—Hazardous Materials Regulation**

## 3. Terminology

### 3.1 Definitions:

3.1.1 The words “must,” “should,” “may,” “can,” and “might” have very specific meanings in this guide. “Must” is used to express an absolute requirement, that is, to state that the test needs to be designed to satisfy the specified conditions, unless the purpose of the test requires a different design. “Must” is used only in connection with the factors that relate directly to the acceptability of the test. “Should” is used to state that the specified conditions are recommended and ought to be met in most tests. Although the violation of one “should” is rarely a serious matter, violation of several will often render results questionable. Terms such as “is desirable,” “is often desirable,” and “might be desirable” are used in connection with less important factors. “May” is used to mean “is (are) allowed to,” “can” is used to mean “is (are) able to,” and “might” is used to mean “could possibly.” Thus, the classic distinction between “may” and “can” is preserved, and “might” is never used as a synonym for either “may” or “can.”

3.1.2 For definitions of terms used in this guide, refer to Guide **E729** and Terminologies **D1129** and **E943**. For an explanation of units and symbols, refer to **SI10-02 IEEE/ASTM SI 10**.

### 3.2 Definitions of Terms Specific to This Standard:

3.2.1 *acid volatile sulfide (AVS)*—sedimentary reduced sulfide phase associated with metal partitioning.

3.2.2 *alpha*—see *Type I error*.

3.2.3 *apparent steady-state*—see *steady-state*.

3.2.4 *bedded sediment*—see *whole sediment*.

3.2.5 *beta*—see *Type II error*.

3.2.6 *bioaccumulation*—the net accumulation of a substance by an organism as a result of uptake from all environmental sources.

3.2.7 *bioaccumulation factor (BAF)*—the ratio of tissue residue to sediment contaminant concentration at steady-state.

3.2.8 *bioaccumulation potential*—a qualitative assessment of whether a contaminant in a particular sediment is bioavailable.

3.2.9 *bioconcentration*—the net assimilation of a substance by an aquatic organism as a result of uptake directly from aqueous solution.

3.2.10 *bioconcentration factor (BCF)*—the ratio of tissue residue to water contaminant concentration at steady-state.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, [www.astm.org](http://www.astm.org), or contact ASTM Customer Service at [service@astm.org](mailto:service@astm.org). For *Annual Book of ASTM Standards* volume information, refer to the standard’s Document Summary page on the ASTM website.

<sup>3</sup> The last approved version of this historical standard is referenced on [www.astm.org](http://www.astm.org).

<sup>4</sup> Available from U.S. Government Publishing Office, 732 N. Capitol St., NW, Washington, DC 20401-0001, <http://www.gpo.gov>.

3.2.11 *biota-sediment accumulation factor (BSAF)*—the ratio of lipid-normalized tissue residue to organic carbon-normalized sediment contaminant concentration at steady state, with units of g-carbon/g-lipid.

3.2.12 *black carbon (BC)*—type of environmental carbon formed during the incomplete oxidation of organic substances (for example, fossil fuels, biomass). May consist of phases such as soot, charcoal, tar, and coal. Certain forms have high affinity for hydrophobic contaminants and can reduce the bioavailability of some contaminants.

3.2.13 *block*—a group of homogeneous experimental units.

3.2.14 *coefficient of variation (CV)*—a standardized variance term; the standard deviation (SD) divided by the mean and expressed as a percent.

3.2.15 *comparison-wise error*—a Type I error applied to the single comparison of two means. Contrast with *experiment-wise error*.

3.2.16 *compositing*—the combining of separate tissue or sediment samples into a single sample.

3.2.17 *control sediment*—sediment containing no or very low levels of contaminants. Control sediments should ideally contain only unavoidable “global” levels of contaminants. Contrast with *reference sediment*.

3.2.18 *degradation*—biochemical breakdown of the contaminant by a test species.

3.2.19 *depuration*—loss of a substance from an organism as a result of any active (for example, metabolic breakdown) or passive process when the organism is placed into an uncontaminated environment. Contrast with *elimination*.

3.2.20 *dichlorodiphenyltrichloroethane (DDT)*—a common environmental contaminant. Metabolites include dichlorodiphenyldichloroethane (DDD) and dichlorodiphenylethylene (DDE).

3.2.21 *dissolved organic carbon (DOC)*—type of organic carbon soluble in aqueous solutions. Particulate and dissolved organic carbon are the primary organic carbon components in aquatic systems.

3.2.22 *Eh (redox potential)*—a measure of the oxidation state of a sediment relative to the hydrogen half-cell reaction.

3.2.23 *elimination*—a general term for the loss of a substance from an organism that occurs by any active or passive means. The term is applicable in either a contaminated environment (for example, occurring simultaneously with uptake) or a clean environment. Contrast with *depuration*.

3.2.24 *equilibrium partitioning (EqP) bioaccumulation model*—a bioaccumulation model based on equilibrium partitioning of a neutral organic between organism lipids and sediment carbon.

3.2.25 *experiment-wise error*—a Type I error (alpha) chosen such that the probability of making any Type I error in a series of tests is alpha. Contrast with *comparison-wise error*.

3.2.26 *experimental error*—variation among replicate experimental units.

3.2.27 *experimental unit*—an organism or organisms to which one trial of a single treatment is applied.

3.2.28 *finest*—the silt-clay fraction of a sediment.

3.2.29 *gut purging*—voiding of sediment contained in the gut.

3.2.30 *hydrophobic contaminants*—low-contaminant water solubility with a high  $K_{ow}$  and usually a strong tendency to bioaccumulate.

3.2.31 *interstitial water*—water within a wet sediment that surrounds the sediment particles.

3.2.32 *kinetic bioaccumulation model*—any model that uses uptake or elimination rates, or both, to predict tissue residues.

3.2.33 *long-term uptake tests*—bioaccumulation tests with an exposure period greater than 28 days.

3.2.34 *metabolism*—see *degradation*.

3.2.35 *minimum detectable difference*—the smallest (absolute) difference between two means that is distinguishable statistically.

3.2.36 *multiple comparisons*—the statistical comparison of several treatments simultaneously.

3.2.37 *no further degradation*—an approach by which a tissue concentration is deemed acceptable if it is not greater than the tissue concentration at a reference site.

3.2.38 *organic carbon (OC)*—type of environmental carbon resulting from the diagenesis of organic substances (for example, plant and animal matter).

3.2.39 *pairwise comparisons*—the statistical comparison of two treatments. Contrast with *multiple comparisons*.

3.2.40 *power*—the probability of detecting a difference between the treatment and control means when a true difference exists.

3.2.41 *pseudoreplication*—the incorrect assignment of replicates, often due to a biased assignment of replicates.

3.2.42 *reference sediment*—a sediment similar to the test sediment in physical and chemical characteristics and not contaminated by the particular contaminant source under study (for example, dredge material, discharge, and non-point runoff). A reference sediment should ideally contain only background levels of contaminants characteristic of the region. Contrast with *control sediment*.

3.2.43 *replication*—the assignment of a treatment to more than one experimental unit.

3.2.44 *sampling unit*—the fraction of the experimental unit that is to be used to measure the treatment effect.

3.2.45 *standard reference sediment*—a standardized sediment and contaminant used to estimate the variability due to variation in the test organisms.

3.2.46 *steady-state*—a “constant” tissue residue resulting from the balance of the flux of compound into and out of the organism, determined operationally by no statistical difference in three consecutive sampling periods.

3.2.47 *total carbon (TC)*—this value includes organic, black, and inorganic carbon.

3.2.48 *total organic carbon (TOC)*—includes organic carbon resulting from the diagenesis of organic substances (for example, plant and animal matter) as well as black carbon resulting from incomplete oxidation of organic substances (for example, fossil fuels, biomass).

3.2.49 *test sediment*—the sediment or dredge material of concern.

3.2.50 *test treatment*—treatment that is compared to the control or reference treatment. It may consist of either a test sediment (compared to a reference or control sediment) or a reference sediment (compared to the control sediment).

3.2.51 *thermodynamic partitioning bioaccumulation model*—see *equilibrium partitioning bioaccumulation model*.

3.2.52 *tissue residues*—the contaminant concentration in the tissues.

3.2.53 *toxicokinetic bioaccumulation model*—a bioaccumulation model based on the feeding and ventilatory fluxes of the organism.

3.2.54 *treatment*—the procedure (type of sediment) whose effect is to be measured.

3.2.55 *Type I error*—chance of rejecting the null hypothesis when it should be accepted.

3.2.56 *Type II error*—the chance of accepting the null hypothesis when it should be rejected.

3.2.57 *whole sediment*—consolidated or bedded sediment (that is, not suspended). Also referred to as *bedded sediment*.

### 3.3 Symbols:

$H_a$	= alternate hypothesis.
$H_o$	= null hypothesis.
$k_1$	= uptake rate coefficient from the aqueous phase, in units of $\text{g-water} \times \text{g-tissue}^{-1} \times \text{time}^{-1}$ . Contrast with $k_s$ .
$k_2$	= elimination rate constant, in units of $\text{time}^{-1}$ .
$K_{bc}$	= black carbon-water partitioning coefficient.
$K_l$ -lipid	= water partitioning coefficient.
$K_{oc}$	= organic carbon-water partitioning coefficient.
$K_{ow}$	= octanol-water partitioning coefficient.
$k_s$	= sediment uptake rate coefficient from the sediment phase, in units of $\text{g-sediment} \times \text{g-tissue}^{-1} \times \text{time}^{-1}$ . Contrast with $k_1$ .

## 4. Summary of Guide

4.1 This guide provides method descriptions for determining the bioaccumulation of sediment-associated contaminants by infaunal invertebrates. The procedures focus on estimating steady-state tissue residues in sediment-ingesting organisms in a 28-day exposure. Alternative methods for estimating steady-state tissue residues from long-term or kinetic exposures are included, as are procedures for non-steady exposures. Sediments tested may be either collected from the field or spiked with known compounds. Criteria for the selection of test organisms are provided, and several species are recommended. Recommendations are provided concerning procedures to meet differing study objectives in sediment evaluations. These recommendations address the following: sediment physical and chemical measurements; test organism selection, collection,

and maintenance; construction and maintenance of exposure apparatus; sampling methods and test durations; models that may be used to predict bioaccumulation; and statistical design of tests and analysis of test data.

## 5. Significance and Use

5.1 Sediment exposure evaluations are a critical component for both ecological and human health risk assessments. Credible, cost-effective methods are required to determine the rate and extent of bioaccumulation given the potential importance of bioaccumulation by benthic organisms. Standardized test methods to assess the bioavailability of sediment-associated contaminants are required to assist in the development of sediment quality guidelines (**1, 2, 3**)<sup>5</sup> and to assess the potential impacts of disposal of dredge materials (**4**).

5.2 The extent to which sediment-associated contaminants are biologically available and bioaccumulated is important in order to assess their direct effects on sediment-dwelling organisms and assess their transport to higher trophic levels. Controlled studies are required to determine the potential for bioaccumulation that can be interpreted and modeled for predicting the impact of accumulated chemicals. The data collected by these methods should be correlated with the current understanding of toxicity or human health risks to augment the hazard interpretation for contaminated sediments.

## 6. Interference

6.1 State-of-the-art sediment quality evaluations are still in their infancy, due largely to methodological difficulties and the complex nature of sediments. The reader is cautioned that the subject of sediment bioavailability is highly dynamic. Recommended methods and this guide will be updated routinely to reflect progress in our understanding of sediments and methods of studying them. The following factors should be considered when determining the bioaccumulation of chemicals from whole sediments.

6.1.1 Maintaining the integrity of a sediment environment during its removal, transport, and testing in the laboratory is extremely difficult. The sediment environment is composed of myriad microenvironments, redox gradients, and other interacting physicochemical and biological processes. Many of these characteristics influence chemical sorption and speciation, microbial degradation, and the bioavailability of sediment-associated contaminants. Any disruption of this environment complicates interpretations of treatment effects, causative factors, and in situ comparisons.

6.1.1.1 Chemical solubility, partitioning coefficients, and other physical and chemical characteristics will differ for sediments tested at temperatures other than those of their collection.

6.1.2 Changes in the ratios between sediment and overlying water may influence the partitioning and accumulation behavior of compounds.

6.1.3 Interactions may occur among chemicals that may be present in the sediment.

<sup>5</sup> The boldface numbers in parentheses refer to the list of references at the end of this standard.

6.1.4 The use of laboratory-spiked sediment may not be representative of contaminants associated with sediments in the field. Geochemical phases in the sediment, such as total organic carbon (TOC), black carbon (BC), acid volatile sulfides (AVS), and grain size influence contaminant bioavailability and bioaccumulation.

6.1.5 An acceptable quality of overlying water should be maintained.

6.1.6 Addition of food to the test chambers may obscure the accumulation of contaminants associated with sediment and may affect water quality.

6.1.7 Resuspension of sediment during the test may alter chemical partitioning and bioavailability.

6.1.8 The natural geochemical properties of test sediment collected from the field may not be within the tolerance limits of the test organisms.

6.1.9 Field-collected sediments may contain endemic organisms including (1) predators, (2) the same species or a species that is related closely to the species being tested, or (3) microorganisms (for example, bacteria and molds) and algae that may grow in or on the sediment and test chamber surfaces.

6.1.9.1 Field-collected sediments may contain concentrations of chemicals that can elicit toxicity responses or can be detected by the organisms. These concentrations may be sufficient to cause the organism to escape from the sediment. This will result in reduced exposure and accumulation.

6.1.10 The longer the study, the more likely the data will approach steady-state for slowly bioaccumulating compounds. However, long-term tests require greater resources and increase the analytical requirements and likelihood of problems involving the maintenance of the organisms and temporal changes in sediment contaminant concentrations.

6.1.10.1 With longer exposures, there is a greater probability of the test organism reproducing. Spawning can affect lipid content drastically and possibly chemical concentrations (5). Additionally, it is prudent to add extra test organisms for studies of extended duration because many species die after spawning.

6.1.10.2 In addition to spawning, the difficulty of maintaining organism health increases with prolonged exposure, including the possibilities of weight loss due to nutritional insufficiency and disease.

6.1.11 Chemical concentrations may be reduced in the overlying water in flow-through testing. Toxic compounds that occur naturally, such as ammonia may increase during testing.

6.2 *Static Tests*—Static tests (without the renewal of overlying water) might not be applicable to materials that are highly volatile or are rapidly transformed biologically or chemically. Furthermore, the overlying water quality may change considerably. The procedures can usually be applied to materials that have a high oxygen demand because the experimental chambers are usually aerated. Materials dissolved in interstitial waters might be removed from solution in substantial quantities by absorption to sediment particles and to the test chamber during the test. The dynamics of chemical partitioning between solid and dissolved phases at the start of the test should be considered, especially in relation to assumptions of chemical equilibrium.

6.3 *Flow-Through Tests*—The equipment and facilities required to conduct flow-through tests (with the renewal of overlying water) make them inherently more expensive than static tests. Water quality, temperature, or salinity are more difficult to control and may require continuous monitoring equipment. Large volumes of waste water can be produced by flow-through tests. This waste may need to be monitored and treated to remove contaminants or to ensure that nonindigenous species are not released.

## 7. Apparatus

7.1 *Facilities*—The facility should include separate constant temperature areas for culturing and testing organisms. The exposure system consists of replicate test chambers, any aquaria or tanks that hold the test chambers, the water delivery system, and any pollution abatement system. The test facility should be well ventilated and free of fumes.

7.1.1 Enclosures may be needed to ventilate the test chambers. To reduce the possible contamination by test materials and other substances, acclimation and culture tanks should be in a separate area from that where the tests are conducted, stock solutions or test solutions are prepared, or equipment is cleaned.

7.1.2 *Lighting*—Lighting conditions should meet the requirements of the study and test organisms. This may generally be accomplished by means of cool-white fluorescent lights at an intensity of about 100 to 1000 lx. Other sources (incandescent, fluorescent/incandescent, and augmented photosynthetically active radiation) may be required for special purposes. Ultraviolet (UV) radiation, especially UV-B, is generally missing from artificially supplied spectra. Although UV-B radiation can enhance the toxicity of certain chemicals (phototoxicity), this should not be a major limitation with bioaccumulation tests with infaunal species.

7.1.2.1 A timing device should be used to provide a light:darkness cycle if a photoperiod other than continuous light is used. Guide E1022 recommends 16 h day, 8 h night as a convenient light/dark cycle. Schedules of 12/12 or 14/10 h day/night are also acceptable and may be useful for delaying the maturation and spawning of some species. The experimental design should consider the specific requirements of the organisms.

7.1.2.2 A 15 to 30-min transition period (6, 7) when the lights go on may be desirable to reduce the potential stress from instantaneous illumination; a transition period when the lights go off may also be desirable.

7.1.3 *Temperature*—Test chambers may be placed in a temperature-controlled recirculating water bath or a constant-temperature area to control the temperature. A temperature corresponding to the average spring-summer temperature of the study site should simulate the biologically most active season.

7.2 *Construction Materials*—Materials used to construct the exposure system should not induce any reaction by the organisms or affect the contaminant concentration or bioavailability. Borosilicate glass and soft glass (soda-lime and window) have proved generally nonreactive to metals and organics and are the preferred materials where their fragility is not a

major limitation. Most rigid plastics (polyolefins, engineering resins, and fluoropolymers) are acceptable after conditioning, such as soaking in deionized water for several days. Some plastics, generally flexible types that contain mobile plasticizers (phthalate esters), need to be tested for toxicity and should not be used if phthalate ester accumulation is studied. Concrete and rigid plastics may be used for holding, acclimation, and culture tanks and in the water-supply system, but they should be soaked, preferably in flowing water, for several days before use (8). Stainless steel should not be used in direct contact with seawater because the alloy components of many stainless steels may react with saltwater. Cast-iron pipe should probably not be used in freshwater supply systems because colloidal iron will be added to the overlying water and strainers will be needed to remove rust particles. Choose another material if contaminant sorption to the internal surfaces of containers is a problem.

7.2.1 Any sealant used to construct the chambers must be nontoxic, such as a clear, nontoxic silicone-rubber that meets FDA Regulation 21 CFR 177.2600, Office of Federal Register. Such materials are usually specified for aquarium use and do not contain fungicides (for example, arsenic compounds). Exposed sealant at joints should be minimized to minimize contaminant sorption. Place the sealant used for mechanical reinforcement on the outside of the joint. Product literature on the material is helpful for determining the compatibility of a particular sealant to a contaminant. All new test chambers constructed should be soaked for at least 48 h in the overlying water used in the sediment bioaccumulation tests to leach potentially toxic compounds.

7.3 *Water Delivery System*—Adequate amounts of overlying water are required to ensure that the oxygen concentration is not depressed, metabolites do not accumulate, and the organism's behavior is not impaired. The system should deliver water independently to each replicate treatment. Flow-through delivery systems that meet these criteria can be one of several designs (See Test Method E1706 for examples). Various metering systems using different combinations of siphons, pumps, solenoids, valves, etc. have been used successfully to control the water flow rates. If a contaminant is added to the water supply, several dilution systems designs are currently available (9-11).

7.3.1 The metering system should be calibrated before the test by determining the water flow rate through each test chamber. The metering system operation should be checked daily during the test. Flow rates through any two test chambers should not differ by more than 10 % at any particular time during the test.

7.4 *Test Chambers*—Test chamber designs should consider the conditions required to maintain an adequate environment for the test organisms. The designs should also consider the contaminant behavior, construction cost, maintenance, and ease of operation. The following recommendations are based on the standard 28-day exposure duration (see 12.2). Specialized exposure chambers are described in Annex A6.

7.4.1 The test chamber can consist of glass boxes, beakers, aquaria, or other containers of appropriate material. Beakers are an inexpensive exposure chamber for single or a few individuals for many species. However, an aquarium filled with

sufficient sediment may be a more practical exposure chamber if large tissue masses composed of a composite of many individuals are required for analysis. The diameter of the exposure chamber and the sediment depth should be sufficient to allow the organism to bury and construct normal tubes and burrows. The opening of the exposure chamber should be large enough to allow the periodic addition of feeding sediment, if required (see 10.1).

#### 7.5 *Exposure Systems:*

7.5.1 *Static Exposure*—In static exposure systems, test organisms are exposed to sediment without flow-through overlying water, although the overlying water may be exchanged on a periodic basis. The test chambers may be individual aquaria or beakers (for example, Ref (12)). A common design for bioaccumulation tests is sets of beakers submerged in aquaria in which overlying water is aerated and replaced with newly prepared water on a regular schedule (for example, Ref (13)). A more recent design places the experimental beakers in a water bath for temperature control and permits water renewal to each beaker independently (11). This improves the independence of each beaker as an experimental unit while maintaining the water quality.

7.5.1.1 The beakers or aquaria in a static system should be covered to reduce evaporation and aerated gently to maintain dissolved oxygen levels at 40 to 100 % of oxygen saturation (Guide E729).

7.5.2 *Flow-Through Exposure Systems*—Chambers may be sets of beakers maintained in aquaria or entire aquaria for flow-through systems. Flow-through systems have the advantages of removing waste products and maintaining oxygen.

7.5.2.1 Water flowing through one container must not flow into another container to prevent cross contamination. Water exiting the system should be passed through a charcoal filter or other appropriate sorptive material. Resuspended sediment should be trapped and retained as waste. Examples of flow-through tests can be found in Guide E1383 and Refs (14-16).

7.5.3 *Multiple Species Exposures*—If several species are being tested, it is possible to place multiple species within each exposure chamber, which may reduce space requirements. However, mixing multiple species tests has the potential for both negative and positive interactions among species that can alter behavior and could have unknown and varying effects on contaminant accumulation. Multiple species tested in the same exposure chamber can be partitioned with screens to minimize species interactions (for example, Ref (16)).

7.5.3.1 Regardless of the specific design, the same numerical ratio of one species to another should be placed in replicate chambers at test initiation. A paired-comparison approach (15.4) should be used when comparing the tissue residues of species kept in the same chambers because the two species are not independent.

7.6 *Cleaning*—To remove organics and metal contamination, the equipment and test chambers are washed initially with a non-phosphate detergent and then rinsed consecutively with distilled water, a water-miscible organic solvent, 5 to 10 % hydrochloric or nitric acid, and finally deionized-distilled water (17-19). Glassware for metal analyses should be stored wrapped in polytetrafluoroethylene (PTFE)

sheets or plastic wrap, whereas glassware for organic analyses should be stored wrapped in PTFE or aluminum foil.

## 8. Safety Precautions

8.1 Personnel involved in bioaccumulation testing need to be protected from exposure to toxic chemicals. Exposure to pathogens must also be considered, especially when working with sediment collected near sewage discharges. The manner of personnel protection must be determined before the start of work, keeping in mind that exposure can occur from breathing vapors, physical contact with the skin, or ingestion. The particular type of protection required depends on the materials involved and is beyond the scope of this guide. Consult Refs (20-24) to determine safety approaches. The Integrated Risk Information System (IRIS) is available to local, state, and federal public health officials through the Public Health Network (PHN) of the Public Health Foundation at (202) 898-5600 or through Dialcom, Inc. at (202) 488-0550.

8.2 The Federal government has published regulations for the management of hazardous waste and has given the states the option of either adopting those regulations or developing their own, which must be at least as stringent as the Federal regulations. As a handler of hazardous materials, it is your responsibility to know and comply with the pertinent regulations for the state in which you are operating. Refer to Ref (25) for citations of the Federal requirements.

## 9. Overlying Water

9.1 *Requirements*—Used both for holding organisms and in bioaccumulation tests, overlying water should be available in adequate supply and uniform quality. The acceptability of the water for test organisms is determined by satisfactory survival and growth without signs of disease or apparent stress.

### 9.2 *Freshwater:*

9.2.1 *Source*—Natural overlying water should be uncontaminated and of constant quality to ensure that test organisms are not stressed during holding, acclimation, and testing (see Guide E1383 for additional details). Water quality should meet the following specifications as established in Guide E729:

Particulate matter	<5 mg/L
Total organic carbon (TOC)	<5 mg/L
Chemical oxygen demand (COD)	<5 mg/L
Residual chlorine	<11 µg/L

### 9.3 *Seawater:*

9.3.1 *Source*—Seawater should be uncontaminated and of constant quality (See Test Method E1367 for additional details). If a constant source of seawater is unavailable, collected seawater should be stored in covered containers in the dark at 4°C. Artificial sea water may be used if natural water is not readily available, although it should be demonstrated that the growth and behavior of the test species is not altered by using artificial salts. Prepare artificial water with deionized water or distilled and charcoal-filtered water.

9.3.2 *Salinity*—Guide E1022 recommends that the overlying water salinity for marine systems should vary less than 2 g/kg or 20 % of the average, whichever is higher. Where the salinity varies (as in water drawn from estuaries with seasonally high river contributions), high-salinity water should be

stored in sufficient quantity to supply the test system during the expected period of low salinity.

9.3.3 *pH*—Seawater is well buffered, but metabolites and waste materials (that is, ammonia) can build up in static systems, raising the pH value. Maintain the pH between 6.5 and 8.0 (Guide E1022). Aeration will help maintain the pH, as will the periodic replacement of water.

9.4 *Filtration*—Because phytoplankton and suspended material are a sink for contaminants and a food for facultative filter-feeders, it is important to filter the water to remove suspended particles (>5 µm) for testing.

9.5 *Dissolved Gases*—Constant water quality should be maintained in the overlying water of the holding aquaria, keeping the dissolved oxygen above 2.5 mg/L (Guide E729) and unionized ammonia concentrations <20 µg/L (Guide E1022). The flow rate of water into the holding aquaria or the aeration rate, or both, should be increased to maintain suitable water quality. Alternatively, the biomass in each holding aquarium can be reduced. Flowing water with a minimum flow rate of 1 L/h/g wet tissue is recommended as a means of maintaining water quality. However, additional flow may be necessary to account for the biological oxygen demand of the sediment.

9.6 *Aeration*—Aeration is usually required in static systems to maintain the oxygen concentration. The air should be filtered (0.22-µm bacterial filter or other suitable system) and free of fumes, oil, and water. The volume should be sufficient to turn the water over but not enough to resuspend sediment. Position the air stone or pipette sufficiently far above the surface to avoid resuspension. Check the bubbler frequently, and remove any salt crystals or encrustations forming at the orifices. If air is provided from a compressed air tank, specify that the composition includes about 0.3 to 1.0 % CO<sub>2</sub> to help control the pH.

9.7 *Tissue Load*—For a flow-through system, Guide E1022 recommends not more than one filter-feeding bivalve (40 to 60 mm from umbo to edge of distal valve) per liter per hour. This would be equivalent to a minimum flow of 1 L/h/g wet tissue for an oyster. However, this requirement is based on feeding and does not account for the sediment oxygen demand. In addition to the flow rate per gram tissue, flow-through systems should be designed to achieve five turnovers per day (Guide E1022).

9.7.1 In static systems, the water volume to loading ratio should be sufficient to maintain the oxygen levels at ≥ 2.5 mg/L of saturation. A gentle aeration helps maintain the oxygen level as does changing the water two or three times per week.

9.7.2 It is important to take into account the total sediment oxygen demand when determining the oxygen demand for the system. In most cases, the sediment microbial demand will be several fold greater than the oxygen used by the test species. The total oxygen demand of sediments ranges from <1 to over 100 mL O<sub>2</sub>/m<sup>2</sup>/h (for example, Refs (26-28)). In general, the total oxygen demand will increase with temperature and organically rich sediments. To maintain appropriate water

quality, either increased flow or aeration can account for this increased demand and flow, and aeration should be the same among treatments.

**9.8 Temperature**—The temperature should not vary by more than 1°C in a 12-h period (Guide E1022) and 3°C over a short period. A storage tank within the laboratory will help ameliorate natural fluctuations in temperature in flow-through systems.

**9.9 Background Contamination**—Regardless of whether flow-through or static systems are used, the water should be analyzed for background levels of contaminants, especially if it is collected from an urbanized area. If a contaminant is detected in the water, its potential uptake can be estimated by multiplying the water concentration by the bioconcentration factor (BCF) for that compound. A different water supply should be used if the calculated tissue residue is greater than that acceptable for a control organism (see Table 1). BCF values and methods for estimating BCFs can be found in Ref (29).

## 10. Sediment

**10.1 Sediment Amounts**—Sediment serves as the habitat and source of food and contaminants for the test organisms. Adequate amounts of sediment are required to ensure that supplies of food and contaminants are not depleted substantially and that the organism's feeding behavior is not impaired. Deposit-feeding organisms may reingest the same particles if insufficient sediment is added. Alternatively, there may be a reduction in the appropriately sized particles if the fecal pellets are resistant to breakdown, especially for the more selective deposit-feeders. Both of these processes could reduce the mass of bioavailable chemical. Although both reingestion and pel-

lization of sediments occurs in the field (see Ref (32)), the rates may be exaggerated in laboratory systems.

**10.1.1** The initial amount of sediment placed in each exposure chamber will depend on test species requirements. If sediment is added periodically to the test chambers during the bioaccumulation test, the amount of sediment added initially needs to be deep enough to allow normal burying and feeding and should equal or exceed the consumption requirements for the exposure period. As selective deposit-feeders ingest the fine grain fraction of a sediment selectively, it is important to obtain an accurate estimate of the sediment processing rates of the size fraction ingested by that species. Compilations of sediment processing rates (for example, Ref (32)) can be used to estimate these requirements.

**10.1.1.1** Assuming periodic sediment additions to the exposure chambers (see Section 13), at least 50 g of wet sediment for each 1 g of wet flesh tissue (excluding shell) should be added initially for surface deposit-feeding bivalves and many larger marine deposit-feeders. For funnel-feeders such as arenicolid worms, at least 200 g of wet sediment to each 1 g of wet flesh tissue may be required for construction of a normal feeding burrow. The initial depth for the deposit-feeding clam *Macoma* should be at least 2 cm and preferably 3 to 5 cm, whereas a large lugworm may require 5 to 10 cm of sediment.

**10.1.1.2** For *Lumbriculus variegatus*, the tissue loading rate has been demonstrated to influence the bioaccumulation of contaminants (33). The loading is thus suggested to be no less than 50 g organic carbon in the sediment per gram dry weight of worms. This will provide sufficient food and contaminant for a 28-day test without the depletion of resources.

**10.1.2** If periodic sediment additions are not made, the initial amount added should exceed the total amount processed over the duration of the experiment by at least two-fold and preferably five-fold. Thus, for the organism with a 2 g/g-tissue/day sediment processing rate, approximately 250 to 300 g of sediment should be added per gram of tissue. However, an organism can deplete the food or contaminants within its specific feeding zone in a laboratory, especially by surface deposit-feeders, regardless of the amount of sediment added.

**10.2 Sediment Characterization**—All sediments should be characterized for contaminant concentration(s), total organic carbon (TOC), percent sand, silt, clay (particle size distribution), and moisture content. Other analyses on sediment might include the following: pH, total volatile solids, biological oxygen demand, chemical oxygen demand, cation exchange capacity, Eh or pE, total inorganic carbon, oil and grease, and interstitial water analysis. Acid volatile sulfides (AVSs) may prove helpful when determining the bioavailable fraction of certain metals (34). Black carbon (BC) may be a useful sediment variable for determining the bioavailability (and bioaccumulation) of many organic contaminants including polycyclic aromatic hydrocarbons (35).

**10.3 Control and Reference Sediments**—The difference between control and reference sediments is critical to interpretation of the results.

**10.3.1** A control sediment contains no or very low concentrations of the contaminant(s) being tested. The comparison of a test sediment to a control is a measure of the extent of

**TABLE 1 Representative Control Organism Tissue Residues**

Organics <sup>A</sup> (ppb wet weight)	Various East Coast Sites <sup>B</sup>	Puget Sound <sup>C</sup>	Yaquina Bay, OR <sup>D</sup>
CB	<1.0–70		
B(ibk)F		<10	
BaP	0.3–6.0 <sup>E</sup>	2.3–<10 <sup>E</sup>	1.9
DDT	<0.08–3.8	<1.0–<5.0	3.9
HCB	0.02–0.17	<130	
Naph	<1.0–9.1	<0.05	
PAH	0.02–7.2	<2–17 <sup>E</sup>	
PCB	10–70	<2.0–10	
Pesticides	<0.03–0.6		
Metals <sup>A</sup> (ppm wet weight)	Various East Coast Sites <sup>B</sup>	Puget Sound <sup>C</sup>	Yaquina Bay, OR <sup>D</sup>
Ag	0.2–2.6		
As	1.5–3.9		
Cd	<0.06–4.0		<0.005
Cr	0.26–2.5		
Cu	0.1–7.2		<1.5
Hg	<0.05–1.2	1.0	
Ni	<0.4–7.0		
Pb	<0.6–2.6		
Zn	2.4–30		<2.0

<sup>A</sup> CB = chlorinated benzenes, B(ibk)F = benzo(i,b,k)fluoranthene, BaP = benzo(a)pyrene, HCB = hexachlorobenzene, Naph = naphthalene, PAH = polycyclic aromatic hydrocarbons, and PCB = polychlorinated biphenyls.

<sup>B</sup> See Ref. (30).

<sup>C</sup> See Ref. (31).

<sup>D</sup> Unpublished data.

<sup>E</sup> See Refs (30, 31).



bioaccumulation from the test sediment. Comparisons of control organisms at the beginning and end of an exposure period provides information on whether contamination from the water or exposure system has occurred. Grain size, TOC, and other key physicochemical characteristics of the control sediment should resemble closely those of the test sediment to the extent possible.

10.3.2 In comparison, a reference is sediment collected in the same region as the site of concern and may contain low to moderate levels of contaminants. Reference sediment may be used as an indicator of localized sediment conditions exclusive of the specific contaminant studied. The reference sediment should resemble the test material closely in grain size, TOC, BC, and other physicochemical characteristics.

10.3.3 Bioaccumulation in a test sediment can be compared to that in a reference sediment to determine whether significantly more accumulation is occurring than at some locally designated site. This approach is used for assessing dredge materials (4).

10.3.4 The use of a reference site is appropriate when a “no further degradation” approach is used to determine the suitability of an industrial or municipal discharge or a disposal operation. The reference sediment should not contain high contaminant levels. If contaminant concentrations are too high, the tissue residues in organisms exposed to reference sediment may not differ significantly from those in the test sediment, even though the organisms exposed to the test sediments accumulated an unacceptable tissue residue.

10.3.5 *Criteria for Control and Reference Sediments*—There are no simple criteria available for judging the acceptability of a sediment as a control or reference sediment. Ideally, the concentration of every anthropogenic contaminant (for example, PCBs and DDT) in a control sediment should be significantly indistinguishable from zero, and the concentrations of naturally occurring compounds (for example, metals) should be within natural levels. It will often be difficult to meet these criteria in practice. Sediment with contaminant concentrations similar to the concentrations given in Table 2 represent adequate control values for the measured compounds. Alternatively, the concentrations at a putative control site can be compared to the sediment concentrations (normalized by the silt-clay fraction) given in (36). This document presents raw data for both organics and metals for approximately 200 near-coastal sites throughout the United States, with the concentrations for the highest and lowest 10 stations. Sediment concentrations falling within or near the 10 lowest station values are acceptable as controls. Neither sediment concentrations substantially above those in Table 2 nor the normalized values of the 10 lowest stations in (36) should be considered control values, except those of sediments containing naturally high levels of certain metals.

10.3.5.1 The acceptability of a reference sediment depends partly on the local background contaminant levels and how the reference sediment will be used. However, the appropriateness of a proposed reference site should be examined carefully if the silt-clay normalized concentrations fall in the upper half of the concentrations presented in Ref (36).

**TABLE 2 Representative Control Sediment Concentrations**

Compound	Southern California <sup>A</sup>	Puget Sound <sup>B</sup>	Oregon <sup>C</sup>	Fresh Water <sup>D</sup>
BaP <sup>E</sup>	...	7–30	10–66	<10
BF <sup>F</sup>	...	7–80	26.2	25
DDT	(15–150)*	0.03–0.6	<6.0	...
NAPH <sup>G</sup>	...	3–30 <sup>H</sup>	37 <sup>I</sup>	16
PAH <sup>J</sup>	...	2–60	<0.01	...
PCB	(<5.0–18)*	<0.02–1.0	<2.0	27
Ag	0.06–2.0	1.2	0.55 <sup>K</sup>	...
As	3–15	3–15	...	<47
Cd	0.001–2	3.1–18.3	0.47	0.32
Cu	6.5–40	20.9	19.3	23.5
Cr	2.8–30	10–50	6.3	10.4
Hg	<1.0	0.02–0.12	...	0.06
Ni	<20.0	13.0	14.5	21.2
Pb	<10.0	8.0	5.5	<32
Zn	<70.0	...	26.3	45

<sup>A</sup> Organics (ppb dry weight), metals (ppm dry weight), \* not considered control values, Southern California (37-39).

<sup>B</sup> Puget Sound, WA (31).

<sup>C</sup> Yaquina and Alsea Bays, Newport and Waldport, OR (unpublished data).

<sup>D</sup> An undisturbed agricultural soil collected from Florissant, MO (40).

<sup>E</sup> Benzo(a)pyrene.

<sup>F</sup> Benzo(i,b,k)-fluoranthene.

<sup>G</sup> Naphthalene.

<sup>H</sup> See Ref (38).

<sup>I</sup> Schults, unpublished data, U.S. EPA, Newport, OR.

<sup>J</sup> Polyaromatic hydrocarbons.

<sup>K</sup> See Ref (41).

10.3.6 *Standard Reference Sediments*—Variation in organism behavior and physiology can affect contaminant uptake substantially. For example, uptake in a test species could vary seasonally in response to changes in the lipid content or temperature or vary non-seasonally in response to the organism health or site of collection. The extent of this variation should be assessed especially if the results will be compared from tests conducted at different seasons or from tests using organisms collected at different sites.

10.3.6.1 The test variation can be assessed by using a standard reference sediment, which is a well-characterized sediment containing known and constant contaminant (organic and metal) concentrations. An experimental treatment that uses a standard reference sediment is a positive control and may be conducted in addition to the normal (negative) control. Differences found among studies in tissue residues of organisms exposed to standard reference sediments primarily measure the inherent variation associated with a test species but may also reflect the variation associated with other test parameters (for example, overlying water, nutritional quality of the sediment, and analytical variability). Using a standard reference sediment would also help standardize the results from different laboratories or different species.

10.3.6.2 Although positive controls have been suggested for sediment toxicity tests (for example, Ref (42)), they have not been used adequately in sediment bioaccumulation tests. Part of the problem is the absence of a standard sediment suitable for bioaccumulation tests. An interim solution is for each laboratory to make its own in the absence of such a national standard.

10.3.6.3 A laboratory-dosed sediment is recommended for use as a standard because of potential spatial and temporal variations in the chemical concentrations of field sediments.

Dosing methods are discussed in Guide E1391. Sediment used for the standard reference can be collected at the site at which the test organisms are collected or are known to exist in nature for laboratory-cultured organisms. If that is impractical, the physical characteristics (for example, grain size and TOC) should match those at the collection or natural habitation site closely. Indigenous organisms will have to be removed before use of the sediment. The undosed sediment can be stored for long periods, by either freezing or drying for the purpose of providing a constant exposure regime. Before either of these storage techniques are used, toxicity tests should be conducted on previously frozen or dried uncontaminated sediment to ensure that the technique does not affect the test species adversely. The sediment would be dosed in a standard manner, and the holding time between dosing and the initiation of organism exposure should be held constant.

10.3.6.4 The standard reference sediment will ideally be dosed with a suite of compounds ranging in chemical properties. Alternatively, a single organic or a single metal could be chosen as a representative compound(s). A specific PCB congener, not an Aroclor, is a good candidate for the organic compounds because of the wealth of information on PCBs, their high bioaccumulation potential, and their resistance to metabolism. A good choice for this congener 2, 2', 4, 4', 5, 5' hexachlorobiphenyl (IUPAC No. 153), which is the most frequently occurring PCB congener in environmental samples (43) and is bioaccumulated by marine worms and clams readily (16, 44, 45). It would be useful to include compounds from a second class of chemicals, such as a polycyclic aromatic hydrocarbon (PAH) congener, since PAH congeners exhibit behavior substantially different from the PCB congeners of similar octanol-water partition coefficients (46, 47). Cadmium is suggested as a general reference metal. The bioaccumulation of sediment-associated cadmium has been studied in a number of organisms (48) and has been suggested as the reference toxicant for *Neanthes* growth tests (42). However, because toxic compounds may alter the behavior of organisms, changes in behavior can alter bioaccumulation. Thus, metals such as zinc that are much less toxic than cadmium and have been well studied may be better for reference tests.

10.4 *Field-Collected Test Sediment*—Bioaccumulation tests use sediments collected in the field and brought back to the laboratory or manipulated experimentally in the laboratory. The handling can result in both cases in the loss of fine sediments, interstitial water, and water-soluble compounds; oxidation of compounds; or contamination by metals and organic compounds. This disruption can change physicochemical properties such as grain size distributions, chemical concentrations, sorption equilibria, speciation, and complexation, thereby affecting chemical bioavailability (17, 49, 50). Although some changes are unavoidable, they can be minimized with appropriate techniques. The specific techniques used will depend on the goal of the experiment and chemicals of concern. In particular, techniques suited optimally to study metals may not be suitable for organic compounds (see Guide E1391 and Ref (17)). The sediment manipulation methods presented in Guide E1391 and Guide D4387 should be followed when possible.

10.4.1 The depths from which sediments are collected can affect bioaccumulation test results; a consistent depth should therefore be used in all collections. Sediments are spatially and temporally variable. Replicate samples should be collected to determine variance in sediment characteristics. Sediment should be collected with as little disruption as possible; however, subsampling, compositing, or homogenization of sediment samples may be necessary for some experimental designs. Sampling may cause loss of sediment integrity, change in chemical speciation, or disruption of chemical equilibrium (Guide E1391). A benthic grab or core should be used rather than a dredge to minimize disruption of the sediment sample. Sediment should be collected from a depth that will represent expected exposure. For example, oligochaetes may burrow 4 to 15 cm into sediment.

10.4.2 Marine intertidal sediments may be hand collected using shovels, scoops, spatulas, or coring tubes. To maintain the sample layers intact, deposit the sediment sample into an appropriate container or, plug the top and bottom of the tube if a corer is used. Core samples may be sectioned later at specific depth-intervals for analytical and bioaccumulation tests (17, 36, 50).

10.4.3 Box corers and benthic grabs are used commonly to collect subtidal and fresh water sediments. The sampler choice will vary according to the firmness of substrate, volume of sediment needed, and type of ship available. Box corers are the preferred collection device because they disturb sediment layers the least and retain fine particles. Although more disruptive to sediment layers, a Smith-McIntyre or modified Van Veen grab is acceptable. Compared to the box corer, these grabs operate in sandier bottoms, are easier to handle, require fewer personnel, and operate in heavier seas (17, 36, 50). Scrape surficial sediment from the grab or box corer samples and store immediately in appropriate containers (Guide E1391). Flocculent material should be considered to be part of the sample (18).

10.4.3.1 The original sediment layering needs to be preserved if depth profiles are of interest. Take core samples from the center of the grab sample once on shipboard, and section them vertically at specific depth intervals (17). To minimize oxidation and changes in other chemical properties, place plastic or PTFE bags or containers of appropriate composition and diameter over the ends of core tubes, and extrude the samples to specified depths.

10.4.4 Construct all collecting equipment with appropriate materials and clean equipment to reduce the possibility of contamination. (See 7.2 for general contaminant-materials interactions.)

10.4.5 The collecting apparatus should be cleaned thoroughly before use (see 7.6). Rinsing grabs or corers with site water between stations should suffice in most studies, although it may be necessary to use a brush or a detergent to remove highly cohesive sediments. When it is critical to remove all contaminants, grabs or corers should be rinsed with an organic solvent, for example, methanol, ethanol, acetone, or methylene chloride (18), followed by a water rinse. Hexane might also be used as a solvent for removing non-ionic organic compounds.

However, acetone is preferable if only one organic solvent is used to clean equipment.

10.4.6 Specifics of the field sampling design, such as the number of sites and number of samples per site, depend on the goals of the study and type of spatial resolution required. Guidance for designing field sampling programs can be found in Refs (18, 51, 52).

10.5 *Field Measurements*—Upon collection, immediately determine sediment characteristics such as temperature, pH, Eh, and salinity (17, 50, 53). Important information recorded with each sample should include the site (the name and location in appropriate coordinate units) and should include additional information such as the replicate number, depth, sampler description, numbers and kinds of subsamples, sediment characteristics, temperature, salinity, pH, Eh, penetration depth, sieve size, date and time, weather conditions, names of chief scientist and team members, and comments (18).

10.6 *Field Storage and Transport*—Physical, chemical, and biological changes in sediment samples can occur rapidly, resulting in altered sediment quality or bioavailability during the transport of sediment. Temperature, pH, and dissolved oxygen are often the rate-controlling factors for these changes (49).

10.6.1 Store the sediment sample in a bag or jar immediately after collection to diminish these effects. PTFE containers or brown borosilicate glass jars with PTFE-lined lids are recommended for both metal and organic samples, but regular glass jars with PTFE-lined lids are acceptable (18). Containers need to be cleaned completely and stored in a covered container to avoid contamination. Cleaning protocols used for the exposure systems or sampling equipment also apply to storage containers (7.6).

10.6.1.1 Fill jars and bags completely with sediment to eliminate airspace and retard the oxidation of metals, but retain as much of the interstitial water as possible (4, 18). Refrigerate sample containers in insulated cartons or ice chests immediately after collection. A temperature near 4°C can be maintained with frozen, jelled refrigerant packs or ice. Ensure that the samples are protected from the refrigerant to prevent cross contamination and freezing of the sample.

10.6.2 Shipping containers should be durable and leak-proof or lined with two heavy-duty plastic bags. Add adequate absorbent material to soak up any spills. Pack the samples tightly, using dividers between glass containers, and fill all empty spaces with packing material. Mark the containers with “This End Up” and “Fragile” labels. Ship the samples by overnight or 24-h carrier to the laboratory after the completion of sampling. Refrigerate the samples at 4°C upon arrival. Guidance for shipping hazardous materials can be found in CFR 49, Title 49 Parts 100–177 (Office of Federal Register).

10.7 *Laboratory Sediment Storage*—Keep the time between sediment collection and use in bioassays to a minimum. Store the collected sediments in air-tight containers in the dark at 4°C (17, 18, 54) with the possible exception of sediment stored for use as a standard reference sediment (see 10.3.6). The sediment for metals should be stored in the absence of air to minimize the oxidation of reduced forms. Nitrogen can be used to fill the

headspace in the container. Glass containers are recommended for sediments polluted with either metals or organic compounds, although high-density polyethylene and PTFE containers are also acceptable. Remove large organisms and extraneous material, such as bivalves or twigs, from the sediment before storing.

10.7.1 Since the chemicals of concern and influencing sediment characteristics are not always known, it is desirable to hold the sediments after collection in the dark at 4°C. Traditional convention has held that sediment tests should be started as soon as possible following collection from the field, although actual recommended storage times range from two weeks (Guide E1391) to less than eight weeks (55). Discrepancies in recommended storage times reflected a lack of data concerning the effects of long-term storage on the physical, chemical, and toxicological characteristics of the sediment; however, numerous studies have recently been conducted to address issues related to sediment storage (56–62). The conclusions and recommendations offered by these studies vary substantially and appear to depend primarily upon the type or class of chemical(s) present. Considered collectively, these studies suggest that the recommended guidance that sediments be tested sometime between the time of collection and eight weeks storage is appropriate. Additional guidance is provided below and in Guide E1391 and Test Method E1706.

10.7.2 Extended storage of sediments that contain high concentrations of labile chemicals, for example, ammonia, volatile organic compounds, may lead to a loss of these chemicals and a corresponding reduction in toxicity or bioavailability. Under these circumstances, the sediment should be tested as soon as possible after collection, but not later than within two weeks (61). Sediments that exhibit low-level to moderate toxicity or contamination can exhibit considerable temporal variability in toxicity or contamination although the direction of change often is unpredictable (57, 58, 60). For these types of sediments, the recommended storage time of less than eight weeks may be most appropriate. In some situations, a minimum storage period for low-to-moderately contaminated sediments may help reduce variability. For example, (58) high variability was observed in survival during early testing periods, for example, less than two weeks, in sediments with low toxicity. DeFoe and Ankley (58) hypothesized that this variability partially reflected the presence of indigenous predators that remained alive during this relatively short storage period; thus, if predatory species are known to exist, and the sediment does not contain labile chemicals, it may be desirable to store the sediment for a short period before testing, for example, two weeks, to reduce potential for interferences from indigenous organisms. Sediments that contain comparatively stable compounds, for example, high molecular weight compounds, such as PCBs, or which exhibit a moderate-to-high level of toxicity, typically do not vary appreciably in toxicity in relation to storage duration (58, 60). For these sediments, long-term storage, for example, greater than eight weeks, can be undertaken.

10.8 *Sediment Preparation and Homogenization*—Before using a field sediment, remove any extraneous materials (for example, macroalgae, twigs, rocks, and large organisms).

Disturb the sediment as little as possible during this process. This can be accomplished by gently spreading the material out in a glass pan and removing large objects with forceps. However, keep contact with air to a minimum and use plastic tools if metals are the primary focus.

10.8.1 While sieving is not recommended, it may be necessary to sieve field sediments to remove predatory organisms or large amounts of extraneous materials. This could be accomplished by sieving the sediments through a 1 to 2-mm mesh sieve. The sieve size should be as large as is reasonable to minimize sediment disturbance. Using as small a volume of water as possible, sieve the sediment over a large container (for example, a garbage pail) to allow for the retention of sediment fines. After letting the suspended fines settle for 6 to 24 h, carefully siphon off or decant the overlying water and mix the settled fine particles back into the sediment. The characteristics of the sediment should be determined before and after sieving (see 10.2 of Test Method E1706).

10.8.2 After settling or storing the sediments, mix them well immediately before taking aliquots for chemical analysis, spiking, or bioaccumulation tests. This helps ensure homogeneity and mix any separated interstitial water back into the sediment. If grab samples were divided into several containers, mix the respective sediment samples together before sampling or using them in biological tests. Large sediment masses can be mixed manually in an appropriately cleaned glass tray or plastic tub or rotated in jars on a rolling mill. Homogenize control and reference sediments in the same manner as test sediments.

10.8.2.1 Inspect the sediment visually to judge the extent of homogeneity. Excess water on the surface of the sediment can indicate the separation of solid and liquid components. If a quantitative measure of homogeneity is required, take replicate subsamples (see 12.3) from the sediment batch and analyze for TOC, chemical concentrations, and particle size.

10.8.2.2 Some changes in the sediment are anticipated with mixing. Prolonged stirring can abrade flocculants and change the sediment's physicochemical properties, such as dissolved organic matter (DOM) (63).

10.9 *Sediment Spiking*—The addition or spiking of chemicals to sediments is a frequent sediment manipulation. Other manipulations include the addition of inert substances to produce a less polluted sediment and alteration of the sediment characteristics, for example, organic content or particle size. Sediment manipulation techniques have not been standardized, so exercise caution when comparing results from different techniques until standard methods are developed or techniques are intercalibrated. Prepare and manipulate control sediments in the same manner as test sediments because manipulations can alter sediment properties (see Guide E1391 and Test Method E1706 for additional details on spiking sediment.) Limited studies have been conducted comparing appropriate methods for spiking chemicals in sediment. Additional research is needed before more definitive recommendations for spiking of sediment can be outlined in this standard. The guidance provided in the following sections has been developed from a variety of sources. Spiking procedures that have been developed using one sediment or test organism may not

be applicable to other sediments or test organisms. See (64) and Guide E1391 for additional detail regarding sediment spiking techniques.

10.9.1 Test sediment can be prepared by manipulating the properties of a control sediment. Additional research is needed before formulated sediments are used routinely for sediment spiking procedures, for example, identifying standardized and representative sources of organic carbon. (see Test Method E1706). Mixing time (65) and aging (66, 67) of spiked sediment can affect bioavailability of chemicals in sediment. Many studies with spiked sediment often are started only a few days after the chemical has been added to the sediment. This short time period may not be long enough for sediments to equilibrate with the spiked chemicals. Consistent spiking procedures should be followed in order to make interlaboratory comparisons. It is recommended that spiked sediment be aged at least one month before starting a test; however equilibration for some chemicals may not be achieved for long periods of time. See (64), Guide E1391, and Test Method E1706 for additional detail regarding sediment spiking.

10.9.2 The test material(s) should be at least reagent grade, unless a test using a formulated commercial product, technical-grade, or use-grade material is specifically needed. Before a test is started, the following should be known about the test material: the identity and concentration of major ingredients and impurities; water solubility in test water; log  $K_{ow}$ , BCE (from other test species), persistence, hydrolysis, and photolysis rates of the test substance; estimated toxicity to the test organism and to humans; if the test concentration(s) are to be measured, the precision and bias of the analytical method at the planned concentration(s) of the test material; and, recommended handling and disposal procedures. Addition of test material(s) to sediment may be accomplished using various methods, such as a rolling mill, feed mixer, or hand mixing (see Guide E1391; (64)). Modifications of the mixing techniques might be necessary to allow time for a test material to equilibrate with the sediment. Mixing time of spiked sediment should be limited from minutes to a few hours and temperature should be kept low to minimize potential changes in the physico-chemical and microbial characteristics of the sediment (see Guide E1391). Duration of contact between the chemical and sediment can affect partitioning and bioavailability (67). Care should be taken to ensure that the chemical is distributed thoroughly and evenly in the sediment. Analyses of sediment subsamples is advisable to determine the degree of mixing homogeneity (68). Moreover, results from sediment-spiking studies should be compared with the response of test organisms to chemical concentrations in natural sediments (69).

10.9.2.1 Organic compounds have been added as follows: (1) directly in a dry (crystalline) form; (2) coated on the inside walls of the container (68); or, (3) coated onto silica sand (for example, 5 % w/w of sediment) which is added to the sediment (70). In Techniques 2 and 3, the chemical is dissolved in solvent, placed in a glass spiking container (with or without sand), then the solvent is evaporated slowly. The advantage of these three approaches is that no solvent is introduced to the sediment, only the chemical being spiked. When testing spiked sediments, procedural blanks (sediments that have been

handled in the same way, including solvent addition and evaporation, but contain no added chemical) should be tested in addition to regular negative controls.

10.9.2.2 Organic solvents such as triethylene glycol, methanol, ethanol, or acetone may be used, but they might affect TOC and BC levels, introduce toxicity, alter the geochemical properties of the sediment, or stimulate undesirable growths of microorganisms (Guide E1391). Acetone is highly volatile and might leave the system more readily than triethylene glycol, methanol, or ethanol. A surfactant should not be used in the preparation of a stock solution because it might affect the bioavailability, form, or toxicity of the test material.

10.9.2.3 Sufficient time should be allowed after spiking for the spiked chemical to equilibrate with sediment components. For organic compounds, it is recommended that the sediment be aged at least one month before starting a test. Two months or more may be necessary for chemicals with a high  $\log K_{ow}$ , for example, greater than six (71). For metals, shorter aging times (one to two weeks) may be sufficient. Periodic monitoring of chemical concentrations in pore water during sediment aging is recommended highly as a means to assess the equilibration of the spiked sediments. Monitoring of pore water during spiked sediment testing also is recommended.

10.9.3 Direct addition of a solvent (other than water) to the sediment should be avoided, if possible. Addition of organic solvents may influence dramatically the concentration of dissolved organic carbon in pore water. If an organic solvent is to be used, the solvent should be at a concentration that does not affect the test organism. The solvent control must contain the highest concentration of solvent present and must be from the same batch used to make the stock solution (see Guide E729).

## 11. Test Organisms

11.1 *Indigenous Versus Surrogate Species*—Species selection can include either or both indigenous or surrogate test species. The indigenous species have the advantage of being the same as those that will be affected in the field. However, because of natural fluctuations (72), contaminant events (73), or succession during recolonization (74), the species selected for testing may not be closely related phylogenetically or ecologically to the species at the impacted site.

11.1.1 Many common indigenous species do not meet the criteria for use as a bioaccumulation test species, negating any advantage of using a native species. Even when an indigenous species is acceptable, established surrogate test species offer several advantages. There is considerable information on the maintenance and biology of the recommended test species. Furthermore, an available accumulation database for standard test species will permit comparisons of bioaccumulation under different environmental conditions.

11.1.2 Surrogate species are recommended for routine monitoring of sediments. Local species that meet the various criteria discussed as follows can be tested along with the recommended bioaccumulation species. The local species could be substituted in future tests if they prove acceptable and the results intercalibrate with those from the standard species. Local species that do not meet the criteria but are of special concern (for example, lobster) can be tested in addition to surrogate species but should not be substituted for them.

11.2 *Selection Criteria*—The choice of test species can greatly influence the success, ecological significance, and interpretability of a bioaccumulation test. No one species is best suited for all conditions given the potential range in environmental characteristics. However, two characteristics, sediment ingestion and contaminant resistance, are required of bioaccumulation test species, as well as a number of other desirable characteristics. These characteristics are summarized as follows, and in Table 3.

11.2.1 First, test species must ingest sediment because sediment ingestion is the major uptake route for higher  $K_{ow}$  compounds for some species (47, 75-77). Many benthic invertebrates can vary their feeding mode, and this requirement does not preclude the use of facultative filter-feeders (for example, *Macoma*) as long as the primary exposure route during the experiment is whole sediment (that is, no resuspended particles or phytoplankton). Obligate filter feeders and obligate predators should not be used as bioaccumulation test species since the sediment ingestion route may be avoided.

11.2.2 The second attribute for bioaccumulation test species is contaminant resistance to survive the exposure with a minimum level of mortality. This requirement precludes the species used routinely in sediment toxicity testing (for example, *Rhepoxynius* and *Hyalella*), at least for more highly polluted sediments.

11.2.3 Environmentally collected sediments display a wide range of toxicities. Organisms that are very pollutant tolerant may thus be required to produce an acceptable test. In general, mortality greater than 10 % is not acceptable for a bioaccumulation test. However, the response of the organism can be altered if significant mortality occurs. Organisms exposed to high concentrations can exhibit accumulation kinetics different from those at lower doses. These alterations can result in either enhanced (78,79) or reduced (33) bioaccumulation. The reduced accumulation is often observed with overt avoidance of sediment.

11.3 *Desirable Criteria*—In addition to the required criteria, there are a number of desirable characteristics that either make the tests easier to perform and the interpretation more straightforward or allow the results to be applied to a wider range of habitats.

11.3.1 The ease of obtaining test species in sufficient numbers at the correct season is of concern when planning repeated tests. Collection ease is determined by a species' abundance, habitat (intertidal versus subtidal versus offshore), robustness to collection techniques, depth in the sediment, and seasonality. The time required to collect sufficient numbers of healthy individuals for testing can be substantial. In general, it is prudent to collect twice the number required, especially with organisms that are susceptible to damage during collection or transport. Alternatively, test organisms may be purchased from biological supply houses or local collectors. Local bait suppliers may sell marine species such as *Nereis* and *Callianassa* and freshwater species such as *Hexagenia*. The health, age, and contaminant history of these organisms must be considered, as they may be variable from supply houses (see 11.6.1 and Table 1).

**TABLE 3 Test Species Characteristics<sup>A</sup>**

Species	Feeding Type	Biomass,	Salinity Tolerance, %	Pollution Tolerance	Culture Potential	Commercial Availability	Information on Bioaccumulation, and Toxicity
<b>Marine</b>							
<i>Abarenicola</i> Sp.	FUN <sup>B</sup>	++	>15	+	-	-	+
<i>Arenicola</i> sp.	FUN	++	>15	+	-	+	+
<i>Callianassa</i> Sp.	SSDF <sup>C</sup>	++	>10	-?	-	+	-
<i>Capitella</i> sp.	SSDF	-	>10	++	+	+	++
* <i>Macoma balthica</i>	SDF <sup>D</sup>	+	>10	+	-	-	++
* <i>Macoma nasuta</i>	SDF	++	>10	+	-	-	++
<i>Nephtys incisa</i>	SSDF	+	>25	+	-	-	+
<i>Neanthes arenaceodentata</i>	SDF/O <sup>E</sup>	+ ?	>28	+	++	+	++
* <i>Nereis virens</i>	SDF/O	++	>10	++	-	+	++
* <i>Hediste diversicolor</i>	SDF/O	++	>10	++	-	+	++
<i>Nucula</i> sp.	SSDF	+	?	+	-	-	+
<i>Palaemonetes pugio</i>	SDF	+ ?	>10	-	+	+	++
* <i>Yoldia limatula</i>	SSDF	+	>25	+	-	-	+
<b>Freshwater</b>							
<i>Chironomus riparius</i>	FF <sup>F</sup> /SDF?	+	<5	-	++	+	++
<i>Chironomus tentans</i>	FF/SDF?	+	<5	-	++	+	++
* <i>Diporeia</i> Sp.	SSDF	-	≤20 <sup>G</sup>	+	-	-	++
<i>Hexagenia</i> Sp.	Col <sup>H</sup>	+	?	-	+	+	++
<i>Hyalella azteca</i>	SSDF	-	≤15	+	++	+	++
Oligochaetes (aquatic)	SSDF	-	?	++	+	-	+
* <i>Lumbriculus variegatus</i>	SSDF	-	?	++	++	+	++
Oligochaetes (earthworms)	SSDF	++	?	?	+	+	-

<sup>A</sup> ++ = very good, + = good, - = poor or insufficient, and \* = recommended species.

<sup>B</sup> FUN = funnel feeder.

<sup>C</sup> SSDF = subsurface deposit-feeder.

<sup>D</sup> SDF = surface deposit-feeder.

<sup>E</sup> O = omnivore.

<sup>F</sup> FF = filter feeder.

<sup>G</sup> Tolerance to 28 h.

<sup>H</sup> Col = collects surface particles.

11.3.2 Culturing of test organisms may be cost effective if a large number of bioaccumulation tests will be conducted over an extended time period. Culturing will provide a ready supply of organisms of known history. A few sediment-ingesting marine polychaetes (for example, *Capitella capitata* and *Neanthes arenaceodentata*) can be cultured with relatively simple equipment (80-83), as can *Palaemonetes* (84, 85). For freshwater, *Lumbriculus variegatus* can be cultured readily in large numbers for bioaccumulation tests (see Ref (86) and Annex A8). Although these organisms are generally suitable test species, most of the species are small. Groups of organisms are thus required to attain sufficient biomass for analysis. Cultures of bivalves, larger polychaetes, and most crustaceans are impractical at this time except for experimental studies.

11.3.3 Regardless of how the test species are obtained, they should be amenable to laboratory conditions and not require elaborate holding facilities. Fortunately, most contaminant-resistant species are relatively hardy and adaptable to laboratory conditions. Most of the bioaccumulation test species listed in Table 3 are reasonably easy to maintain and do not require flowing water.

11.3.4 Whether field-collected or laboratory-cultured specimens are used, gravid individuals or individuals that are likely to become gravid during a test should be avoided if possible. The reduction in tissue lipids often occurs with spawning (87, 88) and can result in a corresponding reduction in contaminant accumulation. Spawning may also result in unacceptable mortality. Certain species, such as *Macomanasuta* in Oregon, have a reasonably well-defined spawning cycle and size at repro-

ductive maturity, making it possible to minimize the collection of reproductive individuals. Other species, such as *Nereis virens*, change appearance when reproductively mature. In extended tests, it may be impossible to avoid gravid individuals completely, although occurrence of the reproductive state should be noted. For *Lumbriculus variegatus*, most reproduction is through budding, so reproduction may not impact the contaminant concentration or lipid content to the extent observed for sexual reproduction. However, selection of smaller individuals of *L. variegatus* for use in the tests may be desirable because reproduction by larger individuals can result in cessation of sediment ingestion (89), which could cause additional variability in bioaccumulation.

11.3.5 A very important characteristic is organism size. Test species need to be small enough to be maintained easily, yet large enough to supply sufficient biomass either as individuals or groups of individuals for chemical analysis. The amount of biomass required depends on the analytical procedures used and the types of analyses required (for example, metals, organics, and lipids). At least 1 g of wet tissue is generally required, and up to 5 g tissue will commonly be required. The species should ideally be large enough to allow chemical analysis on individuals. Depending on the techniques, it may be impossible to conduct both metals and organic analyses on an individual, even when using large species. Twice as many exposure chambers are thus required if both contaminant types are measured. An alternative approach to obtaining sufficient biomass is to composite individuals (see Annex A1). When compositing individuals, it is simpler to handle and count a few

larger individuals (for example, *Nereis*) than dozens or even hundreds of smaller specimens (for example, *Capitella* and *Lumbriculus variegatus*).

11.3.6 The more tolerant a species to sediment, temperature, and water quality variations, the more types of sediments that can be tested. Using a few widely adaptable species allows direct comparison of sediment bioavailability from a variety of environments or biogeographic regions. Also, collecting and maintaining a few adaptable species is simpler than developing techniques for a larger number of those less adaptable. The approximate environmental conditions of potential bioaccumulation species are given in [Table 3](#). The ranges for environmental conditions are estimates in which the organisms could be used in a bioaccumulation test and are not the physiological limits. The ranges are based on the general literature and discussions with other researchers rather than extensive experimentation. A preliminary survival test is advisable before initiating a large bioaccumulation experiment to test for both potential physiological limits and toxic responses.

11.3.7 It is important to choose species with high bioaccumulation potential. Unfortunately, insufficient numbers of multi-species tests have been conducted to compare adequately the bioaccumulation potential of a range of species over a range of compounds. In general, tissue residues will be higher in species with higher lipid contents, varying as much as 10-fold among species (for example, [\(16\)](#)). Organisms with a minimal biotransformation capability are desirable for those contaminants that are metabolized readily. For example, to study PAHs, at least one test species should have minimal biotransformation capability, such as a bivalve in a marine environment [\(90\)](#) or for freshwater *Diporeia* spp. (formerly *Pontoporeia hoyi* [\(91\)](#)) or *Lumbriculus variegatus* [\(92, 93\)](#).

11.3.8 Infaunal species are preferable to epibenthic deposit-feeders because the latter are exposed only intermittently to interstitial water. Because interstitial water may be the major uptake route, both for compounds with a  $\log_{10} K_{ow}$  below approximately 5 [\(94\)](#) and for metals [\(48\)](#), uptake by an epibenthic deposit-feeder may be underestimated.

11.3.9 Compatibility with other species or with the same species is important if multiple species or multiple individuals of the same species are exposed in the same chamber. Several of the nereid worms are aggressive to members of the same sex [\(42, 95\)](#). Some nereids also prey on smaller species, and *Palaemonetes* may crop the siphons of bivalves.

11.4 *Recommended Species*—An evaluation of the suitability of potential test species is summarized in [Table 3](#). This evaluation is not based on extensive comparative studies and should be considered a guide rather than a definitive characterization of the species.

11.4.1 *Marine Species*—Five recommended bioaccumulation test species and another eight “secondary” taxa are identified in [Table 3](#). The recommended species meet all or nearly all of the desired criteria and are well established as bioaccumulation test species. The recommended species are the polychaetes *Hediste diversicolor* and *Nereis virens* and the bivalves *Macoma nasuta*, *Macoma balthica*, and *Yoldia limatula*. These species have been used in a substantial number of experimental bioaccumulation studies and in regulatory moni-

toring. They should serve as suitable test species within their tolerance levels. Using at least one of these species in all tests is recommended, at least until the suitability of other species has been demonstrated locally.

11.4.1.1 The secondary marine bioaccumulation species meet the required characteristics but are deficient in one or more of the important desired characteristics. Insufficient information often exists for making a final evaluation. However, some of these secondary taxa offer potential advantages, such as large size (arenicolid worms), additional phylogenetic groups (that is, crustaceans), adaptability to culturing (for example, *Neanthes arenaceodentata*), and high-pollution tolerance (*Capitella* spp.). The importance of these various advantages depend on the site-specific situation (for example, the level of toxicity of sediment).

11.4.2 *Freshwater Species*—[Table 3](#) recommends two primary bioaccumulation organisms, *Diporeia* spp. (see the annex on *Diporeia* in [Guide E1383](#)) and *Lumbriculus variegatus*. *Diporeia* spp. are easy to handle and have high lipid content and thus a high bioaccumulation potential. *Diporeia* are exposed to contaminants by means of all appropriate routes including porewater and sediment ingestion. *Diporeia* do not biotransform PAHs and are relatively insensitive to contaminants and sediment characteristics. *Diporeia* can tolerate relatively high salinity, 20 parts per thousand; and they can thus be used for both freshwater and estuarine exposure conditions [\(96\)](#). A large database on contaminant bioaccumulation and toxicokinetics is available for *Diporeia*. However, procedures for culturing *Diporeia* in the laboratory have not been developed, and groups of organisms are required to attain sufficient mass for analysis.

11.4.2.1 Oligochaetes are infaunal benthic organisms that meet many of the test criteria previously listed. Oligochaetes are exposed to contaminants by means of all appropriate exposure routes, including pore water and ingestion of sediment particles. Various oligochaete species have been used in toxicity and bioaccumulation evaluations [\(86, 97-101\)](#), and field populations have been used as indicators of pollution of aquatic sediments [\(102-109\)](#). Specifically, *L. variegatus* are handled and cultured easily and are tolerant of varying sediment physical and chemical characteristics (See [Annex A8](#)). For analysis, groups of organisms are generally required to attain sufficient mass. *L. variegatus* does not biotransform PAHs [\(93\)](#). They do not need to be fed during long-term bioaccumulation exposures [\(86\)](#). Verifications of bioaccumulation between laboratory studies and field conditions have been performed [\(108\)](#).

11.4.2.2 The secondary freshwater species meet many of the important criteria for bioaccumulation but are deficient in one or more aspects. Freshwater clams provide an adequate tissue mass, are easily handled, and can be used in long-term exposures. However, few freshwater species are available for testing. The exposure of clams is uncertain because of valve closure. Furthermore, clams are filter feeders and may accumulate lower concentrations of contaminants compared to detritivores [\(45\)](#). Chironomids can be cultured readily, are easy to handle, and reflect appropriate exposure routes. However, their rapid life-cycle makes it difficult to perform long-term

exposures with hydrophobic compounds, and chironomids can biotransform organic compounds such as benzo[a]pyrene readily (93). Larval mayflies reflect appropriate exposure routes, have adequate tissue mass for residue analysis, and can be used in long-term tests. Mayflies cannot be cultured continuously in the laboratory and consequently are not always available for testing. They are also sensitive to sediment-associated contaminants. The background concentrations of contaminants and health of field-collected nymphs of mayflies may be uncertain. *Hyalella azteca* can be cultured in the laboratory, are easy to handle, can tolerate 15 % salinity, and reflect appropriate exposure routes. However, their size may be insufficient for residue analysis, and *H. azteca* are sensitive to contaminants in sediment. Because of exposure routes, sensitivity, and short life spans, these secondary freshwater species are useful as bioaccumulation test species only under special conditions.

**11.4.3 Multiple Species Tests**—Species and larger phylogenetic groups vary in their tendencies to bioaccumulate contaminants in response to both their modes of exposure and their metabolic characteristics. The extent of these interspecific variations is not well understood, and both the magnitude and direction of species differences can vary with contaminant (for example, metals versus organics) and perhaps with sediment type. The use of two or more species from different major taxa thus increases the probability of assessing the maximum field tissue residues accurately.

**11.4.3.1** The actual number of species and taxa used depends on the goals and scale of the project and the range of contaminants in the sediment. In general, a single species should be adequate for a general area survey or for assessing a small discharge or volume of dredge material. The data from a single species test should not be interpreted as the likely maximum for all contaminants. Multiple species, at least two, from different major taxa are recommended to assess a moderate- to large-sized discharge or dredging operation.

**11.4.3.2** A polychaete and a bivalve are recommended for marine tests. It is especially important to include a bivalve if PAH contamination is of concern since bivalves have a reduced capability to metabolize PAHs compared to amphipods or polychaetes (90). The addition of an arthropod species or additional polychaete or bivalve species may be justified when assessing a large discharge or dredging operation, especially if there is a wide range of contaminants.

**11.4.3.3** Only tests with *L. variegatus* are currently standardized for testing for freshwater bioaccumulation (Annex A8). However, other test species such as *Diporeia* or *Chironomus* may be useful for particular applications.

**11.5 Age**—The organisms should be as uniform as possible in age and size class. The age or size class chosen should not be overly sensitive to contaminants; nor should organisms that are reproductively ripe or recently spawned be used. For bioconcentration tests Guide E1022 stipulates that the length (umbo to distal valve) of the largest clam should be no greater than 1.5 times larger than that of the smallest clam.

**11.6 Test Organism Acceptability**—The specimens selected for a test should be able to tolerate the physico-chemical conditions (for example, total organic carbon (TOC) content and interstitial water salinity) of the test substrate and should

not show signs of disease or stress from capture or handling. Field-collected specimens should be collected from the same site and preferably at the same time. It is important to identify the test species correctly, and voucher specimens should be kept from each collection.

**11.6.1 High-contaminant background levels** in the test specimens may confound the results, making it difficult to detect differences between treatments. Tissue residues in the test organisms should therefore be no greater than those expected in organisms living in control sediment. Approximate background tissue concentrations for test species are given in Table 1. These concentrations are from organisms collected from sites that appeared to meet the criteria for a control site. The Guide E1022 criterion of the background tissue residue not exceeding 10 % of the expected steady-state can be applied for compounds not listed in Table 1. First-order estimates of steady-state tissue residues can be obtained from data on other species or from the thermodynamic-based bioaccumulation model for neutral organics (see Annex A1).

**11.6.2 Culture Acceptability**—Organisms obtained from cultures should meet performance-based acceptance criteria, such as those described, before use in bioaccumulation testing. Laboratories should examine culture organisms routinely for concentrations of contaminants before testing. Cultured organisms should be tested periodically in water only, 96-h toxicity tests, to assess culture sensitivity (see Test Method E1706). Laboratories should monitor and record the frequency of population doubling, particularly for *L. variegatus*, under the culture conditions as criteria for population health. The food and paper towels substrates used to culture organisms should be analyzed for compounds to be evaluated in the bioaccumulation test before the test start. The following water quality characteristics of cultures should be measured and recorded at least quarterly and the day before the start of the test: pH, hardness, alkalinity, and ammonia. Dissolved oxygen should be measured weekly. Temperature should be recorded daily. Physiological measurement such as lipid content might provide useful information regarding the health of the cultures.

## 11.7 Source of Test Organisms:

**11.7.1 Field Collection**—The logistics of collecting intertidal marine specimens are usually much simpler than those of collecting deeper water specimens; intertidal collection is recommended when possible. Infaunal organisms can be collected by turning the sediment over with a shovel and picking out larger species (for example, clams) or by gently sieving the sediment in the field. For most marine bioaccumulation test species, a sieve size of 4 to 6 mm will collect adequate numbers while minimizing damage and sorting time. In freshwater systems, the screen size will generally have to be a finer mesh, with a 0.5 to 1.0-mm opening. Even smaller mesh sizes will occasionally be required, depending on the organisms to be collected. The collection equipment should not have been used in contaminated sites or should have been cleaned adequately.

**11.7.1.1 Freshwater and subtidal marine organisms** can be collected by grabs, dredges, or suction samplers (50, 110). Dredges sample a larger area than grabs and are usually more proficient at collecting shallow-buried organisms, although



there is a possibility of damaging some organisms. Grabs are recommended for collecting more deeply buried species. Suction lifts are also useful for collecting larger, deeply buried bivalves, although they require the use of SCUBA divers and a greater likelihood of damage exists. Holding collected organisms in the laboratory before use can help eliminate damaged organisms. Electro-shocking, chemical poisons, and other harsh collection methods are not recommended.

11.7.1.2 Remove the organisms from the collection device as soon as possible, and submerge them in ambient water or sediment contained in ice chests or uncontaminated plastic buckets. Avoid overcrowding the animals in collection containers. Discard organisms with signs of disease or obvious defects (for example, bivalves with cracked shells).

11.7.1.3 State or local authorities may require collection permits or ban collection from specified areas. The collection of regulated species may require a local license, be limited to a season, and preclude certain collection techniques. Additional permits or precautions may be required when importing non-indigenous species. Check with state authorities concerning local regulations before collecting or importing specimens.

11.7.1.4 *Transport*—Guide E1022 recommends not more than a 3°C change in water temperature within a 12-h period and an oxygen concentration of between 60 and 100 % of saturation. Simple precautions should meet these requirements if the time between collection and return to the laboratory is short (less than 1 to 2 h) and the ambient temperature is not extreme. If possible, collection buckets or ice-chests should be kept out of direct sunlight and should not be left in closed vehicles. Water in the containers should be changed periodically while collecting and immediately before returning. Use an aerator to maintain oxygen concentrations if the time before returning to the laboratory is several hours or the air temperature is high.

(I) Successful long-distance transport of organisms, whether in a vehicle or through the mail, requires packaging that retains moisture and maintains an adequate supply of oxygen. For many species, this can be accomplished by placing the animals in a minimum amount of water (a few milliliters) in a sealed container filled with air. Alternatively, marine test animals may be placed between wet nylon or seagrass (for example, *Zostera*) and surrounded by layers of wet paper towels, all contained in polyethylene bags. Wet sediments of low organic content (for example, ashed sediment and beach sand) can also be used to retain moisture and are not as prone to anoxia as natural sediment. Regardless of the moisture-retaining agent, the container should have a large air space to maintain aerobic conditions. Air trapped within a plastic bag has the added advantage of preventing the animals from being crushed. Containers with organisms should be placed in ice chests or insulated shipping containers with packets of jelled refrigerant placed at or taped to the inside of the top of the container. Jelled refrigerants are preferred over ice to avoid melted water, and a layer of insulating material should be placed between the refrigerant and animals. Add sufficient refrigerants to maintain the water temperature in the containers at or a few degrees below the water temperature at the collection site, taking care not to cold shock the organisms.

Insulating material should fill all extra space in the shipping container, protecting and securing the containers in the carton. Pack the shipment containers to obtain a low center of gravity, and label them plainly to keep the package upright. Every effort should be made to provide overnight or 24-h delivery. If the organisms are transported by vehicle, monitor the temperature periodically and drain any melt water, and replace the ice as required.

11.7.2 *Culturing Test Organisms*—A successful culture of an appropriate test species has the advantage of providing a ready supply of specimens with a known history. Only a few marine sediment-ingesting organisms can be cultured currently. Polychaetes can be cultured with relatively simple equipment (see Annex A6), but the majority of recommended marine test species are not cultured routinely. Culturing procedures for *Lumbriculus variegatus* are given in Annex A8. Culturing conditions for *Chironomus*, *Hexagenia*, and *Hyaella* are outlined in Guide E1383, Annex. Culturing conditions for these organisms are not provided in this guide since these species can be used for bioaccumulation tests only under special conditions. Other freshwater organisms for use will need to be field collected, for example, *Diporeia*.

11.7.3 *Purchasing Test Organisms*—Some test organisms can be purchased from biological supply houses, local collectors, universities, or bait shops. There are several companies that specialize in supplying bioassay organisms, although most do not presently supply appropriate benthic bioaccumulation organisms on a routine basis. Check with a supplier even if bioaccumulation test species are not carried currently because the availability of particular species may change or the supplier may be able to fill special orders.

11.7.3.1 Maintain purchased organisms in the laboratory for at least one week to acclimate them to the local conditions and to monitor their health. Before beginning the bioaccumulation tests, analyze the purchased organisms for background contaminant levels to determine whether they meet the criteria for control organisms.

11.8 *Preexperimental Conditions*—Most bioaccumulation test species are adaptable to laboratory conditions, so elaborate procedures are not usually required for maintenance of the adults. Additional information on the maintenance of marine benthic invertebrates can be found in Refs (83, 111-113). Permits may be required from state or local authorities when maintaining a nonindigenous species. This may require fail-safe precautions against the accidental release of such organisms into the local environment (that is, double containment, diked water drains, siphon breaks, etc.). Equipment, water, wastes, and dead animals may require sterilization before disposal.

11.8.1 *Sediment Quality for Holding Organisms*—Maintain animals in a sufficient amount of sediment to allow them to burrow naturally. This sediment should be analyzed for contaminant concentrations, which should not exceed the level acceptable for a control sediment (Table 2). Periodically add fresh sediment of the same type to maintain an adequate food supply (that is, detritus and associated microbes). For large marine deposit-feeders (for example, *Macoma*) add approximately 2 mm of fresh control sediment to the sediment surface

one to three times per week. This sediment replenishment should be sufficient if the organisms are not overcrowded. Remove the organisms and replace the sediment if the sediments become heavily loaded with fecal material. The addition of other types of food is not recommended except in special cases of long-term maintenance. These foods include detritus (for example, decaying seaweeds), cultured phytoplankton and zooplankton, micro-encapsulated diets, formulated feeds such as fish flakes, or small bits of tissue for omnivores (114). Check the background contaminant levels of all foods.

11.8.2 *Handling of Test Organisms*—Field-collected and shipped organisms should be held in the laboratory for at least four days before starting an exposure, and purchased organisms should be held for at least one week. The longer holding time for purchased organisms is necessary because of the greater uncertainty of the organisms' health prior to control by the laboratory performing the test. Discard any organism if injured or behaving abnormally. Field-collected animals should generally not be held longer than two weeks before testing. If longer maintenance periods are needed, the investigators should have experience with the species and should monitor for any signs of stress (for example, a reduced sediment processing rate and unusual tube construction). A flow-through system for delivering overlying water is advised if long-term maintenance is planned.

11.8.2.1 To prevent the spread of diseases, organisms collected more than one week apart should be maintained in separate aquaria, each with an independent water supply. The organisms should be checked daily, and any diseased, dying, and dead organisms should be removed promptly. Black spots on the surface of the sediment can mark the location of dead organisms. Should a question arise concerning the health of the animals, a behavioral test such as time to rebury or analysis of lipid content is recommended.

11.8.2.2 If the holding and experimental conditions are different, acclimate the test organisms gradually to the experimental conditions. This transition may be accomplished using serial water dilutions until the proper temperature, salinity, and pH are reached. Acclimation for temperature should proceed no faster than 3°C in 72 h (Guide E1022). Maintain the animals at the test temperature and salinity for at least two days before the commencement of an experiment. No more than 3 % mortality is permitted within 48 h before the test (Guide E1022).

## 12. Experimental Design

12.1 *Statistical Considerations*—The experimental objectives are to quantify the contaminant bioaccumulation by organisms exposed to sediments or dredge materials and determine whether this accumulation is statistically greater than that occurring in a control or reference sediment. Each experiment consists of at least two treatments: the control and one or more test treatment(s). The test treatment(s) consist(s) of the contaminated or potentially contaminated sediment(s). A control sediment is always required to ensure that there is no contamination from the experimental setup, and some designs will also require a reference sediment. Uptake from the control sediment or reference sediment (when appropriate) is used to

provide baseline values to compare with accumulation from the test sediment. The reference sediment thus functions as the “control” during comparisons with test sediment but also functions as a test treatment during comparisons with the control sediment. The combined descriptor control-reference will be used when referring to the sediment used as the “control” since the statistical term “control” could be confused with the control sediment.

12.1.1 *Experimental Unit*—The organism(s) to which a treatment is applied is the experimental unit. This will be either a single organism or group of organisms exposed to an aliquot of a particular type of sediment. The specific type of sediment constitutes the treatment. If a clam is placed in a beaker containing sediment, the clam is the experimental unit and the beaker is the exposure chamber. If several worms have to be composited to supply sufficient biomass for chemical analysis, the group of worms would constitute the experimental unit, and the beaker or aquarium containing them would constitute the exposure chamber. The important concept is that the treatment (sediment) is applied to the experimental unit as a discrete unit. Experimental units must be independent, for example, there is no flow of water between replicates and they do not differ systematically.

12.1.2 *Replication*—Replication is the assignment of a treatment to more than one experimental unit, which in the bioaccumulation experiment is the organism (or composite of organisms) to which a single treatment (for example, test or control/reference sediment) is applied. The variation among replicates is a measure of the within-treatment variation and provides an estimate of within-treatment error for assessing the significance of observed differences between treatments (see 12.1.4).

12.1.2.1 *Minimum Detectable Difference*—The smaller the minimum detectable difference between treatments, the greater the number of replicates required for a given significance level, power, and extent of variance. Although there is no consensus concerning what constitutes an acceptable minimum difference, it is suggested that the bioaccumulation experiment be designed to detect a two-fold difference between tissue residues in the test and control sediments or the test and reference sediments. A two-fold difference should provide a sufficient signal for ecological and human health concerns in most cases.

12.1.2.2 *Minimum Number of Replicates*—The risk of a Type II error must be selected when determining the minimum number of replicates. Because a Type II error could have serious environmental or health consequences, it is advisable to assign the same risk of 5 % to both Type I and Type II errors providing a power of 95 %. Guide E1022 recommends at least four replicates to determine bioconcentration factors but does not specify which power is used for this estimation. Because of the likelihood of a greater variation in sediment exposures compared to water exposures and the choice of a power of 95 %, eight replicates is recommended as the default number of replicates for bioaccumulation tests. Fewer replicates can be used in some cases, for example, when variability is low, the difference between the control or reference and the test is large, or less power is required. It is prudent to include an extra

replicate or two for each treatment in case of mortality or the loss of samples during chemical analysis.

**12.1.3 Randomization**—Randomization is the unbiased assignment of treatments to the experimental units (that is, organisms or composites of organisms) ensuring that no treatment is favored and that observations are independent. It is often performed by using tables of random numbers. For these experiments, it is important to assign the organisms to the control and test treatments, to allocate the sediment between replicates, and to locate the exposure units in a non-biased manner.

**12.1.4 Pseudoreplication**—The appropriate assignment of treatments to experimental units is critical in order to prevent a common error in design and analysis recently termed “pseudoreplication” (**115**). Pseudoreplication occurs when inferential statistics are used to test for treatment effects even though the treatments are not replicated or the replicates are not statistically independent (**115**).

**12.1.4.1** The simplest form of pseudoreplication is treating subsamples of the experimental unit as true replicates. For example, two aquaria are prepared, one with control sediment and the other with test sediment, and five organisms are placed in each aquarium. Even if each organism is analyzed individually, the five organisms replicate only the biological response and do not replicate the treatment (that is, the sediment type). The experimental unit in this case is the five organisms, and each organism is a subsample.

**12.1.4.2** A less obvious form of pseudoreplication is the physical segregation of replicates by treatment, potentially resulting in a systematic error. For example, if all of the control experimental units are placed in one area of a room and all of the test experimental units are in another, spatial effects (for example, different lighting and temperature) could bias the results for one set of treatments. Random physical intermixing of the experimental units is necessary to prevent this type of pseudoreplication.

**12.1.4.3** A more common form of segregating replicates is the use of separate aquaria for each treatment. For example, segregation would occur if all of the control experimental chambers (for example, beakers) are placed in one aquarium and all of the test experimental chambers are in another aquarium. Any effects due to temperatures or different lighting conditions could bias the results for one of the treatments. Replicate aquaria are necessary in this case.

**12.1.4.4** Randomized spatial interspersal does not necessarily preclude pseudoreplication. If the replicates are physically interdependent, spurious effects can bias one treatment over another. This can occur if all of the aquaria replicates of the control are serviced by the same water supply system while all of the treatment aquaria replicates are serviced by another water supply system. Any differences between supply systems may potentially bias one set of aquaria over another. Thus, the replicates are not independent, even if the aquaria replicates are interspersed physically. To prevent pseudoreplication, each experimental unit should have its own water or air supply, all branching off a common supply, and there should be no flow of water from one exposure system to another.

**12.1.5 Preventing or Reducing Pseudoreplication**—Pseudoreplication can be prevented or reduced by identifying the experimental unit properly, providing replicate experimental units for each treatment, and applying the treatments to each experimental unit in a manner that includes interspersal and independence.

**12.1.5.1** The simplest design that prevents pseudoreplication is the completely randomized design. Treatments are assigned randomly to the experimental units independent of location in this design, and each experimental unit is maintained in a separate exposure chamber with a separate water and air supply.

**12.1.5.2** A randomized block design is also appropriate. A block is a set of relatively homogeneous units to which treatments are to be applied, such as an aquarium (block) containing several beakers (experimental units). In the randomized block design, all of the treatments are assigned randomly to each block, and there are multiple blocks. For example, if there are two treatments and one wishes to contain the experiment in only two aquaria with eight beakers per aquarium, each aquarium (block) is randomly assigned four beakers with control sediment and four beakers with test sediment. One drawback of this design, however, is that since both the test and control organisms are in one aquarium, the potential exists for the cross contamination of controls by test sediment. This is especially likely with organisms that eject sediment into the water, such as *Macoma* during the production of pseudofeces. If this design is used, the aquaria or control exposure chambers, or both, need to be monitored to ensure that cross-contamination does not occur.

**12.1.5.3** Preventing pseudoreplication completely may be difficult or impossible given resource constraints. For example, one common experimental design segregates the experimental treatments in separate aquaria. In this case, the beakers containing the test sediment are placed in aquaria separate from the beakers containing the control sediment. Such a design prevents the problem of cross-contamination between the test and control sediment and does not require a separate aquarium for each beaker. However, because the beakers are segregated by treatment type, their distribution is not random. The experimental unit may be defined in such cases as the replicated unit (organism(s) in the beaker with each beaker as a replicate), but with the stated assumption that there is no effect due to the physical segregation (aquaria effect in this example). Using replicate aquaria for each treatment type is recommended with this design to enable the comparison of results between aquaria within a given treatment using a nested ANOVA. The data from one or more aquaria may be considered invalid if aquaria effects are apparent. The organism(s) within each beaker may be considered the experimental unit and each beaker a replicate if no significant aquaria effects are detected. The analysis is then performed as if the beakers were not segregated into aquaria.

**12.1.6 Compositing Samples**—Compositing consists of combining samples (for example, organisms or sediment) and chemically analyzing the mix rather than the individual samples (**116**). The chemical analysis of the mix provides an estimate of the average concentration of the individual samples

comprising the composite. Compositing will be used in bioaccumulation experiments primarily when the biomass of an individual organism is insufficient for chemical analysis. Several individuals can be composited into a single experimental unit with sufficient biomass and the analysis performed on the composite. Compositing is also used when the cost of analysis is high.

12.1.6.1 Individuals must be assigned randomly to the various treatments for the tissue composite to be unbiased. Each organism, group of organisms, or sediment sample added to the composite must be of equal size (that is, wet weight), and the composite must be homogenized completely before taking a sample for chemical analysis. If compositing is performed in this manner, the value obtained from the analysis of the composite is the same as the average obtained from analyzing each individual sample (within any sampling and analytical errors). If replicate composites are made, the variance of the replicates will be less than the variance of the individual samples, providing a more precise estimate of the mean value. This increases the power of a test between means of composites over a test between means of individuals or samples for a given number of samples analyzed.

12.1.6.2 If composites are made of individuals or samples varying in size or quality (for example, a disproportionate number of gravid females in one composite), the value of the composite and the mean of the individual organisms or sediment samples are no longer equivalent. The variance of the replicate composites will increase, decreasing the power of any test between means. The variance of the composites can exceed the population variance in extreme cases (117). It is therefore important to keep the individuals or sediment samples comprising the composite equivalent in size and quality. If sample sizes vary, consult the tables in Ref (118) to determine whether replicate composite variances will be higher than individual sample variances, which would make compositing inappropriate.

12.1.6.3 It is not advisable to composite samples if either an estimate of the population variance is required or information concerning the range in concentrations obtained for individuals is needed. Compositing also requires more individuals (assuming that individuals can be analyzed), so it is not advised when space or cost keeps the number of individuals at a minimum. When there is extra sediment or tissue, archive individual samples in case a measure of the population variance or the concentration in a particular exposure chamber is desired later.

12.2 *Test Duration*—Ideally, the duration of a bioaccumulation test should be sufficient for the organisms to reach steady-state tissue residues, where steady-state is defined operationally as the absence of any significant difference (ANOVA,  $\alpha = 0.05$ ) among tissue residues taken at three consecutive sampling intervals (Guide E1022). The time to reach or approach steady-state varies drastically among different compounds, but the tests should generally be designed to generate environmentally relevant data on high  $K_{ow}$  organic compounds (for example, PCBs and DDT) and metals. A 28-day exposure is considered the standard duration because the 28-day exposure will result in tissue residues generally within 80 % of the steady-state tissue residues for most cases.

A 28-day exposure provides inherently better estimates of steady-state than a 10-day bioaccumulation test (Table 4), which has been used previously in the evaluation of dredge materials (119). Because of the recognized limitations of the 10-day exposures, updated procedures for evaluating dredge materials require a 28-day exposure if organic compounds are present (4). Additionally, a 28-day duration test is the recommended standard length for conducting bioconcentration tests (Guide E1022). See Annex A3 for details comparing the adequacy of 10 and 28-day bioaccumulation tests. When steady-state is not approached within 28 days, tissue residues of organic compounds usually appear to be within two- to four-fold of steady-state concentrations (Table 4), which is considered acceptable for the ASTM bioconcentration test (Guide E1022). However, if steady-state cannot be documented from the experimental results, the tissue residue is only an estimate of steady-state and can be a substantial underestimate of the true value for some compounds. A longer-term bioaccumulation test (>28 days) or an approach that uses a kinetic uptake model should be considered for cases in which more accurate estimates of the steady-state tissue residues are needed. If long-term bioaccumulation tests are considered, the design should address their inherent problems of changing sediment contaminant concentrations and characteristics, as well as possible changes in the physiology of the test organism (for example, the loss of tissue lipids). An exposure duration of 10 to 14 days may be sufficient to achieve steady state for many compounds in sediment bioaccumulation tests with the oligochaete *Lumbriculus variegatus* (see A8.5.2).

12.3 *Biotic Sampling Schedule*—Biological samples are used to determine the amount of chemicals accumulated from the test sediment and to compare these values statistically to the amount of chemicals accumulated from control and reference sediments. Bioassay organisms should be analyzed for chemical and lipid content immediately before the start of the experiment ( $t_0$  samples) to set the baseline conditions for these comparisons. Eight replicates is assumed to be the number required to achieve sufficient statistical power. Therefore, eight replicate organisms or composites (that is, experimental units) should be analyzed at  $t_0$  (see 12.1.2.2). *The replicates sampled at  $t_0$  should be chosen randomly from the same set of organisms used in the various sediment treatments. The same compositing scheme should be used for all sampling periods throughout the experiment if compositing of individuals is necessary to obtain sufficient biomass. Eight replicate organisms or composites should be taken from each of the treatments and analyzed for chemicals and lipids at the end of the 28-day test period ( $t_{28}$ ). The simplest design for comparing test and control sediments results in 24 tissue samples (8 controls at  $t_0$ , 8 controls at  $t_{28}$ , and 8 test samples at  $t_{28}$ ). It is recommended that one or two extra replicates be included in each treatment in case a sample is lost. Additionally, several extra individuals or composites should be taken at the initiation of the experiment. These extra samples should be frozen until the tissue residue data have been analyzed and interpreted. This experimental design is considered the minimum data set needed to document bioaccumulation, but it does not supply sufficient data to document that steady state has been attained.*

**TABLE 4 Percent of Steady-State Tissue Residues of Neutral Organics and Metals Obtained After 10 and 28-Day Exposures to Whole Sediment**

Organic Compound	Steady-State <sup>A</sup> 10-Day	Tissue Residue, % 28-Day	Species	Estimate by	Reference
<b>PCBs</b>					
Aroclor 1242	18	87	<i>Nereis virens</i>	G	(120)
Aroclor 1242	29	82	<i>Cerastodema edule</i>	G	(120)
Aroclor 1254	12	82	<i>Macoma balthica</i>	G	(120)
Aroclor 1254	25	56	<i>Nereis virens</i>	K	(121)
Aroclor 1254	27	100	<i>Cerastodema edule</i>	G	(120)
Aroclor 1260	27	100	<i>Cerastodema edule</i>	G	(120)
Aroclor 1260	53	100	<i>Macoma balthica</i>	G	(120)
Hexachlorobiphenyl	88	100	<i>Hexagenia limbata</i>	K	(122)
Hexachlorobiphenyl	17	41	<i>Pontoporeia hoyi</i>	K	(123)
Total PCBs	21	54	<i>Nereis virens</i>	G	(124)
Total PCBs	48	80	<i>Macoma nasuta</i>	G	(124)
Total PCBs	23	71	<i>Macoma nasuta</i>	G	(125)
<b>PAHs</b>					
Benzo(a)pyrene	32	66	<i>Pontoporeia hoyi</i>	K	(122)
Benzo(a)pyrene	43	75	<i>Macoma inquinata</i>	G	(126)
Benzo(a)pyrene	96	100	<i>Hexagenia limbata</i>	K	(122)
Benzo(bk)fluor	71	100	<i>Macoma nasuta</i>	G	(127)
Chrysene	43	87	<i>Macoma inquinata</i>	G	(126)
Fluoranthene	100	100	<i>Macoma nasuta</i>	G	(127)
Phenanthrene	67	95	<i>Pontoporeia hoyi</i>	K	(122)
Phenanthrene	100	100	<i>Hexagenia limbata</i>	K	(122)
Phenanthrene	100	100	<i>Macoma inquinata</i>	G	(126)
Phenanthrene	100	100	<i>Macoma nasuta</i>	G	(127)
Pryene	84	97	<i>Macoma nasuta</i>	G	(127)
<b>PCDD/PCDF</b>					
2,3,7,8-TCDD	6	22	<i>Nereis virens</i>	G	(124)
2,3,7,8-TCDD	63	80	<i>Macoma nasuta</i>	G	(124)
2,3,7,8-TCDF	43	62	<i>Nereis virens</i>	G	(124)
2,3,7,8-TCDF	92	100	<i>Macoma nasuta</i>	G	(124)
<b>Miscellaneous</b>					
DDE	21	48	<i>Pontoporeia hoyi</i>	K	(123)
Dieldrin	27	65	<i>Macoma nasuta</i>	G	(128)
4,4'DDT	17	10	<i>Macoma nasuta</i>	G	(128)
4,4'DDD	31	60	<i>Macoma nasuta</i>	G	(128)
2,4'DDD	31	56	<i>Macoma nasuta</i>	G	(128)
4,4'DDE	20	50	<i>Macoma nasuta</i>	G	(128)
Hexachlorobenzene	35	70	<i>Macoma nasuta</i>	K	(77)
Hexachlorobenzene	36	98	<i>Macoma nasuta</i>	G	(125)
<b>Metals</b>					
Americium	36	47	<i>Hediste diversicolor</i>	G	(129)
Americium	50	95	<i>Venerupis decussata</i>	G	(130)
Americium	32	67	<i>Hermione hystrix</i>	G	(130)
Cadmium	17	50	<i>Callinassa australiensis</i>	G	(49)
Copper	75	100	<i>Macoma nasuta</i>	G	(127)
Iron	11	59	<i>Hediste diversicolor</i>	G	(131)
Lead	81	100	<i>Macoma nasuta</i>	G	(127)
Plutonium	43	83	<i>Hediste diversicolor</i>	G	(129)

<sup>A</sup>All steady-state values are estimates since steady state was not documented rigorously (see 12.2) in any of these studies. K = steady-state tissue residue estimated from the kinetic uptake model. G = steady-state tissue residue estimated by visual inspection of graphs of tissue residue versus time.

12.3.1 Time-series samples may be taken during the 28-day exposure to document uptake kinetics and steady state. This type of information can be very helpful, even if it is necessary to limit the analytical load by taking only a single sample or, preferably, a single composite at each sampling period. However, if the data will be compared statistically to determine whether steady state has been attained, replicates are required at each sampling period. The sampling interval for these samples should approach a geometric progression with sampling periods of no greater than one week (for example, day 0, 2, 4, 7, 14, 21, and 28). A sample at 10 days is recommended if there are previous 10-day exposure data.

12.4 *Abiotic Sampling*—The physical and chemical properties of each test, control, and reference sediment should have been characterized immediately after collection (see 10.2).

Depending on the length of storage, it may be necessary to remeasure these physical and chemical characteristics, with the possible exception of grain size distribution, immediately before the start of the bioaccumulation test (that is,  $t_0$ ). Additionally, if these  $t_0$  samples will be compared statistically to samples taken at the end of the test period ( $t_{28}$ ), eight replicate samples are suggested (see 12.4.1).

12.4.1 At the end of the bioaccumulation test ( $t_{28}$ ), take sediment samples from each exposure chamber for measurements of contaminant concentrations, total organic carbon (TOC), black carbon (BC), if present in preliminary analyses, and moisture content. It is usually not necessary to remeasure grain size. These analyses should preferably be conducted on the sediment from each beaker or aquarium (that is, experimental unit). Measurements on individual experimental units

may help explain any unexpected variation among the replicates. If eight replicates are used per treatment, this would result in a total of 32 sediment samples (8 controls and 8 tests at  $t_0$ , 8 controls, and 8 tests samples at  $t_{28}$ ).

12.4.2 An alternative sampling scheme could be used to reduce analytical loads. This would be conducted by making a composite sample for each experimental unit composed of equal aliquots of sediment from each beaker or aquarium within the treatment. Additionally, a sediment sample from each beaker or aquarium should be taken and archived. If the tissue residue data are more variable than expected, or if there are “unusual” data points, these individual sediment samples should be analyzed. Additionally, individual sediment samples should be analyzed if the differences in contaminant concentrations in the  $t_0$  and  $t_{28}$  sediment samples are greater than would be expected from analytical variation alone.

12.5 *Long-Term Uptake Tests*—In some cases, body burdens will not approach steady-state body burdens in a 28-day test (see [Table 4](#)). Organic compounds exhibiting these kinetics will probably have a  $\log K_{ow} > 5$ , be metabolically refractory (for example, highly chlorinated PCBs and dioxins), or have low depuration rates. Additionally, tissue residues of several metals may increase gradually over time so that 28 days is inadequate to approach steady-state. Depending on the goals of the study and the adaptability of the test species to long-term testing, it may be necessary to conduct an exposure longer than 28 days (or a kinetic study) to obtain a sufficiently accurate estimate of the steady-state tissue residues of these compounds.

12.5.1 *Biotic Sampling*—In long-term studies, the exposure should continue until steady-state body burdens are attained (see [12.2](#)). Guide [E1022](#) recommends a minimum of five sampling periods (plus  $t_0$ ) when conducting water exposures to generate BCFs. For bioconcentration tests, Guide [E1022](#) recommends sampling in a geometric progression with sampling times reasonably close to  $S/16$ ,  $S/8$ ,  $S/4$ ,  $S/2$ , and  $S$ , where  $S$  = the time to steady-state. This sampling design presupposes a fairly accurate estimate of time to steady-state, which is often not the case with sediment exposures.

12.5.1.1 Placing a greater number of samples at and beyond the predicted time to steady-state is recommended to document steady-state from sediment exposures. With a contaminant expected to reach steady-state within 28 to 50 days, samples should be taken at days 0, 7, 14, 21, 28, 42, 56, and 70. If the time to steady-state is much greater than 42 days, additional sampling periods at two-week intervals should be added (for example, Day 84). Slight deviations from this schedule (for example, Day 45 versus Day 42) are not critical, although samples should be taken at  $t_{28}$  for comparative purposes. An estimate of time to steady-state may be obtained from the literature or approximated from structure-activity relationships ([Annex A5](#)), although these values should be considered the minimum times to steady-state.

12.5.1.2 Compared to the ASTM bioconcentration sampling schedule, this schedule increases the likelihood of documenting statistically that steady-state has been obtained, although it does not document the initial uptake phase as well. Add sampling periods during the initial uptake phase (for example,

Days 0, 2, 4, 7, 10, and 14) if accurate estimates of the sediment uptake rate coefficient ( $K_s$ ) are required.

12.5.1.3 The loss of replicates due to mortality and spawning can be a problem with long-term exposures. However, increasing the total number of replicates by an additional 10 to 20 % should suffice in most cases. If not needed, archive these extra individuals at the end of the test as replacement samples in case of analytical failures, or analyze them to increase the statistical power of the final sampling period.

12.5.1.4 Avoidance of the sediment can occur, particularly at high doses. The exposure will decrease if this occurs, and the expected kinetics and overall steady state will be altered.

12.5.2 *Abiotic Samples*—The bioavailable fraction of the contaminants as well as the nutritional quality of the sediment are more prone to depletion in these extended tests than in 28-day exposures. To document statistically whether such depletions have occurred, eight replicate sediment samples are ideally required for physical and chemical analysis from each sediment type at the beginning and end of the exposure. Additionally, archiving sediment samples from every biological sampling period is recommended.

12.5.2.1 To minimize the depletion of sediment contaminants or nutrients, sediment can be completely replaced stored sediment or freshly dosed sediment on a regular basis (for example, monthly). Sediment must be renewed carefully to avoid damaging the test organisms, especially polychaete worms. Another way of minimizing the depletion of contaminants is by periodically adding fresh sediment (see [13.3.1](#)). However, over a long experiment the exposure container may be filled entirely, necessitating replacement of the sediment anyway. Replenishment sediment should be sampled and characterized completely for the recommended characteristics (see [10.2](#)). Test organisms should not be given a supplemental food source (for example, fish flakes) since this will reduce exposure to ingested sediment and may result in an underestimation of the sediment bioavailability and steady-state tissue residues ([132](#)).

12.6 *Estimating Steady State*—It may be possible to estimate steady-state levels in tests in which steady-state cannot be documented (see [12.2](#)). Several methods have been published that can be used to predict steady-state contaminant levels from uptake and depuration kinetics ([133](#), [134](#), [135](#), [136](#), [137](#)). All of these methods were derived from fish exposures, and most use a linear uptake, first-order depuration model that can be modified for contaminant uptake from sediment. To avoid confusing uptake from water versus sediment,  $k_s$ , the sediment uptake rate coefficient, is used instead of  $k_1$  ([138](#)). The  $k_s$  coefficient has also been referred to as the uptake clearance rate ([47](#)). Following the recommendation of Stehly, et al ([139](#)), the gram sediment and gram tissue units are retained in the following formulation:

$$C_t(t) = k_s \times C_s / k_2 \times (1 - e^{-k_2 \times t}) \quad (1)$$

where:

$C_t$  = contaminant concentration in tissue at time  $t$ ,  
 $C_s$  = contaminant concentration in sediment,  
 $k_s$  = uptake rate coefficient in tissue,  $g \text{ sed } g^{-1} \text{ day}^{-1}$ ,  
 $k_2$  = depuration constant,  $\text{day}^{-1}$ , and

$t$  = time, days.

As time approaches infinity, the maximum or equilibrium concentration within the organism ( $C_{t_{\max}}$ ) becomes

$$C_{t_{\max}} = C_s \times k_s / k_2 \quad (2)$$

Correspondingly, the bioaccumulation factor (BAF) for a compound may be estimated from

$$\text{BAF} = k_s / k_2 \quad (3)$$

This model assumes that the sediment concentration and kinetic coefficients are invariant. Depletion of the sediment concentrations in the vicinity of the organism would invalidate the model. Furthermore, the rate coefficients are conditional on the environment and health of the test organisms. Changes in environmental conditions such as temperature or changes in physiology such as reproduction will thus also invalidate the model. The model can provide estimates of steady-state tissue residues despite these potential limitations.

12.6.1 The kinetic approach requires an estimate of  $k_s$  and  $k_2$ , which are determined from the changes in tissue residues during the uptake phase and depuration phase, respectively. The uptake experiment should be short enough that an estimate of  $k_s$  is made during the linear portion of the uptake phase to prevent an unrealistically low uptake rate due to depuration. The depuration phase should be of sufficient duration to smooth out any loss from a rapidly depurated compartment such as loss from the voiding of feces. It is acceptable to use a  $k_2$  derived from a water exposure unless there is reason to suspect that the route of exposure will affect the depuration rate. The durations of the uptake and depuration experiments will vary with animal species, compound, contaminant concentration, analytical detection limits, and test sediment. As a result, no specific guidelines will be presented here. For a discussion of this method for bioconcentration studies in fish, see Guide E1022 and Refs (133, 134). Its application to sediment is discussed in Ref (138). Recent studies of the accumulation of sediment-associated contaminants by benthos suggest that the kinetics for freshly dosed sediments may require a more complex formulation to estimate the uptake clearance constant than that previously presented (46).

### 13. Procedure

13.1 *Preexperimental Preparations*—Coordinate the collection and acclimation of the test organisms with collection of the sediments so that the experiment can begin with a minimum of delay. The glassware, water delivery system, and any stored water, as well as sampling containers, labels, and related materials, should be ready. Beakers and other containers should be pre-labeled. A detailed work schedule, showing daily tasks and the individuals responsible for accomplishing them, should be prepared before the sediment arrives. A prearranged numbering scheme should be agreed upon by the analytical chemists. It is critical to keep the analytical chemists well informed of the sampling schedule so they can prepare for the sample load. Arrange with maintenance personnel to look for power failures, pump leaks, breakage of aquaria, inadvertent switching on of lights at night, and other accidents. Provide telephone numbers for key personnel responsible for maintenance

of the experiment in a prominent location (for example, on the door of the laboratory). Any safety warnings should also be posted at entry points.

13.2 *Experiment Initiation*—Weigh all individual organisms or composites of organisms, while taking care to minimize the exposure of soft-bodied organisms to air. In cases in which it is not possible to pre-weigh soft-bodied aquatic organisms without damage, an average population weight should be determined by random sampling of the population of organisms that will be used in the test. Maintain the air temperature of the room near the experimental water temperature to prevent temperature shock. Large bivalves should be measured (anterior to posterior valve), weighed, and marked individually with a random number. Discard any organisms not meeting the criteria for size or condition. Maintain a few extra individuals for potential replacements (see 13.3). Also, choose randomly an appropriate number of specimens for wet-to-dry weight conversions and for lipid analysis.

13.2.1 Distribute measured aliquots of homogenized sediment to each exposure chamber. Weighing the sediment aliquot is preferable, but the sediment volume can be used to estimate the mass for a particular sediment type. During the process of measuring aliquots of sediment, re-stir the source periodically to prevent separation of the fines and interstitial water. If beakers are used as exposure chambers, tap the beaker gently to consolidate the sediment and eliminate air bubbles. To prevent the loss of surficial fines when filling the beakers, place a plastic film over the sediment surface, slowly fill the beaker with water, and then withdraw the film using forceps. Place the water-filled beakers into filled aquaria carefully, and allow any suspended fines to settle.

13.2.2 If aquaria or other large containers are used as the exposure chambers, stir the sediment gently after adding the sediment and to remove bubbles. As with the beakers, a plastic film can be placed over the sediment surface when filling the aquarium with water. Alternatively, if the water delivery is controlled (slow gentle flow), there may be no discernible resuspension of surficial fines, possibly obviating the need for a plastic film. Position any aerating device so that the induced turbulence does not resuspend sediment. Allow the sediment to consolidate and the suspended particles to settle before adding organisms. Settling times will vary with the grain size of the test sediment, but it is often convenient to add the sediment to the test chamber the day before the test is initiated, which allows the sediment to settle overnight.

13.2.3 *Adding Organisms*—Place animals on the surface of the sediment, and allow them to bury themselves. Mobile organisms, such as the polychaetes or oligochaetes, should be observed for a sufficient period to ensure that they bury in the correct chamber and do not swim into another chamber. For mobile animals, it may be necessary to place screens on the tops of beakers to keep them from swimming out. It is also important to ensure that sediment samples are not toxic to the test organisms (see 13.5) or that the organisms do not exhibit significant sediment avoidance to ensure appropriate exposure (see Table A8.5).

13.3 *Experiment Maintenance*—Replace animals whose behavior is abnormal (failure to bury in the sediment, etc.) within

the first 24 h if possible. Observe the chambers daily, and note any signs of abnormal activity (for example, reduced production of fecal pellets and avoidance of the sediment). Remove beakers with dead organisms. It is especially important to check for dead organisms in a static system. (Note that the previous recommendations may not be practical for the smaller test organisms). Record the temperature and other water-quality characteristics on a weekly basis. Replenish the water in water renewal experiments according to a preplanned schedule, and dispose of drained water in accordance with the applicable rules for hazardous waste.

13.3.1 *Sediment Renewal*—It is recommended for some test organisms (for example, *Macoma*) that periodic additions of small amounts of the appropriate sediment type be made to each exposure chamber. Because the bioavailable fraction may constitute a small portion of the total sediment chemical (see Ref (46)), sediment-ingesting organisms may deplete the available fraction, especially if they have a restrictive feeding zone. Accordingly, depletion of the bioavailable fraction may be the reason that tissue residues of 35 of 37 compounds declined between Day 39 and Day 79 in Oliver’s study (140) of uptake by oligochaetes. Also, without organic input from settling phytoplankton and with low light levels inhibiting benthic microalgae, it is possible that the nutrient quality of the sediment could decline over the course of a long-term experiment. Periodic sediment renewal should reduce these potential laboratory artifacts and help maintain a more constant chemical concentration and food supply. The amount of sediment added daily should equal or exceed the daily sediment processing rate of the organism. Sediment-ingesting clams such as *Macoma* require about 1 g of wet sediment per gram of wet tissue mass per day, and arenicolid worms (2 to 6 g wet weight) require about 10 g of sediment per day. It is sufficient to add the sediment two or three times per week (for example, about 3.5 g twice per week for a 1-g *Macoma*).

13.3.1.1 Periodically replacing all of the sediment in the chambers is recommended for long-term exposures (>28 days). Replacement of the sediment reduces the possibility of depletion of the bioavailable fraction of the chemicals or food and prevents excessive pelletization of the sediment. Additionally, the periodic addition of surface sediments will overfill most chambers within a few weeks. Replacement on a monthly schedule should suffice, and it coordinates with the long-term sampling schedule. All of the sediment should be collected at the same time and the renewal sediment stored until needed if a field sediment is tested. It may be preferable to dose new sediment for replacement if a dosed sediment is tested. All added or replacement sediments need to be analyzed for physical and chemical characteristics (see 10.2).

13.3.2 Test organisms should not be fed a supplemental source of food in either 28-day or long-term experiments. Studies on long-term maintenance (>28 days) of deposit-feeding bivalves (for example, Ref (141)), polychaetes (for example, Ref (44)), and crustaceans (for example, Ref (46)) have shown that an artificial food was not necessary. By ingesting added food, the organisms presumably ingest less sediment, resulting in less uptake of the sediment-associated

contaminants. Supplemental food may also enhance the rate of loss by passing uncontaminated material through the intestinal tract.

13.4 *Contaminant Samples*—Samples of sediment, water, and biota should be taken for chemical analysis before, during, and after testing (see 12.3 – 12.5). The sampling techniques and apparatus will vary with the nature of the sediment, species of test organism, and compound(s) of interest. Consistency in sampling for any given characteristic is essential since the manner in which the samples are taken may affect the analysis.

13.4.1 *Overlying Water*—Although no contaminants are intentionally added to overlying water in sediment bioaccumulation tests, contaminants may be introduced from the water supply system, leached from the sediment, or present on resuspended particulates. The activities of some species (for example, *Yoldia*) can resuspend considerable amounts of fine-grain material directly into the water column. Depending on the design of the exposure system, this bioturbation may lead to cross-contamination between treatments. This potential uptake from the water needs to be quantified to differentiate it from uptake from the whole sediment and to check for possible cross-contamination among treatments.

13.4.1.1 At a minimum, overlying water should be sampled for contaminants from each treatment at the beginning, middle, and end of the test period (that is,  $T_0$ ,  $T_{14}$ , and  $T_{28}$ ). A sample from each aquarium should be analyzed if statistical comparisons are planned, although it would be acceptable to composite water samples from aquaria of the same treatment in many cases. If samples are composited, individual samples from each aquarium should be archived in case a more detailed analysis is required. Samples should also be taken during periods of high turbidity or other unusual water quality.

13.4.1.2 Overlying water should be sampled at mid-depth from each exposure unit. Care should be taken to avoid disturbing the flocculent material at the sediment-water interface. Sampling apparatus (pipettes and sample vials) should be made of materials that do not absorb or leach contaminants appreciably. Rinse the sampling apparatus after each use to guard against cross-contamination. Sample volumes will depend on the analytical technique used but may range from about 1 to 100 mL.

13.4.2 *Sediment and Interstitial Water*—Sample all test, control, and reference sediments before the addition of organisms ( $t_0$  sample) and at the end of the exposure (typically  $t_{28}$ ). These sediment samples should be analyzed for chemical concentrations, total organic carbon (TOC), black carbon (BC), acid volatile sulfides (AVS) and moisture content. It is adequate to conduct the grain size analysis only on the initial sample in most cases.

13.4.2.1 One procedure for sampling sediment for organic compounds from exposure chambers is as follows:

(1) Remove overlying water from the exposure chamber by siphoning or decanting, taking care not to disturb the surface floc. Use PTFE or glass tubing for siphoning or decanting if metals are also to be analyzed. Depending on the procedure, interstitial water samples may be taken at this stage (see Guide E1391 and Test Method E1706 for guidance on sampling interstitial water).



(2) Remove the test organism(s) from the sediment. Larger bivalves can be removed directly with forceps (use PTFE forceps if metals are a concern). Spread the sediment out on a tray to remove small bivalves, polychaetes, and oligochaetes. Do not use any water to remove the sediment from the exposure chambers, as doing so could alter the characteristics of the sediment.

(3) Homogenize the test sediment from each exposure chamber by stirring with a PTFE-coated spoon or glass rod. Take a sediment sample from each exposure chamber, place it in a labeled sample glass or plastic (for metals) vial, and freeze it leaving a head space above the sample. These individual samples will be either analyzed or archived if composites are analyzed.

(4) If composites are going to be taken, the compositing strategy will depend on how the exposure chambers were allocated among aquaria. Composite all of the beakers within an aquarium if only one treatment type is placed in each aquarium. If the exposure chambers are allocated randomly among aquaria, combine all of the sediment from each treatment (that is, sediment type) regardless of the aquarium. In both cases, homogenize the sediment, take replicate samples from each composite, and freeze until analyzed.

13.4.2.2 Extra sediment samples should be taken from individual exposure chambers (and from any composites) and frozen in case there is an analytical failure or greater statistical power is required.

13.4.2.3 Reduced metal forms will be oxidized because the removal of organisms exposes the sediment to air. The organisms should be removed from the sediment sample in a glove bag under a controlled atmosphere if metal speciation will be studied. Interstitial water should be collected at the same time as the sediment samples. Interstitial water may be collected by a variety of methods, including centrifugation, sediment squeezing, and dialysis membranes (see Guide E1391).

13.4.3 *Tissue Samples*—Test organisms need to be removed carefully from the sediment by gentle sieving or other mechanical means, and all adhering particles need to be removed. A gentle rinse with clean water will help remove particles from benthos. Use seawater or freshwater, as appropriate. Organisms should generally be placed in clean water for 24 h to purge their gut contents before chemical analysis.

13.4.3.1 *Gut Purging*—When a whole-body tissue analysis is conducted on a deposit-feeder, any contaminants associated with the mineral particles and detritus in the gut are included. Depending on the mass of sediment and the associated contaminant concentration, the gut sediment can increase the apparent whole-body tissue residue measurably. Allowing the organism to purge its gut contents (that is, defecate) in a clean environment can reduce or eliminate this positive bias. Contaminants can depurate or be metabolized during purging, resulting in an underestimation of the bioaccumulation. The type and extent of the error will depend on many factors, including the nature of the contaminant, feeding behavior of the organism, and ability of the organism to metabolize and eliminate the contaminant. Factors influencing the errors associated with purging are summarized in Table 5. Purging in either uncontaminated water or sediment have both been used.

**TABLE 5 Errors Associated With Gut Sediment/Purging**

1	Gut sediment introduces greatest error: (a) In organisms that ingest high-organic particles selectively. (b) In organisms with a large gut capacity. (c) During the early stages of uptake when tissue residues are low. (d) For compounds not extensively bioaccumulated, especially high $K_{oc}$ compounds with steric hindrance to uptake.
2	Purging introduces greatest error: (a) For rapidly depurated/metabolized compounds. (b) Purging in uncontaminated sediment can introduce a dilution error.

However, purging in clean sediment can enhance the depuration of compounds from the organism and add uncontaminated sediment to the organism weight, which will result in concentration dilution (33, 142). While complete evacuation of the organism's gut contents may not occur in water-only purging, the error of dilution by the addition of uncontaminated gut contents will probably be greater than the contribution from incomplete gut clearance.

13.4.3.2 After collection, rinse the organisms with clean water, blot them dry, and then weigh them. Measure the shell length of bivalves. Organisms should be analyzed immediately or frozen in baked-out aluminum foil or glass vials. Use non-contaminating plastic (linear or high-density polyethylene or equivalent for metals). The entire soft-tissue of each individual or composite of individuals from an experimental unit should be prepared for analysis. In many cases, the tissue from each experimental unit will be homogenized first, and then subsamples will be taken for organic, metal, and lipid analyses and archiving. The type of homogenization technique will depend on the size and tissue consistency of the organism, contaminant of interest, and analytical procedures used for the contaminant analysis.

13.4.4 *Standard 24-h Purge*—Organic compounds with high  $K_{ow}$  values (for example, PCBs, DDT, and BaP) are usually the greatest environmental concern in terms of bioaccumulation. Most of these compounds are depurated slowly, so a relatively small amount should be lost during purging. A 24-h gut purging is therefore recommended as the standard procedure for sediments known or suspected to contain more than trace amounts of these contaminants. A 24-h depuration period is sufficient for most organisms to defecate the majority of their gut contents without introducing substantial errors from contaminant depuration or metabolism. If the rate of compound depuration is unknown, a time series of samples can be taken to determine the elimination rate coefficient and estimate the extent of loss during the 24-h purge.

13.4.4.1 Many deposit feeders require the ingestion of sediment to void their gut contents completely, and organisms have been placed in control sediment to ensure complete purging. A clean control sediment should be used if purging is performed in sediment. Reference sediment may contain substantial contaminant concentrations and should not be used. The experimental conditions (for example, temperature and salinity) should be maintained. An estimate of the gut content

mass must be made to correct for dilution by the uncontaminated material. If metals are to be measured, the uncontaminated sediment may contain as high a mineral metals concentration as the test sediment. The organisms in the control and reference sediment(s) should undergo the same purging treatment as individuals exposed to the test sediment. Organisms from different treatments should be kept in separate containers to prevent any possibility of cross-contamination. Observations should be made on whether feces were produced during the purging period and on the general health of the organisms.

13.4.4.2 Whether to purge organisms in water only or an uncontaminated sediment depends on the expected extent of the bias. Oliver (140) indicated that no bias existed for chlorinated hydrocarbons and that purging did not have to be performed. For the oligochaete, *Lumbriculus variegatus*, purging in water only results in rapid gut content elimination, and back extrapolation along the elimination curve suggests a contribution of approximately 10 % of the total concentration to be attributed to gut contents for both pyrene and benzo(a)pyrene (33, 142). The depuration rate will be much greater if the purging is performed in clean sediment; it is thus critical to correct for depuration losses. Furthermore, a negative bias due to dilution by uncontaminated sediment exists and reduces the expected concentration by an additional 10 to 15 % when the elimination curve is back extrapolated (33, 142). This is almost exactly the fractional mass of material eliminated by the oligochaetes. Purging the organisms in sediment will thus require a correction for dilution (Annex A7). The decision to purge needs to consider the potential bias from remaining gut contents if the purge is water only, the potential bias from depuration and metabolism during the purging period, and the potential bias from errors in estimating the dilution mass if purging in uncontaminated sediment.

13.4.4.3 *When Not to Purge*—Gut purging may introduce an error in some situations that is greater than that associated with retaining gut sediment. If the purpose of the study is to compare laboratory and field organisms, it is often impractical to purge field-collected organisms. Therefore, to ensure that the laboratory and field results are directly comparable, laboratory organisms should not be purged. If the purpose of the study is to determine contaminant trophic transport, do not purge because predators usually ingest the entire prey item. If the compounds of concern are lower molecular weight PAHs, purging is not recommended since these compounds may be depurated and metabolized rapidly (see Table 6), so that a 24-h

purge can result in a greater error than leaving the gut sediment.

13.5 *Acceptable Levels of Mortality*—According to Guide E1022 guidelines for bioconcentration tests, a test is unacceptable if “more than 10 % of the organisms in any treatment died or showed signs of disease, stress, or other adverse effects.” This criterion is applicable to studies of dosed sediments in which it is possible to adjust contaminant concentrations. Repeat any 28-day spiking experiment at a lower contaminant concentration if 10 % or more of the organisms in any treatment die or show overt signs of stress. Signs of stress include avoidance of the sediment, non-burial, casting off of siphons, abnormal tube construction, and reduced ventilation or sediment processing rates.

13.5.1 Many of the field sediments or dredge materials of environmental concern will have moderate to high toxicity, in contrast to most experimental studies of bioavailability. It may be impossible or difficult to meet the 10 % mortality criterion with these sediments. However, this may not represent a serious problem because the purpose of evaluating these sediments is to determine the extent of bioaccumulation resulting from a particular sediment. The mortality in the laboratory would presumably mimic the response in the field and so represent the actual effect of the sediment. However, when sediments produce toxicity, the bioaccumulation response may be lower than if toxicity did not occur. Altered behaviors due to stress and avoidance of sediment have both been observed when sediment-associated contaminants produced a toxic response. These altered behaviors have been associated with altered exposure and accumulation.

13.5.1.1 Because tests conducted on field and dosed sediments have different purposes, it may not be necessary to reject the tests when mortality in the test sediment is greater than 10 %. The determining factors in deciding to accept a test treatment with high mortality is whether there are adequate replicates to obtain sufficient statistical power and consideration of the potential for altered exposure. The test should be considered invalid if overt sediment avoidance is observed. The experiment should be repeated if the statistical power is insufficient. Also, mortality or stress at greater than 10 % in the control or reference sediment could indicate that the organisms were stressed initially, the system was contaminated, or the control or reference sediment was unacceptable. The cause of the problem should be determined and the experiment repeated. Consider using a more contaminant-resistant species in any future tests if the mortality in the test sediment exceeds 25 %.

13.5.1.2 High mortality in field sediments may be a moot problem because a sediment sufficiently toxic to kill a substantial proportion of the recommended test species would presumably be unacceptable based on toxicity. Even in cases in which a sediment is rejected on the basis of toxicity, a bioaccumulation test conducted on the diluted sediment may help identify the compounds responsible for the toxicity. However, diluting a sediment with uncontaminated sediment may alter the contaminant bioavailability.

**TABLE 6 Depuration Loss Of Contaminants During 24 and 72-h Gut Purges<sup>A</sup>**

Compound	Organism	%Lost, h		Reference
		24	72	
PCB	<i>Crangon septemspinosus</i>	3	8	(121)
HCB	<i>Macoma nasuta</i>	4	12	(76)
BaP	<i>Pontoporeia hoyi</i>	4 ± 3	12 ± 8	(46)
Phe	<i>Pontoporeia hoyi</i>	11 ± 7	33 ± 19	(46)
BaP	<i>Hexagenia limbata</i>	14–26	43–99	(122)
Phe	<i>Hexagenia limbata</i>	77–100		(122)
HCBP	<i>Hexagenia limbata</i>	12–41	36–99	(122)

<sup>A</sup> PCB = Aroclor 1254, HCB = hexachlorobenzene, BaP = benzo(a)pyrene, Phe = phenanthrene, and HCBP = hexachlorobiphenyl.

## 14. Analytical Methodology

14.1 *Contaminant Analysis*—Explanation of specific techniques used to analyze sediment, water, and tissues for contaminants is a complex subject beyond the scope of this guide. Discussions of analytical techniques can be found in Refs (22, 143-148). Although no single extraction technique alone can accurately and universally predict the bioavailability of sediment-bound metals it is possible to offer several guidelines. First, analytical techniques are media dependent. Time should thus be allocated for modifying procedures for the various media and any special conditions (for example, high total organic carbon (TOC) sediment and low tissue biomass). Second, a harsh extraction technique should not be used when analyzing sediments for metals since such a technique can extract biologically unavailable metals from the mineral matrix. A discussion of various metal extraction techniques is found in Refs (149, 150). Third, the PCB analysis should be at the level of identifying and reporting specific congeners rather than Aroclor equivalents to the extent possible. In particular, the more toxic planar congeners need to be identified. A thorough review of PCB congeners, including which to analyze, can be found in McFarland and Clarke (43).

14.1.1 The required or desired detection limits will have a major effect on the choice of analytical techniques and on the ability to interpret the data. The detection limits and analytical procedures will be specified by the pertinent regulation in some cases, while the decision will be determined by the researcher in other cases. If no detection limits are specified, the minimum requirements of the analytical techniques should meet the requirements of the U.S. Environmental Protection Agency's (EPA's) Contract Laboratory Program (22, 148). The quantification limits from these documents are summarized in Table 7. These limits cover organics in water and sediment and metals in water. Although tissues are not addressed, it should be possible to obtain the same quantification limits as with the sediments.

14.1.2 Control samples or samples from relatively clean areas contain low contaminant concentrations and may require lower detection limits to achieve satisfactory results. The methods developed for measuring contaminants in samples collected from the Puget Sound Dredge Disposal Analysis study (PSDDA) control sites (19) are suggested in such cases. The PSDDA values include tissues as well as water and sediment and are summarized in Table 8.

14.1.3 A complete quality assurance/quality control QA/QC plan is a central part of any analytical procedure. Information on analytical QA/QC procedures is available from several sources (22, 148, 151). An important part of any QA/QC program is the use of reference samples and standards. Reference samples and standards are available from the U.S. EPA in Cincinnati, OH; Las Vegas, NV; and Research Triangle Park, NC, as well as the National Institute of Standards and Technology (Office of Standard Reference Materials, Room B311, Chemistry Building, NIST, Gaithersburg, MD 20899).

14.2 *Lipid Analysis*—A number of studies have demonstrated that lipids are the major storage site for organic contaminants in a variety of organisms (152-154). Bioaccumulated concentrations for nonpolar organics should be normalized to the tissue lipid concentration because of the importance of lipids. Lipid concentration is one of the factors required in deriving the Biota-sediment accumulation factor (BSAF) (see Annex A1). However, the difficulty in using this approach is that each lipid method generates different lipid concentrations. (See Kates (155) for a discussion of lipid methodology.) The differences in lipid concentration translate directly to a similar variation in the lipid-normalized contaminant concentrations or BSAFs.

14.2.1 To allow lipid-normalized tissue residues or BSAFs to be compared, it is necessary to either promulgate a standard lipid technique or intercalibrate the various techniques. Standardization on a single method is difficult because the lipid methodology is often intimately tied in with the extraction procedure for contaminant analysis. As an interim solution, the

**TABLE 7 U.S. EPA Contract Laboratory Program Quantification Limits for Water and Sediment With Estimates for Tissue Matrices**

Organics	Water, $\mu\text{g/L}$	Sediment, $\mu\text{g/kg}^A$	Tissue, $\mu\text{g/kg}^B$
Volatiles	5–10	0.5–10	0.5–10
Semivolatiles	10–50	330–1600	330–1600
Pesticides/ PCBs	0.05–1	8–160	8–160
For individual contaminants, refer to CLP Statement of Work			
Metals	Water, $\mu\text{g/L}$		
Antimony	20–300		
Arsenic	5–100		
Cadmium	0.5–10		
Copper	5–100		
Lead	5–100		
Mercury	0.2–20		
Nickel	5–100		
Silver	1–25		
Zinc	0.2–4		
Metals not listed, refer to CLP Statement of Work			

<sup>A</sup>  $\mu\text{g/kg}$  wet weight.

<sup>B</sup>  $\mu\text{g/kg}$  wet weight basis. Values for tissues were estimated from the sediment values on the premise that tissue and sediment contaminant concentrations are of a similar magnitude and are analyzed by similar techniques.

**TABLE 8 Puget Sound Dredged Disposal Analysis Program (PSDDA) Low Limits of Detection for Water, Sediment, and Tissue Matrices**

Organics	Sediment, $\mu\text{g/kg}^A$	Tissue, $\mu\text{g/kg}^B$	
Volatiles	10–20	5–10	
Semivolatiles	1–50	10–20	
Pesticides/PCBs	0.1–15	0.1–20	
Metals	Water, $\mu\text{g/L}^C$	Sediment, $\text{mg/kg}^D$	Tissue, $\text{mg/kg}^E$
Antimony	3	0.1	0.02
Arsenic	1	0.1	0.02
Cadmium	0.1	0.1	0.01
Copper	1	0.1	0.01
Lead	1	0.1	0.03
Mercury	0.2	0.01	0.01
Nickel	1	0.1	0.02
Silver	0.2	0.1	0.01
Zinc	1	0.2	0.20

<sup>A</sup>  $\mu\text{g/kg}$  dry weight, ppb.

<sup>B</sup>  $\mu\text{g/kg}$  wet weight, ppb.

<sup>C</sup>  $\mu\text{g/L}$ , ppb.

<sup>D</sup>  $\text{mg/kg}$  dry weight, ppm.

<sup>E</sup>  $\text{mg/kg}$  wet weight, ppm.

Bligh-Dyer lipid method (156) is recommended as a temporary “intercalibration standard.”

14.2.1.1 The potential advantages of Bligh-Dyer include its ability to extract neutral lipids not extracted by many other solvent systems and the use of Bligh-Dyer (or the same solvent system) in numerous biological and toxicological studies (for example, (46, 152, 153)). Because the technique is independent of any particular analytical extraction procedure, it will not change when the extraction technique is changed. Additionally, the method can be modified for small tissue sample sizes as long as the solvent ratios are maintained (157, 158).

14.2.1.2 A potential disadvantage of the Bligh-Dyer is that by extracting many lipids not extracted by other techniques, the method may extract lipids that are not important to the storage of neutral organic contaminants. Solvents used in the Bligh-Dyer method are not commonly used in analytical methodologies to quantify nonpolar organic contaminants, and as a result it may be necessary to quantify lipids on a subsample of the tissue used to quantify the tissue residues.

14.2.1.3 Compare the chosen lipid method with Bligh-Dyer for each tissue type if the Bligh-Dyer method is not the primary lipid method used. The chosen lipid method can then be converted to “Bligh-Dyer equivalents” and the lipid-normalized tissue residues reported in “Bligh-Dyer equivalents.” In the interim, it is suggested that extra tissue of each species be frozen for future lipid analysis in the event that a different technique proves more advantageous.

14.3 *Sample Storage*—For organics, the U.S. EPA Contract Laboratory Program (22) requires that the samples be protected from light and refrigerated at 4°C ( $\pm 2^\circ\text{C}$ ) from the time of receipt until they are extracted and analyzed. Water samples shall be extracted within five days of receipt of the sample. Sediment samples shall be extracted within 10 days of receipt of the sample, and the extraction of water samples shall be started within five days of receipt of the sample if continuous extraction procedures are used.

14.3.1 For inorganics, the U.S. EPA Contract Laboratory Program (148) requires that soil and sediment samples be maintained at 4°C ( $\pm 2^\circ\text{C}$ ) until analyzed. Samples for mercury shall be analyzed within 26 days of receipt of the sample. Samples for metals shall be analyzed within 180 days of receipt of the sample.

14.3.2 If other priorities interfere with the requirements set by the Contract Laboratory Program, it is suggested that in those cases the samples either be frozen ( $-20^\circ\text{C}$ ) in airtight containers or dried, depending on the type of sample and analyses required. Purging the container with nitrogen before sealing will delay the degradation of some contaminants as well as lipids. Sample containers should be as full as practical to prevent moisture loss from the sample. Sediment samples so preserved are stable for at least six months, if not longer (145). Tissue and water samples are expected to be at least as stable as sediments.

14.4 *Reporting of Results*—Investigators have reported results on either a dry or wet basis, usually without a conversion factor between the two and sometimes without any indication of which was used. This makes it difficult, or impossible, to compare the results from different studies. A dry-weight basis

is generally preferred for both sediment and tissue contaminant concentrations. However, certain analytical techniques use wet tissue or wet sediment, necessitating the calculation of wet-weight concentrations. The wet-to-dry weight ratios should be reported for each tissue and sediment type to allow comparisons among studies. As previously mentioned, lipid values should be reported in “Bligh-Dyer equivalents,” along with any conversion factor(s) between lipid methods.

14.5 *Organic Carbon Analysis*—Several methods are available, but the Lloyd Kahn method is used most often (159). This method uses an acid treatment to remove inorganic carbon (for example, carbonates and bicarbonates), after which organic compounds are decomposed by pyrolysis in the presence of oxygen or air. The carbon dioxide that is formed is detected by infrared detection, gas chromatography or thermal conductivity.

14.6 *Black Carbon Analysis*—A variety of methods are available for measuring BC in various environmental media (for example, (160, 161, 162, 163, 164, 165)). However, no one procedure is universally accepted or demonstrated to be most accurate for working with sediments. Further, efforts to evaluate and compare the methods for sediments have also generated results that were fairly variable (for example, (166)). Arguably, the most frequently used procedure for sediments, which uses laboratory equipment that is widely available, is the combustion method based on (160), with modifications by (161). Among the most significant artifacts associated with combustion based methods is charring which may occur during the thermal oxidation (167). As total organic carbon (TOC) is oxidized, charring results in the formation of black carbon (BC). There is a distinct need for further development, improvement and standardization of methods for measuring BC.

## 15. Data Analysis and Interpretation

15.1 *Objective*—The main objective of statistical testing is to determine whether the mean tissue residues in animals exposed to the test sediment are significantly greater than those in the control or reference sediments, or greater than a specified criterion value such as a Food and Drug Administration (FDA) action limit. Additional statistical tests comparing the means of other tissue residues (for example, control versus reference) or sediment characteristics will also be conducted, but the same principles and methods apply. A summary of the standard statistical tests and their interpretation are presented in Table 9 and Table 10.

15.2 *Requirements for Statistical Testing*—To perform statistical testing, replicate samples must have been taken to provide an estimate of variability. Non-replicated samples (that is, a concentration from a single composite sample) cannot be compared using these methods. The concentration of each chemical in a tissue or sediment sample is considered statistically independent in these tests and is compared separately. Comparisons of tissue residues of different chemicals within the same organisms require the use of “repeated measures.”

15.2.1 The standard deviations (SDs) or standard errors (SEs) and number of replicates ( $n$ ) should always be reported in addition to the mean values. When composited values are

**TABLE 9 Summary of Statistical Analyses**

Pairwise Comparisons Hypothesis	Test(s) <sup>A</sup>	Comments
Normality	Chi-square or Kolmogorov-Smirnov	try transformations if not normal
Equality of variances	F-test	try transformations if not equal
Equality of means	t-test	one-tailed with a priori knowledge, otherwise two-tailed
Equality of a means	modified t-test	if variances are not equal
Equality of a mean and a constant	t-test	one-tailed with a priori knowledge, otherwise two-tailed
Equality of means	nonparametric tests	if normality is not established
<b>Multiple Comparisons</b>		
Normality	Chi-square or Kolmogorov-Smirnov	try transformations if not normal
Equality of variances	Bartlett's test	try transformations if not equal
Equality of means	ANOVA	if normality is established
Equality of means	nonparametric tests	if normality is not established

<sup>A</sup> More than one test can often be used for the same hypothesis. Each test will have different assumptions. Choose the test with the assumptions most closely matching your specific conditions and requirements.

used, report the number of organisms per composite (if the composite comprises the experimental unit) or the number of experimental units per composite, as well as the number of replicate composites sampled.

15.2.1.1 It is necessary to decide whether the comparisons between means are to be multiple or pairwise before conducting any statistical analyses. Pairwise comparisons include comparisons of a test and control/reference mean for tissue concentrations, sediment characteristics, etc. Pairwise comparisons may also include comparison of the control with the reference mean and comparisons of a mean and a specified criterion value such as comparison of a test tissue residue with a constant such as an FDA action limit. Multiple comparisons involve comparisons of more than two means simultaneously. Multiple comparisons are used in cases such as determining whether three or more test tissue concentrations are equal or whether all of the total organic carbon (TOC) or black carbon (BC) values for the sediments (test(s), control, and reference) are equal.

15.2.2 After the applicable comparisons are determined, the data need to be tested for normality to determine whether parametric statistics are appropriate and the variances of the means to be compared are homogeneous. If normality and homogeneity of variances are established, *t*-tests can be performed in the case of pairwise comparisons or ANOVA in the case of multiple comparisons. Transformations of the data or nonparametric statistics may be used if normality or homogeneity of variance are not established.

15.3 *Tests for Normality and Homogeneity of Variances*—The data need to be checked for both normality and homogeneity of variances before conducting parametric statistics. The data for each chemical or sediment characteristic are tested separately. Tests used commonly for testing normality are the Kolmogorov-Smirnov one-sample test and the chi-square test (168). However, these tests are not very powerful, especially if

the sample sizes are small (such as eight replicates). More powerful, but less common, tests of normality such as Shapiro-Wilk and  $K^2$  tests (169) can be used for small sample sizes.

15.3.1 If the data are not distributed normally, they can often be transformed to achieve normality. The logarithmic and arcsine are two commonly used transformations. It may be necessary to apply different transformations to different chemical or sediment characteristics. See Ref (168) for a more extensive discussion on transformations.

15.3.2 The variances of the samples to be compared should be tested for homogeneity. This is performed using an *F*-test when comparing two variances or Bartlett's test when comparing more than two variances. A *t*-test or ANOVA is appropriate if the variances are considered homogeneous. The data can be transformed in an attempt to achieve homogeneity if the variances are heterogeneous. A modified *t*-test for comparisons of two means or approximate tests for multiple comparisons can be performed under conditions of variance heterogeneity. See Ref (168) for a more extensive discussion on appropriate tests when different treatments have unequal variances.

15.3.3 An alternative approach is to use non-parametric tests which do not require that normality be assumed or that data be transformed. Non-parametric tests for comparisons of two means, such as the Mann-Whitney test and the Tukey's Quick test may be used. Another test for paired data, the Wilcoxon Rank Sum (also known as, Wilcoxon paired-sample test) procedure has been recommended (170-172). Non-parametric tests are more robust than parametric tests, since they make no assumptions as to distribution. If the distribution is non-normal, these methods are preferred. If the assumptions concerning normality can be met, then parametric tests will be more powerful in determining significant differences and therefore should be used. See Refs (170 and 173) for discussion of non-parametric statistics.

15.4 *Pairwise Comparisons*—Pairwise comparisons are performed using Student's *t*-test, using a pooled variance estimate when variances are homogeneous. A modified *t*-test can be used under conditions of variance heterogeneity (see Ref (132)). Before analysis, it must be established whether the *t*-test performed will be a one-tailed or two-tailed test and whether the Type I error rate should be a comparison-wise or experiment-wise error rate.

15.4.1 *One-Tailed Versus Two-Tailed Tests*—In formulating a statistical hypothesis, the alternative hypothesis can be one-sided (one-tailed test) or two-sided (two-tailed test). The null hypothesis ( $H_0$ ) is always whether two values are equal. A one-sided alternative hypothesis ( $H_a$ ) is that there is a specified relationship between the two values (for example, one value is greater than the other) versus a two-sided alternative hypothesis ( $H_a$ ), which is that the two values are different. A one-tailed test is used when there is an a priori reason to test for a specific relationship between two means such as the alternative hypothesis that the test tissue residue is greater than the control tissue residue. In contrast, the two-tailed test is used when the direction of the difference is not important or cannot be assumed before testing. An example of an alternative two-sided hypothesis is that the reference sediment TOC is different (greater or lesser) from the control sediment TOC.

**TABLE 10 Examples of Analyses and Interpretation of Results<sup>A</sup>**

Hypothesis	Interpretation of Test Rejection of Null Hypothesis
	<b>Physical Characteristics</b>
Ho: $TOC_c = TOC_i$	two-tailed t-test TOC not equal between control and test sediment <i>i</i>
Ha: not $TOC_c = TOC_i$ Ho: $TOC_c = TOC_r$	two-tailed t-test TOC not equal between control and reference
Ha: not $TOC_c = TOC_r$ Ho: $TOC_c = TOC_r = TOC_1 = \dots = TOC_n$ Ha: not $TOC_c = TOC_r = TOC_1 = \dots = TOC_n$	ANOVA TOC of one or more sediment differs
	<b>Adequacy of Control</b>
Ho: $Ct_c = Ct_u$ Ha: $Ct_c > Ct_u$	one-tailed t-test exposure system contaminated
	<b>Treatment Differences</b>
Ho: $Ct_i = Ct_c$ Ha: $Ct_i > Ct_c$	one-tailed t-test significant uptake from sediment <i>i</i> above control
Ho: $Ct_i = Ct_r$ Ha: $Ct_i > Ct_r$	one-tailed t-test significant uptake from sediment <i>i</i> above reference
Ho: $Ct_r = Ct_c$ Ha: $Ct_r > Ct_c$	one-tailed t-test significant uptake from reference sediment above control
Ho: $Ct_c = Ct_r = Ct_1 = \dots = Ct_n$ Ha: not $Ct_c = Ct_r = Ct_1 = \dots = Ct_n$	ANOVA uptake from one or more sediment differs
Ho: $Ct_1 = Ct_2 = \dots = Ct_n$ Ha: not $Ct_1 = Ct_2 = \dots = Ct_n$	ANOVA uptake from one or more test sediment differs
	<b>Long-Term Exposures</b>
Ho: $Ct(j)_i = Ct(j-1)_i = Ct(j-2)_i$ Ha: not $Ct(j)_i = Ct(j-1)_i = Ct(j-2)_i$	ANOVA $Ct_i$ has not reached steady state

<sup>A</sup> Ho = null hypothesis, Ha = alternative hypothesis,  $Ct$  = concentration of contaminant in tissue at Day 28. Subscripts: *c* = control organisms or sediment, *i* = 1, 2, ..., *n* test organisms or sediment, *j* = last sampling period, *n* = total number of test treatments, *r* = reference organisms or sediments, and *u* = unexposed organisms.

15.4.1.1 Conducting one-tailed tests is recommended in most cases because control tissue residues and sediment contaminant concentrations are presumed lower than reference values, which are presumed lower than test values. For the same number of replicates, one-tailed tests are more likely to detect statistically significant differences between treatments (that is, they have a greater power). This is a critical consideration when dealing with a small number of replicates (such as eight per treatment). The other alternative to increasing statistical power is to increase the number of replicates, which increases the cost of the bioassay.

15.4.1.2 There are cases in which a one-tailed test is inappropriate. A two-tailed test should be used when no a priori assumption can be made concerning which treatment is higher than the other. For example, a two-tailed test should be used when comparing TOCs of the test and reference sediments. A two-tailed test should also be used when one regulatory action will be taken when the two treatments are equal and another when they are not equal, regardless of which one was larger or smaller. This would be unusual for tissue residues, but it would apply to other benthic characteristics. For example, a two-tailed test should be used when comparing the benthic biomass at a control and test site because both enhanced and reduced biomass are indicators of organic enrichment (73). A two-tailed test should also be used when comparing tissue residues among

different species exposed to the same sediment and when comparing BAFs or BSAFs (see Annex A1).

15.4.2 The non-parametric Wilcoxon Rank Sum procedure has been recommended for paired sample data (170). Non-parametric tests are usually not as powerful as parametric tests. However, Lehman suggests that the power of the Wilcoxon procedure is only about 5 % less than the *t* test under normal distributions, and has equivalent power under other distributions (170). Under skewed distributions, the power of the *t*-test declines while the power of the Wilcoxon Rank Sum remains constant (174). The Wilcoxon test has also been recommended where there are unequal numbers of observations between experimental treatments (171, 172).

15.5 *Comparison-Wise Versus Experiment-Wise Error Rates*—The Type I error rate used in the tests will be chosen either as a comparison-wise or experiment-wise error rate, depending on whether one decision is made for each pairwise comparison or from a set of pairwise comparisons. A comparison-wise Type I error rate of 0.05 should be used for each comparison for cases in which test sediments are chosen in a stratified manner or along a gradient and any decisions will be made on a case by case basis. For example, a comparison-wise error would be used for deciding which specific stations along a gradient were acceptable or not acceptable.

15.5.1 If the test sediments are selected from a supposedly homogeneous source (for example, multiple sediment samples from a dredge barge; , and the decision to accept or reject the sediment will be made from the results of several pairwise comparisons, an experiment-wise error rate of 0.05 should be used. Each individual comparison is performed at a lower error rate such that the probability of making a Type I error in the entire series of comparisons is not greater than 0.05. This results in a more conservative test when comparing any particular sample to the control or reference. A single sediment sample from the barge that would have been rejected at the 0.05 level may thus not be rejected at the lower experiment-wise error rate, although the probability of rejecting  $H_0$  for the entire set of samples is still 0.05. The use of experiment-wise error rates adjusts for the possibility of random differences when multiple samples are taken from a homogeneous source. (For example, if 100 samples were taken, a certain percentage would be greater than the control/reference because of random variation.) The error rate used in each comparison is a function of the number of comparisons to be used in the decision “experiment” and can be computed using the method of Dunn-Sidak (168) as follows:

$$\alpha_{pw} = 1 - (1 - \alpha_{cw})^{1/k} \quad (4)$$

where:

$\alpha_{pw}$  = Type I error rate used for each pairwise comparison,

$\alpha_{cw}$  = experiment-wise Type I error rate (0.05), and  
 $k$  = number of comparisons.

When an experiment-wise error is used, the power to detect real differences between any two means decreases as a function of  $k$ , the number of comparisons.

15.6 *Multiple Comparisons*—For comparisons involving several means, as in the case of comparing TOC values among all sediment types, an ANOVA is first performed to establish whether any of the means are different. The ANOVA also provides a “best” estimate of the variance (within-treatment error). If there are significant differences, a series of  $t$ -tests can be performed for any planned (a priori) comparisons (such as between test and control) to distinguish which means are different. Tests such as the T-Method Fisher’s Least Significant Difference (LSD), Duncans’ New Multiple Range Test, Student-Newman-Keuls’ Procedure, Scheffe’s Method, or Tukey Kramer procedure (Dunnett’s test) are more appropriate for unplanned (a posteriori) comparisons, such as between two reference tissue residues. See Ref (168) for unplanned multiple comparison tests to determine which is most suited for each case.

15.6.1 It is important to note that an ANOVA is inherently for two-tailed comparisons. If the comparisons can be broken down into a series of one-tailed pairwise comparisons, it is therefore preferable to perform the analysis in this manner because of the increase in power. However, if the series of comparisons are two-tailed, an ANOVA can be performed first to determine whether any additional comparisons should be made.

15.7 *Interpretation of Comparisons of Tissue Residues*—If the mean control tissue residues at Day 28 are not significantly

greater than the Day 0 tissue residues, it can be concluded that there is no significant contamination from the exposure system or control sediment. If there is significant uptake, the exposure system or control sediment, or both, should be reevaluated for potential sources of contamination. Even if there is a significant uptake in the controls, it is still possible to compare the controls and treatments as long as the contaminant concentrations in the test tissue residues are substantially higher. However, if control values are high, the data should be discarded and the experiment conducted again after determining the source of contamination.

15.7.1 Comparisons between the 28-day control or reference, or both, tissue residues and 28-day test tissue residues determines whether statistically significant bioaccumulation exists due to exposure to test sediment. Comparisons between control and reference tissue residues at Day 28 determine whether statistically significant bioaccumulation exists due to exposure to the reference sediment. If no significant difference is detected when test tissue residues are compared with a one-tailed test using a set criterion value (for example, FDA action limit), the residues must be considered equivalent to the value even though the mean tissue residue may be numerically lower.

#### 15.8 *Additional Analyses:*

15.8.1 *Testing BAFs and BSAFs*—Statistical comparisons between ratios such as BAFs or BSAFs are difficult due to the computation of error terms. Since all variables used to compute BAFs and BSAFs have errors associated with them, it is necessary to estimate the variance as a function of these errors (137). This can be accomplished using approximation techniques such as the propagation of error (175) or a Taylor series expansion method (176). BAFs and BSAFs can then be compared using these estimates for the variance. See Ref (13) for an example of this approach.

15.8.2 *Comparing Tissue Residues of Different Compounds*—It is of interest to compare the tissue residues of different compounds in some cases. For example, Rubinstein, et al (16) compared the uptake of thirteen different PCB congeners to test for differences in bioavailability. Because the values for the different compounds are derived from the same tissue samples, they are not independent and tend to be correlated, so standard  $t$ -tests and ANOVAs are inappropriate. Rather, a repeated measures technique (repeated testing of the same individual) should be used where the individual (experimental unit) is considered as a random factor and the different compounds are considered as a second factor. See Refs (16, 45) for an example of the application of repeated measures to bioaccumulation data.

15.8.3 *Analyses for Alternative Test Designs*—Long-term exposures require a test to show that steady state has been reached. An ANOVA should be performed on the last three sample sets. Guide E1022 requires that there be no significant difference ( $p > 0.05$ ) between the means of these sample sets. If apparent steady state is reached, the mean of the samples taken during apparent steady state should be used for the steady-state concentration value. For steady state estimates based on uptake and depuration tests, see Refs (133, 134) for

details on the nonlinear parameter estimation methods required to estimate these rate constants and steady-state concentrations.

## 16. Keywords

16.1 bioavailability; freshwater invertebrates; marine invertebrates; sediment-associated contaminants; sediment bioaccumulation

## ANNEXES

### (Mandatory Information)

#### A1. ADDITIONAL METHODS FOR PREDICTING BIOACCUMULATION

A1.1 *Field Collection of Organisms*—The most direct method of assessing the tissue residues in existing sediments is by measuring the tissue residues in organisms from a potentially contaminated site and comparing these values to the tissue levels for control and reference sites. The field approach is appealing because it avoids laboratory artifacts, as well as additional time, expense, and facilities required for laboratory tests. However, the routine use of field-collected organisms has several limitations.

A1.1.1 The greatest problem is collecting sufficient tissue biomass from selected species for chemical analysis. This problem exists at the most contaminated sites because smaller species dominate both stressed communities and the early stages of recolonization (73, 74). In addition, benthic densities are reduced under severe stress (73). Even when sufficient biomass of a particular species can be collected at a given station, it will often be impossible to collect the same species from either other stations located along a pollution gradient, seasonally within a single station, or at an estuarine dredge site and an open ocean disposal site.

A1.1.1.1 An approach to collecting sufficient biomass is to composite individuals from each species at each site. Although this will increase biomass, the species composited at one station may not be present at another station. Additionally, the presence of a given species at a station may vary seasonally. These compounding factors will make it unclear whether the patterns in tissue residues are due to site differences (for example, physicochemical differences and bioavailability) or to interspecific differences in bioaccumulation (for example, population differences and metabolism). For example, if the PAH tissue residues in a bivalve composite are compared to an amphipod composite from a different site, the difference in PAH tissue residues between sites could reflect the greater ability of amphipods to metabolize PAHs (90) as opposed to a real difference in sediment bioavailability.

A1.1.2 Unknown exposure histories of field-collected specimens is an additional problem. For example, many benthic species, especially amphipods and some polychaetes, are mobile during some stages of development (for example, Refs (177-179)) and may migrate to new sites. Another source of unknown exposure is resuspension. Although contaminant

concentrations in sediments are relatively constant, resuspension events can obscure recent or historical sediment-bioaccumulation relationships. In this example, the deposition of resuspended contaminated sediment in an uncontaminated site may form a surface veneer available to surface-deposit-feeders or filter-feeders. A bulk sediment analysis may underestimate the actual exposure if this were the case. Also, field organisms may be exposed to contaminated phytoplankton and contaminants dissolved in the overlying water. If the water column contaminant concentration is important to uptake, relating tissue residues to the field sediment will generate incorrect conclusions regarding sediment bioavailability.

A1.1.3 *Sediment Parameters*—In addition to the organisms, sediment must be collected from the same site and characterized. This characterization needs to be just as extensive as that previously described for sediments used in laboratory experiments (see 10.2).

A1.1.4 With these limitations, field collections are not as well suited as laboratory experiments for routine predictions of the tissue residues resulting from sediments and contaminant discharges or for between-site comparisons. However, field collections are a powerful regulatory tool if used in the context of periodic monitoring of existing sites. When comparing changes at the same stations over time, problems with the comparison of different species are reduced, although there may still be problems with collecting sufficient biomass. Field collections also complement the laboratory studies as a QA check and by providing data on commercially important species difficult to maintain in the laboratory. In some cases, both laboratory and field assessments of tissue residues are justified by the size of a discharge or dredging operation or by a high contaminant concentration. Guidelines on sampling designs for field surveys can be found in Refs (36, 51, 52), while Ref (50) contains information on the sampling techniques.

A1.2 *Bioaccumulation Factors (BAFs)*—Several approaches have been developed for predicting benthic tissue residues directly from sediment concentrations, thereby obviating the need for field collections or bioassays. The simplest of these approaches is the BAF, which is



$$\text{BAF} = C_t/C_s \quad (\text{A1.1})$$

where:

$C_t$  = tissue concentration,  $\mu\text{g/g}$ , and  
 $C_s$  = sediment concentration,  $\mu\text{g/g}$ .

BAFs are derived empirically from either laboratory bioassays or field-collected organisms. Both tissue and sediment concentrations are preferably given in dry weight units, but the units must be reported in any case. Assuming that the BAFs were constant among species and sediments, multiplying the BAF of a compound times the sediment concentration would predict the steady-state tissue residue. However, empirically determined steady state BFAs can vary by orders of magnitude, because of variation among species in rates of metabolism and elimination of organic compounds or variation among sediments in contaminant bioavailability. BAFs are analogous to the BCFs, which are used to predict tissue residues from water concentrations:

$$\text{BCF} = C_t/C_w \quad (\text{A1.2})$$

where:

$C_w$  = concentration in water,  $\mu\text{g/mL}$ .

Although the formulas are analogous, the terms are not interchangeable, and BCFs should be limited to uptake from water.

**A1.3 Biota-Sediment Accumulation Factors (BSAFs)**—Sediment characteristics, such as total organic carbon (TOC), have a major influence on the bioavailability of nonpolar contaminants and increase the among-site variation in BAFs. The BAF variability is reduced by normalizing the sediment concentrations to the total organic carbon (TOC) content (180). Normalizing tissue residues to tissue lipid concentrations reduces the variability in contaminant concentrations among individuals of the same species and between species (for example, (181, 182)). These normalizations are combined in a simple thermodynamic-based bioaccumulation model for contaminant uptake from sediment (16, 183). The fundamental assumptions of this thermodynamic model are that the tissue concentration is controlled by the contaminant's physical partitioning between sediment carbon and tissue lipids and that the organism and the environment may approach thermodynamic equilibrium. The method assumes that lipids in different organisms and TOC in different sediments partition contaminants in similar manners. The key value in the model is the BSAF, which predicts the lipid-normalized tissue residue when multiplied by the TOC-normalized sediment contaminant concentration. However, not all contaminants bioaccumulate according to equilibrium partitioning predictions (for example, organotins and chlorophenols).

NOTE A1.1—Some previous studies such as (44, 183) reported Preference Factors, which is the inverse of the BSAF.

A1.3.1 In its simplest form, the model is as follows:

$$C_t/L = \text{BSAF} \times (C_s/\text{TOC}) \quad (\text{A1.3})$$

or

$$\text{BSAF} = (C_t/L)/(C_s/\text{TOC}) \quad (\text{A1.4})$$

where:

$L$  = concentration of lipid in organism,  $\text{g/g}$  dry weight,  
 $\text{TOC}$  = total organic carbon in sediment,  $\text{g/g}$  dry weight,  
 and  
 $\text{BSAF}$  = biota-sediment accumulation factor,  $\text{g carbon/g}$  lipid.

For sediments in which black carbon or other phases are expected to reduce bioavailability of hydrophobic organic contaminants, measured concentrations of contaminants in pore water can be used to calculate the fraction of contaminant in sediment that is available for equilibrium partitioning (184). Measured porewater concentrations ( $C_w$ ) can be used to predict lipid-normalized concentrations in organisms and the associated BSAF as:

$$\text{BSAF} = \frac{(K_l \times C_w)}{(C_s/\text{TOC})} \quad (\text{A1.5})$$

where:

$K_l$  = lipid-water partitioning coefficient

$K_l$  ( $\text{mL/g}$  lipid) can be estimated from  $0.945 \times \log K_{ow}$  (185). Although no definitive approach for incorporating the role of black carbon into the estimation of BSAFs has been established, a simplified version of the approach proposed by (186) is expressed as:

$$\text{BSAF} = \frac{K_l}{(K_{oc} + \text{BC}/\text{TOC}) \times K_{bc}} \quad (\text{A1.6})$$

$\text{BC}$  = black carbon in sediment,  $\text{g black carbon/g dry weight}$ , and

$K_{bc}$  = black carbon – water partitioning coefficient ( $\text{mL/g BC}$ ).

$K_{oc}$  and  $K_{bc}$  can be measured or taken from the literature, although measured values of  $K_{bc}$  may be more accurate since  $K_{bc}$  can vary among sites (187). TOC and BC are measured. This simplified version assumes linear sorption by the black carbon and would result in smaller BSAFs than the more complicated equation provided by (186). However, this simplified equation could be used as a first step approximation to incorporating the influence of black carbon.

A1.3.2 In theory, BSAFs should not vary with sediment type or among species. Based on the relationship between  $K_{oc}$  and lipid-normalized BCFs, the maximum BSAF for neutral organic compounds has been calculated at approximately 1.7 (188) although higher BSAFs have been reported for field collected organisms (189, 190). Measured BSAFs would be lower than this maximum if metabolism of the compound by the organism is rapid or the organism fails to reach steady-state body burdens due to limited exposure durations or kinetic limitations to accumulation (for example, steric hindrances to uptake and slow desorption from sediment particulates to interstitial water). Measured BSAFs could exceed the calculated thermodynamic maximum if there is active uptake of the contaminant in the gut or if there is an increase in the contaminant's gut fugacity, driving the contaminant from the gut into the body. The contaminant fugacity in the gut could increase as the volume of food decreases during digestion or as a result of a reduction in lipids (191).

A1.3.3 Laboratory and field validation of the thermodynamic partitioning model suggests that BSAF values do not exceed the maximum value for a large number of organic contaminants (13) and observed that BSAFs can be several orders of magnitude lower than the value of 1.7 (189). Reduced bioaccumulation of PAHs in certain organisms may be attributed to metabolism (192, 193, 194). Molluscs generally have reduced ability to metabolize PAHs in comparison to other species of aquatic invertebrates (195). For example, the recommended molluscan bioaccumulation test organism, *Macoma balthica*, has reduced ability to metabolize benzo[a]pyrene and increased bioaccumulation in comparison to the polychaete, *Nereis virens* (194). Note, however, that the ability of marine mollusks, crustaceans, and annelid species to metabolize PAHs may be highly variable among species (193, 194). Species-specific information on metabolic ability should be obtained before assessing bioaccumulation, critical body burdens, or trophic transfer of PAHs in invertebrates. Another factor that influences the bioavailability of organic contaminants is the quality of the sediment organic and the presence of phases, such as black carbon, with high affinity for certain organic contaminants. In particular, sorption of PAHs to black carbon reduces the bioaccumulation of PAHs by aquatic invertebrates (196, 197, 198, 199). Sorption of non-planar organochlorine compounds (for example, PCBs) to black carbon and bioaccumulation by invertebrates may be somewhat hindered by the bulky chlorine substitutions ((200, 201). Alternatively, BSAFs for some highly lipophilic PCB congeners can exceed the theoretical maximum of 1.7 by as much as an order-of-magnitude (16). Sediments with the lowest TOCs tend to have the highest BSAF values (13, 16, 44, 45), which is not explained by the present model.

A1.3.4 The BSAFs are also dependent on the accuracy of the lipid measurement. Some evidence suggests that the presence of black carbon may actually reduce lipid levels in exposed organisms (201). A standard lipid extraction method is needed because total lipids can vary several fold based on the extraction technique used. As discussed in 15.2.1, using the Bligh-Dyer lipid method is recommended as an interim standard method for BSAF determinations. If another lipid extraction technique is used, a conversion factor should be provided to allow the conversion of the lipid values to chloroform-methanol extraction values.

A1.3.5 Although laboratory and field evaluations of the BSAFs have shown that they are not statistically constant in all cases, BSAFs are less variable for predicting sediment uptake than BAFs (13, 16, 45). The BSAFs have great potential as a cost-effective, first-order estimate of tissue residues because of their minimal data requirements. The predicted tissue residues can then be used for determining whether bioaccumulation tests or field surveys are needed. U.S. EPA has compiled a data set of approximately 20 000 biota-sediment accumulation factors (BSAFs) from 20 locations (mostly Superfund sites) for nonionic organic chemicals ([http://www.epa.gov/med/Prods\\_Pubs/bsaf.htm](http://www.epa.gov/med/Prods_Pubs/bsaf.htm)) (202). Species in the data set include fish and benthic species. The data set is intended to be used as a tool to evaluate the reasonableness of BSAFs from other locations, or

to bound potential for bioaccumulation for locations where limited or no bioaccumulation are available.

A1.3.5.1 For these reasons, the data required to calculate BSAFs should be collected and reported in all laboratory tests and field collections.

**A1.4 Toxicokinetic Bioaccumulation Models—** Toxicokinetic bioaccumulation models are an alternative to thermodynamic-based partitioning approaches. Toxicokinetic models assume that contaminant uptake is a function of the feeding behaviors and physiological characteristics of the organism as well as the physicochemical characteristics of the contaminant and sediment. Most of these toxicokinetic models (for example, (203)) assume that the tissue residue can be predicted as the sum of the uptake from each individual phase (for example, interstitial water and ingested sediment) minus any loss due to depuration or metabolism.

A1.4.1 In its simplest form, uptake from all phases may be expressed as follows:

$$dC/dt = \sum (F_x \times CP_x \times EP_x) - MD \quad (A1.7)$$

where:

- $dC/dt$  = change in tissue residue with time,
- $F_x$  = flux of Phase  $x$  through organism, for example, ingestion rate (IR)
- $CP_x$  = concentration of contaminant in Phase  $x$ ,
- $EP_x$  = fraction of contaminant extracted from Phase  $x$  by the organism, for example, digestion or assimilation efficiency (AE or  $\alpha$ )
- $MD$  = summation of loss of contaminant through metabolism and depuration, and
- $x$  = phase ( $W$  = water,  $F$  = food, and  $S$  = sediment).

A1.4.1.1 For example, the uptake from water would be the product of the amount of water ventilated across the gills ( $FW$ ), the contaminant concentration in the water ( $CPW$ ), and the efficiency with which the contaminant is extracted from the water ( $EPW$ ). These kinds of models usually assume that uptake efficiency values do not change as body burdens approach steady-state and that loss ( $L$ ) can be modeled as a first-order process. Opposed to the thermodynamic model, the toxicokinetic model assumes the uptake from each route is independent and additive, so that an organism exposed to two uptake phases (for example, interstitial water and sediment) would have a higher steady-state tissue residue than an organism exposed to one phase.

A1.4.2 These models have been used successfully to predict the PCB, methylmercury, and kepone levels in marine and freshwater fish (203-205). This approach has been applied to benthic species to model the uptake of hexachlorobenzene by a marine clam (76, 77, 206-208). A slightly different toxicokinetic model has been used to predict the uptake of various PAHs by freshwater amphipods (46, 92, 122). Landrum used this model to determine the relative importance of interstitial water versus ingested particulates as an uptake route for these PAHs.

A1.4.3 In contrast to thermodynamic approaches, toxicokinetic models can predict tissue residues under non-steady-state conditions and can account for differences in organism feeding

or ventilatory behaviors due to toxic or natural effects (for example, growth-related changes). The models can also predict the time course of uptake and depuration. However, the approach requires relatively sophisticated laboratory experiments to measure the input parameters. This approach is not presently suited for the routine prediction of bioaccumulation

because of the extensive data needs and the ongoing process of developing the laboratory methods. The toxicokinetic models are appropriate when detailed analyses of sediment or biological effects on bioaccumulation are required and as a method to test the assumptions of various sediment assessment approaches.

## A2. DETERMINING THE NUMBER OF REPLICATES

**A2.1 Number of Replicates**—Adequate replication is essential for determining statistically significant differences between treatments with sufficient power. If there is a question that the eight replicates recommended (see 12.3) will not provide sufficient statistical power, the techniques in this annex can be used to determine the appropriate number. Determining the appropriate number of replicates requires estimates of the variability of each treatment and the minimum detectable difference. The minimum detectable difference is the smallest difference between two means, or between a mean and a constant value, that needs to be distinguishable statistically. The variability is a measure of the within-treatment variation and is expressed as a standard deviation (SD) or coefficient of variation (CV) and can be obtained from previous experiments or the literature. This information is needed because treatments with high variation will require more replication to distinguish differences between treatments than less variable ones. See **Table A2.1** for a listing of CVs for tissue residues reported for a variety of contaminants.

**A2.2 Minimum Detectable Difference**—The number of replicates required is related to the minimum detectable

difference, and detecting a two-fold increase in tissue concentrations requires many more replicates than detecting a 100-fold increase. No standards exist for an acceptable minimum detectable difference; however, it is recommended that there be sufficient replication to detect, at a minimum, two-fold differences in tissue concentrations between two treatments (12.3.1).

**A2.3 Rates for Type I and Type II errors** must be chosen. A Type I error (alpha) is the probability of rejecting the null hypothesis when no true difference exists between treatment means and is usually given a value of 0.05. A Type II error (beta) is the probability of accepting the null hypothesis when a true difference exists between treatment means. As discussed in 12.1.2.2, a beta of 0.05 is recommended. This is equivalent to a power of 0.95, where the power of a test is the probability of rejecting the null hypothesis correctly.

**A2.4** One equation that can be used to estimate the number of replicates ( $n$ ) required to detect a minimum detectable difference between two means (adapted from Ref (168)) is as follows:

$$n > 2 \times (s/d)^2 \times (t_{\alpha, \nu} + t_{2\beta, \nu})^2 \quad (\text{A2.1})$$

where:

- $n$  = sample size for each treatment,
- $s$  = standard deviation (often a pooled value of the two sample variances),
- $d$  = minimum detectable difference,
- $\nu$  = number of degrees of freedom ( $\nu = 2 \times (n - 1)$  for the comparison of two means;  $\nu = (n - 1)$  for the comparison of a mean and a constant),
- alpha = experiment-wise or comparison-wise Type I error (see Section 15). If a two-tailed test is performed, each tail will consist of alpha/2. If a one-tailed test is performed, the single tail is alpha,
- beta = Type II error (or  $1 - \text{power of test}$ ),
- $t_{\alpha, \nu}$  = critical value for alpha of Student's  $t$ -distribution with  $\nu$  degrees of freedom. (Use a two-tailed  $t$ -table for a two-tailed test and a one-tailed table for a one-tailed test),
- $t_{2\beta, \nu}$  = critical value for  $2 \times \text{beta}$  of Student's  $t$ -distribution with  $\nu$  degrees of freedom. (Use a two-tailed table. The critical value is beta if a one-tailed table is used. The critical value is the same whether the test is one- or two-tailed.)

For the comparison of one mean and a constant (for example, FDA Action Limit), the formula becomes

**TABLE A2.1 Ranges of CVs for Tissue Residues Reported for Benthic Organisms**

Contaminant	Organism	CV,%	Reference
Cadmium	<i>Modiolus demissus</i>	4–54 <sup>A</sup>	(209)
	<i>Mytilus edulis</i>	4–61 <sup>A</sup>	(209)
	<i>Mya arenaria</i>	18–22	(210)
	<i>Mulinia lateralis</i>	35–49	(210)
	<i>Callinassa australiensis</i>	5–67	(48)
Mercury	<i>Modiolus demissus</i>	5–34 <sup>A</sup>	(209)
	<i>Mytilus edulis</i>	5–53 <sup>A</sup>	(209)
Copper	<i>Neanthes arenaceodentata</i>	8–60	(211)
Zinc	<i>Nereis diversicolor</i>	42	(212)
	<i>Octolasion tyrtaeum</i>	12–30 <sup>A</sup>	(213)
	<i>Corbicula fluminea</i>	7–8 <sup>A</sup>	(213)
Kepona	<i>Crassostrea virginica</i>	8–80	(214)
PCB	<i>Octolasion tyrtaeum</i>	2–23 <sup>A</sup>	(213)
	<i>Corbicula fluminea</i>	10–74 <sup>A</sup>	(213, 215)
	<i>Nereis virens</i>	5–40	(216)
	<i>Uca</i> spp.	31–75	(217)
HCB	<i>Macoma nasuta</i>	23–33	(218)
BaP	Amphipods	4–22	(218)
	<i>Macoma inquinata</i>	4–36	(126)
	<i>Abarenicola pacifica</i>	9–24 <sup>A</sup>	(126)
Napthalene	<i>Macoma inquinata</i>	50–100 <sup>A</sup>	(219)
Phenanthrene	<i>Macoma inquinata</i>	17–56	(126)
	<i>Abarenicola pacifica</i>	10–31 <sup>A</sup>	(126)
Chrysene	<i>Macoma inquinata</i>	11–46	(126)
	<i>Abarenicola pacifica</i>	2–46 <sup>A</sup>	(126)

<sup>A</sup> Samples were composited resulting in (usually) lower CVs.

$$n > (s/d)^2 \times (t_{\alpha, \nu} + t_{2\beta, \nu})^2 \quad (\text{A2.2})$$

A2.5 An iterative approach is used to calculate  $n$  since  $t_{\alpha, \nu}$  and  $t_{2\beta, \nu}$  are dependent on  $n$  through  $\nu$ . The values for  $t_{\alpha, \nu}$ ,  $t_{2\beta, \nu}$ ,  $\alpha$ ,  $\beta$ , and  $\nu$  are either set by the investigator or found in tables. Therefore, only the SD and the minimum detectable difference must be estimated. Although a minimum detectable difference ( $d$ ) of 2 is recommended (see 12.3.1), an estimate of the SD will not be available in many cases. However, the ratio of the two ( $s/d$ ) can be described in several ways, providing different approaches to estimating these parameters. Three methods of estimating  $s/d$  and their advantages and disadvantages are as follows:

A2.5.1 *Method No. 1:*

$$(s/d) = [s/(u_1 - u_2)] \quad (\text{A2.3})$$

where:

$u_1 - u_2$  = difference between mean  $u_1$  and mean  $u_2$ , or mean  $u_1$  and a constant.

A2.5.1.1 *Advantages*—There may be cases in which an absolute difference between two numbers is of interest, as in a comparison of a measured tissue residue and a regulatory action limit.

A2.5.1.2 *Disadvantages*—It requires an estimate of the SD of the sample, a value often difficult to obtain.

A2.5.2 *Method No. 2:*

$$(s/d) = [(CV/100)/m_1] \quad (\text{A2.4})$$

where:

CV = coefficient of variation, %, and

$m_1$  = a multiplicative factor of  $u_1$  that is the minimum detectable difference between mean  $u_1$  and mean  $u_2$  (or criterion value) (for example, if  $m_1 = 5$ , the minimum detectable difference between  $u_1$  and  $u_2$  will be five times the value of  $u_1$ ).

A2.5.2.1 *Advantages*—The CV is often easier to estimate than the SD. The CVs in Table A2.1 can be used as estimates if no other information is available, although it would be prudent to consider these values as the minimum estimates of variation.

A2.5.2.2 *Disadvantages*—The value for  $m_1$  will change whether the comparisons are between control and test values or a test and a criterion value. Control values (tissue residues) will tend to be low compared to test values (tissue residues), while test values may be large and close to a criterion value (for example, FDA action limits).

A2.5.3 *Method No. 3:*

$$(s/d) = [s/(m_2 \times s)] = [1/m_2] \quad (\text{A2.5})$$

where:

$m_2$  = multiplicative factor of  $s$ .

A2.5.3.1 For example, if  $m_2 = 2$ , the minimum detectable difference is 2 SDs (that is,  $u_2$  will have to be 2 SDs from  $u_1$  to be able to detect a difference).

A2.5.3.2 *Advantages*—No estimates are required of the SD or CV.

A2.5.3.3 *Disadvantages*—The value of  $m_2$  may have to vary whether the comparisons are between control and test values or test and action limits.

A2.5.4 If a comparison between more than two means is anticipated (as in the determination of steady-state conditions), see Ref (168) for a modification of this approach or Ref (117) for tables of estimates.

### A3. ADEQUACY OF 10-DAY AND 28-DAY EXPOSURES

A3.1 Organisms should ideally be exposed to test sediments for a period sufficient to attain steady-state tissue residues. However, cost considerations often prove prohibitive to conducting tests long enough to document that steady-state has been attained. Bioaccumulation tests have historically been conducted for a preset duration as a result. Choosing a single time period is complicated by the multitude of organic contaminants and metals found in most field sediments or dredge materials, with each having differing uptake and elimination kinetics. To date, a 10-day exposure to assess “bioaccumulation potential” has been the most commonly used time period for the testing of marine sediments (primarily dredge materials) (119). Bioaccumulation potential is the potential for any uptake of a contaminant by organisms exposed to a sediment, and the basic premise was that if there was going to be bioaccumulation, it should be possible to detect it within 10

days. The original intent of the 10-day test was thus as a qualitative rather than quantitative measure. Since 1977, however, data from 10-day tests have frequently been extended beyond their original intent and used as a quantitative result.

A3.2 Because of the widespread use of the 10-day exposures, it is worth assessing their utility as both a qualitative measure of bioaccumulation potential and a quantitative method of generating data for ecological and human health risk assessments. The percent of steady-state tissue residue obtained after 10 days for several organic contaminants was used as a simple measure of accuracy (Table 4). To assess bioaccumulation potential adequately, the exposure should result in a sufficient percentage of the steady-state tissue residues to identify which sediments could be an environmental problem. Also, the percentage of the steady-state tissue residue obtained

should be relatively consistent for the same contaminant in different species. That is, the exposure should yield a strong and consistent signal. Benthic tissue residues will be used in the quantitative risk assessments to predict the amount of contaminants transported from the sediment to higher trophic levels, including man. A large error at the base of the food-web will result in errors throughout the analysis, especially as some of the errors may be multiplicative. As a preliminary measure, for data to be acceptable for quantitative risk assessment, the resulting tissue residues should be within 80 % of the steady-state tissue concentrations. An accuracy of 80 % for each trophic step results in the prediction of tissue residues being within two-fold of the actual residues for a three-step chain (that is, sediment to benthos to demersal predator to higher predator or man; or  $0.8 \times 0.8 \times 0.8 = 0.51$ ).

**A3.2.1** For organic contaminants in these studies, only 33 % of the organisms approached within 80 % of the steady-state level in 10 days (Table 4). Ten-day tissue residues averaged 56 % of the estimated steady-state value, and this average included some rapidly eliminated PAHs. Tissue residues of PCBs achieved after 10 days averaged only approximately 34 % of the steady-state values and ranged from 100 % to a low of 12 %. In contrast, 28-day tissue residues averaged 82 % of the estimated steady-state value, with 67 % of the tests within 80 % of the steady-state level (Table 4).

**A3.3 Metals**—Ten days is also likely to generate a relatively low percentage of the steady-state tissue residues for metals. For example, mercury levels in fish may not attain steady-state during the lifetime of the organism (220, 221), and the minimum time for lead to attain steady-state in *Mytilus edulis* was greater than 230 days (222). In the few studies in which 10 and 28-day values could be compared (Table 4), only 13 % attained 80 % of the steady-state value in 10-day tests, while 50 % of organisms exposed for 28 days attained this value.

**A3.4** Several conclusions are apparent based on this preliminary review. First, a 10-day exposure generates a low percentage of the steady-state tissue residues for PCBs and presumably other high  $K_{ow}$  organics and some metals. These compounds are the most likely to represent an ecological and human health risk through bioaccumulation and biomagnification. Second, the percentage of the steady-state tissue residue obtained varies several-fold even within a single compound. Third, the amount accumulated within 10 days is such a small percentage of the steady-state concentration that it may be below the detection limits of standard analytical methods or may not be significantly different from the control values. The 10-day exposure can thus result in false negatives concerning the bioaccumulation potential of a sediment. Fourth, the percentage of the steady-state tissue residues accumulated over 10 days is inadequate for a quantitative risk assessment. Finally, the 10-day exposure does not generate any additional insights into the bioaccumulation potential of neutral organics that are not generated by use of the BSAFs (see summary in Table A3.1).

**TABLE A3.1 Information Gained and Requirements of Different Approaches to Estimating Benthic Tissue Residues**

Method	Bioaccumulation Potential <sup>A</sup>	False Negative Bioaccumulation Potential <sup>B</sup>	Estimates Equilibrium Residue <sup>C</sup>	Additional Requirements
Accumulation factors	yes	no	yes?	sediment concentration, TOC, lipids
10-Day test	yes	yes	no	10 days laboratory time, tissue concentration
28-Day test	yes	no	approximate to yes	18 days additional laboratory time
Kinetic models	yes	no	yes	additional tissue concentration, additional laboratory time? development of techniques
Long-term exposures	yes	no	yes	28 to 70 days additional laboratory time, additional tissue concentration

<sup>A</sup> Bioaccumulation potential = qualitative ability to detect uptake.

<sup>B</sup> False negative bioaccumulation potential = amount accumulated is so low that it is concluded incorrectly that no uptake will occur.

<sup>C</sup> Estimates equilibrium residue = tissue residue data sufficiently accurate for use in quantitative risk assessments. Development of techniques = resources devoted to determining the correct uptake and depuration periods for specific compounds and organisms. Laboratory time = laboratory time required for biological exposure. Lipids = tissue samples analyzed for lipid content. Sediment concentration = sediment samples analyzed for contaminants. Tissue concentration = tissue samples analyzed for contaminants. TOC = sediment samples analyzed for total organic carbon (TOC).

**A3.5** A 28-day exposure is a practical compromise between cost, data accuracy, and data utility. When 28-day organic and metal contaminant levels were compared to observed or estimated steady-state levels (Table 4), steady-state tissue residues were approached (that is,  $\geq 80$  % of steady-state) in 69 % of the tests, and the mean steady-state contaminant tissue level increased to 84 % of the steady-state maximum. An average of 83 % of the PCB steady-state tissue residues was obtained after 28 days. This level of accuracy should be sufficient in nearly all cases to test for bioaccumulation potential with a reasonable level of statistical certainty. The data should be sufficiently accurate for quantitative risk analysis in most cases. In cases in which more accurate estimates are required, either a long-term exposure (12.5) or an alternative approach (Annex A1) can be used.

**A3.6** In addition to underestimating tissue residues because of insufficient duration, single-point tests can underestimate maximum tissue residues when a compound reaches a maximum value before the sampling period and then declines. For example, phenanthrene approaches its maximum tissue residue in freshwater amphipods after approximately 10 days and then declines (46). A 28-day test would generate a lower value than a 10-day test in this case. The decline is presumably the result of an increase in the metabolic degradation rate of the contaminant and should be most common with the lower molecular weight PAHs and other rapidly degraded contaminants. The ability to degrade PAHs varies among taxa (90) so different taxa may not show the same pattern. Time series samples should be taken before Day 28 if low-molecular-weight PAHs or other rapidly metabolized compounds are of interest (see 12.3.1).

**A3.7 When Steady-State Is Not Achieved**—If steady-state cannot be documented from the experimental results, the tissue residue is only an estimate of steady-state and can be a substantial underestimate of the true value for some compounds.

#### A4. ALTERNATIVE TEST DESIGNS

**A4.1 Short-Term Test**—Some compounds (for example, volatiles) may attain steady-state in less than 28 days (see [Table 4](#)), so that a 28-day exposure may not be necessary. Generally, 10-day tests should be acceptable with organic compounds that have  $\log K_{ow} < 3$  that have been dosed into sediments. Even with these compounds, a 10-day test should be used only after it has been documented to approach steady-state in phylogenetically similar species in less than 10 days or documented that the depuration rate ( $k_2$ ) in phylogenetically similar species is  $>0.5/\text{day}$ . However, when determining the bioaccumulation of contaminants from field sediments, a 28-day test should be used because nearly all field sediments contain some contaminants that are eliminated slowly and take longer to reach steady state. 10-day test may also be appropriate when the goal of the study is to estimate tissue residues in insect larvae that have larval stages shorter than 28 days (for example, *Chironomus*). Biotic and abiotic samples should be taken at Day 0 and Day 10 following the same protocol as that used for the 28-day tests. Sample on Days 0, 1, 3, 5, 7, and 10 if time-series biotic samples are desired.

**A4.2 Estimating Steady-State from Uptake Rates**—In theory, it is possible to estimate both the uptake clearance,  $k_s$ , and elimination rate constant,  $k_2$ , from the uptake phase alone if the experiment continues past the point at which the tissue residues begin to “bend over,” indicating that the elimination is sufficient to slow the net uptake. This approach obviates the need to run a separate elimination experiment, as is required in the kinetic approach (see [12.6](#)). However, since both  $k_s$  and  $k_2$  are estimated from the fitting of nonlinear mathematical models, this method can have more variance in parameter estimates than the kinetic approach, that uses independent measures of  $k_s$  and  $k_2$ . This approach nonetheless has utility when time or analytical support is limited, or if a long-term, time-series uptake test is terminated before steady-state is attained. In this design, the sampling schedule should follow closely that of the uptake phase of the kinetic approach using both uptake and depuration rates. Refer to Refs ([223](#), [224](#)) for the specifics of estimating  $k_s$  (or  $k_1$ ) and  $k_2$ . If a mathematical model is used for estimating  $k_s$  and  $k_2$  simultaneously, caution should be used to ensure that the model will account for complexities that occur with sediment exposures such as changes in the bioavailability of sediment compartments with time ([46](#)).

**A4.3 Growth Dilution**—Growth dilution, the dilution of contaminant concentrations in the tissues by the increase in tissue mass, will occur if the test organisms grow during an experiment. Taking an extreme example, if an organism doubled its weight during a depuration study, it would appear that half of the contaminants had been depurated, even if none of the contaminants were excreted from the organism. Without correction for growth, the depuration rate ( $k_2$ ) calculated from this experiment would be incorrect for an organism growing at a different rate. Many experiments have not taken growth dilution into account, which may contribute to the variation among measured depuration rates (see Ref ([225](#))).

**A4.3.1** For the larger benthic test species (for example, *Macoma*), growth dilution is usually not a problem in 28-day tests since the growth is relatively slow. However, growth dilution can cause errors in estimating uptake and depuration parameters for the kinetic approach, resulting in errors in predicting steady-state concentrations and time to steady-state.

**A4.3.2** If substantial growth occurs during experiments to determine the rate constants, the uptake rate constants will be underestimated and the depuration rate constants will be overestimated. If these erroneous constants are used in the kinetic model (([Eq 1 and 2](#)) of [12.6](#)) under no growth conditions, both steady-state tissue concentrations and time to steady-state will be underestimated. Conversely, an error occurs when correct (that is, derived under no growth) uptake and depuration rate constants are used in this kinetic model when the organisms are growing. Both the steady-state concentrations and time to steady-state will be overestimated in this case because the model does not compensate for growth dilution.

**A4.3.3** If possible, experiments should be conducted with organisms that grow very slowly or under environmental conditions that keep growth at a minimum (such as low temperatures). If growth cannot be prevented, growth dilution must be taken into consideration when a kinetic approach is used.

**A4.3.4** Assuming that growth dilution is a first-order process and that growth occurs at a constant rate, the kinetic model ([12.6](#)) becomes the following:

$$C(t) = k_s \times C_s / (k_2 + k_3) \times [1 - e^{-(k_2 + k_3) \times t}] \quad (\text{A4.1})$$

where:

- $C_t$  = concentration in the organism at time  $t$ ,  
 $C_s$  = concentration in the sediment,  
 $k_s$  = sediment uptake rate coefficient, g sediment/g tissue  $\times$  days,  
 $k_2$  = depuration rate constant, days<sup>-1</sup>,  
 $k_3$  = growth rate constant, days<sup>-1</sup>, and  
 $t$  = time, days.

A4.3.4.1 The growth rate constant ( $k_3$ ) can be measured from the weight change during the exposure experiment or during a separate growth experiment under similar environmental conditions. (Eq A4.1) assumes that the  $k_s$  and  $k_2$  values are constants and were measured under no growth conditions or, if growth occurred, that growth dilution was taken into account. If the depuration rate is measured while the organisms

are growing, the rate measured will actually be a function of growth and depuration and can be modeled as  $k_2 + k_3$ .

A4.3.4.2 Under growth conditions, and using an estimated growth constant ( $k_3$ ), the maximum tissue residue becomes the following:

$$C_{t_{\max}} = k_s \times C_s / (k_2 + k_3) \quad (\text{A4.2})$$

A4.4 Kinetic coefficients determined for specific experimental designs are conditional on both the environmental and physiological conditions of the test. The coefficients will be altered if the temperature is raised or lowered. Similarly, the coefficients will be altered by changes in the organism's physiology such as changes in reproductive status or lipid content. Generalizing results to conditions different from the test must therefore be made with caution.

## A5. CALCULATION OF TIME TO STEADY-STATE

A5.1 Having an estimate of the time to reach steady-state tissue residues is helpful when designing long-term studies and assessing the adequacy of a 28-day test. If no estimate for a contaminant in phylogenetically similar organisms is available, the time required to approach steady-state can be estimated from a linear uptake, first-order depuration model (see 12.6). Note, however that phylogenetic similarity does not insure similar rates of bioaccumulation. Nonetheless, this model can be used as an approximation for benthic invertebrates, although it was developed for fish exposed to dissolved organic contaminants (133). The uptake of organic contaminants from the dissolved phase is modeled as follows:

$$C_t(t) = k_s \times C_w / k_2 \times (1 - e^{-k_2 \times t}) \quad (\text{A5.1})$$

where:

- $C_t$  = contaminant concentration in tissue at time  $t$ ,  
 $C_w$  = dissolved contaminant concentration in water,  
 $k_s$  = sediment uptake rate coefficients, g sediment/g tissue  $\times$  days,  
 $k_2$  = depuration rate constant, days<sup>-1</sup>, and  
 $t$  = time, days.

A5.1.1 This model predicts that equilibrium would be reached only as time becomes infinite. For practical reasons, apparent steady-state is therefore defined here as 95 % of the equilibrium tissue residue. The time to reach steady-state can be estimated by the following:

$$S = \ln[1/(1.00 - 0.95)] / k_2 = 3.0 / k_2 \quad (\text{A5.2})$$

where:

$S$  = time to apparent steady-state, days.

A5.1.2 The key information is thus the depuration rate of the compound of interest in the test species or phylogenetically related species. Unfortunately, little of this data has been generated for benthic invertebrates. When no depuration rates are available, the depuration rate constant for organic com-

pounds can then be estimated from the relationship between  $K_{ow}$  and  $k_2$  for fish species (133):

$$k_2 = \text{antilog} [1.47 - 0.414 \times \log(K_{ow})] \quad (\text{A5.3})$$

A5.1.3 The relationship between  $S$  and  $k_2$  (using (Eq A5.2)) and between  $k_2$  and  $K_{ow}$  (using (Eq A5.3)) is summarized in Table A5.1. The estimated time (days) to reach 95 % of contaminant steady-state tissue residue ( $S$ ) and depuration rate constants ( $k_2$ ) is calculated from octanol-water partition coefficients using a linear uptake, first-order depuration model (133). Values of  $k_2$  are the amount depurated (the decimal fraction of tissue residue lost per day). Table A5.1 may be used to make a rough estimate of the exposure time to reach steady-state tissue residues if a depuration rate constant for the compound of interest from a phylogenetically similar species is available. The table may be used for estimating the  $S$  of organic compounds from the  $K_{ow}$  value if no depuration rate is available. Note, however that these estimates may not be useful for species that do not bioaccumulate contaminants according to the assumptions of equilibrium partitioning. In addition, since these data were developed from fish bioconcentration data, their applicability to the kinetics of uptake from sediment-associated contaminants is unknown. The portion of organics readily available for uptake may be small compared to the total sediment organic concentration (46). The  $S$  values

**TABLE A5.1 Estimated Time to Obtain 95 % of Steady-State Tissue Residue**

Log $K_{ow}$	$k_2$ (days <sup>-1</sup> )	$S$ (days)
1	0.114	0.2
2	0.44	0.5
3	0.17	1.4
4	0.0065	3.5
5	0.0025	9.2
6	0.00097	24
7	0.00037	61
8	0.00014	160
9	0.00006	410

generated by this model should therefore be considered to be minimum time periods. Also, (Eq A5.2) does not account for growth dilution (see Annex A4). To correct for growth dilution, (Eq A5.3) becomes the following:

$$S = \ln[1/(1.00 - 0.95)] / (k_2 + k_3) = 3.0 / (k_2 + k_3) \quad (\text{A5.4})$$

where:

$k_3$  = growth rate constant, days<sup>-1</sup>.

A5.1.4 Using a linear uptake, first-order depuration model to estimate the exposure time to reach steady-state body burden for metals is problematic for a number of reasons. The kinetics of uptake may be dependent on a small fraction of the total sediment metal load that is bioavailable (226). Depuration rates

may be more difficult to determine, as metals bound to proteins may have very low exchange rates (227). High exposure concentrations of some metals can lead to the induction of metal binding proteins, such as metallothionein, which detoxify metals. These metal-protein complexes within the organism have extremely low exchange rates with the environment (227). The induction of metal binding proteins may thus result in decreased depuration rate constants in organisms exposed to the most polluted sediments. Additionally, structure-activity relationships that exist for organic contaminants (for example, relationships between  $K_{ow}$  and BCFs) are not well developed for metals.

## A6. SPECIAL PURPOSE EXPOSURE CHAMBERS

A6.1 *Clambox*—This exposure chamber is designed to separate the inhalant and exhalant siphons of sediment-ingesting clams having independent siphons (see Fig. A6.1). The technique is applicable for *Macoma* spp. and other tellinids, although the two siphons are fused together to form the “neck” in most bivalves. The apparatus allows isolation and collection of the feces from the parent sediment and ventilated (pumped) water from the input supply. This permits a direct measure of short- and long-term ventilation and sediment processing rates (the  $F_x$  terms of (Eq A1.7) (141). By analyzing the contaminant content in the feces or ventilated water, the amount of contaminant extracted by the clam (the  $EP_x$  term of (Eq A1.7)) can be estimated. The chamber has been used to determine the efficiency of the uptake of dissolved hexachlorobenzene (HCB) by the gills (206), HCB uptake through the gut from ingested sediment (207), uptake from ventilated interstitial water (208), and passive sorption of HCB to the soft-tissues (228).

A6.2 *Worm Tubes*—These exposure chambers are tubes open on each end, simulating the burrow of sediment-ingesting polychaete such as *Abarenicola pacifica* and *Arenicola marina*. The worms pump water and sediment in one direction through the tubes (Fig. A6.2). As with the clamboxes, the feces can be collected and separated from the parent sediment, allowing measurement of the sediment processing rate and collection of the feces for chemical analysis. These systems have been used to study the effects of crude oil on sediment processing rates (229) and on the uptake rate of cadmium as a function of the addition of sewage carbon to sediment (230). Some versions also allow simultaneous measurement of the ventilation rate and oxygen consumption (231, 232).

A6.3 *Sediment Resuspension Systems*—This flow-through device maintains a constant suspended sediment load in the water column automatically, using an electro-optical feedback mechanism (14) that employs an airlift dosing system, a transmissometer to measure particle concentration, and a microcomputer that calculates the dose required to achieve a programmed turbidity (see Fig. A6.3) (233-235). The system has been used in several studies on the uptake and effects of contaminants from resuspended sediments using the mussel *Mytilus edulis* and the infaunal polychaete *Nephtys incisa* (234, 236, 237). A guide to conducting sediment resuspension toxicity tests is presented in Guide E1525. Additional systems for maintaining suspended sediments are given in Refs (15, 238). These chambers should be used when there is concern about bioaccumulation in obligate benthic filter-feeders (for example, *Mercenaria*, *Mya*, and *Mytilus*) or facultative filter-feeders (for example, *Macoma*) by means of resuspended sediments. This mode of exposure is important in areas in which current or wave action resuspend sediments periodically and in areas with a flocculent surface layer.


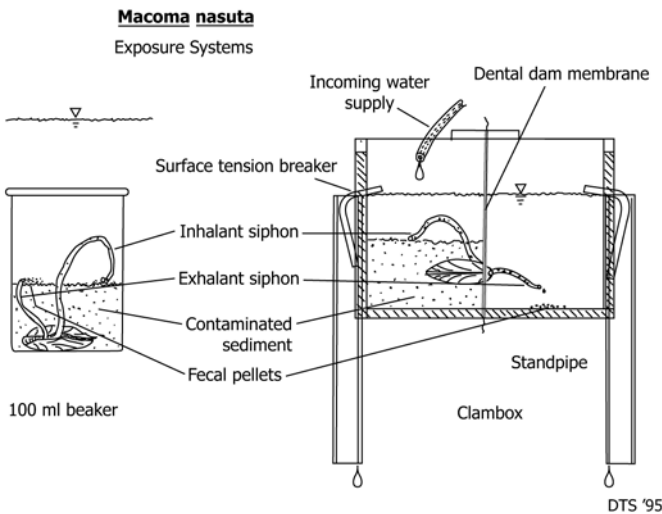


FIG. A6.1 Clam Exposure Chambers



### Wormtube Exposure Systems

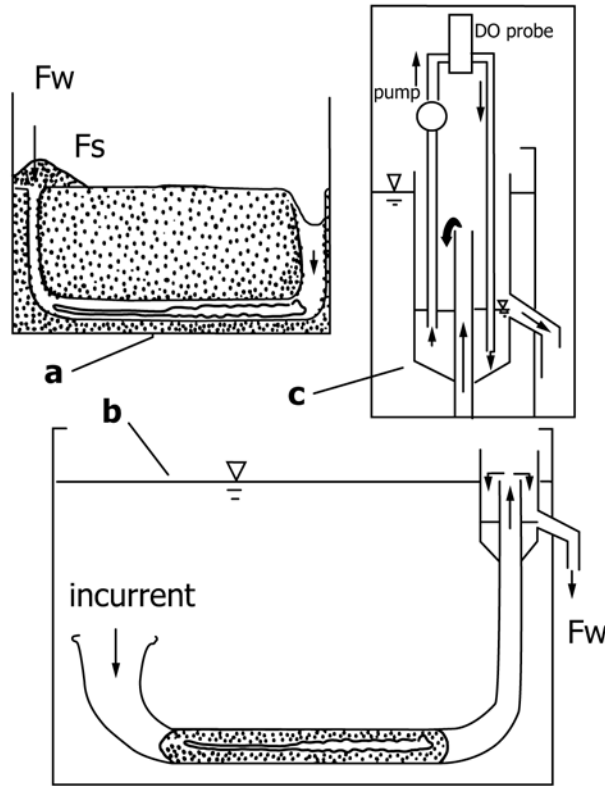

- a. Worm in sediment, 1 L glass box
- b. Worm in glass tube, 30 L aquarium
- c. Expanded view of ventilated water collection and monitoring device

FIG. A6.2 Worm Tube Exposure Chamber

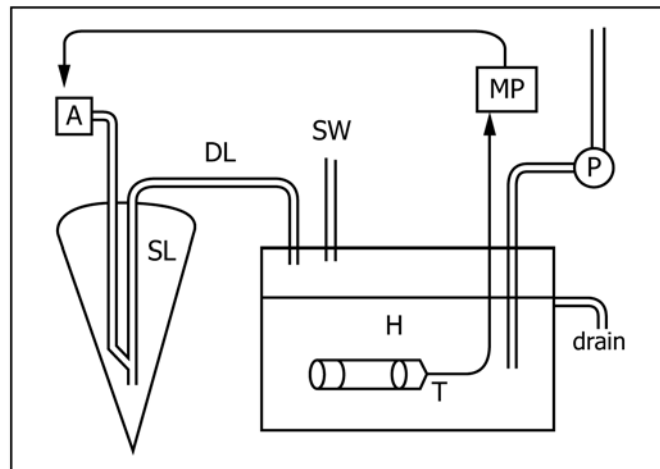


FIG. A6.3 Flow-Through Sediment Resuspension System: A = Air Lift Pump, DL = Slurry Delivery, H = Head Tank, MP = Microprocessor, P = Pump for Dose Delivery to Exposure Chambers, SL = Sediment Slurry, SW = Seawater or Freshwater Inflow, and T = Transmissometer

## A7. ADDITIONAL TECHNIQUES TO CORRECT FOR GUT SEDIMENT

A7.1 *Modifications to 24-h Purge and Dissection*—There are a number of other techniques or modifications to the standard 24-h purge in control sediment (13.4.4) that should be considered in specific cases. When it is unclear whether a species is voiding all of its gut contents within 24 h, a marker “sediment” can be added to the control sediment during the purging. Marker sediments are inert particles of a contrasting color or phosphorescence under UV radiation added to the control sediment. The observation of feces composed of these marker sediments is an indicator that the gut has been voided. Techniques for marking sediments for use as tracers are given in (239). When purging in an uncontaminated sediment, corrections must be made for both the mass dilution based on the mass of the uncontaminated material and for the enhanced elimination that occurs in the presence of ingestible material. In cases in which it is critical to not have any sediment in the gut, such as in certain studies of metals, it may be necessary to purge the organisms in clean water without sediment. It is necessary to determine whether the test species will void its gut satisfactorily in the absence of sediment before using this approach.

A7.1.1 Another approach is removing the gut sediment by dissection. Dissection avoids problems with loss of tissue contaminants during purging, but it requires the use of larger test species (for example, *Abarenicola*). Care has to be taken to minimize the loss of body fluids and to prevent contamination, especially with the metals. General instructions for minimizing contamination are available in Ref (18).

A7.2 *Calculating Contaminant Mass of Gut Sediment*—It is possible to calculate the contaminant mass associated with the gut sediment if both the mass and the contaminant concentration of gut sediment can be estimated. The contaminant concentration of the ingested sediment for selective deposit-feeders may be several fold greater than the concentration of the bulk sediment (207), so the bulk sediment concentration should not be used as an estimate of the gut sediment. Instead, the gut concentrations can be estimated from either the contaminant concentrations of the ingested sediment or the feces. Using the fecal pellet concentrations as the input parameter, the whole body tissue residue ( $C_{tw}$ , including both the tissue and gut sediment contaminants) can be expressed as follows:

$$C_{tw} = \frac{(M_s \times \text{CPSf}) + (M_t \times C_t)}{M_s + M_t} \quad (\text{A7.1})$$

where:

- $C_{tw}$  = whole body tissue concentration (tissue and gut sediment),  $\mu\text{g/g}$ ,
- $M_s$  = mass of gut sediment, g,
- CPSf = contaminant concentration in feces,  $\mu\text{g/g}$ ,
- $M_t$  = mass of tissue, g, and
- $C_t$  = tissue concentration without gut sediment,  $\mu\text{g/g}$ .

A7.2.1 Expressed on a tissue residue-only basis (that is, no gut sediment), the formula becomes

$$C_t = \frac{C_{tw} \times (M_s \times M_t) - (\text{CPSf} \times M_s)}{M_t} \quad (\text{A7.2})$$

A7.2.2 If the ingested contaminant concentration (CPSi) is used, the formula is the same except that CPSi is substituted for CPSf. Use of the fecal pellet contaminant concentration underestimates the average gut contaminant content because some of the contaminants are extracted from the sediment before defecation. Ingested sediment conversely overestimates the average gut contaminant content because some of the contaminants have been extracted. These errors are not expected to be large, but both methods could be calculated and the results averaged for the most accurate estimate. Fecal pellets can be collected for chemical analysis by using special exposure chambers such as the clambox with *Macoma* or worm tubes with polychaetes (see Annex A6). A method for estimating ingested dose is given in Ref (207).

A7.3 *Use of Conservative Trace Elements*—Using the concentration of a conservative, non-biologically active element as a means to determine sediment mass in the gut (240) is another approach to correcting for gut sediment. Knowing the sediment contaminant concentration, it is theoretically possible to calculate the amount of contaminant associated with the gut sediment. Some of the conservative elements common in minerals but not typically found in more than trace amounts in tissues include silicon, aluminum, and iron (240). The difficulty with this approach is that the elemental content of gut sediment in selective deposit-feeders may differ from that of the bulk sediment, especially if the organism ingests organic rather than mineral particles selectively. Additionally, this method will underestimate the gut contaminant mass unless the CPSi is used rather than the bulk sediment concentration.

## A8. BIOACCUMULATION TESTING WITH *LUMBRICULUS VARIEGATUS*

A8.1 General guidance for conducting 28-day bioaccumulation tests with the oligochaete *Lumbriculus variegatus* is described in this Annex. Overlying water is renewed daily, and test organisms are not fed during the bioaccumulation tests. Methods are described for determining the bioaccumulation kinetics of different classes of compounds during 28-day exposures with *L. variegatus*.

A8.1.1 *Lumbriculus variegatus* is one of the best developed organisms for testing bioaccumulation in freshwater systems (Table 3 and Table A8.1). It meets most of the criteria of an ideal test organism listed in the main guide except for size, but sufficient biomass can be obtained for bioaccumulation testing since this species can be cultured in large numbers. *Lumbriculus variegatus* in sediment exposures attains steady state rapidly (33, 142) and does not biotransform polycyclic aromatic hydrocarbons (132). Furthermore, *L. variegatus* bioaccumulation has been compared with field populations and was found to yield very similar bioaccumulation (108, 109, 241).

A8.1.2 *Lumbriculus variegatus* inhabit a variety of sediment types throughout the United States and Europe (242-246). *Lumbriculus variegatus* typically tunnel in the upper aerobic zone of sediments of reservoirs, rivers, lakes, ponds, and marshes. When not tunneling, they bury their anterior portion in sediment and undulate their posterior portion in overlying water for respiratory exchange.

A8.1.2.1 Adults of *L. variegatus* can reach a length of 40 to 90 mm, diameter of 1.0 to 1.5 mm, and wet weight of 5 to 12 mg (86, 109, 247). Smaller organisms are also available. The lipid content is about 1.0 % (wet weight (248)). *Lumbriculus variegatus* reproduce asexually most commonly, although sexual reproduction has been reported (243). Newly hatched worms have not been observed in cultures (86, 109, 249). Cultures consist of adults of various sizes. Populations of laboratory cultures double (number of organisms) every 10 to 14 days at 20°C (86).

A8.1.2.2 *Lumbriculus variegatus* tolerate a wide range of substrates. Ankley, et al (250) evaluated the effects of natural sediment physicochemical characteristics on the results of 10-day laboratory toxicity tests with *Hyalella azteca*, *Chironomus tentans*, and *L. variegatus*. Tests were conducted with and without the addition of exogenous food. The survival of organisms was decreased in tests without added food. The physicochemical sediment characteristics, including grain size and TOC, were not correlated significantly to reproduction or growth of *L. variegatus* in either fed or unfed tests.

A8.1.3 Concentrations of total PCBs in laboratory-exposed *L. variegatus* were similar to concentrations measured in field-collected oligochaetes from the same sites (108). PCB homolog patterns also were similar to between laboratory-exposed and field-collected oligochaetes. The more highly chlorinated PCBs tend to have greater accumulation in the field-collected organisms. In contrast, total PCBs in laboratory-exposed (*Pimephales promelas*) and field-collected (*Ictalurus melas*) fish revealed poor agreement in bioaccumulation relative to sediment concentrations at the same sites.

A8.1.4 Chemical concentrations measured in *L. variegatus* after 28-day exposures to sediment in the laboratory were compared to chemical concentrations in field-collected oligochaetes from 13 pools of the upper Mississippi River where these sediments were collected (241). Chemical concentrations were relatively low in sediment and tissue concentrations from the pools evaluated. Only polycyclic aromatic hydrocarbons (PAHs) and total PCBs were frequently measured above detection limits. A positive correlation was observed between lipid-normalized concentrations of PAHs detected in laboratory-exposed *L. variegatus* and field-collected oligochaetes across all sampling locations. Rank correlations for concentrations of individual compounds between laboratory-exposed and field-collected oligochaetes were strongest for benzo(e)pyrene, perylene, benzo(b,k)fluoranthene, and pyrene (Spearman rank correlations > 0.69). About 90 % of the paired PAH concentrations in laboratory-exposed and field-collected oligochaetes were within a factor of three of one another indicating laboratory results could be extrapolated to the field with reasonable certainty.

### A8.2 Culturing Procedures for *Lumbriculus variegatus*:

A8.2.1 The culturing procedures described are based on methods described in Refs (86, 109, 70, 251). The bioaccumulation tests are started with adult organisms.

**TABLE A8.1 Summary of Testing Procedures Used to Conduct Whole-Sediment Bioaccumulation Tests with *Lumbriculus variegatus***

Condition	Reference				
	(86)	(33)	(109)	(242)	(70)
Temperature, °C	20	23	23	20	23
Light intensity (foot-candles)	NR <sup>A</sup>	NR	25–50	NR	50–100
Photoperiod	NR	various	16–8	NR	16–8
Test chamber, L	3–5	0.15–0.6	4	3–3.8	4–6
Sediment volume, L	1.5–2	30–180 g	1	0.3–0.35	1 L or more
Overlying water volume, L	1.5–3	0.1–0.45	3	2.7–3	1 L or more
Renewal rate of overlying water (additions/day)	2–6	0.5–1	1	0	2
Age of organisms	adult	adult	adult	adult	adult
Loading (g/chamber)	1	1:50 <sup>B</sup>	1	0.1–0.39/L	1
Number of replicate chambers/treatment	NR	3–4	3–5	3	5
Food	none	none	none	yes	none
Aeration	none	yes	yes	yes	none
Overlying water	natural/reconstituted	natural	natural	natural	natural/reconstituted
Test duration (day)	10–60	10–60	56	28–44	10–28
Test acceptability	NR	biomass lipid	biomass	NR	biomass

<sup>A</sup> NR = not reported.

<sup>B</sup> 1:50 g dry weight organism:sediment organic carbon.

A8.2.2 *Lumbriculus variegatus* are generally cultured with daily renewal of water (57 to 80-L aquaria containing 45 to 50 L of water). Phipps, et al (86) recommend starting a new culture with 500 to 1000 worms.

A8.2.3 Paper towels can be used as a substrate for culturing *L. variegatus* (86). Substrate is prepared by cutting unbleached brown paper towels into strips, either with a paper shredder or with a scissors. Cut toweling is packed loosely into a blender with culture water and blended for a few seconds. Small pieces should be available to the organisms. Blending too long will result in a fine pulp that will not settle in the culture tanks. Blended towels then can be added directly to the culture tanks eliminating any conditioning period for the substrate. The paper towel substrate should be renewed with conditioned towels when thin or bare areas appear in the cultures. The substrate in the chamber will generally last for about two months.

A8.2.4 Oligochaetes probably obtain nourishment from ingesting the organic matter in the substrate (252). *Lumbriculus variegatus* in each culture chamber are fed a 10-mL suspension of 6 g of trout starter three times per week. The particles will disperse on the surface film temporarily, break through the surface tension, and settle out over the substrate. Laboratories using static systems should develop lower feeding rates specific to their systems. Food or substrate used to culture oligochaetes should be analyzed for compounds to be evaluated in the bioaccumulation tests. Recent studies in other laboratories, for example, have indicated elevated concentrations of PCBs in substrate or food used in culturing of oligochaetes (70).

A8.2.5 Oligochaetes can be isolated on the day before the start of a test by transferring substrate from the cultures into a beaker using a fine mesh net. Additional organisms can be

removed using a glass pipette (20-cm long, 5-mm inside diameter (ID); (86)). Water can be trickled slowly into the beaker. The oligochaetes will form a mass, and most of the remaining substrate will be flushed from the beaker (109). Organisms can be placed in glass or stainless steel pans on the day the test is started. A gentle stream of water from the pipette can be used to spread out clusters of oligochaetes. The remaining substrate can be siphoned from the pan by allowing the worms to reform in a cluster on the bottom of the pan. For bioaccumulation tests, aliquots of worms to be added to each test chamber can be transferred using a blunt dissecting needle or dental pick. Excess water can be removed during transfer by touching the mass of oligochaetes to the edge of the pan. The mass of oligochaetes is then placed in a tared weigh boat, weighed quickly, and introduced immediately into the appropriate test chamber. Organisms should not be blotted with a paper towel to remove excess water. Brunson et al. (241) recommended adding about 1.33× of the target stocking weight. This additional 33 % should account for the excess weight from water in the sample of nonblotted oligochaetes at the start of the test (see A8.4.4.1).

A8.2.6 The culture population generally doubles (the number of organisms) in about 10 to 14 days. See Table A8.2, Section B for additional details on procedures for evaluating the health of the cultures.

### A8.3 Guidance for Conducting a 28-Day Sediment Bioaccumulation Test with *Lumbriculus variegatus*:

A8.3.1 Recommended conditions for conducting a 28-day sediment bioaccumulation test with *L. variegatus* are summarized in Table A8.3. A general activity schedule is outlined in Table A8.4. Decisions concerning the various aspects of experimental design, such as the number of treatments, number

**TABLE A8.2 Test Acceptability Requirements for a 28-Day Sediment Bioaccumulation Test with *Lumbriculus variegatus***

(A)	It is recommended for conducting a 28-day test with <i>L. variegatus</i> that the following performance criteria are met:
(1)	Numbers of <i>L. variegatus</i> in a 4-day toxicity screening test should not be reduced significantly in the test sediment relative to the control sediment.
(2)	Test organisms should burrow into test sediment. Avoidance of the test sediment by <i>L. variegatus</i> may decrease bioaccumulation.
(3)	The hardness, alkalinity, pH, and ammonia of overlying water within a treatment typically should not vary by more than 50 % during the test and dissolved oxygen should be maintained above 2.5 mg/L in the overlying water.
(B)	Performance-based criteria for culturing <i>L. variegatus</i> include the following:
(1)	It may be desirable for laboratories to perform periodic 96-h water-only reference toxicity tests to assess the sensitivity of culture organisms (see Test Method E1706). Data from these reference toxicity tests could be used to assess genetic strain or life-stage sensitivity of test organisms to select chemicals.
(2)	Laboratories should monitor the frequency with which the population is doubling in the culture (the number of organisms) and record this information using control charts (the doubling rate would need to be estimated on a subset of animals from a mass culture). Records also should be kept on the frequency of restarting cultures. If static cultures are used, it may be desirable to measure water quality more frequently.
(3)	Food used to culture organisms should be analyzed before the start of a test for compounds to be evaluated in the bioaccumulation test.
(4)	Laboratories should record the following water quality characteristics of the cultures at least quarterly and the day before the start of a sediment test: pH, hardness, alkalinity, and ammonia. Dissolved oxygen in the cultures should be measured weekly. Temperatures of the cultures should be recorded daily.
(5)	Laboratories should characterize and monitor the background contamination and nutrient quality of food if problems are observed in culturing or testing organisms.
(6)	Physiological measurements such as lipid content might provide useful information regarding the health of the cultures.
(C)	Additional requirements:
(1)	All organisms in a test must be from the same source.
(2)	Storage of sediment collected from the field should follow guidance outlined in 10.7.
(3)	All test chambers (and compartments) should be identical and should contain the same amount of sediment and overlying water.
(4)	Negative-control sediment or appropriate solvent controls, must be included in a test. The concentration of solvent used must not affect test organisms adversely.
(5)	Culture and test temperatures must be the same. Acclimation of test organisms to the test water is not required.
(6)	The daily mean test temperature must be within $\pm 1^{\circ}\text{C}$ of the desired temperature. The instantaneous temperature must always be within $\pm 3^{\circ}\text{C}$ of the desired temperature.
(7)	Natural physicochemical characteristics of test sediment collected from the field should be within the tolerance limits of the test organisms.

**TABLE A8.3 Recommended Test Conditions for Conducting a 28-Day Sediment Bioaccumulation Test with *Lumbriculus variegatus***

Parameter	Conditions
(1) Test type	whole-sediment bioaccumulation test with renewal of overlying water
(2) Temperature	23°C
(3) Light quality	wide-spectrum fluorescent lights
(4) Illuminance	about 100 to 1000 lx
(5) Photoperiod	16L:8D
(6) Test chamber	4 to 6-L aquaria with stainless steel screens or glass standpipes
(7) Sediment volume	1 L or more depending on TOC
(8) Overlying water volume	1 L or more depending on TOC
(9) Renewal of overlying water	2 volume additions/day; continuous or intermittent (for example, one volume addition every 12 h)
(10) Age of test organisms	adults
(11) Loading of organisms in chamber	Ratio of TOC in sediment to organism dry weight should be no less than about 50:1; minimum of 1 g/replicate; preferably 5 g/replicate
(12) Number of replicate chambers/treatment	Depends on the objective of the test. Five replicates are recommended for routine testing.
(13) Feeding	none
(14) Aeration	None, unless dissolved oxygen in overlying water drops below 2.5 mg/L.
(15) Overlying water	culture water, well water, surface water, site water, or reconstituted water
(16) Test chamber cleaning	If screens become clogged during the test, gently brush the <i>outside</i> of the screen.
(17) Overlying water quality	hardness, alkalinity, conductivity, pH, and ammonia at the beginning and end of a test temperature and dissolved oxygen daily
(18) Test duration	28 days
(19) Endpoint	bioaccumulation
(20) Test acceptability	performance-based criteria specifications outlined in <a href="#">Table A8.2</a>

**TABLE A8.4 General Activity Schedule for Conducting a 28-Day Sediment Bioaccumulation Test with *Lumbriculus variegatus***

(A) Conducting a 4-Day Toxicity Screening Test (Conducted Before the 28-Day Bioaccumulation Test)	
Day	Activity
-1	Isolate worms for conducting toxicity screening test. Add sediment into each test chamber, place chambers into exposure system, and start renewing overlying water.
0	Measure total water quality (pH, temperature, dissolved oxygen, hardness, alkalinity, conductivity, and ammonia). Measure the weight of a subset of 20 organisms used to start the test. Transfer 10 worms into each test chamber. Observe the behavior of test organisms.
1-2	Measure temperature and dissolved oxygen. Observe the behavior of test organisms.
3	Same as Day 1. Measure total water quality.
4	Measure temperature and dissolved oxygen. End the test by collecting the oligochaetes with a sieve and determine the weight of survivors. Bioaccumulation tests should not be conducted with <i>L. variegatus</i> if a test sediment significantly reduces the number of oligochaetes relative to the control sediment or if oligochaetes avoid the sediment.
(B) Conducting a 28-Day Bioaccumulation Test	
Day	Activity
-1	Isolate worms for conducting bioaccumulation test. Add sediment into each test chamber, place chambers into exposure system, and start renewing overlying water.
0	Measure total water quality (pH, temperature, dissolved oxygen, hardness, alkalinity, conductivity, and ammonia). Sample a subset of worms used to start the test for residue analyses. Transfer appropriate amount of worms (based on weight) into each test chamber. Observe the behavior of test organisms.
1	Measure temperature and dissolved oxygen. Observe the behavior of test organisms.
2-6	Same as Day 1
7	Same as Day 1. Measure total water quality.
8-13	Same as Day 1
14	Same as Day 7
15-20	Same as Day 1
21	Same as Day 7
22-26	Same as Day 1
27	Same as Day 1. Measure total water quality.
28	Measure temperature and dissolved oxygen. End the uptake by collecting the worms with a sieve. Separate any indigenous organisms from <i>L. variegatus</i> . Determine the weight of survivors. Eliminate the gut contents of surviving worms in water for 6 to 8 h. Longer purging periods (not to exceed 24 h) may be used if all target analytes have Log $K_{ow}$ >5 (see <a href="#">A8.4.7.3</a> ).

of test chambers per treatment, and water quality characteristics should be based on the purpose of the test and methods of data analysis. The number of replicates and concentrations tested depends partly on the significance level selected and type of statistical analysis. The sensitivity of a test increases as the number of replicates increases when variability remains constant. Additional research is needed on the standardization of bioaccumulation procedures with sediment; therefore, [A8.3.2](#) describes general guidance for conducting a 28-day

sediment bioaccumulation test with *L. variegatus*. Methods outlined in USEPA (70) were used for developing this general guidance. Results of tests using procedures different from the procedures described in [A8.3.2](#) may not be comparable, and these different procedures may alter bioavailability. Comparison of results obtained using modified versions of these procedures might provide useful information concerning new concepts and procedures for conducting sediment tests with aquatic organisms. If tests are conducted with procedures

different from the procedures described in this standard, additional tests are required to determine comparability of results.

A8.3.2 The recommended 28-day sediment bioaccumulation test with *L. variegatus* can be conducted with adult oligochaetes at 23°C with a 16L:8D photoperiod at an illuminance of about 100 to 1000 lx. However, if smaller animals are used, methods for selection of smaller individuals are included in (89). While a specific light regimen has been suggested, no specific tests on light requirements for bioaccumulation testing have been performed to date. Test chambers are 4 to 6-L that contain 1 to 2 L of sediment and 1 to 4 L of overlying water. The number of replicates per treatment depends on the objective of the test. Five replicates are recommended for routine testing. To minimize the depletion of sediment contaminants, the ratio of total organic carbon (TOC) in sediment to dry weight of organisms should be no less than about 50:1 (33). A minimum of 1 g/replicate with up to 5 g/replicate should be tested. Oligochaetes are not fed during the test. Each chamber receives 2 volume additions per day of overlying water. Benoit, et al (253) and Zumwalt, et al (11), and Brunson et al.(241) describe water-renewal systems that can be used with minor modifications to deliver overlying water. Overlying water can be culture water, well water, surface water, site water, or reconstituted water. For site-specific evaluations, the characteristics of the overlying water should be as similar as possible to the site at which the sediment is collected. The requirements for test acceptability are outlined in Table A8.2.

A8.3.2.1 If there is concern that the test samples may exhibit overt toxicity, and hence reduced bioaccumulation, a 4-day toxicity screening test can be conducted before starting a 28-day sediment bioaccumulation test with *L. variegatus* (Table A8.5, (99)). The preliminary toxicity screening test is conducted at 23°C with a 16L:8D photoperiod at an illuminance of about 100 to 1000 lx. The test chambers are 300-mL high-form lipless beakers containing 100 mL of sediment and

175 mL of overlying water. Ten adult oligochaetes per replicate are used to start a test. Four replicates are recommended for routine screening tests. Oligochaetes are not fed during the test. Each chamber receives 2 volume additions per day of overlying water. Benoit, et al (253) and Zumwalt, et al (11) and Brunson et al. (241) describe water-renewal systems that can be used to deliver overlying water. Overlying water should be similar to the water to be used in the bioaccumulation test. Endpoints monitored at the end of a toxicity test are number of organisms and behavior. Numbers of *L. variegatus* in the toxicity screening test should not be reduced significantly in the test sediment relative to the control sediment. The test organisms should burrow into test sediment. Avoidance of the test sediment by *L. variegatus* may decrease bioaccumulation.

#### A8.4 General Procedures:

A8.4.1 *Sediment into Test Chambers*—The day before the sediment test is started (Day – 1), each sediment should be mixed thoroughly and added to the test chambers. The sediment should be inspected visually to judge the extent of homogeneity. Excess water on the surface of the sediment can indicate separation of solid and liquid components. If a quantitative measure of homogeneity is required, replicate subsamples should be taken from the sediment batch and analyzed for characteristics such as TOC, chemical concentrations, or particle size.

A8.4.1.1 Each test chamber should contain the same amount of sediment, determined either by volume or by weight. Overlying water is added to the chambers in a manner that minimizes the suspension of sediment. This can be accomplished by pouring water along the sides of the chambers gently or by pouring water onto a baffle (for example, a circular piece of PTFE with a handle attached) placed above the sediment to dissipate the force of the water. Renewal of overlying water is started on Day – 1. A test begins when the organisms are added to the test chambers (Day 0).

**TABLE A8.5 Recommended Test Conditions for Conducting a Preliminary 4-Day Sediment Toxicity Screening Test with *Lumbriculus variegatus***

Parameter	Conditions
(1) Test type	4-day whole-sediment toxicity test with renewal of overlying water
(2) Temperature	23°C
(3) Light quality	wide-spectrum fluorescent lights
(4) Illuminance	about 100 to 1000 lx
(5) Photoperiod	16L:8D
(6) Test chamber	300-mL high-form lipless beaker
(7) Sediment volume	100 mL
(8) Overlying water volume	175 mL
(9) Renewal of overlying water	2 volume additions/day; continuous or intermittent (for example, one volume addition every 12 h)
(10) Age of test organisms	adults
(11) Number of organisms/chamber	10
(12) Number of replicate chambers/treatment	4 min
(13) Feeding	none
(14) Aeration	none, unless dissolved oxygen in overlying water drops below 2.5 mg/L
(15) Overlying water	culture water, well water, surface water, site water, or reconstituted water
(16) Test chamber cleaning	If screens become clogged during the test, gently brush the <i>outside</i> of the screen.
(17) Overlying water quality	hardness, alkalinity, conductivity, pH, and ammonia at the beginning and end of a test; temperature and dissolved oxygen daily
(18) Test duration	4 days (minimum; up to 10 days)
(19) Endpoints	Number of organisms and behavior; there should be no significant reduction in number of organisms in a test sediment relative to the control
(20) Test acceptability	performance-based criteria specifications outlined in Table A8.2

**A8.4.2 Renewal of Overlying Water**—Renewal of overlying water is recommended during a test. Flow rates through any two test chambers should not differ by more than 10 % at any particular time during the test. Mount and Brungs (9) diluters have been modified for sediment testing, and other automated water delivery systems have also been used (10, 11, 40, 253, 254). The water-delivery system should be calibrated before a test is started to verify that the system is functioning properly. Renewal of overlying water is started on Day – 1 before the addition of test organisms on Day 0.

**A8.4.2.1** In water-renewal tests with one to four volume additions of overlying water/day, water quality characteristics generally remain similar to the in-flowing water (40, 248); however, in static tests, water quality may change profoundly during the exposure (255). For example, in static whole-sediment tests, the alkalinity, hardness, and conductivity of overlying water more than doubled in several treatments during a four-week exposure (40). Additionally, concentrations of metabolic products (for example, ammonia) may also increase during static exposures, and these compounds can be either directly toxic to the test organisms or may contribute to the toxicity of the contaminants in the sediment. Furthermore, changes in water quality characteristics such as hardness may influence the toxicity of many inorganic (256) and organic (257) contaminants. Although contaminant concentrations are reduced in the overlying water in water-renewal tests, organisms in direct contact with sediment generally receive a substantial proportion of a contaminant dose directly from either the whole sediment or the interstitial water.

**A8.4.3 Acclimation**—Test organisms should be cultured and tested at the same temperature. The test organisms should ideally be cultured in the same water that will be used in testing. However, acclimation of test organisms to the test water is not required. If the test organisms are to be acclimated, they could be held for 2 h in a 50 to 50 mixture of culture water to overlying water and then for 2 h in a 25 to 75 mixture of culture water to overlying water, followed by a transfer into 100 % overlying water for 2 h (40).

**A8.4.4 Placing Test Organisms in Test Chambers**—Paragraph A8.2.5 describes a procedure for isolating oligochaetes for starting a test. At the start of the test, a subset of *L. variegatus* should be sampled to determine the starting concentrations of chemicals of concern. Mean group weights should be measured on a subset of at least 100 organisms used to start the test. The ratio of TOC in sediment to dry weight of organisms at the start of the test should be no less than about 50:1.

**A8.4.4.1** Oligochaetes added to each replicate should not be blotted to remove excess water. Brunson et al. (241) recommend adding about 1.33× of the target stocking weight. This additional 33 % should account for the excess weight from water in the sample of non-blotted oligochaetes at the start of the test.

**A8.4.5 Monitoring a Test**—All chambers should be checked daily and observations made to assess test organism behaviors such as sediment avoidance. However, monitoring effects on the burrowing activity of test organisms may be difficult

because the test organisms are often not visible during the exposure. The operation of the exposure system should be monitored daily.

**A8.4.5.1 Measurement of Overlying Water Quality Characteristics**—Conductivity, hardness, pH, alkalinity, and ammonia should be measured in all treatments at the beginning and end of a test. Overlying water should be sampled just before water renewal from about 1 to 2 cm above the sediment surface using a pipette. It may be necessary to composite water samples from individual replicates. The pipette should be checked to ensure that no organisms are removed during the sampling of overlying water. The hardness, alkalinity, conductivity, and ammonia of overlying water within a treatment should not vary by more than 50 % during a test.

(1) Dissolved oxygen should be measured daily and should be above 2.5 mg/L (Guide E729). If a probe is used to measure dissolved oxygen in the overlying water, it should be inspected thoroughly between samples to ensure that the organisms are not attached and should be rinsed between samples to minimize cross contamination. Aeration can be used to maintain dissolved oxygen in the overlying water above 2.5 mg/L, that is, about one bubble/s in the overlying water. Dissolved oxygen and pH can be measured directly in the overlying water with a probe.

(2) Temperature should be measured at least daily in at least one test chamber from each treatment. The temperature of the water bath or exposure chamber should be monitored continuously. The daily mean test temperature must be within  $\pm 1^\circ\text{C}$  of the desired temperature. The instantaneous temperature must always be within  $\pm 3^\circ\text{C}$  of the desired temperature.

**A8.4.6 Feeding**—*Lumbriculus variegatus* should not be fed during a bioaccumulation test.

**A8.4.7 Ending a Test**—Care should be taken to isolate at least the minimum amount of tissue mass from each replicate chamber needed for analytical chemistry.

**A8.4.7.1** Sediment at the end of the test can be sieved through a fine-meshed screen sufficiently small to retain the oligochaetes (for example, U.S. Standard Sieve 40 (425- $\mu\text{m}$  mesh) or 60 (250- $\mu\text{m}$  mesh)). Samples from freshwater or wetland environments can have a large amount of vegetative material (for example, live or decaying root fibers). If tests are started with sediments “as received” (without pre-test sieving) retrieving the organisms by sieving at the end of the test may be very time consuming and may result in reduced biomass at the end of the test. The sieved material should be transferred rapidly to a shallow pan to keep the oligochaetes from moving through the screen. Immobile organisms should be considered dead.

**A8.4.7.2** The sediment contribution to the body weight of *Lumbriculus variegatus* is reported to be about 20 % of the wet weight and the contribution to chemical concentrations ranges from 0 to 11 % in two laboratory studies (33, 142). Analyses by Mount et al. (71) suggest that under certain conditions substantially larger errors may occur if gut contents are included in samples for tissue analysis. Accordingly, after separating the organisms from the sediment, test animals are held in clean water to allow the worms to purge their guts of sediment. To initiate gut purging, live oligochaetes are transferred from the

sieved material to a 1-L beaker containing overlying water only. Oligochaetes should not be placed in clean sediment to eliminate gut contents. Clean sediment can add to the dry weight of the oligochaetes, which would result in a dilution of chemical concentrations on a dry weight basis. Further, purging in clean sediment is thought to accelerate depuration of chemical from tissues (33). The elimination beakers may need to be aerated to maintain dissolved oxygen above 2.5 mg/L.

A8.4.7.3 The previous version of this guide (E1688–97a) specified a 24-h holding period for gut purging, based on the findings of Call et al. (247) who reported that *L. variegatus* clear more than 90 % of their gut contents in 24 h. Kukkonen and Landrum (142) reported *L. variegatus* will purge out the intestinal contents in 10 h in water, and more recently, Mount et al. (71) found that gut purging of *L. variegatus* was essentially complete in only 6 h. Shorter purging periods may be preferable to reduce depuration of chemical from tissue during holding in clean water, particularly for compounds with  $\log K_{ow} < 5$  (see Fig. A8.1). Mount et al. (71) estimated that after a 6-h purging period, compounds with  $\log K_{ow} > 3.85$  would remain at >90 % of their initial concentrations, but after 24 h, only compounds with  $\log K_{ow} > 5$  would be at >90 % of the initial concentration in tissue. For this reason, it is recommended that the purging period last 6 to 8 h. Longer purging periods (not to exceed 24 h) may be used if all target analytes have  $\log K_{ow} > 5$ .

A8.4.7.4 Field-collected sediments may include indigenous oligochaetes. The behavior and appearance of indigenous oligochaetes is usually different from *L. variegatus*. It may be desirable to test extra chambers without the addition of *L.*

*variegatus* to check for the presence of indigenous oligochaetes in field-collected sediment (86). Dwyer, et al (109) evaluated the bioaccumulation of chemicals by indigenous oligochaetes that were exposed in the same chamber with introduced *L. variegatus* in a 28-day test. The peak concentrations of select PAHs and DDT were similar in the indigenous oligochaetes and *L. variegatus* exposed in the same chamber for 28 days.

A8.4.8 Test Data—Sensitivity of tissue analyses is dependent largely on the mass of tissue available and the sensitivity of the analytical procedure. To obtain meaningful results from bioaccumulation tests, it is essential that desired detection limits be established before testing, and that the test design allow for sufficient tissue mass. Tissue masses required for various analyses at selected lower limits of detection are listed in Table A8.6. Detection limits for individual PAHs in tissue are listed in Table A8.7. For most chemicals, a minimum mass of 1 g/replicate (wet weight) and preferably 5 g/replicate (wet weight) should be tested. Again, however, to insure results will be meaningful, required masses for analytes of interest to the study should be evaluated specifically before the study is designed.

A8.4.8.1 If an estimate of dry weight is needed, a subsample should be dried to a constant weight at approximately 60 to 90°C. The sample is brought to room temperature in a desiccator and weighed to the nearest 0.01 mg. *Lumbriculus variegatus* typically contain approximately 1 % lipid (dry weight). It may be desirable to determine ash-free dry weight (AFDW) of oligochaetes instead of dry weight. Measurement of AFDW is recommended over dry weight for *C. tentans* due

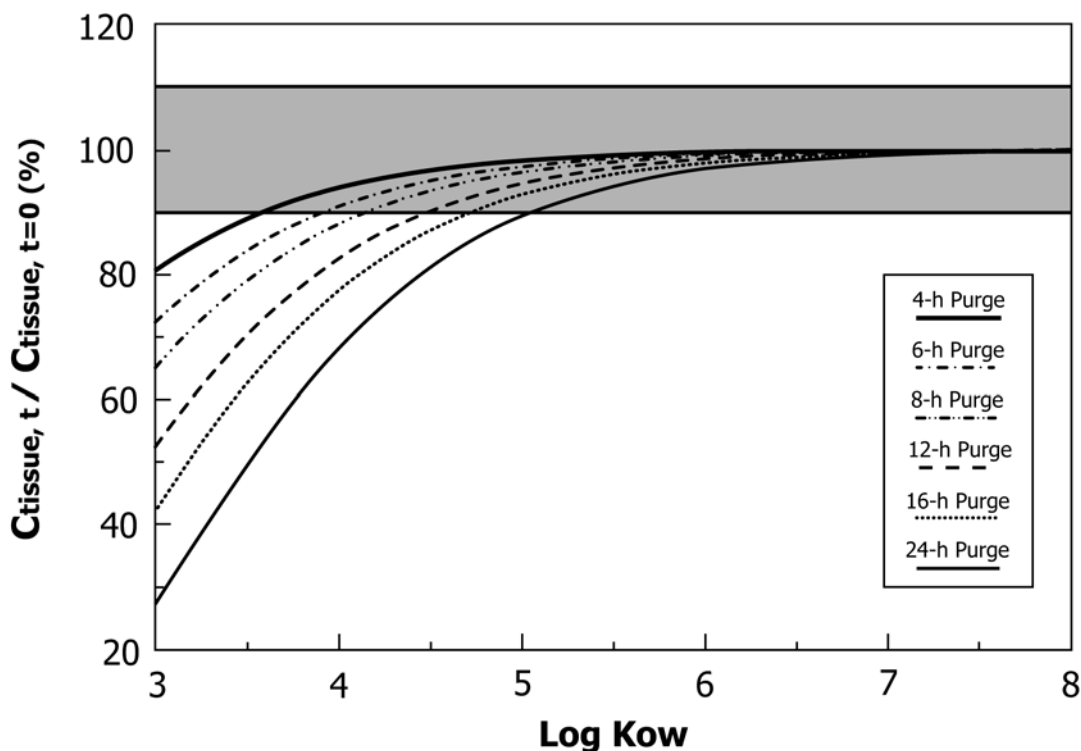


FIG. A8.1 Predicted depuration of nonionic organic chemicals from tissue of *Lumbriculus variegatus* as a function of  $K_{ow}$  and duration of depuration, assuming no contribution of sediment in the gut. Shaded area represents  $\pm 10$  % of tissue concentration at the beginning of the depuration period (Mount et al., (71)).



**TABLE A8.6 Wet Weight (g) Tissue Required for Various Analytes at Selected Lower Limits of Detection (257)**

Analyte	Grams of Tissue		
	1.0	5.0	2.0
Lower Limit of Detection, µg/g			
PCB (total)	0.600	0.300	0.120
PCB 1–3 chlorines	0.025	0.0125	0.005
PCB 4–6 chlorines	0.050	0.025	0.010
PCB 7–8 chlorines	0.075	0.0375	0.015
PCB 9–10 chlorines	0.125	0.0625	0.025
p,p'-DDE	0.050	0.025	0.010
p,p'-DDD	0.050	0.025	0.010
p,p'-DDT	0.050	0.025	0.010
o,p'-DDE	0.050	0.025	0.010
o,p'-DDD	0.050	0.025	0.010
o,p'-DDT	0.050	0.025	0.010
α-Chlordane	0.050	0.025	0.010
γ-Chlordane	0.050	0.025	0.010
Dieldrin	0.050	0.025	0.010
Endrin	0.050	0.025	0.010
Heptachlorepoxide	0.050	0.025	0.010
Oxychlordane	0.050	0.025	0.010
Mirex	0.050	0.025	0.010
Trans-Nonachlor	0.050	0.025	0.010
Toxaphene	0.600	0.300	0.120
PAH (total)	0.012	0.006	0.002
Dioxins	0.020 (ng/g)	0.010 (ng/g)	0.004 (ng/g)
TCDD	0.005 (ng/g)	0.0025 (ng/g)	0.001 (ng/g)
Cadmium	0.005	0.0025	0.001
Copper	0.005	0.0025	0.001
Lead	0.005	0.0025	0.001
Zinc	0.005	0.0025	0.001

**TABLE A8.7 Detection Limits (ng) of Individual PAHS by HPLC-FD (258)**

Analyte	Detection Limit, ng
Benzo(a)pyrene	0.01
Pyrene	0.03
Benzo(k)fluoranthene	0.03
Dibenz(a,h)anthracene	0.03
Anthracene	0.10
Benz(a)anthracene	0.10
Benzo(e)pyrene	0.10
Benzo(b)fluoranthene	0.10
Benzo(g,h,i)perylene	0.10
3-Methyleholanthrene	0.10

to the contribution of sediment in the gut to the weight of midge (see Test Method E1706). Additional data are needed to determine the contribution of sediment in the gut of *L. variegatus* to body weight before a definitive recommendation can be made to measure AFDW of oligochaetes routinely.

A8.4.8.2 Depending on specific study objectives, total lipids can be measured on a subsample of the total tissue mass of each thawed replicate sample. Gardner, et al (158) describe procedures for measuring lipids in 1 mg of tissue. Different methods of lipid analysis can yield different results. The analytical method used for lipid analysis should be calibrated against the chloroform-methanol extraction method described by (156, 259). The dry weight of oligochaetes can be determined on a separate subsample from each replicate.

(1) A number of studies have demonstrated that lipids are the major storage site for organic compounds in a variety of organisms (152-154). It may be desirable to normalize bioaccumulated concentrations of nonpolar organic compounds to the tissue lipid concentration because of the importance of

lipids. Lipid concentration is one of the factors required for deriving the BSAF. However, the difficulty with using this approach is that each lipid method generates different lipid concentrations. (See Ref (155) for a discussion of lipid methodology.) The differences in lipid concentrations translate directly to a similar variation in the lipid-normalized chemical concentrations or BSAF.

(2) For comparisons of lipid-normalized tissue residues or BSAFs, it is necessary to either promulgate a standard lipid technique or intercalibrate the various techniques. Standardization on a single method is difficult because the lipid methodology is often intimately tied in with the extraction procedure for chemical analysis. As an interim solution, the Bligh-Dyer lipid method (156) is recommended as a temporary “intercalibration standard.”

(3) The potential advantages of Bligh-Dyer include (1) its ability to extract neutral lipids not extracted by many other solvent systems and (2) the wide use of this method (or the same solvent system) in biological and toxicological studies (for example, Refs (46, 152-154)). Because the technique is independent of any particular analytical extraction procedure, it will not change when the extraction technique is changed. Additionally, the method can be modified for small tissue sample sizes as long as the solvent ratios are maintained (158, 260).

(4) If the Bligh-Dyer method is not the primary lipid method used, the chosen lipid analysis method should be compared with Bligh-Dyer for each tissue type. The chosen lipid method can then be converted to “Bligh-Dyer” equivalents and the lipid-normalized tissue residues reported in “Bligh-Dyer equivalents.” In the interim, it is suggested that extra tissue of each species be frozen for future lipid analysis in the event that a different technique proves more advantageous.

### A8.5 Interpretation of Results:

A8.5.1 *Test Acceptability*—For the test results to be acceptable, numbers of *L. variegatus* should not be reduced in test sediments relative to the control sediment in a 4-day screening toxicity test, and the organisms should burrow into the test sediment. Avoidance of the test sediment by *L. variegatus* will decrease bioaccumulation.

A8.5.2 *Duration of Exposure*—Because the data from bioaccumulation tests will often be used in ecological or human health risk assessments, the procedures are designed to generate quantitative estimates of steady-state tissue residues. Eighty percent of steady-state is used as the general criterion. Because the results from a single or few species will often be extrapolated to other species, the procedures are designed to maximize exposure to sediment-associated contaminants so as not to underestimate the residues in untested species systematically.

A8.5.2.1 A kinetic study can be conducted to estimate steady-state concentrations instead of conducting a 28-day bioaccumulation test (for example, sample on Day 1, 3, 7, 14, and 28; (4, 109, 119, 70); Section 16). A kinetic test can be used when 80 % of steady-state will not be obtained within 28 days or when more precise estimates of steady-state tissue residues are required.

A8.5.2.2 Dwyer, et al (109) reported DDT to reach 90 % of steady state by Day 14 of a 56-day exposure with *L. variegatus*. However, low molecular weight PAHs (for example, acenaphthylene, fluorene, and phenanthrene) generally peaked at Day 3 and tended to decline to Day 56. In general, concentrations of high molecular weight PAHs (for example, benzo(b)fluoranthene, benzo(e)pyrene, and indeno (1,2,3-c, d)pyrene) either peaked at Day 28 or continued to increase during the 56-day exposure.

A8.5.3 *Isolating Organism at the End of a Test*—Quantitative recovery of *L. variegatus* at the end of a sediment test should not be a problem. However, the presence of large amounts of vegetative material can increase the time required to recover the organisms and may result in reduced biomass at the end of the test. Laboratory personnel need to be able to distinguish between native oligochaetes and *L. variegatus*.

A8.5.4 *Influence of Indigenous Organisms*—Field-collected sediments may include indigenous oligochaetes. The presence of a second oligochaete in a laboratory study altered bioaccumulation compared to its absence (100, 101). Phipps, et al (86) recommends testing extra chambers without the addition of *L.*

*variegatus* to check for the presence of indigenous oligochaetes in field-collected sediment.

A8.5.5 *Sediment Toxicity in Bioaccumulation Tests*—Toxicity or altered behavior of organisms in a sample may not preclude the use of bioaccumulation data; however, information on the adverse effects of a sample should be included in the report.

A8.5.5.1 *Grain Size*—*Lumbriculus variegatus* are tolerant of a wide range of substrates. Physicochemical characteristics (for example, grain size) of sediment were not correlated significantly to the growth or reproduction of *L. variegatus* in 10-day toxicity tests in which the organisms were fed (248).

A8.5.5.2 *Sediment Organic Carbon*—Reduced growth of *L. variegatus* may result from exposure to sediments with low organic carbon concentrations (248). For this reason, reduced growth observed in bioaccumulation tests could be caused by either direct toxicity or insufficient nutrition of the sediment. Testing additional replicate chambers with supplemental food could be used to help make this distinction, although the effect of added food on accumulation of chemicals would need to be considered in the test interpretation.

## REFERENCES

- (1) *Sediment Classification Methods Compendium*, Report No. 823-R-92-006, U.S. Environmental Protection Agency, Office of Water, Washington, DC, 1992.
- (2) Di Toro, D. M., Zarba, C., Hansen, D. J., Berry, W., Swartz, R. C., Cowan, C., Pavlou, S., Allen, H., Thomas, N., and Paquin, P., "Technical Basis of Establishing Sediment Quality Criteria for Non-ionic Organic Chemicals Using Equilibrium Partitioning," *Environmental Toxicology and Chemistry*, Vol 10, 1991, pp. 1541–1583.
- (3) Wenning RJ, Batley GE, Ingersoll CG, Moore DW (eds.). 2005. "Use of Sediment Quality Guidelines and Related Tools for the Assessment of Contaminated Sediments." *Pellston Workshop Proceedings*, SETAC Press, Pensacola, FL.
- (4) *Evaluation of Dredged Material Proposed for Ocean Disposal* (Testing Manual), EPA-503/8-91/001, U.S. Environmental Protection Agency-U.S. Army Corps of Engineers, Washington, DC, 1991.
- (5) Niimi, A. J., "Biological and Toxicological Effects of Environmental Contaminants in Fish and Their Eggs," *Canadian Journal of Fisheries and Aquatic Sciences*, Vol 40, 1983, pp. 306–312.
- (6) Drummond, R. A., and Dawson, W. F. "An Inexpensive Method for Stimulating Diel Pattern of Lighting in the Laboratory," *Transactions of the American Fisheries Society*, Vol 99, 1970, pp. 434–435.
- (7) Everest, F. H., and Rodgers, J., "Two Economical Photoperiod Controls for Laboratory Studies," *The Progressive Fish-Culturist*, Vol 44, 1982, pp. 113–114.
- (8) Carmigani, G. M., and Bennett, J. P., "Leaching of Plastics Used in Closed Aquaculture Systems," *Aquaculture*, Vol 7, 1976, pp. 89–91.
- (9) Mount, D. J., and Brungs, W. A., "A Simplified Dosing Apparatus for Fish Toxicology Studies," *Water Research*, Vol 1, 1967, pp. 21–30.
- (10) Maki, A. W., "Modifications of Continuous Flow Test Methods for Small Aquatic Organisms," *The Progressive Fish-Culturist*, Vol 39, 1977, pp. 172–174.
- (11) Zumwalt, D. C., Dwyer, F. J., Greer, I. E., and Ingersoll, C. G., "A Water-Renewal System that Accurately Delivers Small Volumes of Water to Exposure Chambers," *Environmental Toxicology and Chemistry*.
- (12) Swartz, R. C., DeBen, W. A., Jones, J. K. P., Lamberson, J. O., and Cole, F. A., "Phoxocephalid Amphipod Bioassay for Marine Sediment Toxicity," *Aquatic Toxicology and Hazard Assessment: Seventh Symposium, ASTM STP 854*, R. D. Cardwell, R. Purdy, and R. C. Bahner, eds., ASTM, Philadelphia, PA, 1985, pp. 284–307.
- (13) Ferraro, S. P., Lee, H., II, Ozretich, R. J., and Specht, D. T., "Predicting Bioaccumulation Potential: A Test of a Fugacity Based Model," *Archives of Environmental Contamination and Toxicology*.
- (14) *Bioassay Procedures for the Disposal Permit Program*, U.S. EPA-600/9-76/010, U.S. Environmental Protection Agency, Ocean Disposal Working Group, Office of Research and Development, Gulf Breeze, FL, 1978, 121 pp.
- (15) Rubinstein, N. I., D'Asaro, C. N., Sommers, C., and Wilkes, F. G., "The Effects of Contaminated Sediments on Representative Estuarine Species and Developing Benthic Communities," *Contaminants and Sediments*, Vol 1, R. A. Baker, ed., Ann Arbor Science, Ann Arbor, MI, 1980, pp. 445–461.
- (16) Rubinstein, N. I., Lake, J. L., Pruell, R. J., Lee, H., II, Taplin, B., Heltshe, J., Bowen, R., and Pavignano, S., "Predicting Bioaccumulation of Sediment-Associated Organic Contaminants: Development of a Regulatory Tool for Dredged Material Evaluation," Internal Report, U.S. EPA 600/x-87/368, U.S. Environmental Protection Agency, Narragansett, RI, 1987, 54 pp. and appendixes.
- (17) Plumb, R. H., Jr., "Procedures for Handling and Chemical Analysis of Sediment and Water Samples", EPA-4805572010, Technical Committee on Criteria for Dredged and Fill Material, U.S. EPA/U.S. ACE, U.S. Environmental Protection Agency Great Lakes Laboratory, Grosse Ile, MI, 1981, pp. 1-1–3-403.
- (18) Lauenstein, G. G., and Young, D. R., *Benthic Surveillance Project: Cycle III Field Manual*, National Status and Trends Program for Marine Environmental Quality, NOAA Technical Memorandum NOS OMA 28, Rockville, MD, 1986, 26 pp.
- (19) *Puget Sound Dredged Disposal Analysis Report Technical Appendix Evaluation Procedures Phase I* (Central Puget Sound), U.S. Army Corps of Engineers, Washington State Department of Natural Resources, U.S. EPA—Region 10, 1988.
- (20) Sax, N. I., *Dangerous Properties of Industrial Materials*, 6th Ed., Van Nostrand Reinhold Company, New York, NY, 1984, 3124 pp.

- (21) *Guidelines for the Selection of Chemical Protective Clothing*, 3rd Ed., Vols I and II, U.S. Environmental Protection Agency, Washington, DC, 1987.
- (22) *USEPA Contract Laboratory Program Statement of Work for Organics Analysis (Multi-Media, Multi-Concentration)*, U.S. Environmental Protection Agency, SOW NO. 2/88, Washington, DC, 1988.
- (23) "Threshold Limit Values and Biological Exposure Indices for 1987–1988," American Conference of Governmental Industrial Hygienists, Cincinnati, OH, 1987.
- (24) *CHRIS Hazardous Chemical Data, Chemical Hazard Response Information System*, U.S. Coast Guard, Washington, DC, 1986.
- (25) *U.S. Environmental Protection Agency General Regulation for Hazardous Waste Management*, The Bureau of National Affairs, Inc., Washington, DC, 1986.
- (26) Smith, K. L., Jr., Rowe, G. T., and Nichols, J. A., "Benthic Community Respiration Near the Woods Hole Sewage Outfall," *Estuarine and Coastal Marine Science*, Vol 1, 1973, pp. 65–70.
- (27) Smith, K. L., Jr., "Benthic Community Respiration in the N.W. Atlantic Ocean: In situ Measurements from 40 to 5200 m," *Marine Biology*, Vol 47, 1978, pp. 337–347.
- (28) Davis, M., and Lee, H., II, "Recolonization of Sediment-Associated Microalgae and Effects of Estuarine Infauna on Microalgal Production," *Marine Ecology Progress Series*, Vol 11, 1983, pp. 227–232.
- (29) Bysshe, S. E., "Bioconcentration Factor in Aquatic Organisms, *Handbook of Chemical Property Estimation Methods: Environmental Behavior of Organic Compounds*, W. J. Lyman, W. F. Reehl, and D. H. Rosenblatt, eds., McGraw-Hill, New York, NY, 1982, pp. 5-1–5-30.
- (30) Tetra Tech, Inc., *Bioaccumulation Monitoring Guidance, 2: Selection of Target Species and Review of Available Bioaccumulation Data*, Final Report prepared for Marine Operations Division, U.S. Environmental Protection Agency, Washington, DC, EPA Contract NO. 68-01-6938, TC 3953-03, Bellevue, WA, 1985.
- (31) Konasewich, D. E., Chapman, P. M., Gerencher, E., Vigers, G., and Treloar, N., *Effects, Pathways, Processes, and Transformation of Puget Sound Contaminants of Concern*, NOAA Technical Memorandum OMPA-20, Prepared for NOAA, Boulder, CO, by E.V.S. Consultants Ltd., Vancouver, B.C., 1982, 357 pp.
- (32) Lee, H., II, and Swartz, R. C., "Biological Processes Affecting the Distribution of Pollutants in Marine Sediments, Part II: Biodeposition and Bioturbation," *Contaminants and Sediments*, Vol 2, R. A. Baker, ed., Ann Arbor Science, Ann Arbor, MI, 1980, pp. 555–606.
- (33) Kukkonen, J., and Landrum, P. F., "Toxicokinetics and Toxicity of Sediment-Associated Pyrene to *Lumbriculus variegatus* (Oligochaeta)," *Environmental Toxicology and Chemistry*, Vol 13, 1994, pp. 1457–1468.
- (34) Di Toro, D. M., Mahony, J. D., Hansen, D. J., Scott, K. John, Hicks, M. B., Mayr, S. M., and Redmond, M. S., "Toxicity of Cadmium in Sediments: The Role of Acid Volatile Sulfide," *Environmental Science Technology*, Vol 9, 1990, pp. 1489–1504.
- (35) Burgess, R.M. 2004. "Role of black carbon in the partitioning and bioavailability of organic pollutants." *Environmental Toxicology and Chemistry*, . 23: 2531-2533.
- (36) "A Summary of Selected Data on Chemical Contaminants in Sediments Collected During 1984, 1985, 1986, and 1987," *Progress Report for Marine Environmental Quality, NS&T Program, NOAA Technical Memorandum NOS OMA 44*, Rockville, MD, 1988, 15 pp. and appendixes.
- (37) Bascom, W., "The Concept of Assimilative Capacity," *Southern California Coastal Water Research Project Biennial Report*, 1983–1984, Willard Bascom, ed., Long Beach, CA, 1984, pp. 171–177.
- (38) Brown, D. A., Gossett, R. W., Hershelman, G. P., Ward, C. F., and Cross, J. N., "Metal and Organic Contaminants in Sediments and Animals," *Southern California Coastal Water Research Project Biennial Report*, 1983–1984, Willard Bascom, ed., Long Beach, CA, 1984, pp. 179–193.
- (39) Thompson, B. E., Cross, J., Laughlin, J., Hershelman, P., Gossett, R., and Tsukada, D., "Sediment and Biological Conditions on Coastal Slopes," *Southern California Coastal Water Research Project Biennial Report*, 1983–1984, Willard Bascom, ed., Long Beach, CA, 1983, pp. 37–67.
- (40) Ingersol, C. G., and Nelson, M. K., "Testing Sediment Toxicity with *Hyalella azteca* (Amphipoda) and *Chironomus riparius* (Diptera)," *Aquatic Toxicology and Risk Assessment, ASTM STP 1096*, Vol 13, W. G. Landis and W. H. van der Schalie, eds., Philadelphia, PA, 1990, pp. 93–109.
- (41) Swartz, R. C., Schults, D. W., Ditsworth, G. R., and DeBen, W. A., "Toxicity of Sewage Sludge to *Rhepoxynius abronius*, a Marine Benthic Amphipod," *Archives of Environmental Contamination and Toxicology*, Vol 13, 1984, pp. 359–364.
- (42) Johns, D.M., Ginn, T. C., and Reish, D. J., "Interim Protocol for Juvenile *Neanthes bioassay*," (Draft), Report for Washington Department of Ecology, Ecology No. C0089018, PTI Contract C901–07, Olympia, WA, 1989, 18 pp. and appendixes.
- (43) McFarland, V. A., and Clarke, J. U., "Environmental Occurrence, Abundance, and Potential Toxicity of Polychlorinated Biphenyl Congeners: Considerations for a Congener-Specific Analysis," *Environmental Health Perspectives*, Vol 81, 1989, pp. 225–239.
- (44) McElroy, A. E., and Means, J. C., "Factors Affecting the Bioavailability of Hexachlorobiphenyls to Benthic Organisms," *Aquatic Toxicology and Hazard Assessment, ASTM STP 971*, Vol 10, W. J. Adams, G. A. Chapman, and W. G. Landis, eds., ASTM, Philadelphia, PA, 1988, pp. 149–158.
- (45) Lake, J. L., Rubinstein, N. I., Lee, H., II, Lake, C. A., Heltshe, J., and Pavignano, S., "Equilibrium Partitioning and Bioaccumulation of Sediment-Associated Contaminants by Infaunal Organisms," *Environmental Toxicology and Chemistry*, Vol 9, 1990, pp. 1095–1106.
- (46) Landrum, P. F., "Bioavailability and Toxicokinetics of Polycyclic-aromatic Hydrocarbons Sorbed to Sediments for the Amphipod *Pontoporeia hoyi*," *Environmental Science and Technology*, Vol 23, 1989, pp. 588–595.
- (47) Landrum, P. F., Faust, W. R., and Eadie, B. J., "Bioavailability and Toxicity of a Mixture of Sediment-Associated Chlorinated Hydrocarbons to the Amphipod *Pontoporeia hoyi*," *Aquatic Toxicology and Hazard Assessment, ASTM STP 1027*, Vol 12, U. M. Cowgill and L. R. Williams, eds., ASTM, Philadelphia, PA, 1989, pp. 315–329.
- (48) Ahsanullah, M., Mobley, M., and Negiilski, D., "Accumulation of Cadmium from Contaminated Water and Sediment by the Shrimp *Callinassa australiensis*," *Marine Biology*, Vol 82, 1984, pp. 191–197.
- (49) Jennett, J. C., Effler, S. W., and Wilson, B. G., "Mobilization and Toxicological Aspects of Sediment Contaminants," *Contaminants and Sediments*, Vol 1, R. A. Baker, ed., Ann Arbor Science, Ann Arbor, MI, 1980, pp. 429–444.
- (50) Holme, N. A., and McIntyre, A. D., eds., *Methods for the Study of Marine Benthos*, IBP Handbook No. 16, 2nd Ed., Blackwell Scientific Publications, Boston, MA, 1984, 387 pp.
- (51) Green, R. H., "Sampling Design and Statistical Methods for Environmental Biologists," Wiley-Interscience, New York, NY, 1979, 257 pp.
- (52) Elliott, J. M., *Some Methods for the Statistical Analysis of Samples of Benthic Invertebrates*, Freshwater Biological Association Scientific Publication 25, 2nd Ed., 1983, 156 pp.
- (53) Swartz, R. C., Ditsworth, G. R., Schults, D. W., and Lamberson, J. O., "Sediment Toxicity to a Marine Infaunal Amphipod: Cadmium and its Interaction with Sewage Sludge," *Marine Environmental Research*, Vol 18, 1986, pp. 133–153.
- (54) Tetra Tech, Inc., *Quality Assurance/Quality Control (QA/QC) for 301(h) Monitoring Programs: Guidance on Field and Laboratory*

- Methods*, Final Report for Marine Operations Division, U.S. Environmental Protection Agency, Washington, DC, EPA Contract No. 68-01-6939, TC-3953-04, Bellevue, WA, 1986 .
- (55) USEPA-USACE (U.S. Army Corps of Engineers), Evaluation of Dredged Material Proposed for Discharge in Waters of the U.S.—Testing Manual, EPA 823-B-98-004, Washington, DC, 1998.
- (56) Becker, D.S., Rose, C.D., and Bigham, G.N. 1995, “Comparison of the 10-day freshwater sediment toxicity test using *Hyalella azteca* and *Chironomus tentans*.” *Environmental Toxicology and Chemistry*, 14:2089–2094.
- (57) Carr, R.S. and Chapman, D.C. “Comparison of solid-phase and pore-water approaches for assessing the quality of estuarine sediments.” *Chemistry and Ecology* 7: 19–30, 1992.
- (58) DeFoe, D.L. and Ankley, G.T. “Influence of storage time on toxicity of freshwater sediments to benthic macroinvertebrates,” *Environmental Pollution*, 99: 121–131, 1998.
- (59) Dillon, T. M., Moore, D. W., and Jarvis, A. S., “The Effects of Storage Temperature and Time on Sediment Toxicity,” *Archives of Environmental Contamination Toxicology*, Vol 27, 1994, pp. 51–53.
- (60) Moore, D.W., Dillon, T.M., and Gamble, E.W., “Long-term storage of sediments: Implications for sediment toxicity testing,” *Environmental Pollution*, 89: 341–342, 1996.
- (61) Sarda, N. and G.A. Burton, Jr., “Ammonia variation in sediments: Spatial, temporal and method-related effects,” *Environmental Toxicology and Chemistry*, 14: 1499–1506, 1995.
- (62) Sijm, R.T.H., Haller, M., and Schrap, S.M. “Influence of storage on sediment characteristics and of drying sediment on sorption coefficients of organic contaminants.” *Bulletin of Environmental Contamination and Toxicology*, 58:961–968, 1997.
- (63) Jenne, E. A., Kennedy, V. C., Burchard, J. M., and Ball, J. W., “Sediment Collection and Processing for Selective Extraction and for Total Trace Element Analyses,” *Contaminants and Sediments*, Vol 2, R. A. Baker, ed., Ann Arbor Science, Ann Arbor, MI, 1980, pp. 169–190.
- (64) USEPA, “Procedures for collection, handling, and manipulation of aquatic sediments for toxicological testing and chemical analysis” (August 12, 1997 draft), 1997 .
- (65) Stemmer, B. L., Burton, Jr., G. A., and Sasson-Brickson, G., “Effect of Sediment Spatial Variance and Collection Method on Cladoceran Toxicity and Indigenous Microbial Activity Determinations,” *Environmental Toxicology and Chemistry*, Vol 9, 1990a, pp. 1035–1044.
- (66) Landrum, P. F., and Faust, W. R., “Variation in the Bioavailability of Polycyclic Aromatic Hydrocarbons Sorbed to Sediments for the Amphipod *Pontoporeia hoyi*,” *Environmental Toxicology and Chemistry*, Vol 11, 1992, pp. 1197–1208.
- (67) Word, J. O., Ward, J. A., Franklin, L. M., Cullinan, V. I., and Kiesser, S. L., “Evaluation of Equilibrium Partitioning Theory for Estimating the Toxicity of the Nonpolar Organic Compound DDT to the Sediment Dwelling Amphipod *Rhepoxynius abronius*,” USEPA Criteria and Standards Division, SCD No. 11, Washington, DC, 1987.
- (68) Ditsworth, G. R., Schults, D. W., and Jones, J. K. P., “Preparation of Benthic Substrates for Sediment Toxicity Testing,” *Environmental Toxicology and Chemistry*, Vol 9, 1990, pp. 1523–1529.
- (69) Lamberson, J. O., and Swartz, R. C., “Spiked-Sediment Toxicity Test Approach,” *Sediment Classification Methods Compendium*, pp. 4–1 to 4–10. EPA 823-R-92-006, Washington, DC, 1992.
- (70) USEPA *Methods for Measuring the Toxicity and Bioaccumulation of Sediment-Associated Contaminants with Freshwater Invertebrates, Second Edition*, EPA/600/R-99/064, U.S. Environmental Protection Agency, Washington, DC, 2000.
- (71) Mount, D.R., Dawson, T.D., and Burkhard, L.P. 1999, “Implications of gut purging for tissue residues determined in bioaccumulation testing of sediment with *Lumbriculus variegatus*,” *Environmental Toxicology and Chemistry*, 18:1244–1249.
- (72) Frankenber, D., and Leiper, A. S., “Seasonal Cycles in Benthic Communities of the Georgia Continental Shelf,” *Ecology of Marine Benthos*, B. Coull, ed., University of South Carolina Press, Columbia, SC, 1977, pp. 383–398.
- (73) Pearson, T. H., and Rosenberg, R., “Macrobenthic Succession in Relation to Organic Enrichment and Pollution of the Marine Environment,” *Oceanography and Marine Biology: Annual Review*, Vol 16, 1978, pp. 229–311.
- (74) Rhoads, D. C., McCall, P. L., and Yingst, J. Y., “Disturbance and Production on the Estuarine Seafloor,” *American Science*, Vol 66, 1978, pp. 557–586.
- (75) Landrum, P. F., and Robbins, J. A., “Bioavailability of Sediment-Associated Contaminants to Benthic Invertebrates,” *Sediment: Chemistry and Toxicity of In-Place Pollutants*, R. Baudo, J. P. Giesy, and H. Mantau, eds., Lewis Publishers, Inc., Boston, MA, 1990, pp. 237–263.
- (76) Boese, B. L., Lee, H., II, Specht, D. T., Randall, R. C., and Winsor, M., “Comparison of Aqueous and Solid-Phase Uptake for Hexachlorobenzene in the Tellinid Clam, *Macoma nasuta* (Conrad): A Mass Balance Approach,” *Environmental Toxicology and Chemistry*, Vol 9, 1990, pp. 221–232.
- (77) Boese, B. L., Winsor, M., Lee, H., II, Specht, D. T., and Rukavina, K. C., “Depuration Kinetics of Hexachlorobenzene in the Clam, *Macoma nasuta*,” *Comparative Biochemistry and Physiology*, Vol 96C, 1990, pp. 327–331.
- (78) Landrum, P. F., Eadie, B. J., and Faust, W. R., “Toxicity and Toxicokinetics of a Mixture of Sediment-Associated Polycyclic Aromatic Hydrocarbons to the Amphipod, *Pontoporeia hoyi*,” *Environmental Toxicology and Chemistry*, Vol 10, 1991, pp. 35–46.
- (79) Landrum, P. F., Dupuis, W., and Kukkonen, J., “Toxicity and Toxicokinetics of Sediment-Associated Pyrene in *Diporeia* spp.: Examination of Equilibrium Partitioning Theory and Residue Based Effects for Assessing Hazard,” *Environmental Toxicology and Chemistry*, Vol 13, 1994, pp. 1769–1780.
- (80) Reish, D. J., and Richards, T. L., “A Culture Method for Maintaining Large Populations of Polychaetous Annelids in the Laboratory,” *Turtax News*, Vol 44, 1966, pp. 16–17.
- (81) Reish, D. J., “The Establishment of Laboratory Colonies of Polychaetous Annelids,” *Thalassia*, Vol 10, 1974, pp. 181–195.
- (82) Reish, D. J., “The Use of the Polychaetous Annelid *Neanthes arenaceodentata* as a Laboratory Experimental Animal,” *Tethys Bioscience*, Vol 11, 1985, pp. 335–341.
- (83) Dean, D., and Mazurkiewicz, M., “Methods of Culturing Polychaetes,” *Culture of Marine Invertebrate Animals*, W. L. Smith and M. H. Chanley, eds., Plenum Press, New York, NY, 1975, pp. 177–197.
- (84) Tyler-Schoeder, D. B., “Culture of the Grass Shrimp *Palaemonetes pugio* in the Laboratory,” U.S. EPA-600/9-76/010, Ocean Disposal Working Group, Office of Research and Development, Bioassay Procedures for the Disposal Permit Program, U.S. Environmental Protection Agency, Gulf Breeze, FL, 1978, pp. 69–72.
- (85) Tyler-Schoeder, D. B., “Entire Life-Cycle Toxicity Tests Using Grass Shrimp *Palaemonetes pugio* *Holthius*,” U.S. EPA-600/9-76/010, Ocean Disposal Working Group, Office of Research and Development, Bioassay Procedures for the Disposal Permit Program, U.S. Environmental Protection Agency, Gulf Breeze, FL, 1978, pp. 83–88.
- (86) Phipps, G. L., Ankley, G. T., Benoit, D. A., and Mattson, V. R., “Use of the Aquatic Oligochaete *Lumbriculus variegatus* for Assessing the Toxicity and Bioaccumulation of Sediment-Associated Contaminants,” *Environmental Toxicology and Chemistry*, Vol 12, 1993, pp. 269–274.
- (87) Gabbot, P. A., “Energy Metabolism,” *Marine Mussels: Their Ecology and Physiology*, B. L. Bayne, ed., Cambridge University Press, 1976, pp. 294–355.
- (88) Davis, J. P., and Wilson, J. G., “Seasonal Changes in Tissue Weight and Biochemical Composition of the Bivalve *Nucula turgida* in Dublin Bay with Reference to Gametogenesis,” *Netherlands Journal of Sea Research*, Vol 17, 1983, pp. 84–95.

- (89) Leppanen, M.T. and J.K. Kukkonen. 1998. Relationship between Reproduction, sediment type, and feeding activity of *Lumbriculus variegatus* (Müller): Implications for sediment toxicity testing. *Environmental Toxicology and Chemistry*, 17: pp. 2196–2202.
- (90) Varanasi, U., Reichert, W. L., Stein, J. E., Brown, D. B., and Sanborn, H. R., “Bioavailability and Transformation of Aromatic Hydrocarbons in Benthic Organisms Exposed to Sediment from an Urban Estuary,” *Environmental Science & Technology*, Vol 19, 1985, pp. 836–841.
- (91) Bousfield, E. L., Revised Morphological Relationships Within the Amphipod Genera *Pontoporeia* and *Gammaracanthus* and the “Glacial Relict” Significance of Their Postglacial Distributions, *Canadian Journal of Fisheries and Aquatic Sciences*, Vol 46, 1989, pp. 1714–1725.
- (92) Landrum, P. F., “Toxicokinetics of Organic Xenobiotics in Amphipod *Pontoporeia hoyi*: Role of Physiological and Environmental Variables,” *Aquatic Toxicology*, Vol 12, 1988, pp. 245–271.
- (93) Harkey, G. A., Landrum, P. F., and Klaine, S. J., “Comparison of Whole Sediment, Elutriate and Porewater Exposures for Use in Assessing Sediment-Associated Organic Contaminants in Bioassays,” *Environmental Toxicology and Chemistry*.
- (94) Adams, W. J., “Bioavailability of Neutral Lipophilic Organic Chemicals Contained on Sediments,” *Fate and Effects of Sediment-Bound Chemicals in Aquatic Systems*, K. L. Dickson, A. W. Maki, and W. A. Brungs, eds., Proceedings of the 6th Pellston Workshop, Florissant, CO, Aug. 12–17, 1984, Pergamon Press, New York, NY, 1987, pp. 219–244.
- (95) Reish, D. J., and Alosi, M. C., “Aggressive Behavior in the Polychaetous Annelid Family Nereidae,” *Bulletin of the Southern California Academy of Sciences*, Vol 67, 1968, pp. 21–28.
- (96) Gossiaux, D. C., Landrum, P. F., and Tsymbal, V. N., “Response of the Amphipod *Diporeia* sp. to Various Stressors: Cadmium, Salinity and Temperature,” *Journal of Great Lakes Research*, Vol 18, 1992, pp. 364–370.
- (97) Chapman, P. M., Farrell, M. A., and Brinkhurst, R. O., “Relative Tolerances of Selected Aquatic Oligochaetes to Individual Pollutants and Environmental Factors,” *Aquatic Toxicology*, Vol 2, 1982, pp. 47–67.
- (98) Chapman, P. M., Farrell, M. A., and Brinkhurst, R. O., “Relative Tolerances of Selected Aquatic Oligochaetes to Combinations of Pollutants and Environmental Factors,” *Aquatic Toxicology*, Vol 2, 1982, pp. 69–78.
- (99) Wiederholm, T., Wiederholm, A. M., and Goran, M., “Freshwater Oligochaetes,” *Water Air Soil Pollut.*, Vol 36, 1987, pp. 131–154.
- (100) Keilty, T. J., White, D. S., and Landrum, P. F., “Short-Term Lethality and Sediment Avoidance Assays with Endrin-Contaminated Sediment and Two Oligochaetes from Lake Michigan,” *Archives of Environmental Contamination and Toxicology*, Vol 17, 1988, pp. 95–101.
- (101) Keilty, T. J., White, D. S., and Landrum, P. F., “Sublethal Responses to Endrin in Sediment by *Limnodrilus hoffmeisteri* (Tubificidae), and in Mixed-Culture with *Styodrilus heringianus* (Lumbriculidae),” *Aquatic Toxicology*, Vol 13, 1988, pp. 227–250.
- (102) Gobas, F. A. P. C., Bedard, D. C., Ciborowski, J. J. H., and Haffner, G. D., “Bioaccumulation of Chlorinated Hydrocarbons by the Mayfly (*Hexagenia limbata*) in Lake St. Clair,” *Journal of Great Lakes Research*, Vol 15, 1989, pp. 581–588.
- (103) Oliver, B. G., “Uptake of Chlorinated Organics from Anthropogenically Contaminated Sediments by Oligochaete Worms,” *Canadian Journal of Fisheries and Aquatic Sciences*, Vol 41, 1984, pp. 878–883.
- (104) Brinkhurst, R. O., “Pollution Biology—The North American Experience,” *Proceedings of the First International Symposium on Aquatic Oligochaete Biology*, R. O. Brinkhurst and G. C. Cook, eds., Plenum Press, New York, NY, 1980, pp. 471–475.
- (105) Spencer, D. R., “The Aquatic Oligochaetes of the St. Lawrence Great Lakes Region,” *Proceedings of the First International Symposium on Aquatic Oligochaete Biology*, R. O. Brinkhurst and D. G. Cook, eds., Plenum Press, New York, NY, 1980, pp. 115–164.
- (106) Lauritsen, D. D., Mozley, S. C., and White, D. S., “Distribution of Oligochaetes in Lake Michigan and Comments on Their Use as Indices of Pollution,” *Journal of Great Lakes Research*, Vol 11, 1985, pp. 67–76.
- (107) Robbins, J. A., Keilty, T. J., White, D. S., and Edgington, D. N., “Relationships Among Tubificid Abundances, Sediment Composition and Accumulation Rates in Lake Erie,” *Journal of Great Lakes Research*, Vol 46, 1989, pp. 223–231.
- (108) Ankley, G. T., Cook, P. M., Carlson, A. R., Call, D. J., Swenson, J. A., Corcoran, H. F., and Hoke, R. A., “Bioaccumulation of PCBs from Sediments by Oligochaetes and Fishes: Comparison of Laboratory and Field Studies,” *Journal of Great Lakes Research*, Vol 49, 1992, pp. 2080–2085.
- (109) Brunson, E. L., Ankley, G. T., Burton, G. A., Dwyer, F. J., Ingersoll, C. G., Landrum, P. F., Lee, H., II, and Phipps, G. L., “Bioaccumulation Kinetics and Field-Validation of Whole-Sediment Exposures with the Oligochaete *Lumbriculus variegatus*, in preparation.
- (110) Southwood, T. R. E., *Ecological Methods*, Chapman and Hall, London, United Kingdom, 1966, 391 pp.
- (111) King, J. M., and Spotte, S., *Marine Aquariums in the Research Laboratory*, Aquarium Systems, Inc., Eastlake, OH, 1974, 39 pp.
- (112) Kinne, Otto W., “Cultivation of Marine Animals,” *Marine Ecology*, Vol III, Part 2, Wiley and Sons, New York, NY, 1977, pp. 579–1293.
- (113) National Research Council Committee on Marine Invertebrates, *Laboratory Animal Management; Marine Invertebrates*, National Academy Press, Washington, DC, 1981, 382 pp.
- (114) Lee, J. J., and Muller, W. A., “Culture of Marsh Microorganisms and Micrometazoa,” *Culture of Marine Invertebrate Animals*, W. L. Smith and M. H. Chanley, eds., Plenum Press, New York, NY, 1972, pp. 87–107.
- (115) Hurlbert, S. H., “Pseudoreplication and the Design of Ecological Field Experiments,” *Ecological Monographs*, Vol 54, 1984, pp. 187–211.
- (116) Tetra Tech, Inc., *Bioaccumulation Monitoring Guidance: Strategies for Sample Replication and Compositing*, Vol 5, U.S. EPA Contract No. 430/09-87/003, prepared for U.S. Environmental Protection Agency, Office of Marine and Estuarine Protection, Washington, DC, Bellevue, WA, 1987.
- (117) Tetra Tech, Inc., *ODES Statistical Power Analysis*, Draft Report, U.S. EPA Contract NO. 68-01-6938, TC-3953-03, prepared for Office of Marine and Estuarine Protection, U.S. Environmental Protection Agency, Bellevue, WA, 1986.
- (118) Schaeffer, D. J., and Janardan, K. G., “Theoretical Comparison of Grab and Composite Sampling Programs,” *Biometrical Journal*, Vol 20, 1978, pp. 215–227.
- (119) *Ecological Evaluation of Proposed Discharge of Dredged Material into Ocean Waters*, Technical Committee on Criteria for Dredged and Fill Material, Environmental Effects Laboratory, U.S. Army Engineer Waterways Experiment Station, U.S. Environmental Protection Agency—U.S. Army Core of Engineers, Vicksburg, MS, 1977.
- (120) Langston, W. J., “Accumulation of Polychlorinated Biphenyls in the Cockle *Cerastoderma edule* and the tellinid *Macomabalthica*,” *Marine Biology*, Vol 45, 1978, pp. 265–272.
- (121) McLeese, D. W., Metcalfe, C. D., and Pezzack, S. S., “Uptake of PCB’s from Sediment by *Nereis virens* and *Crangon septemspinosa*,” *Archives of Environmental Contamination and Toxicology*, Vol 9, 1980, pp. 507–518.
- (122) Landrum, P. F., and Poore, R., “Toxicokinetics of Selected Xenobiotics in *Hexagenia limbata*,” *Journal of Great Lakes Research*, Vol 14, 1988, pp. 427–437.
- (123) Evans, M. S., and Landrum, P. F., “Toxicokinetics of DDE, Benzo(a)pyrene, and 2,4,5,2,4,5-hexachlorobiphenyl in *Pontoporeia hoyi* and *Mysis relicta*,” *Journal of Great Lakes Research*, Vol 15, 1989, pp. 589–600.

- (124) Pruell, R. J., Rubinstein, N. I., Taplin, B. K., LiVolsi, J. A., and Norwood, C. B., 2,3,7,8-TCDD, 2,3,7,8-TCDF and PCBs in Marine Sediments and Biota: Laboratory and Field Studies, U.S. Environmental Protection Agency, ERL-Narragansett, RI, Final Report to U.S. Army Corps of Engineers, New York District, 1990.
- (125) Boese, B. L., Winsor, M., Lee, H., II, Echols, S., Pelletier, J., and Randall, R., "PCB Congeners and Hexachlorobenzene Biota-Sediment Accumulation Factors for *Macoma nasuta* Exposed to Sediments with Different Total Organic Carbon Contents," *Environmental Toxicology and Chemistry*, Vol 14, 1995, pp. 303–310.
- (126) Augenfeld, J. M., Anderson, J. W., Riley, R. G., and Thomas, B. L., The Fate of Polyaromatic Hydrocarbons in an Intertidal Sediment Exposure System: Bioavailability to *Macoma inquinata* (Mollusca: pelecypoda) and *Abarenicola pacifica* (Annelida: polychaeta)," *Marine Environmental Research*, Vol 7, 1982, pp. 31–50.
- (127) Lee, II, H., U.S. Environmental Protection Agency, ERL-N Pacific Ecosystems Branch, Newport, OR.
- (128) Lee, H., II, and Lincoff, A., *Ecological Risk Assessment of the Marine Sediments at the United Heckathorn Superfund Site*, ERL-N296, EPA-600/X-91/121, U.S. Environmental Protection Agency, 1993.
- (129) Beasley, T. M., and Fowler, S. W., "Plutonium and Americium: Uptake from Contaminated Sediments by the Polychaete *Nereis diversicolor*," *Marine Biology* ., Vol 38, 1976, pp. 95–100.
- (130) Vangenechten, J. H. D., Aston, S. R., and Fowler, S. W., "Uptake of Americium-241 from Two Experimentally Labelled Deep-Sea Sediments by Three Benthic Species: A Bivalve Mollusc, a Polychaete and an Isopod," *Mar. Ecol. Progress Series*, Vol 13, 1983, pp. 219–228.
- (131) Jennings, C. D., and Fowler, S. W., "Uptake of <sup>55</sup> Fe from Contaminated Sediments by the Polychaete *Nereis diversicolor*," *Marine Biology* ., Vol 56, 1980, pp. 227–280.
- (132) Harkey, G. A., Landrum, P. F., and Klaine, S. J., "Preliminary Studies on the Effect of Feeding During Whole Sediment Bioassays Using *Chironomus riparius* Larvae," *Chemosphere*, 1994, pp. 597–606.
- (133) Spacie, A., and Hamelink, J. L., "Alternative Models for Describing the Bioconcentration of Organics in Fish," *Environmental Toxicology and Chemistry*, Vol 1, 1982, pp. 309–320.
- (134) Davies, R. P., and Dobbs, A. J., "The Prediction of Bioconcentration in Fish," *Wat. Res.*, Vol 18, 1984, pp. 1253–1262.
- (135) Landrum, P.F., Lee II, H. and Lydy, M.J. 1992. Toxicokinetics in aquatic systems: model comparisons and use in hazard assessment. *Environmental Toxicology and Chemistry*, 11:1709-1725.
- (136) Nuutinen, S., P.F. Landrum, L.J. Schuler, J.V.K. Kukkonen and M.J. Lydy. 2003. Toxicokinetics of organic contaminants in *Hyaella azetca*. Archives of *Environmental Contamination and Toxicology*. 44: 467-475.
- (137) Schuler, L.J., M. Wheeler, J.A. Bailer and M.J. Lydy. 2003. Toxicokinetics of sediment-sorbed BaP and HCBP using the freshwater invertebrates; *Hyaella azetca*, *Chironomus tentans* and *Lumbriculus variegatus*. *Environmental Toxicology and Chemistry*. 22(2):439-449.
- (138) Lee, H., II, "Models, Muddles, and Mud: Predicting Bioaccumulation of Sediment-Associated Pollutants," *Sediment Toxicity Assessment*, G. A. Burton, ed., Lewis Publishers, Chelsea, MI, 1992, pp. 267–293.
- (139) Stehly, G. R., Landrum, P. F., Henry, M. G., and Klemm, C., "Toxicokinetics of PAHs in *Hexagenia*," *Environmental Toxicology and Chemistry*, Vol 9, 1990, pp. 167–174.
- (140) Oliver, B. G., "Biouptake of Chlorinated Hydrocarbons from Laboratory-Spiked and Field Sediments by Oligochaete Worms," *Environmental Science & Technology*, Vol 21, 1987, pp. 785–790.
- (141) Specht, D. T., and Lee, H., II, "Direct Measurement Technique for Determining Ventilation Rate in the Deposit-Feeding Clam *Macoma nasuta* (Bivalvia, Tellinaceae)," *Marine Biology*, Vol 101, 1989, pp. 211–218.
- (142) Kukkonen, J., and Landrum, P. F., "Effects of Sediment-Bound PDMS on the Bioavailability and Distribution of Benzo(a)pyrene in Lake Sediment," *Environmental Toxicology and Chemistry*, Vol 14, 1995, pp. 523–531.
- (143) Tetra Tech, Inc., *Bioaccumulation Monitoring Guidance: Recommended Analytical Detection Limits*, EPA Contract No. 68-01-6938, TC 3953-03, Final Report prepared for U.S. Environmental Protection Agency, Washington, DC, Bellevue, WA, 1985.
- (144) Tetra Tech, Inc., *Analytical Methods for U.S. EPA Priority Pollutants and 301(h) Pesticides in Estuarine and Marine Sediments*, EPA Contract No. 68-01-6938, TC-3953-03, Final Report prepared for Marine Operations Division, U.S. Environmental Protection Agency, Washington, DC, Bellevue, WA, 1986.
- (145) Tetra Tech, Inc., *Bioaccumulation Monitoring Guidance: Analytical Methods for U.S. EPA Priority Pollutants and 301(h) Pesticides in Tissues from Estuarine and Marine Organisms*, prepared for Marine Operations Division, EPA Contract No. 68-01-638, TC-3953-03, U.S. Environmental Protection Agency, Washington, DC, Bellevue, WA, 1986.
- (146) Tetra Tech, Inc., *Recommended Protocols for Measuring Metals in Puget Sound Water, Sediment, and Tissue Samples*, Contract No. TC-3090-04, Final Report prepared for Resource Planning Associates for U.S. Army Corps of Engineers, Seattle District, Seattle, WA, Bellevue, WA, 1986.
- (147) Tetra Tech, Inc., *Recommended Protocols for Measuring Organic Compounds in Puget Sound Sediment and Tissue Samples*, Contract No. TC-3991-04, Final Report prepared for U.S. Environmental Protection Agency, Region X, Seattle, WA, Bellevue, WA, 1986.
- (148) USEPA Contract Laboratory Program Statement of Work for *Inorganic Analysis (Multi-Media, Multi-Concentration)*, U.S. Environmental Protection Agency, Washington, DC, SOW No. 788, 1989.
- (149) Luoma, S. N., and Bryan, G. W., "Factors Controlling Availability of Sediment-Bound Lead to the Estuarine Bivalve *Scrobicularia plana*," *Journal of The Marine Biological Association of the United Kingdom*, Vol 58, 1978, pp. 973–802.
- (150) Waldichuk, M., "Biological Availability of Metals to Marine Organisms," *Marine Pollution Bulletin*, Vol 16, 1985, pp. 7–11.
- (151) *Evaluation of Dredged Material for Ocean Disposal, (Testing Manual)*, U.S. EPA Report No. 503/8/91/001, Office of Marine and Estuarine Protection, Washington, DC, 1991.
- (152) Roberts, J. B., deFrietas, A. W. S., and Gidney, M. A. J., "Influence of Lipid Pool Size on Bioaccumulation of the Insecticide Chlordane by Northern Redhorse Suckers *Moxostoma macrolepidotum*," *J. Fish. Res. Board Can.*, Vol 34, 1977, pp. 89–97.
- (153) Oliver, B. J., and Niimi, A. J., "Bioconcentration of Chlorobenzenes from Water by Rainbow Trout: Correlations with Partition Coefficients and Environmental Residues," *Environmental Science & Technology*, Vol 17, 1983, pp. 287–291.
- (154) de Boer, J., "Chlorobiphenyls in Bound and Non-Bound Lipids of Fishes: Comparison of Different Extraction Methods," *Chemosphere*, Vol 17, 1988, pp. 1803–1810.
- (155) Kates, M., *Techniques of Lipidology (Isolation, Analysis and Identification of Lipids)*, 2nd Ed., Elsevier Science Publishing Co., New York, NY, 1986, 464 pp.
- (156) Bligh, E. G., and Dyer, W. J., "A Rapid Method of Total Lipid Extraction and Purification," *Can. J. Biochem. Physiol.*, Vol 37, 1959, pp. 911–917.
- (157) Herbes, S. E., and Allen, C. P., "Lipid Quantification of Freshwater Invertebrates: Method Modification for Microquantification," *Canadian Journal of Fisheries and Aquatic Sciences* ., Vol 40, 1983, pp. 1315–1317.
- (158) Gardner, W. S., Frez, W. A., Cichocki, E. A., and Parrish, C. C., "Micromethods for Lipids in Aquatic Invertebrates," *Limnology and Oceanography* ., Vol 30, 1985, pp. 1099–1105.
- (159) U.S. Environmental Protection Agency. Determination of Total Organic Carbon in Sediment (Lloyd Kahn Method). 1988. U.S.

Environmental Protection Agency, Region II Environmental Services Division, Monitoring Management Branch, Edison, New Jersey.

- (160) Gustafsson O, Haghseta F, Chan C, MacFarlane J, Gschwend PM. 1997. Quantification of the dilute sedimentary soot phase: implications for PAH speciation and bioavailability. *Environmental Science and Technology* 31: 203-209.
- (161) Accardi-Dey A, Gschwend PM. 2003. Reinterpreting literature sorption data considering both absorption into OC and adsorption onto black carbon. *Environmental Science and Technology* 37:99-106.
- (162) Kuhlbusch TAJ. 1995. Method for determining black carbon in residues of vegetation fires. *Environmental Science and Technology* 29:2695-2702.
- (163) Hitzenberger R, Jennings SG, Larson SM, Dillner A, Cachier H, Galambos Z, Rouc A, Spain TG. 1999. Intercomparison of measurement methods for black carbon aerosols. *Atmospheric Environment* 33:2823-2833.
- (164) Gelinas Y, Prentice KM, Baldock JA, Hedges JI. 2001. An improved thermal oxidation method for the quantification of soot/graphitic black carbon in sediment and soils. *Environmental Science and Technology* 35: 3519-3525.
- (165) Song J, Peng PA, Huang W. 2002. Black carbon and kerogen in soils and sediments. 1. quantification and characterization. *Environmental Science and Technology* 36: 3960-3967
- (166) Currie LA, Benner BA, Kessler JD, Klindinst DB, Klouda GA, Marolf JV, Slater JF, Wise SA, Cachier H, Cary R, Chow JC, Watson J, Druffel ERM, Masiello CA, Eglinton TI, Pearson A, Reddy CM, Gustafsson O, Quinn JG, Hartmann PC, Hedges JI, Prentice KM, Kirchstetter TW, Novakow T, Puxbaum H, Schmid H. 2002. A critical evaluation of interlaboratory data on total, elemental, and isotopic carbon in the carbonaceous particle reference material, NIST SRM 1649a. *Journal of Research of the National Institute of Standards and Technology* 107:279-298.
- (167) Yu JZ, Xu J, Yang H. 2002. Charring characteristics of atmospheric organic particulate matter in thermal analysis. *Environmental Science and Technology* 36: 754-761.
- (168) Sokal, R. R., and Rohlf, F. J., *Biometry*, 2nd Ed., W. H Freeman and Company, New York, NY, 1981, 859 pp.
- (169) D'Agostino, R. B., and Stephens, M. A., *Goodness-of-Fit Techniques*, Marcel Dekker, Inc., New York, NY, 1986, 560 pp.
- (170) Lehman, E. L., *Nonparametrics, Statistical Methods based on Ranks*, Holden Day, Inc., McGraw-Hill International, New York, 1975.
- (171) Newman, M. C., *Quantitative Methods in Aquatic Ecotoxicology*, Advances in Trace Substances Research, Lewis Publishers, Boca Raton, LA., 1995, pp. 196-200.
- (172) Weber, C. I., Peltier, W. H., Norberg-King, T. J., Horning, W. B. II, Kessler, F. A., Menkedick, J. R., Neiheisel, T. W., Lewis, P. A., Klemm, D. J., Pickering, Q. H., Robinson, E. L., Lazorchak, J. M., Wymer, L. J., and Freyberg, R. W., "Short-Term Methods for Estimating the Chronic Toxicity of Effluents and Receiving Waters to Freshwater Organisms," EPA/600/4-89/001, *Environmental Monitoring Systems Laboratory*, U.S. Environmental Protection Agency, Cincinnati, OH, 1989.
- (173) Daniel, W. W., *Applied Nonparametric Statistics*, Houghton Mifflin Co., Boston, MA, 1978, 503 pp.
- (174) Hardin, J. W., and Gilbert, R. O., "Comparing Statistical Tests for Detecting Soil Contamination Greater than Background," PNL-8989, *Pacific Northwest Laboratories*, Richland, Washington, 1993.
- (175) Beers, Y., *Introduction to the Theory of Error*, Addison-Wesley Publishing Co., Inc., Reading, MA, 1957, 26 pp.
- (176) Mood, A. M., Graybill, F. A., and Boes, D. C., *Introduction to the Theory of Statistics*, 3rd Ed., McGraw-Hill Book Company, New York, NY, 1974, 546 pp.
- (177) Williams, A. B., and Porter, H. J., "A Ten-Year Study of Mero-plankton in North Carolina Estuaries: Occurrence of Postmetamorph-al Bivalves," *Ches. Sci.*, Vol 12, 1971, pp. 26-32.
- (178) Williams, A. B., and Bynum, K. H., "A Ten-Year Study of Mero-plankton in North Carolina Estuaries: Amphipods," *Chesa-peake Science.*, Vol 13, 1972, pp. 175-192.
- (179) DeWitt, T. H., "Adult vs Larval Colonization: A Comparison of Recruitment Rates in Soft-Bottomed Benthic Communities," presented at AAAS Annual Meeting, Boston, MA, February 1988.
- (180) Rubinstein, N. I., Loes, E., and Gregory, N., "Accumulation of PCBs, Mercury, and Cadmium by *Nereis virens*, *Mercenaria mercenaria*, and *Palaemonetes pugio* from Contaminated Harbor Sediments," *Aquatic Toxicology* ., Vol 3, 1983, pp. 249-260.
- (181) Veith, G. D., "Baseline Concentrations of PCBs and DDT in Lake Michigan Fish," *Pet. Monit. J.*, Vol 9, 1975, pp. 21-29.
- (182) Clayton, J. R., Jr., Pavlou, S. P., and Breitner, N. F., "Polychlorinated Biphenyls in Coastal Marine Zooplankton: Bioaccumulation by Equilibrium Partitioning," *Environmental Science and Technology.*, Vol 11, 1977, pp. 676-681.
- (183) Lake, J. L., Rubinstein, N. I., and Pavignano, S., "Predicting Bioaccumulation: Development of a Partitioning Model for Use as a Screening Tool in Regulating Ocean Disposal of Wastes," *Fate and Effects of Sediment-Bound Chemicals in Aquatic Systems*, K. L. Dickson, A. W. Maki, and W. A. Brungs, eds., Sixth Pellston Workshop, Florissant, CO, Aug. 12-17, 1984.
- (184) McGroddy, S.E., J.W. Farrington, and P.M. Gschwend. Comparison of the in Situ and Desorption Sediment-Water Partitioning of Polycyclic Polychlorinated Biphenyls. *Environmental Science and Technology*. 1996, Vol 30, pp. 172-177.
- (185) Di Toro, DM and McGrath, JA. 2000. Technical basis for narcotic chemicals and polycyclic aromatic hydrocarbon criteria. II. Mixtures and Sediments. *Environmental Toxicology and Chemistry* . 8: 1971-1982.
- (186) Cornellisen, G., O. Gustafsson, T.D. Bucheli, M.T. Jonker, A.A. Koelmans and P.C van Noort. 2005. Extensice sorption of organic compounds to black carbon, coal, and kerogen in sediments and soils: Mechanisms and consequences for distribution, bioaccumulation, and biodegradation. *Env. Sci. Technol.* 39: 6881-6890.
- (187) Hawthorne, S.B., C.B. Grabanski, and D.J. Miller. 2007. Measured partition coefficients for parent and alkyl polycyclic aromatic hydrocarbons in 114 historically contaminated sediments: Part 2. Testing the KOCKBC two carbon-type model. *Environ. Toxicol. Chem.* 26: 2505-2516.
- (188) McFarland, V. A., and Clarke, J. U., "Testing Bioavailability of Polychlorinated Biphenyls from Sediments Using a Two-Level Approach," *Successful Bridging Between Theory and Applications*, R. G. Willey, ed., Proceedings of the Seminar on Water Quality Research and Development, Davis, CA, 1986, pp. 220-229.
- (189) Tracy, G.A. and Hansen, D.J. Use of biota sediment accumulation factors to assess similarity on nonionic organic chemical exposure to benthically coupled organisms of differing trophic mode. 1996. Vol 30 pp. 467-475.
- (190) Wong, C., Capel, P.D., and Nowell, L.H. 2001. National-Scale, Field-Based Evaluation of the Biota-Sediment Accumulation Factor Model. *Environ. Sci. Toxicol.* 35, 1709-1715
- (191) Gobas, F. A. P. C., Derek, C. G., and MacKay, D., "Dynamics of Dietary Bioaccumulation and Fecal Elimination of Hydrophobic Organic Chemicals in Fish," *Chemosphere*, Vol 17, 1988, pp. 943-962.
- (192) Kane Driscoll, S.B., and A.E. McElroy. Bioaccumulation and metabolism in three species of polychaete worms. *Environmental Toxicology and Chemistry*. 1996, Vol 15, pp 1401-1410.
- (193) McElroy, A.E., and K. Leitch, and A. Fay. A survey of in vitro benzo[a]pyrene metabolism in small benthic invertebrates. *Marine Environmental Research*. 2000, Vol 50, pp 33-38.

- (194) Rust, A.J., R.M. Burgess, B.J. Brownawell, A.E. McElroy. 2004a. Relationship between metabolism and bioaccumulation of benzo[a]pyrene in benthic invertebrates. *Environmental Toxicology and Chemistry* . 23: 2587-2593.
- (195) James, M.O. Biotransformation and disposition of PAH in aquatic invertebrates. In U. Varanasi, ed., *Metabolism of polycyclic aromatic hydrocarbons in the aquatic environment*. 1989. CRC Press. Boca Raton, FL.
- (196) Maruya, K.A., R.W. Riseborough and A.J. Horne. The bioaccumulation of polynuclear aromatic hydrocarbons by benthic invertebrates in an intertidal marsh. *Environmental Toxicology and Chemistry*. 1997, Vol 16, pp . 1087-1097.
- (197) Vinturella, A.E., R.M. Burgess, B.A. Coull, K.M. Thompson, and J.P. Shine. "Importance of black carbon in distribution and bioaccumulation models of polycyclic aromatic hydrocarbons in contaminated marine sediments" *Environmental Toxicology and Chemistry* 2004 Vol 23 pp . 2578-2586.
- (198) Rust, A.J., R.M. Burgess, A.E. McElroy, M.G. Cantwell, and B.J. Brownawell. 2004b. Influence of soot carbon on the bioaccumulation of sediment-bound polycyclic aromatic hydrocarbons by marine benthic invertebrates: An interspecies comparison. *Environ. Toxicol. Chem.* 23: 2594-2603.
- (199) Sundelin, B., A.K. Eriksson Wiklund, G. Lithner and O. Gustafsson. 2004. Evaluation of the role of black carbon in attenuating bioaccumulation of polycyclic aromatic hydrocarbons from field-contaminated sediments. *Environmental Toxicology and Chemistry* . 23: 2611-2617.
- (200) Lamoreaux, E.M. and B.J. Brownawell, 2004. Influence of soot on hydrophobic organic contaminant desorption and assimilation efficiency. *Environmental Toxicology and Chemistry* . 23: 2571-2577.
- (201) Jonker, M.T.O., A.H. Hoenderboom and A.E. Koelmans. 2004. Effects of sedimentary sootlike materials on bioaccumulation and sorption of polychlorinated biphenyls. *Environmental Toxicology and Chemistry* . 23: 2563-2570.
- (202) U.S. Environmental Protection Agency. 2007. BSAF (Biota-Sediment Accumulation Factor) Data Set – Version 1.0. Office of Research and Development, National Health and Environmental Research Laboratory, Mid-Continent Ecology Division, Duluth, MN. Version 1.0 Available: [http://www.epa.gov/med/prods\\_pubs.htm](http://www.epa.gov/med/prods_pubs.htm)
- (203) Norstrom, R. J., McKinnon, A. E., and deFreitas, A. S., "A Bioenergetics Based Model for Pollutant Accumulation by Fish, Simulation of PCB and Methylmercury Residue Levels in Ottawa River," *Journal of the Fisheries Research Board of Canada* , Vol 33, 1976, pp. 248–267.
- (204) Jensen, A. L., Spigarelli, S. A., and Thommes, M. M., "PCB Uptake by Species of Fish in Lake Michigan, Green Bay of Lake Michigan, and Cayuga, New York, NY," *Canadian Journal of Fisheries and Aquatic Sciences* , Vol 39, 1982, pp. 700–709.
- (205) Thomann, R. V., and Connolly, J. P., "Model of PCB in the Lake Michigan Lake Trout Food Chain," *Environmental Science and Technology*., Vol 18, 1984, pp. 65–71.
- (206) Boese, B. L., Lee, H., II, and Specht, D. T., "The Efficiency of Uptake of Hexachlorobenzene from Water by the Tellinid Clam *Macoma nasuta*," *Aquatic Toxicology* ., Vol 12, 1988, pp. 345–356.
- (207) Lee, H., II, Boese, B. L., Pelletier, J., Randall, R. C., and Specht, D. T., "Method to Estimate Gut Uptake Efficiencies for Hydrophobic Organic Pollutants," *Environmental Toxicology and Chemistry*, Vol 9, 1990, pp. 215–220.
- (208) Winsor, M., Boese, B. L., Lee, H., II, Randall, R. C., and Specht, D. T., "Determination of the Ventilation Rates of Interstitial and Overlying Water by the Clam *Macoma nasuta*," *Environmental Toxicology and Chemistry*, Vol 9, 1990, pp. 209–213.
- (209) Breteler, R. J., and Saksa, F. I., "The Role of Sediment Organic Matter on Sorption-Desorption Reactions and Bioavailability of Mercury and Cadmium in an Intertidal Ecosystem," *Aquatic Toxicology and Hazard Assessment: Seventh Symposium, ASTM STP 854* , R. D. Cardwell, R. Purdy, and R. C. Bahner, eds., ASTM, Philadelphia, PA, 1985, pp. 454–468.
- (210) Jackim, E., Morrison, G., and Steele, R., "Effects of Environmental Factors on Radiocadmium Uptake by Four Species of Marine Bivalves," *Mar. Biol.*, Vol 40, 1977, pp. 303–308.
- (211) Pesch, C., and Morgan, D., "Influence of Sediment in Copper Toxicity Tests with the Polychaete *Neanthes arenaceodentata*," *Wat. Res.*, Vol 12, 1978, pp. 747–751.
- (212) Renfro, W. C., and Benayoun, G., "Sediment-Worm Interaction: Transfer of Zn65 from Marine Silt by the Polychaete *Nereis diversicolor*," *Radioecology and Energy Sources*, Colbert E. Cushing, Jr., ed., Proc. Fourth National Symposium on Radiology, Oregon State University, Vol 4, 1975, pp. 250–255.
- (213) Mac, M. J., Edsall, C., Hesselberg, R., and Sayers, R., *Flow Through Bioassay for Measuring Bioaccumulation of Toxic Substances from Sediment*, Final Report to EPA, 905/3-84/007, U.S. Environmental Protection Agency, 1984, 17 pp.
- (214) Morales-Alamo, R., and Haven, D. S., "Uptake of Kepone from Sediment Suspensions and Subsequent Loss by the Oyster *Crassostrea virginica*," *Mar. Biol.*, Vol 74, 1983, pp. 187–201.
- (215) McFarland, V. A., Clark, J. U., and Gibson, A. B., *Bioaccumulation of Polychlorinated Biphenyls (PCBs) from Sheboygan Harbor Sediments in Laboratory Exposures*, Technical Report D-85-1473, prepared by the Environmental Laboratory of U.S. Department of the Army for U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS, 1985, 53 pp. and appendixes.
- (216) Rubinstein, N. I., Gilliam, W. T., and Gregory, N. R., "Dietary Accumulation of PCBs from a Contaminated Sediment Source by a Demersal Fish (*Leiostomus xanthurus*)," *Aquat. Toxicol.*, Vol 5, 1984, pp. 331–342.
- (217) *Techniques for Study of Effects and Uptake of Sediment Associated Chemicals*, Office of Toxic Substances, U.S. Environmental Protection Agency, Gulf Breeze, FL, 1986.
- (218) Reichert, W. L., Eberhart, B. L., and Varanasi, U., "Exposure of Two Species of Deposit-Feeding Amphipods to Sediment-Associated BaP: Uptake, Metabolism, and Covalent Binding to Tissue Macromolecules," *Aquat. Toxicol.*, Vol 6, 1985, pp. 45–56.
- (219) Roesijadi, G., Woodruff, D. L., and Anderson, J. W., "Bioavailability of Naphthalenes from Marine Sediments Artificially Contaminated with Prudhoe Bay Oil," *Environ. Pollut.*, Vol 15, 1978, pp. 223–228.
- (220) River, J. B., Pearson, J. E., and Shultz, C. D., "Total and Organic Mercury in Marine Fish," *Bulletin of Environment Contamination and Toxicology* , Vol 8, 1972, pp. 257–266.
- (221) Cross, F. A., Hardy, L. H., Jones, N. Y., and Barber, R. T., "Relation Between Total Body Weight and Concentrations of Manganese, Iron, Copper, Zinc, and Mercury in White Muscle of Bluefish (*Pomatomus saltatrix*) and a Bathyl-Demersal Fish *Antimora rostrata*," *J. Fish. Res. Board Can.*, Vol 30, 1973, pp. 1287–1291.
- (222) Schultz-Baldes, M., "Lead Uptake from Seawater and Food, and Lead Loss in the Common Mussel *Mytilus edulis*," *Mar. Biol.*, Vol 25, 1974, pp. 177–193.
- (223) Branson, D. R., Blau, G. E., Alexander, H. C., and Neely, W. B., "Bioconcentration of 2,2',4,4'-Tetrachlorobiphenyl in Rainbow Trout as Measured by an Accelerated Test," *Trans. Am. Fish. Soc.*, Vol 4, 1975, pp. 785–792.
- (224) Foster, G., Baksi, S. M., and Means, J. C., "Bioaccumulation of Trace Organic Contaminants from Sediment Baltic Clams (*Macoma balthica*) and Soft-Shell (*Mya arenaria*)," *Environmental Toxicology and Chemistry*, Vol 6, 1987, pp. 969–976.
- (225) Niimi, A. J., and Cho, C. Y., "Elimination of Hexachlorobenzene (HCB) by Rainbow Trout (*Salmo gairdneri*), and an Examination of its Kinetics in Lake Ontario Salmonids," *Can. J. Fish. Aquat. Sci.*, Vol 38, 1981, pp. 1350–1356.
- (226) Luoma, S. N., and Bryan, G. W., "A Statistical Study of Environmental Factors Controlling Concentrations of Heavy Metals in the



- Burrowing Bivalve *Scrobicularia plana* and the Polychaete *Nereis diversicolor*,” *Estuarine Coastal Shelf Sci.*, Vol 15, 1982, pp. 95–108.
- (227) Bryan, G. W., “Some Aspects of Heavy Metal Tolerance in Aquatic Organisms,” *Effects of Pollutants on Aquatic Organisms*, A. P. M. Lockwood, ed., Cambridge University Press, New York, NY, 1976, pp. 7–34.
- (228) Lee, H., II, Boese, B. L., Winsor, M., Randall, R. C., and Specht, D. T., “Passive Sorption of Hexachlorobenzene from Interstitial Water by the Clam, *Macoma nasuta* (Abstract),” presented at 9th Annual Meeting of the Society of Environmental Toxicology and Chemist, Arlington, VA, Nov. 13–17, 1988.
- (229) Augenfeld, J. M., “Effects of Prudhoe Bay Crude Oil Contamination on Sediment Working Rates of *Abarenicola pacifica*,” *Marine Environmental Research*, Vol 3, 1980, pp. 307–313.
- (230) Pelletier, J. K., Williamson, K. J., and Lee, H., II, “Bioaccumulation of Cadmium by *Abarenicola pacifica*,” Final Report to U.S. Environmental Protection Agency, Project No. CR811118-01-3, Newport, OR, by K. J. Williamson, S. Woods, and P. O. Nelson, Oregon State University, Corvallis, OR, 1988, pp. 18–50.
- (231) Kristensen, E., “Direct Measurement of Ventilation and Oxygen Uptake in Three Species of Tubicolous Polychaetes (*Nereis* spp.),” *J. Comp. Physiol.*, Vol 145, 1981, pp. 45–50.
- (232) Pelletier, J. K., Williamson, K. J., and Lee, H., II, “Bioenergetics of *Abarenicola pacifica*,” Final Report to U.S. EPA, Project No. CR811118-01-3, Newport, OR, by K. J. Williamson, S. Woods, and P. O. Nelson, Oregon State University, Corvallis, OR, 1988, pp. 1–18.
- (233) Sinnett, J. C., and Davis, W. R., “A Programmable Turbidistat for Suspended Particles in Laboratory Aquaria,” *J. Exp. Mar. Biol. Ecol.*, Vol 73, 1983, pp. 167–174.
- (234) Lake, J. L., Hoffman, G., and Schimmel, S., “Bioaccumulation of Contaminants from Black Rock Harbor Dredged Material by Mussels and Polychaetes,” Technical Report D-85-02, prepared by U.S. Environmental Protection Agency, Environmental Research Laboratory, Narragansett, RI, for the U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS, 1985.
- (235) Pruell, R. J., Lake, J. L., Davis, W. R., and Quinn, J. G., “Uptake and Depuration of Organic Contaminants by Blue Mussels (*Mytilus edulis*) Exposed to Contaminated Sediment,” *Mar. Biol.*, Vol 91, 1986, pp. 497–507.
- (236) Nelson, W. G., Phelps, D. K., Galloway, W. B., Rogerson, P. F., and Pruell, R. J., “Effects of Black Rock Harbor Dredge Material on the Scope for Growth of the Blue Mussel *Mytilus edulis* After Laboratory and Field Exposures,” Technical Report D-87-7, prepared by the U.S. Environmental Protection Agency, Narragansett, RI, for the U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS, 1987.
- (237) Yevich, P. P., Yevich, C., Pesch, G., and Nelson, W., “Effects of Black Rock Harbor Dredged Material on the Histopathology of the Blue Mussel *Mytilus edulis* and Polychaete Worm *Nephtys incisa* After Laboratory and Field Exposures,” Field Verification Program (Aquatic Disposal) Technical Report D-87-8, prepared by the U.S. Environmental Protection Agency, Narragansett, RI, for the U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS (available from NTIS, 5285 Port Royal Road, Springfield, VA 22161), 1987.
- (238) Peddicord, R. K., “Direct Effects of Suspended Sediments on Aquatic Organisms,” *Contaminants and Sediments*, Vol 1, R. A. Baker, ed., Ann Arbor Science, Ann Arbor, MI, 1980, pp. 501–536.
- (239) Ingle, J. C., *The Movement of Beach Sand: An Analysis Using Fluorescent Grains*, Elsevier Publishing Co., New York, NY, 1966.
- (240) Kennedy, P. C., “The Use of Molluscs for Monitoring Trace Elements in the Marine Environment in New Zealand, 1: The Contribution of Ingested Sediment to the Trace Element Concentrations in New Zealand Molluscs,” *New Zealand J. Mar. F. W. Res.*, Vol 20, 1986, pp. 627–640.
- (241) Brunson, E.L., Canfield, T.J., Dwyer, F.J., Kemble N.E., Ingersoll, C.G. 1998, Assessing bioaccumulation of contaminants from sediments from the upper Mississippi River using field-collected oligochaetes and laboratory-exposed *Lumbriculus variegatus*. *Arch Environ Contam Toxicol*, 35:191–201.
- (242) Schuytema, G. S., Krawczyk, D. F., Griffis, W. L., Nebeker, A. V., Robideaux, M. L., Brownawell, B. J., and Westall, J. C., “Comparative Uptake of Hexachlorobenzene by Fathead Minnows, Amphipods and Oligochaete Worms from Water and Sediment,” *Environmental Toxicology and Chemistry*, Vol 7, 1988, pp. 1035–1044.
- (243) Chekanovskaya, O. V., *Aquatic Oligochaeta of the U.S.S.R.*, Akademiya Nauk SSSR, Moscow, USSR, 1962.
- (244) Cook, D. G., “Observations on the Life History and Ecology of Some Lumbriculidae (Annelida, Oligochaeta),” *Hydrobiologia*, Vol 34, 1969, pp. 561–574.
- (245) Spencer, D. R., “The Aquatic Oligochaetes of the St. Lawrence Great Lakes Region,” *Proceedings of the First International Symposium on Aquatic Oligochaete Biology*, R. O. Brinkhurst and D. G. Cook, eds., Plenum Press, New York, NY, 1980, pp. 115–164.
- (246) Brinkhurst, R. O., “Guide to the Freshwater Aquatic Microdrile Oligochaetes of North America,” *Can. Spec. Publ. Fish. Aquatic Sci.* 84, Department Fisheries and Oceans, Ottawa, Ontario, 1986, 259 pp.
- (247) Call, D. J., Balcer, M. D., Brooke, L. T., Lozano, S. J., and Vaishnav, D. D., *Sediment Quality Evaluation in the Lower Fox River and Southern Green Bay of Lake Michigan*, U.S. Environmental Protection Agency Cooperative Agreement Final Report, University of Wisconsin-Superior, Superior, WI, 1991.
- (248) Ankley, G. T., Benoit, D. A., Hoke, R. A., Leonard, E. N., West, C. W., Phipps, G. L., Mattson, V. R., and Anderson, L. A., “Development and Evaluation of Test Methods for Benthic Invertebrates and Sediments: Effects of Flow Rate and Feeding on Water Quality and Exposure Conditions,” *Arch. Environ. Contam. Toxicol.*, Vol 25, 1993, pp. 12–19.
- (249) Call, D. J., Brooke, L. T., Ankley, G. T., Benoit, D. A., West, C. W., and Hoke, R. A., *A Short-Term Method for Estimating the Toxicity of Solid Phase Sediment to Chironomus tentans*, U.S. Environmental Protection Agency, Region 5, Chicago, IL, MN, 1993.
- (250) Ankley, G. T., Benoit, D. A., Balough, J. C., Reynoldson, T. B., Day, K. E., and Hoke, R. A., “Evaluation of Potential Confounding Factors in Sediment Toxicity Tests with Three Freshwater Benthic Invertebrates,” *Environmental Toxicology and Chemistry*, in press.
- (251) Call, D. J., Brooke, L. T., Ankley, G. T., Benoit, D. A., Phipps, G. L., West, C. W., and Hoke, R. A., *A Method for Determining Bioaccumulation of Sediment-Associated Contaminants Using the Oligochaete, Lumbriculus variegatus*, U.S. Environmental Protection Agency, Region 5, Chicago, IL, 1993.
- (252) Pennak, R. W., *Freshwater Invertebrates of the United States*, John Wiley and Sons, Inc., New York, NY, 1989, 628 pp.
- (253) Benoit, D. A., Phipps, G. A., and Ankley, G. T., “A Simple, Inexpensive Mini-Flow System for the Automatic Renewal of Overlying Water in Toxicity Tests with Contaminated Sediments,” *Water Res.*, Vol 27, 1993, pp. 1403–1412.
- (254) Wall, D.V., London, J., Warren, J.E., Gossett, R., Wenholtz, M.D., and Klaine, S.J., 1998. Development of a continuous-flow renewal system for sediment toxicity testing, *Environ. Toxicol. Chem.*, 17:1159 –1164.
- (255) Shuba, P. J., Tatem, H. E., and Carroll, J. H., *Biological Assessment Methods to Predict the Impact of Open-Water Disposal of Dredged Material*, U.S. Army Corps of Engineers Technical Report D-78-5Q, Washington, DC, 1978.
- (256) Gauss, J. D., Woods, P. E., Winner, R. W., and Skillings, J. H., “Acute Toxicity of Copper to Three Life Stages of *Chironomus tentans* as Affected by Water Hardness-Alkalinity,” *Environ. Poll. (Ser. A)*, Vol 37, 1985, pp. 149–157.

- (257) Mayer, F. L., Jr., and Ellersieck, M. R., *Manual of Acute Toxicity: Interpretation and Data Base for 410 Chemicals and 66 Species of Freshwater Animals*, U.S. Fish and Wildlife Service Resource Publication 160, Washington, DC, 1986.
- (258) Obana, H., Hori, S., and Kushimoto, T., “Determination of Polycyclic Aromatic Hydrocarbons, i.e., Marine Samples by High-Performance Liquid-Chromatography,” *Bulletin of Environment Contamination and Toxicology* ., Vol 26, 1981, pp. 613–620; .
- (259) Randall, R. C., Lee, H., II, Ozretich, R. J., Lake, L. J., and Pruell, R. J., “Evaluation of Selected Lipid Methods for Normalizing Pollutant Bioaccumulation,” *Environmental Toxicology and Chemistry*, Vol 10, 1991, pp. 1431–1436.
- (260) Folch, J., Lees, M., and Stanley, G. H. S., “A Simple Method for Isolation and Purification of Total Lipids from Animal Tissue,” *Journal of Biological Chemistry* , Vol 226, 1957, pp. 497–509.

## SUMMARY OF CHANGES

Committee E47 has identified the location of selected changes to this standard since the last issue (E1688–00a) that may impact the use of this standard.

(1) Changes were made throughout the whole standard.

*ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.*

*This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.*

*This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or [service@astm.org](mailto:service@astm.org) (e-mail); or through the ASTM website ([www.astm.org](http://www.astm.org)). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; <http://www.copyright.com/>*