



Standard Specification for Water Trap for Diesel Exhaust¹

This standard is issued under the fixed designation F1431; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This specification covers the material, dimensions, and construction of diesel exhaust water traps, which shall be required whenever the exhaust is to be expelled through the hull of the vessel.

1.2 The traps are designed to prevent sea backwash from entering the diesel exhaust system.

1.3 The values stated in SI units are to be regarded as standard. The values given in parentheses are mathematical conversions to inch-pound units that are provided for information only and are not considered standard.

2. Referenced Documents

2.1 *ASTM Standards*:²

B443 Specification for Nickel-Chromium-Molybdenum-Columbium Alloy (UNS N06625) and Nickel-Chromium-Molybdenum-Silicon Alloy (UNS N06219) Plate, Sheet, and Strip

F104 Classification System for Nonmetallic Gasket Materials

2.2 *Military Standard*:³

MIL-S-901 Requirements for Shock Tests, High Impact, Shipboard Machinery, Equipment and Systems

2.3 *Other Documents*:

ABS Rules for Building and Classing Steel Vessels⁴

AWS D1.1 Structural Welding Code⁵

3. Ordering Information

3.1 Water traps ordered under this specification shall include the following information:

¹ This specification is under the jurisdiction of ASTM Committee F25 on Ships and Marine Technology and is the direct responsibility of Subcommittee F25.11 on Machinery and Piping Systems.

Current edition approved Sept. 1, 2016. Published September 2016. Originally approved in 1992. Last previous edition approved in 2010 as F1431 – 92 (2010). DOI: 10.1520/F1431-92R16.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from Standardization Documents Order Desk, Bldg. 4 Section D, 700 Robbins Ave., Philadelphia, PA 19111-5094, Attn: NPODS.

⁴ Available from American Bureau of Shipping (ABS), ABS Plaza, 16855 Northchase Dr., Houston, TX 77060, <http://www.eagle.org>.

⁵ Available from American Welding Society (AWS), 8669 NW 36 St., #130, Miami, FL 33166-6672, <http://www.aws.org>.

- 3.1.1 ASTM designation, title and date of this specification,
- 3.1.2 Quantity,
- 3.1.3 Size,
- 3.1.4 Shock test and grade (see Supplementary Requirement S1),
- 3.1.5 Handhole shall be at 45° unless otherwise specified, and
- 3.1.6 Flange dimensions shall be indicated for gaskets.

4. Materials and Manufacture

4.1 *Materials*:

4.1.1 The tank and baffles shall be of nickel-chromium-molybdenum-columbium alloy and tested in accordance with Specification **B443**.

4.1.2 *Gaskets*—Gaskets shall be ASTM Classification **F104** (F712100–A9B4–E22K5M6) and shall withstand temperatures of 650°C (1200°F).

4.2 *Manufacture*:

4.2.1 Construction of the water traps shall be in accordance with this specification and **Fig. 1**.

4.2.2 Welding shall be in accordance with ABS Rules for Building and Classing Steel Vessels or AWS D1.1.

5. Requirements

5.1 Water traps for diesel exhaust systems shall be designed for maximum temperatures of 650°C (1200°F).

5.2 *Baffles*:

5.2.1 No less than three baffles shall be installed. The bottom baffle shall not extend below the top of the outlet pipe, as shown in **Fig. 1**.

5.2.2 The inlet may be rotated about the centerline of the trap to suit the installations. The top baffle shall also be rotated to retain the same relation with the inlet as shown in **Fig. 1**.

5.3 *Trap Size*:

5.3.1 The trap size shall be a minimum of 1 m (3 ft) high.

5.3.2 The diameter shall equal twice the diameter of the inlet exhaust line.

5.3.3 The minimum free area through the trap shall equal twice the area of the outlet exhaust line.

5.4 *Hand Hole*—The hand hole shall be configured as indicated in **Fig. 1**.

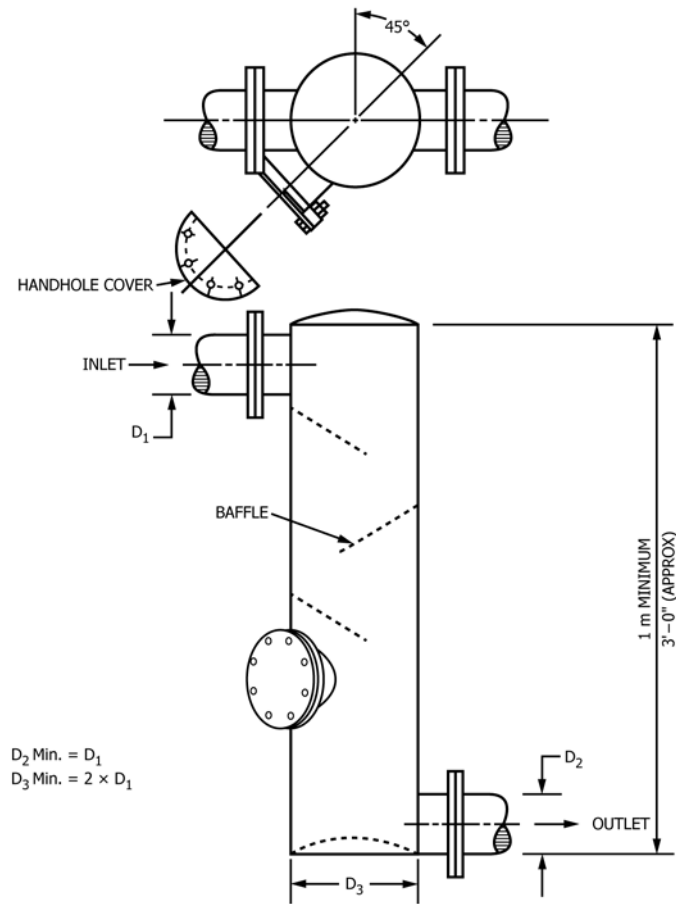


FIG. 1 Water Trap for Diesel Exhaust

6. Dimensions

6.1 The dimensions in Fig. 1 are recommended nominal dimensions.

7. Workmanship, Finish, and Appearance

7.1 Workmanship on traps and piping shall be of sufficient quality to prevent dirt accumulation. Welding shall have small, even beading, free of slag and spatter.

7.2 The trap shall be free of paint.

8. Test Method

8.1 Each trap shall be pneumatically proof tested 35 kPa (5 psi) with no visible seam leakage.

9. Packaging

9.1 The water traps shall be crated or packaged individually for shipment by a commercial common carrier.

9.1.1 Talc and talcum used in the packaging process of items shall be free of asbestos and asbestiform-like materials.

10. Marking

10.1 Each water trap shall bear a weathertight tag showing the purchase order number, ASTM designation, size, and name of manufacturer. The markings on the package shall be approximately 25.4 mm (1 in.) high.

11. Quality Assurance Provisions

11.1 *Source Inspection*—The purchaser reserves the right to inspect the manufacturing process and end product in the supplier's plant.

12. Keywords

12.1 diesel exhaust systems; piping systems

SUPPLEMENTARY REQUIREMENTS

The following supplementary requirements shall apply only when specified by the purchaser in the contract order.

S1. Provisions to withstand high shock. The grade will be specified by the navy requirements.

S1.1 When specified, the diesel exhaust water trap shall meet the requirements set forth in MIL-S-901.

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org). Permission rights to photocopy the standard may also be secured from the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, Tel: (978) 646-2600; <http://www.copyright.com/>