BS EN ISO 4264:2007 +A1:2013 BS 2000-380:2007 +A1:2013

Petroleum products — Calculation of cetane index of middle-distillate fuels by the four-variable equation

ICS 75.160.20



## National foreword

This British Standard is the UK implementation of EN ISO 4264:2007+A1:2013. It is identical to ISO 4264:2007. It supersedes BS EN ISO 4264:2007 (dual numbered BS 2000-380:2007) which is withdrawn.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to ISO text carry the number of the ISO amendment. For example, text altered by ISO amendment 1 is indicated by (A).

The UK participation in its preparation was entrusted to Technical Committee PTI/13, Petroleum testing and terminology.

A list of organizations represented on this committee can be obtained on request to its secretary.

Energy Institute, under the brand of IP, publishes and sells all Parts of BS 2000, and all BS EN petroleum test methods that would be Part of BS 2000, both in its annual publication "Standard methods for analysis and testing of petroleum and related products and British Standard 2000 Parts" and individually.

Further information is available from:

Energy Institute, 61 New Cavendish Street, London W1G 7AR. Tel: 020 7467 7100. Fax: 020 7255 1472.

The publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2007

© The British Standards Institution 2013. Published by BSI Standards Limited 2013

#### Amendments/corrigenda issued since publication

Comments
Implementation of ISO amendment 1:2013 with CEN endorsement A1:2013. BS EN ISO 4264:2007+A1:2013 is still dual numbered as BS 2000-380:2007+A1:2013

ISBN 978 0 580 76801 9

# EUROPEAN STANDARD

# NORME EUROPÉENNE EUROPÄISCHE NORM

May 2013

ICS 75.160.20

#### **English Version**

# Petroleum products - Calculation of cetane index of middledistillate fuels by the four-variable equation (ISO 4264:2007)

Produits pétroliers - Calcul de l'indice de cétane des distillats moyens par équation à quatre variables (ISO 4264:2007) Mineralölerzeugnisse - Berechnung des Cetanindex von Mitteldestillat-Kraftstoffen aus der 4 Parameter-Gleichung (ISO 4264:2007)

EN ISO 4264:2007+A1

This European Standard was approved by CEN on 13 August 2007.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

BS EN ISO 4264:2007+A1:2013 EN ISO 4264:2007+A1:2013

#### **Foreword**

This document (EN ISO 4264:2007) has been prepared by Technical Committee ISO/TC 28 "Petroleum products and lubricants" in collaboration with Technical Committee CEN/TC 19 "Gaseous and liquid fuels, lubricants and related products of petroleum, synthetic and biological origin" the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2008, and conflicting national standards shall be withdrawn at the latest by February 2008.

This document supersedes EN ISO 4264:1996.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

#### **Endorsement notice**

The text of ISO 4264:2007 has been approved by CEN as a EN ISO 4264:2007 without any modification.

#### Foreword to amendment A1

This document (EN ISO 4264:2007/A1:2013) has been prepared by Technical Committee ISO/TC 28 "Petroleum products and lubricants" in collaboration with Technical Committee CEN/TC 19 "Gaseous and liquid fuels, lubricants and related products of petroleum, synthetic and biological origin" the secretariat of which is held by NEN.

This Amendment to the European Standard EN ISO 4264:2007 shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2013, and conflicting national standards shall be withdrawn at the latest by November 2013.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

#### **Endorsement notice**

The text of ISO 4264:2007/Amd 1:2013 has been approved by CEN as EN ISO 4264:2007/A1:2013 without any modification.

# Petroleum products — Calculation of cetane index of middledistillate fuels by the four-variable equation

WARNING — The use of this International Standard may involve hazardous materials, operations and equipment. This International Standard does not purport to address all the safety problems associated with its use. It is the responsibility of the user of this International Standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

#### 1 Scope

This International Standard describes a procedure for the calculation of the cetane index of middle-distillate fuels from petroleum-derived sources. The calculated value is termed the "cetane index by four-variable equation". Throughout the remaining text of this International Standard, the term "cetane index" implies cetane index by four-variable equation.

This International Standard is not applicable to fuels containing additives for raising the cetane number, nor to pure hydrocarbons, nor to distillate fuels derived from coal. It is applicable to fuels containing non-petroleum derivatives from tar sand and oil shale.

NOTE 1 This International Standard was originally developed using a matrix of fuels, some of which contain non-petroleum derivates from tar sands and oil shale. Other cetane index equations have since been developed which can be more applicable to tar sands products.

NOTE 2 The cetane index is not an alternative way to express the cetane number; it is a supplementary tool, to be used with due regard for its limitations.

NOTE 3 The cetane index is used to estimate the cetane number of diesel fuel when a test engine is not available to determine this property directly, or when insufficient sample is available for an engine rating. In cases where the cetane number of a fuel has been previously established, the cetane index can be used to verify the cetane number of subsequent samples of that fuel, provided the fuel's source and mode of manufacture remain unchanged.

NOTE 4 The cetane index method is used to estimate the cetane number of the fuel, but does not take into account the effects of cetane improver additives that may be present. (41)

The recommended range of fuel properties for application of this International Standard is as follows:

# Fuel propertyRecommended rangeCetane number32,5-56,5Density at 15 °C, kg/m³805,0-895,010 % (V/V) distillation recovery temperature, °C171-25950 % (V/V) distillation recovery temperature, °C212-30890 % (V/V) distillation recovery temperature, °C251-363

Within the recommended range of cetane number (32,5 to 56,5), the expected error of the prediction via the cetane index equation will be less than  $\pm$  2 cetane numbers for 65 % of the distillate fuels examined. Errors may be greater for fuels whose properties fall outside the recommended range of application.

#### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

[A] ISO 91-1, Petroleum measurement tables — Part 1: Tables based on reference temperatures of 15 °C and 60 °F

ISO 3405, Petroleum products — Determination of distillation characteristics at atmospheric pressure

ISO 3675, Crude petroleum and liquid petroleum products — Laboratory determination of density — Hydrometer method

ISO 12185, Crude petroleum and petroleum products — Determination of density — Oscillating U-tube method (A)

#### 3 Principle

The density at 15 °C and the temperatures at which 10 % (V/V), 50 % (V/V) and 90 % (V/V) are recovered (distillation recovery temperatures) are determined by standard test methods and the cetane index is calculated from these test data using known correlations.

#### 4 Procedure

- **4.1** Determine the density at 15 °C of the sample, to the nearest 0,1 kg/m<sup>3</sup>, by the procedure described in ISO 3675 or ISO 12185, using the corrections given in ISO 91-1 if appropriate.
- **4.2** Determine the temperatures, to the nearest 1  $^{\circ}$ C, at which 10  $^{\circ}$  (V/V), 50  $^{\circ}$  (V/V) and 90  $^{\circ}$  (V/V) of the sample is recovered during distillation, corrected to standard barometric pressure, by the procedure described in ISO 3405.

#### 5 Calculation

- 5.1 Calculate the cetane index by one of the procedures given in 5.1.1 and 5.1.2.
- **5.1.1** Insert the measured values (see 4.1 and 4.2) in Equation (1) below and calculate the cetane index, CI.

$$CI = 45,2 + 0,089 \ 2T_{10N} + (0,131 + 0,901B)T_{50N} + (0,052 \ 3 - 0,42B)T_{90N} + \dots$$

$$\dots + 0,000 \ 49 \left(T_{10N}^2 - T_{90N}^2\right) + \ 107B + 60B^2$$
(1)

where

$$T_{10N} = T_{10} - 215;$$

$$T_{50N} = T_{50} - 260;$$

$$T_{90N} = T_{90} - 310;$$

 $T_{10}$  is the 10 % (V/V) distillation recovery temperature, in degrees Celsius;

 $T_{50}$  is the 50 % ( $V\!/V\!$ ) distillation recovery temperature, in degrees Celsius;

 $T_{90}$  is the 90 % (V/V) distillation recovery temperature, in degrees Celsius;

$$B = [\exp(-0.0035D_N)] - 1;$$

$$D_N = D - 850$$
;

- D is the density at 15 °C, in kilograms per cubic metre.
- **5.1.2** Use the nomographs in Figures 1, 2 and 3 to derive the cetane index as follows:
- a) insert the density and 50 % (V/V) distillation recovery temperature values in Figure 1 to estimate the fuel cetane index:
- b) insert the density and 90 % (V/V) distillation recovery temperature values in Figure 2 to determine a correction factor for deviations in these parameters from average values;
- c) insert the 10 % (V/V) and 90 % (V/V) distillation recovery temperature values in Figure 3 to determine a second correction factor for deviations in these parameters from average values;
- d) sum the correction factors from Figures 2 and 3 with the estimated cetane index from Figure 1 to give the final cetane index.
- **5.2** The method of using the nomography is indicated by the example shown below for a fuel of cetane number 46,8.

#### 5.2.1 Measured fuel properties

Density at 15 °C, kg/m <sup>3</sup>	860,0
10 % ( $\emph{V/V}$ ) distillation recovery temperature, °C	220
50 % ( $\emph{V/V}$ ) distillation recovery temperature, °C	290
90 % (V/V) distillation recovery temperature, °C	340

#### 5.2.2 Cetane index

Estimation from Figure 1		44,1
Correction from Figure 2		+ 0,4
Correction from Figure 3		<u>+ 1,5</u>
	CI =	46,0

#### 6 Expression of results

Report the result to the nearest 0,1 as the cetane index by four-variable equation.

#### 7 Precision


- **7.1** The calculation of the cetane index from measured density at 15 °C and measured 10 % (V/V), 50 % (V/V) and 90 % (V/V) distillation recovery temperatures is exact.
- **7.2** The precision of the cetane index equation is dependent on the precision of the original density and distillation recovery temperature determinations which enter into the calculation. The precision of these determinations is stated in ISO 3675, ISO 12185 and ISO 3405.

#### BS EN ISO 4264:2007+A1:2013 EN ISO 4264:2007+A1:2013

## 8 Test report

The test report shall contain at least the following information:

- a) a reference of this International Standard;
- b) the type and identification of the product tested;
- c) the result of the test (see Clause 6);
- d) any deviation, by agreement or otherwise, from the procedure specified;
- e) the date of the test.

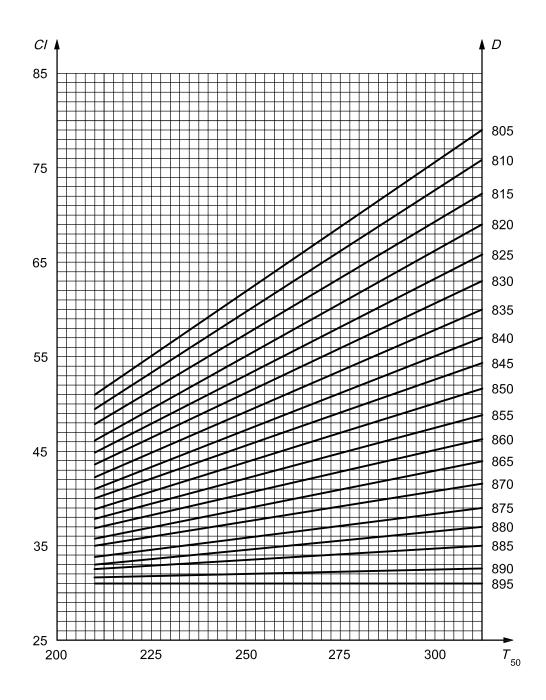


#### Key

CI cetane index

 $T_{50}$  50 % distillation recovery temperature, °C

D density at 15 °C, kg/m<sup>3</sup>

Figure 1 — Cetane index — Estimate based on density and 50 % distillation recovery temperature

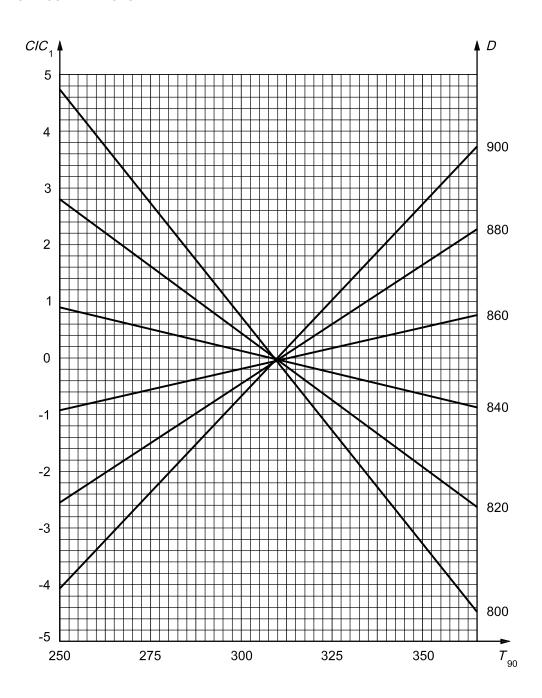


# Key

CIC<sub>1</sub> cetane index correction

 $T_{90}$  90 % distillation recovery temperature, °C

D density at 15 °C, kg/m<sup>3</sup>

Figure 2 — Cetane index correction for deviations from average values in density and 90 % distillation recovery temperature

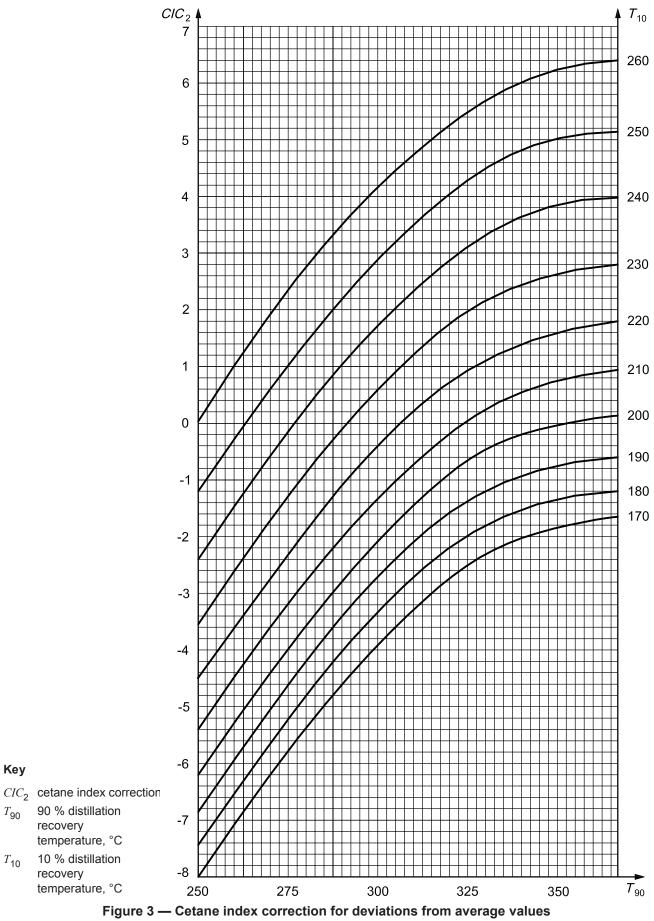

in 10 % and 90 % distillation recovery temperatures

# **Energy Institute**



## **Buying Parts of BS 2000**

Orders for BS 2000 publications should be addressed to either:

**Energy Institute – Library and Information Service** 

61 New Cavendish Street London W1G 7AR

Tel: +44 (0)20 7467 7100 Fax: +44 (0)20 7255 1472 www.energyinst.org.uk

Order standards securely via: www.energyinstpubs.org.uk

or:

**British Standards Institution – Customer Services** 

389 Chiswick High Road London W4 4AL

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001 www.bsi-global.com

Order hard copy standards securely via: <a href="https://www.bsi-global.com/bsonline">www.bsi-global.com/bsonline</a>

#### Copyright

Copyright exists in all BS 2000 publications. No part of this publication may be reproduced in any form without the prior permission in writing of BSI and the Energy Institute. Enquiries about copyright should be made to the Secretary of PTI/13 at the Energy Institute.

