BRITISH STANDARD

BS EN ISO 6867:2001
BS 5766-24: 2001

Animal feeding stuffs — Determination of vitamin E content — Method using high-performance liquid chromatography

The European Standard EN ISO 6867:2000 has the status of a British Standard

ICS 65.120

National foreword

This British Standard is the official English language version of EN ISO 6867:2000. It is identical with ISO 6867:2000.

The UK participation in its preparation was entrusted to Technical Committee AW/10, Animal feeding stuffs, which has the responsibility to:

— aid enquirers to understand the text;

— present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;

— monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

Attention is drawn to the fact that CEN and CENELEC standards normally include an annex which lists normative references to international publications with their corresponding European publications. The British Standards which implement these international or European publications may be found in the BSI Standards Catalogue under the section entitled "International Standards Correspondence Index", or by using the "Find" facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

This British Standard, having been prepared under the direction of the Consumer Products and Services Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 March 2001

Summary of pages

This document comprises a front cover, an inside front cover, the EN ISO title page, the EN ISO foreword page, the ISO title page, pages ii and iii, a blank page, pages 1 to 11, the annex ZA page, an inside back cover and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

ISBN 0 580 36932 3

EUROPEAN STANDARD

NORME EUROPÉENNE

EUROPÄISCHE NORM

EN ISO 6867

December 2000

ICS 06.012

English version

Animal feeding stuffs - Determination of vitamin E content - Method using high-performance liquid chromatography (ISO 6867:2000)

Aliments des animaux - Détermination de la teneur en vitamine E - Méthode par chromatographie liquide à haute performance (ISO 6867:2000)

Futtermittel - Bestimmung des Gehalts an Vitamin E - Hochleistungs-flüssigchromatographisches Verfahren (ISO 6867:2000)

This European Standard was approved by CEN on 1 December 2000.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Ref. No. EN ISO 6867:2000 E

Foreword

The text of the International Standard ISO 6867:2000 has been prepared by Technical Committee ISO/TC 34 "Agricultural food products" in collaboration with Technical Committee CEN/TC 327 "Animal feeding stuffs - Methods of sampling and analysis", the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2001, and conflicting national standards shall be withdrawn at the latest by June 2001.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of the International Standard ISO 6867:2000 was approved by CEN as a European Standard without any modification.

NOTE: Normative references to International Standards are listed in annex ZA (normative).

EN ISO 6867:2000

INTERNATIONAL STANDARD

ISO 6867

First edition
2000-12-01

Animal feeding stuffs — Determination of vitamin E content — Method using high-performance liquid chromatography

Aliments des animaux — Détermination de la teneur en vitamine E — Méthode par chromatographie liquide à haute performance

Reference number
ISO 6867:2000(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 6867 was prepared by Technical Committee ISO/TC 34, *Food products*, Subcommittee SC 10, *Animal feeding stuffs*.

Annex A of this International Standard is for information only.

Animal feeding stuffs — Determination of vitamin E content — Method using high-performance liquid chromatography

1 Scope

This International Standard specifies a method for the determination of the vitamin E (DL-α-tocopherol) content of animal feeding stuffs and pet foods using high performance liquid chromatography.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 3696:1987, *Water for analytical laboratory use — Specifications and test methods*.

ISO 6498, *Animal feeding stuffs — Preparation of test samples*.

3 Principle

A test portion of the sample is saponified with ethanolic potassium hydroxide solution and the vitamin E is extracted into light petroleum. The light petroleum is removed by evaporation and the residue is dissolved in hexane. The vitamin E concentration in the hexane extract is determined by normal-phase liquid chromatography using conditions that separate DL-α-tocopherol from other tocopherols.

4 Reagents

Use only reagents of recognized analytical grade, unless otherwise stated.

4.1 Water, complying with at least grade 3 in accordance with ISO 3696.

4.2 Potassium hydroxide solution.

Dissolve 500 g of potassium hydroxide in water (4.1) and dilute to 1 litre.

4.3 Ethanol, $w(C_2H_5OH)$ = 95 % (by volume), or equivalent industrial methylated spirit.

4.4 Hexane, HPLC grade.

4.5 Light petroleum, boiling range 40 °C to 60 °C; the residue on evaporation shall be less than 20 mg/l.

4.6 Vitamin E standard substance: DL-α-tocopherol, minimum purity not less than 96,0 %.

The purity of the standard substance should be checked spectrophotometrically (see 8.5.2).

4.7 1,4-Dioxan, HPLC grade.

4.8 Sodium sulfate (Na_2SO_4), anhydrous.

4.9 Sodium ascorbate solution, ρ = 100 g/l.

4.10 Inert gas, e.g. nitrogen.

4.11 Mobile phase for liquid chromatography.

Mix 30 ml 1,4-dioxan (4.7) with 970 ml hexane (4.4).

Filter through a membrane filter (5.5) before use.

4.12 Ethanol, $w(C_2H_5OH)$ = 96 % (by volume).

4.13 Methanol (CH_3OH), HPLC grade.

5 Apparatus

Using laboratory apparatus and, in particular, the following.

5.1 High-performance liquid chromatograph, consisting of the following.

5.1.1 Pump, set to deliver a constant eluent volume flow rate of 1,5 ml/min.

5.1.2 HPLC injection device.

5.1.3 Column, length 250 mm, internal diameter 4,6 mm, packed with a stationary phase consisting of silica.

A column with at least 5 000 theoretical plates and a k' value of 0,8 m, both with respect to DL-α-tocopherol, has been found to be satisfactory. The particle size should not be smaller than 5 µm and not greater than 10 µm. Other systems may be used provided that a satisfactory separation of vitamin E from other co-extractives is achieved.

5.1.4 Detector, allowing the measurement of fluorescence emitted at a wavelength of 326 nm when the column eluent is irradiated with ultraviolet light at a wavelength of 293 nm, with integrator/recorder.

5.2 Boiling water bath.

5.3 Rotary vacuum evaporator, with water bath at 40 °C.

5.4 Extraction apparatus (see Figure 1) consisting of the following:

— a cylinder of 1 litre capacity fitted with a ground glass neck and stopper;

— a ground glass joint, fitting the cylinder and equipped with an adjustable tube passing through the centre; and

— a side-arm.

The adjustable tube should have a U-shaped lower end and a jet at the opposite end so that the upper liquid layer in the cylinder may be transferred to a separating funnel of 1 litre capacity.

Other extraction equipment such as conical flasks and separating funnels may be used in place of the apparatus shown in Figure 1, provided that satisfactory recoveries of vitamin E are achieved.

5.5 Membrane filter, 0,45 m pore size, for filtration of mobile phase (4.11) and sample test solutions.

5.6 Grinding apparatus, capable of grinding the sample so that it passes through a **sieve** with 1 mm apertures.

5.7 UV (or UV/Visible) spectrometer, capable of measuring absorbance at the wavelengths defined in 8.5.2, equipped with quartz cells of 10 mm path length.

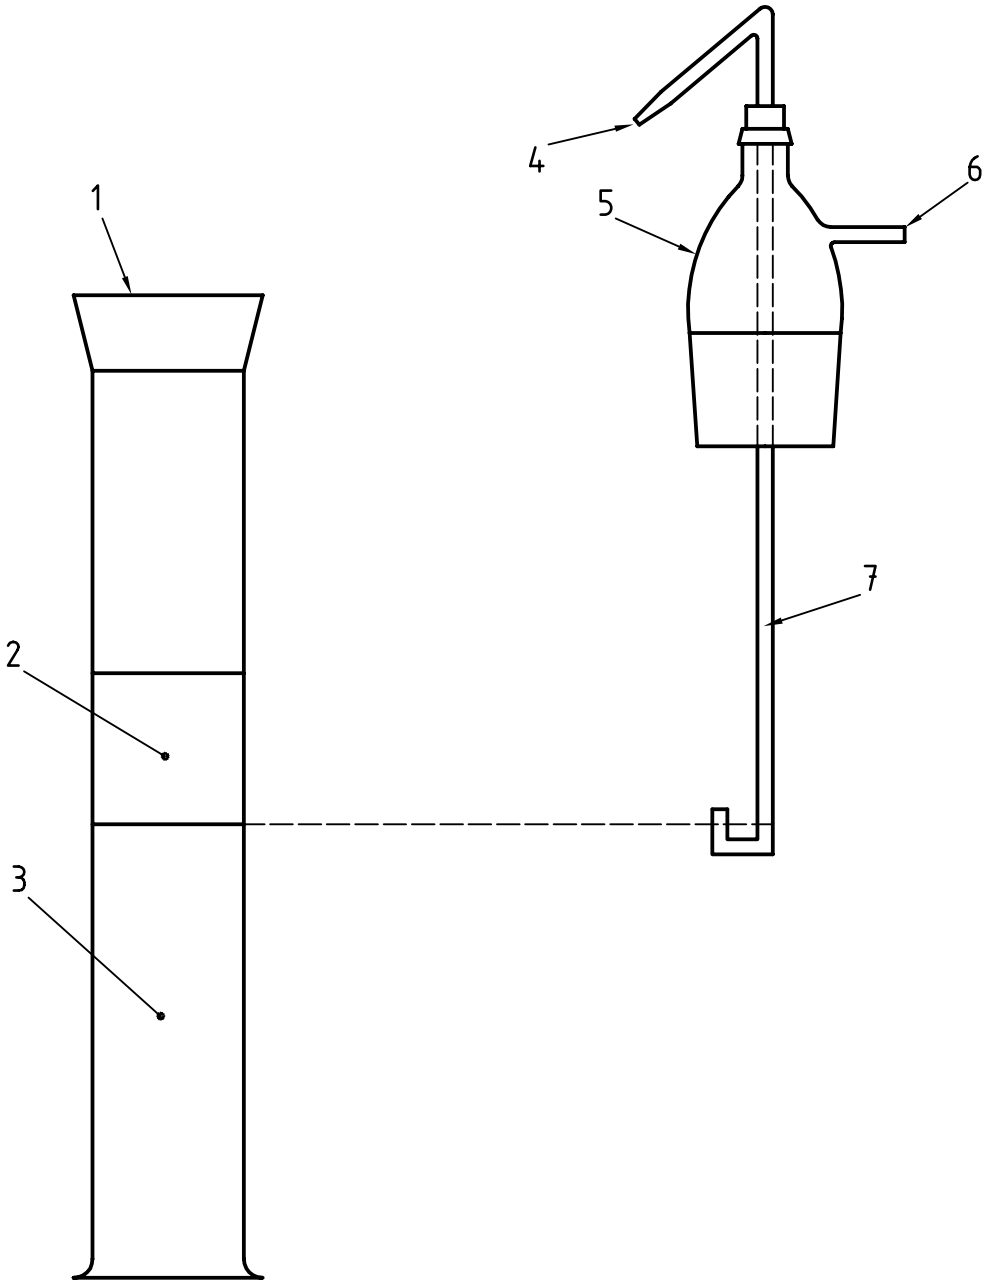

Key

1 Cylinder, of capacity 1 litre, with ground-glass neck
2 Light petroleum layer
3 Aqueous layer + saponified feed
4 Jet
5 Bottle, of capacity 1 litre, with ground-glass joint
6 Side-arm
7 Adjustable tube

Figure 1 — Example of extraction apparatus

6 Sampling

It is important that the laboratory receive a sample which is truly representative and has not been damaged or changed during transport or storage.

Sampling is not part of the method specified in this International Standard. A recommended sampling method is given in ISO 6497 [1].

Store the sample in such a way that deterioration and change in its composition are prevented.

7 Preparation of test samples

Prepare the test sample in accordance with ISO 6498.

Just prior to starting the analysis, grind a portion of the well-mixed laboratory sample so that it passes through a sieve with 1 mm apertures. Mix thoroughly.

Homogenize canned pet foods. Pass semi-moist pet foods through a mincer with 4-mm apertures.

8 Procedure

8.1 General

Because of the sensitivity of vitamin E to UV radiation and air, perform all operations away from natural and strong fluorescent light and as rapidly as is consistent with accurate working. Use amber glassware where possible. Complete each assay within one working day.

8.2 Saponification

Weigh, to the nearest 0,1 g, approximately 50 g of the prepared sample (see clause 7) into a 1 litre conical flask.

Add to the test portion 200 ml of ethanol (4.3) whilst swirling the flask to disperse the sample. Add 2 ml of sodium ascorbate solution (4.9), mix by swirling and then add 50 ml of potassium hydroxide solution (4.2) and swirl again.

Fit a reflux condenser to the flask and immerse the flask in the boiling water bath (5.2).

Allow the contents of the flask to reflux for 30 min, swirling occasionally.

NOTE In exceptional cases some products may require a longer saponification time.

Cool the flask to room temperature under a stream of cold water.

Transfer the contents of the flask into the extraction cylinder (see 5.4).

8.3 Extraction of vitamin E

Rinse the saponification flask with two 25 ml portions of ethanol (4.3) and transfer the rinsings to the cylinder.

Repeat the rinsing of the flask with two 125 ml portions of light petroleum (4.5) and one 250 ml portion of water (4.1), each time transferring the rinsings to the cylinder.

Stopper the cylinder and shake well for 1 min, releasing the pressure from time to time.

Cool the cylinder under a stream of cold water while waiting for the two liquid phases to separate, before removing the stopper.

When the layers have separated, remove the stopper, wash the sides of the stopper with a few millilitres of light petroleum (4.5) and insert the adjustable tube (see 5.4), positioning the lower open end so that it is just above the level of the interface.

By application of a slight pressure of inert gas (4.10) to the side arm tube, transfer the upper, light petroleum layer to a 1 litre separating funnel (see 5.4).

Add 125 ml of light petroleum (4.5) to the cylinder, stopper and shake well for 1 min.

Allow the layers to separate and transfer the upper layer to the separating funnel using the adjustable tube (see 5.4) as before.

Again, add 125 ml of light petroleum (4.5) to the cylinder, stopper and shake well for 1 min.

Again, allow the layers to separate and transfer the upper layer to the separating funnel using the adjustable tube as before.

Wash the combined light petroleum extracts with four 100 ml portions of water using at first only gentle inversion then only gentle shaking in order to keep emulsion formation to a minimum.

Transfer the washed extract through a medium/fast filter paper containing 30 g of anhydrous sodium sulfate (4.8) into a 1 litre flask suitable for vacuum evaporation (5.3).

Rinse the separating funnel with two 20 ml portions of light petroleum (4.5) and add the rinsings through the filter to the evaporation flask.

Wash the filter further with two 25 ml portions of light petroleum (4.5) and collect the washings in the evaporation flask.

Evaporate the light petroleum extract to dryness under vacuum at a temperature not exceeding 40 °C.

Care should be taken to ensure that the flask is removed from the rotary evaporator immediately after reaching the point of dryness; prolonged drying may lead to loss of vitamin E from the extract residue.

If the vitamin E concentration of the light petroleum extract is sufficiently high, the extract may be made up to a fixed volume with light petroleum and an aliquot part taken for the rotary evaporation stage.

Restore atmospheric pressure by admitting inert gas (4.10).

8.4 Determination

8.4.1 Dissolve the residue from 8.3 in a minimum volume of hexane (4.4) and transfer quantitatively to a 25 ml volumetric flask.

Rinse the evaporation flask with three small portions of hexane (4.4), transferring the rinsings to the volumetric flask. Dilute to volume with hexane and mix.

If necessary, filter the sample extract through a membrane filter (5.5) or centrifuge.

8.4.2 Inject 20 µl of the sample extract onto the column of the liquid chromatograph (5.1) and measure the area of the DL-α-tocopherol peak. The following HPLC conditions are offered for guidance; other conditions may be used provided that they give equivalent results:

— liquid chromatographic column (5.1.3): 250 mm × 4,6 mm, silica 5 µm or 10 µm packing, or equivalent;

— mobile phase (4.11): mixture of hexane (4.4) and 1,4-dioxan (4.7), 970:30 (by volume);

— flow rate: 1,5 ml/min;

— detector (5.1.4): fluorescence detector (excitation 295 nm, emission 330 nm).

Reverse-phase chromatography may also be used provided that the efficiency of the column is sufficient to allow the separation of DL-α-tocopherol from other tocopherols and sample co-extractives. If reverse-phase chromatography is used, sample and standard solutions should be made up in an appropriate solvent, for example methanol (4.13).

8.4.3 Calculate the mean peak area from replicate injections of the sample extract and determine the DL-α-tocopherol concentration in micrograms per millilitre of the extract, either

a) by reference to the mean peak areas obtained from replicate injections of DL-α-tocopherol standard solution of concentration within 5 % of the concentration in the sample extract, or

b) by reference to a calibration curve prepared as in 8.5.

8.5 Calibration

8.5.1 Preparation of DL-α-tocopherol standard solutions

8.5.1.1 DL-α-tocopherol stock standard solution

Dissolve approximately 100 mg, weighed to the nearest 0,1 mg, of DL-α-tocopherol (4.6) in 100 ml of hexane (4.4). The stock standard solution is stable for 1 week when stored at $\leqslant$ 4 °C in an airtight amber glass flask.

8.5.1.2 DL-α-tocopherol working standard solution: single-point calibration

Prepare a working standard by diluting the stock standard (8.5.1.1) with hexane (4.4) to give a concentration approximately equal to that expected in the sample extract. Alternatively, proceed as in 8.5.1.3.

8.5.1.3 DL-α-tocopherol working standard solution: multi-point calibration

Prepare a range of calibration working standards containing 2 µg/ml, 4 µg/ml, 6 µg/ml, 8 µg/ml and 10 µg/ml of DL-α-tocopherol by diluting the stock standard solution (8.5.1.1) with hexane (4.4).

Prepare working standards daily.

8.5.2 UV check of DL-α-tocopherol standard substance

Weigh, to the nearest 0,1 mg, 100 mg of DL-α-tocopherol (4.6) in a 100 ml volumetric flask. Dissolve in ethanol (4.12). Dilute to the mark with the same solvent and mix.

Dilute 2,0 ml of this solution to 25,0 ml with ethanol (4.12) and measure the UV spectrum of the resulting solution against ethanol (4.12) in the spectrometer (5.7) at wavelengths of between 250 nm and 320 nm. The absorption maximum should be at 292 nm:

$E_{1\,\mathrm{cm}}^{1\%} = 75{,}8$ at 292 nm in ethanol.

At this dilution an extinction value of 0,6 should be obtained.

9 Expression of results

Calculate the vitamin E content of the test sample by the equation:

$$w_E = \frac{25 \times c \times 1{,}1}{m}$$

where

w_E is the numerical value of the vitamin E content of the test sample, in International Units per kilogram;

c is the numerical value of the DL-α-tocopherol concentration of the extract, in micrograms per millilitre;

m is the numerical value of the mass of the test sample, in grams;

1,1 is the correction factor for DL-α-tocopherol acetate.

10 Precision

10.1 Interlaboratory test

Details of a laboratory test on the precision of the method are summarized in annex A. The values derived from these tests may not be applicable to concentration ranges and matrices other than those given.

10.2 Repeatability

The absolute difference between two independent single test results, obtained using the same method on identical test material in the same laboratory by the same operator using the same equipment within a short interval of time, will in not more than 5 % of cases exceed the repeatability limit (r) mentioned in or derived from Table 1.

10.3 Reproducibility

The absolute difference between two single test results, obtained using the same method on identical test material in different laboratories by different operators using different equipment, will in not more than 5 % of cases exceed the reproducibility limit (R) mentioned in or derived from Table 1.

Table 1 — Repeatability limit (r) and reproducibility limit (R)

Sample	Vitamin E content IU/kg	r IU/kg	R IU/kg
Cattle ration	23,1	1,36	3,51
Poultry ration	29,7	2,07	10,02
Pig ration	64,9	4,06	17,44
Animal feed A [a] (Ration 722)	78,0	4,94	18,31
Animal feed B [a] (Ration 748)	140,6	15,73	43,91
Semi-moist pet food	20,6	0,98	7,46
Canned pet food	180,4	15,23	29,70
Dry pet food	78,7	4,22	16,97

[a] Calculated on dry matter basis.

11 Test report

The test report shall specify:

— all information necessary for the complete identification of the sample;

— the sampling method used, if known;

— the test method used, with reference to this International Standard;

— all operating details not specified in this International Standard, or regarded as optional, together with details of any incidents which may have influenced the test result(s);

— the test results obtained, or the two test results obtained if the repeatability has been checked.

Annex A
(informative)

Results of interlaboratory tests

The precision of the method was established by interlaboratory tests carried out in accordance with ISO 5725 [2][1)]. The results of these tests have been published (see reference [5]). In the tests 10 to 12 laboratories participated and samples of pet foods, cattle, poultry and pig feeds were investigated.

Table A.1 — Statistical results of an interlaboratory test for determination of vitamin E in feeding stuffs

Parameter	Sample[a]				
	1	2	3	4[b]	5[b]
Number of laboratories	10	10	10	12	12
Number of individual results	20	20	20	24	24
Number of accepted results	14	16	16	18	18
Mean vitamin E content, IU/kg	23,11	29,66	64,94	78,03	140,63
Repeatability standard deviation (s_r), IU/kg	0,44	0,69	1,35	1,66	5,27
Repeatability coefficient of variation, %	1,92	2,32	2,07	2,12	3,75
Repeatability limit (r) [$r = 2{,}8 \times s_r$], IU/kg	1,36	2,07	4,06	4,94	15,73
Reproducibility standard deviation (s_R), IU/kg	1,15	3,33	5,79	6,13	14,72
Reproducibility coefficient of variation, %	4,97	11,21	8,91	7,86	10,46
Reproducibility limit (R) [$R = 2{,}8 \times s_R$], IU/kg	3,51	10,02	17,44	18,31	43,91

a 1: cattle ration
2: poultry ration
3: pig ration
4: animal feed A (ration 722)
5: animal feed B (ration 748)

b Calculated on dry matter basis.

1) ISO 5725:1986 (now withdrawn) was used to obtain the precision data.

Table A.2 — Statistical results of an interlaboratory test for the determination of vitamin E in pet foods

Parameter	Sample[a]		
	6	7	8
Number of laboratories	11	11	11
Number of individual results	22	22	22
Number of accepted results	14	14	14
Mean vitamin E content, IU/kg	20,55	180,39	78,66
Repeatability standard deviation (s_r), IU/kg	0,32	4,98	1,38
Repeatability coefficient of variation, %	1,56	2,76	1,76
Repeatability limit (r) [$r = 2{,}8 \times s_r$], IU/kg	0,98	15,23	4,22
Reproducibility standard deviation (s_R), IU/kg	2,44	9,72	5,55
Reproducibility coefficient of variation, %	11,89	5,39	7,06
Reproducibility limit (R) [$R = 2{,}8 \times s_R$], IU/kg	7,46	29,70	16,97

[a] 6: canned cat food
7: semi-moist dog food
8: dry dog food

Bibliography

[1] ISO 6497, *Animal feeding stuffs — Sampling*.

[2] ISO 5725:1986, *Precision of test methods — Determination of repeatability and reproducibility for a standard test method by inter-laboratory tests*.

[3] ISO 5725-1:1994, *Accuracy (trueness and precision) of measurement methods and results — Part 1: General principles and definitions*.

[4] ISO 5725-2:1994, *Accuracy (trueness and precision) of measurement methods and results — Part 2: Basic method for the determination of repeatability and reproducibility of a standard measurement method*.

[5] Analytical Methods Committee, *Analyst*, **116**, 1991, pp. 421-430.

Annex ZA
(normative)

Normative references to international publications with their corresponding European publications

This European Standard incorporates, by dated or undated reference, provisions from other publications. These normativereferences are cited at the appropriate places in the text, and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

NOTE Where an International Publication has been modified by common modifications, indicated by (mod.), the relevant EN/HD applies.

Publication	Year	Title	EN/HD	Year
ISO 3696	1987	Water for analytical laboratory use - Specification and test methods	EN ISO 3696	1995

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001. Standards are also available from the BSI website at http://www.bsi-global.com.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001. Further information about BSI is available on the BSI website at http://www.bsi-global.com.

Copyright

BSI
389 Chiswick High Road
London
W4 4AL