

BS EN ISO 7380-2:2011

Incorporating corrigendum August 2011



BSI Standards Publication

Button head screws

Part 2: Hexagon socket button head screws
with collar (ISO 7380-2:2011)

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of EN ISO 7380-2:2011.

The UK participation in its preparation was entrusted to Technical Committee FME/9/3, Fasteners - Product Standards.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2011

ISBN 978 0 580 76657 2

ICS 21.060.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2011.

Amendments/corrigenda issued since publication

| Date | Text affected |
|------------------|--|
| 30 November 2011 | Implementation of CEN Correction Notice August 2011; supersession information removed. |

ICS 21.060.10

English Version

Button head screws - Part 2: Hexagon socket button head screws with collar (ISO 7380-2:2011)

Vis à tête cylindrique bombée plate - Partie 2: Vis à tête cylindrique bombée plate à six pans creux à embase plate (ISO 7380-2:2011)

Halbrundkopfschrauben (abgeflacht) - Teil 2: Abgeflachter Halbrundkopf mit Bund und Innensechskant (ISO 7380-2:2011)

This European Standard was approved by CEN on 22 July 2011.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Foreword

This document (EN ISO 7380-2:2011) has been prepared by Technical Committee ISO/TC 2 "Fasteners" in collaboration with Technical Committee CEN/TC 185 "Fasteners" the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2012, and conflicting national standards shall be withdrawn at the latest by February 2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of ISO 7380-2:2011 has been approved by CEN as a EN ISO 7380-2:2011 without any modification.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7380-2 was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 11, *Fasteners with metric external thread*.

This first edition of ISO 7380-2, together with ISO 7380-1, cancels and replaces ISO 7380:2004, which has been technically revised.

ISO 7380 consists of the following parts, under the general title *Button head screws*:

- *Part 1: Hexagon socket button head screws*
- *Part 2: Hexagon socket button head screws with collar*

BS EN ISO 7380-2:2011
EN ISO 7380-2:2011 (E)

Button head screws —

Part 2: Hexagon socket button head screws with collar

1 Scope

This International Standard specifies the characteristics of hexagon socket button head screws with collar with threads from M3 up to and including M16, with product grade A and with reduced loadability according to Table 3.

If, in special cases, specifications other than those listed in this International Standard are required, they can be selected from existing International Standards, e.g. ISO 261, ISO 888, ISO 898-1, ISO 965-2 and ISO 4759-1.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions*

ISO 261, *ISO general purpose metric screw threads — General plan*

ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs with specified property classes — Coarse thread and fine pitch thread*

ISO 965-2, *ISO general purpose metric screw threads — Tolerances — Part 2: Limits of sizes for general purpose external and internal screw threads — Medium quality*

ISO 965-3, *ISO general purpose metric screw threads — Tolerances — Part 3: Deviations for constructional screw threads*

ISO 3269, *Fasteners — Acceptance inspection*

ISO 4042, *Fasteners — Electroplated coatings*

ISO 4753, *Fasteners — Ends of parts with external ISO metric thread*

ISO 4759-1, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C*

ISO 6157-1, *Fasteners — Surface discontinuities — Part 1: Bolts, screws and studs for general requirements*


ISO 8992, *Fasteners — General requirements for bolts, screws, studs and nuts*

ISO 10683, *Fasteners — Non-electrolytically applied zinc flake coatings*

3 Dimensions

See Figure 1 and Table 1.

Symbols and descriptions of dimensions are specified in ISO 225.

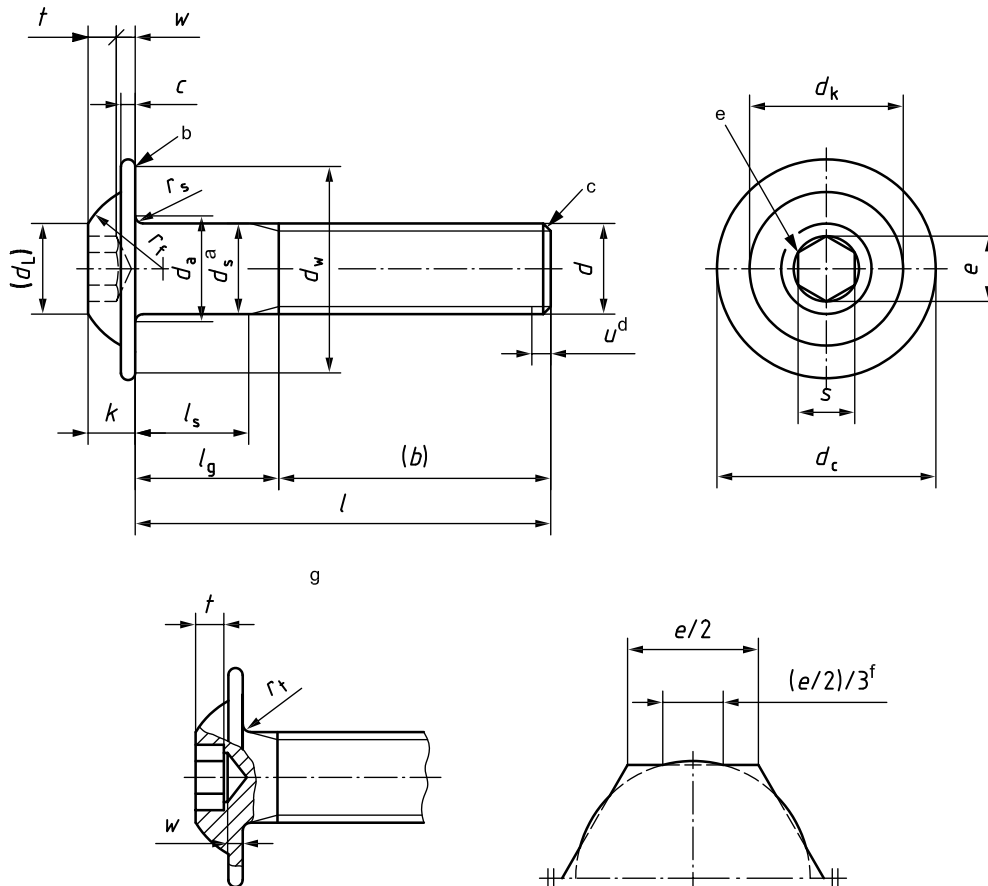

Key

- r_s underhead radius for a screw with unthreaded shank
- r_t underhead radius for a fully threaded screw
- a d_s applies if values of $l_{s,min}$ are specified.
- b Contour at the discretion of the manufacturer.
- c In accordance with ISO 4753, point chamfered or for sizes $\leq M4$ "as rolled".
- d Incomplete thread $u \leq 2P$.
- e A slight rounding or countersink at the mouth of the socket is permissible.
- f For broached sockets which are at the maximum limit of size, the overcut resulting from drilling shall not exceed one third of the length of any flat of the socket which is $e/2$.
- g Permissible alternative form of socket.

Figure 1 — Hexagon socket button head screw with collar

Table 1 — Dimensions of hexagon socket button head screws with collar

Dimensions in millimetres

| Thread, d | M3 | M4 | M5 | M6 | M8 | M10 | M12 | M16 | |
|----------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
| p^a | 0,5 | 0,7 | 0,8 | 1 | 1,25 | 1,5 | 1,75 | 2 | |
| b^b ref. | 18 | 20 | 22 | 24 | 28 | 32 | 36 | 44 | |
| c | max. | 0,7 | 0,8 | 1,0 | 1,2 | 1,5 | 2,0 | 2,4 | 2,8 |
| | min. | 0,55 | 0,65 | 0,80 | 1,00 | 1,25 | 1,70 | 2,10 | 2,50 |
| d_a max. | 3,6 | 4,7 | 5,7 | 6,8 | 9,2 | 11,2 | 13,7 | 17,7 | |
| d_c | max. | 6,9 | 9,4 | 11,8 | 13,6 | 17,8 | 21,9 | 26,0 | 34,0 |
| | min. | 6,32 | 8,82 | 11,10 | 12,90 | 17,10 | 21,06 | 25,16 | 33,00 |
| d_k | max. | 5,2 | 7,2 | 8,8 | 10,0 | 13,2 | 16,5 | 19,4 | 26,0 |
| | min. | 4,9 | 6,8 | 8,4 | 9,6 | 12,8 | 16,1 | 18,9 | 25,5 |
| d_L ref. | 2,6 | 3,8 | 5,0 | 6,0 | 7,7 | 10,0 | 12,0 | 16,0 | |
| d_s | max. | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 16 |
| | min. | 2,86 | 3,82 | 4,82 | 5,82 | 7,78 | 9,78 | 11,73 | 15,73 |
| d_w min. | 5,74 | 8,24 | 10,40 | 12,20 | 16,40 | 20,22 | 24,32 | 32,00 | |
| $e^{c,d}$ min. | 2,303 | 2,873 | 3,443 | 4,583 | 5,723 | 6,863 | 9,149 | 11,429 | |
| k | max. | 1,65 | 2,20 | 2,75 | 3,30 | 4,40 | 5,50 | 6,60 | 8,80 |
| | min. | 1,40 | 1,95 | 2,50 | 3,00 | 4,10 | 5,20 | 6,24 | 8,44 |
| r_f | max. | 3,70 | 4,60 | 5,75 | 6,15 | 7,95 | 9,80 | 11,20 | 15,30 |
| | min. | 3,30 | 4,20 | 5,25 | 5,65 | 7,45 | 9,20 | 10,50 | 14,50 |
| r_s min. | 0,10 | 0,20 | 0,20 | 0,25 | 0,40 | 0,40 | 0,60 | 0,60 | |
| r_t min. | 0,30 | 0,40 | 0,45 | 0,50 | 0,70 | 0,70 | 1,10 | 1,10 | |
| s^d | nom. | 2 | 2,5 | 3 | 4 | 5 | 6 | 8 | 10 |
| | max. | 2,080 | 2,580 | 3,080 | 4,095 | 5,140 | 6,140 | 8,175 | 10,175 |
| | min. | 2,020 | 2,520 | 3,020 | 4,020 | 5,020 | 6,020 | 8,025 | 10,025 |
| t min. | 1,04 | 1,30 | 1,56 | 2,08 | 2,60 | 3,12 | 4,16 | 5,20 | |
| w min. | 0,20 | 0,30 | 0,38 | 0,74 | 1,05 | 1,45 | 1,63 | 2,25 | |

Table 1 (continued)

Dimensions in millimetres

| Thread, <i>d</i> | | | M3 | | M4 | | M5 | | M6 | | M8 | | M10 | | M12 | | M16 | |
|----------------------|-------|-------|---|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| <i>l^e</i> | | | <i>l_s</i> and <i>l_g^f</i> | | | | | | | | | | | | | | | |
| nom. | min. | max. | <i>l_s</i> min. | <i>l_g</i> max. | <i>l_s</i> min. | <i>l_g</i> max. | <i>l_s</i> min. | <i>l_g</i> max. | <i>l_s</i> min. | <i>l_g</i> max. | <i>l_s</i> min. | <i>l_g</i> max. | <i>l_s</i> min. | <i>l_g</i> max. | <i>l_s</i> min. | <i>l_g</i> max. | <i>l_s</i> min. | <i>l_g</i> max. |
| 6 | 5,76 | 6,24 | | | | | | | | | | | | | | | | |
| 8 | 7,71 | 8,29 | | | | | | | | | | | | | | | | |
| 10 | 9,71 | 10,29 | | | | | | | | | | | | | | | | |
| 12 | 11,65 | 12,35 | | | | | | | | | | | | | | | | |
| 16 | 15,65 | 16,35 | | | | | | | | | | | | | | | | |
| 20 | 19,58 | 20,42 | | | | | | | | | | | | | | | | |
| 25 | 24,58 | 25,42 | 4,5 | 7 | | | | | | | | | | | | | | |
| 30 | 29,58 | 30,42 | 9,5 | 12 | 6,5 | 10 | 4 | 8 | | | | | | | | | | |
| 35 | 34,5 | 35,5 | | | 11,5 | 15 | 9 | 13 | 6 | 11 | | | | | | | | |
| 40 | 39,5 | 40,5 | | | 16,5 | 20 | 14 | 18 | 11 | 16 | 5,75 | 12 | | | | | | |
| 45 | 44,5 | 45,5 | | | | | 19 | 23 | 16 | 21 | 10,75 | 17 | 5,5 | 13 | | | | |
| 50 | 49,5 | 50,5 | | | | | 24 | 28 | 21 | 26 | 15,75 | 22 | 10,5 | 18 | | | | |
| 55 | 54,4 | 55,6 | | | | | | | 26 | 31 | 20,75 | 27 | 15,5 | 23 | 10,25 | 19 | | |
| 60 | 59,4 | 60,6 | | | | | | | 31 | 36 | 25,75 | 32 | 20,5 | 28 | 15,25 | 24 | | |
| 65 | 64,4 | 65,6 | | | | | | | | | 30,75 | 37 | 25,5 | 33 | 20,25 | 29 | 11 | 21 |
| 70 | 69,4 | 70,6 | | | | | | | | | 35,75 | 42 | 30,5 | 38 | 25,25 | 34 | 16 | 26 |
| 80 | 79,4 | 80,6 | | | | | | | | | 45,75 | 52 | 40,5 | 48 | 35,25 | 44 | 26 | 36 |
| 90 | 89,4 | 90,6 | | | | | | | | | | | 50,5 | 58 | 45,25 | 54 | 36 | 46 |

a *P* is the pitch of the thread.

b For lengths between the bold, stepped lines in the unshaded area.

c $e_{min} = 1,14 s_{min}$.

d Combined gauging of socket dimensions *e* and *s*, as specified in ISO 23429.

e The range of preferred lengths is between the bold stepped lines.

f Lengths in the shaded area are threaded to the head within 3*P*. Lengths below the shaded area have values of *l_g* and *l_s* in accordance with the following equations:
 $l_{g,max} = l_{nom} - b$
 $l_{s,min} = l_{g,max} - 5P.$

4 Requirements and reference International Standards

See Tables 2 and 3.

Table 2 — Requirements and reference International Standards

| | | |
|--|--|-------------------------------|
| Material | | Steel |
| General requirements | International Standard | ISO 8992 |
| Thread | Tolerance class | 6g |
| | International Standard | ISO 261, ISO 965-2, ISO 965-3 |
| Mechanical property | Property class | 8.8, 10.9 |
| | Marking symbol | 08.8, 010.9 |
| | International Standard | ISO 898-1 ^a |
| Tolerance | Product grade | A |
| | International Standard | ISO 4759-1 |
| Finish — Coating | <p>As processed.</p> <p>Requirements for electroplating are specified in ISO 4042.</p> <p>Requirements for non-electrolytically applied zinc flake coatings are specified in ISO 10683.</p> <p>Additional requirements or other finishes or coatings shall be agreed between the supplier and the purchaser.</p> | |
| Surface integrity | Limits for surface discontinuities are specified in ISO 6157-1. | |
| Acceptability | The acceptance inspection is specified in ISO 3269. | |
| <p>^a Because of their head configurations, it is possible for these screws to not meet the minimum ultimate tensile loads specified in ISO 898-1. They shall nevertheless meet the other material and property requirements for the respective property class specified in ISO 898-1. In addition, when full-size screws are tensile tested in accordance with ISO 898-1, they shall withstand, without fracture, the minimum ultimate tensile loads given in Table 3. If tested to failure, the fracture may occur in the threaded section, the head, the shank or at the head/shank junction.</p> | | |

Table 3 — Reduced minimum ultimate tensile loads for hexagon socket button head screws

| Thread, <i>d</i> | Property class | |
|---|------------------|-------------------|
| | 8.8 ^a | 10.9 ^a |
| Reduced minimum ultimate tensile load N | | |
| M3 | 3 220 | 4 180 |
| M4 | 5 620 | 7 300 |
| M5 | 9 080 | 11 800 |
| M6 | 12 900 | 16 700 |
| M8 | 23 400 | 30 500 |
| M10 | 37 100 | 48 200 |
| M12 | 53 900 | 70 200 |
| M16 | 100 000 | 130 000 |
| <p>^a 80 % of the values for $F_{m,min}$ specified in ISO 898-1.</p> | | |

5 Designation

The designation and marking requirements for steel fasteners with reduced loadability shall apply as specified in ISO 898-1.

EXAMPLE A hexagon socket button head screw with collar, thread M12, of nominal length $l = 40$ mm and property class 10.9 in accordance with ISO 898-1, is designated as follows:

Hexagon socket button head screw ISO 7380-2 - M12 × 40 - 010.9

Bibliography

- [1] ISO 888, *Bolts, screws and studs — Nominal lengths, and thread lengths for general purpose bolts*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™