

BS EN ISO 8205-3:2012



BSI Standards Publication

Water-cooled secondary connection cables for resistance welding

Part 3: Test requirements

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of EN ISO 8205-3:2012. It supersedes BS EN ISO 8205-3:1997 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee WEE/29, Resistance welding.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012.

Published by BSI Standards Limited 2012

ISBN 978 0 580 78102 5

ICS 25.160.30

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2012.

Amendments issued since publication

Date	Text affected
-------------	----------------------

English Version

**Water-cooled secondary connection cables for resistance
welding - Part 3: Test requirements (ISO 8205-3:2012)**

Câbles secondaires refroidis par eau, pour le soudage par
résistance - Partie 3: Spécifications pour les essais (ISO
8205-3:2012)

Widerstandsschweißen - Wassergekühlte
Sekundäranschlusskabel für das Widerstandsschweißen -
Teil 3: Prüfanforderungen (ISO 8205-3:2012)

This European Standard was approved by CEN on 14 October 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
---------------	---

Foreword

This document (EN ISO 8205-3:2012) has been prepared by Technical Committee ISO/TC 44 "Welding and allied processes" in collaboration with Technical Committee CEN/TC 121 "Welding" the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2013, and conflicting national standards shall be withdrawn at the latest by April 2013.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 8205-3:1996.

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 8205-3:2012 has been approved by CEN as a EN ISO 8205-3:2012 without any modification.

Water-cooled secondary connection cables for resistance welding —

Part 3: Test requirements

1 Scope

This part of ISO 8205 specifies test procedures for single- and double-conductor secondary connection cables used for resistance welding and allied processes. It stipulates the requirements regarding the electrical, mechanical, and cooling characteristics of these cables.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8205-1, *Water-cooled secondary connection cables for resistance welding — Part 1: Dimensions and requirements for double-conductor connection cables*

ISO 8205-2, *Water-cooled secondary connection cables for resistance welding — Part 2: Dimensions and requirements for single-conductor connection cables*


3 Tests

3.1 General

All the tests are type tests.

Figure 1 gives an example of the water supply to the cable for the tests requiring this.

When the tests are carried out, there shall be no trace of water at the various connections.

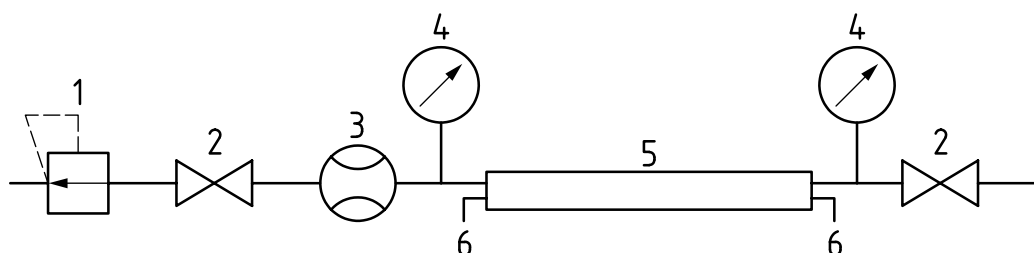

Key

1	pressure reducing valve	4	pressure gauge
2	valve	5	cable
3	flow meter	6	seal

Figure 1 — Example of water supply to the cable

3.2 Leak tightness and pressure resistance of the water circuit

Supply the water circuit, sealed downstream of the cable (e.g. by closing the valve on the right-hand side of Figure 1), under a pressure of 750 kPa (7,5 bar), e.g. by adjusting pressure-reducing valve 1, for 6 min.

3.3 Water flow

Carry out this test successively:

- with the cable laid flat out straight on a horizontal surface — see Figure 2 a);
- with the cable placed on a horizontal surface but bent with a radius of curvature of 300 mm — see Figure 2 b).

With the water circulating in the cable, e.g. by opening both valves (labelled 2) shown in Figure 1, adjust the pressure loss to 70 kPa (0,7 bar) for an upstream pressure greater than or equal to 100 kPa (1 bar).

Measure the water flow using a suitable flow transducer — see Figure 1, item 3.

3.4 Verification of flexibility at ends

3.4.1 General

Carry out this test on a low-reactance cable with a cross-sectional area of 200 mm² and length of 2 500 mm, considered to be representative of cables of the same design with a cross-sectional area or length as specified in ISO 8205-1 and ISO 8205-2.

3.4.2 Fixing of the cable

Fix the cable by one of its end lugs to a device fitted with horizontal and vertical graduated rules for measuring the coordinates of a point, in such a way that its other end hangs free — see Figure 3.

Carry out the test for each of the two ends of the cable.

3.4.3 Measurements to be taken

Using the two graduated rules, measure the ordinate y at each of the points A, B and C with x equal to 0 mm, 150 mm, and 300 mm, respectively. The origin A of the coordinates is the point of intersection of the axis of the fixing hole in the end lug with its median plane; points B and C are located on the axis of the cable — see Figure 3.

3.4.4 Interpretation of results

Determine the arc of the circle passing through the three points A, B, and C by geometrical construction. The radius of the arc shall be regarded as the radius of curvature — see Figure 3 b).

NOTE If the ordinate of point C is greater than 0,30 m, the radius of curvature is regarded as being less than 0,30 m provided that the ordinate of point B is different from 0.

3.5 Torsion

3.5.1 General

Carry out this test on low-reactance cable with a cross-sectional area of 200 mm² and length of 1 250 mm, regarded as being representative of cables of the same design having a cross-sectional area and length as specified in ISO 8205-1.

3.5.2 Test rig

See Figure 4.

Suspend the cable vertically, with the end lug by which it is suspended, immobilized as regards rotational and translational motion. Apply a force of $500 \text{ N} \pm 50 \text{ N}$ to the lower lug of the cable by means of a rotating fork coupling and a pressure cylinder. Fill the cable with water at a pressure of 150 kPa (1,5 bar).

3.5.3 Measurement to be taken

Measure the torque required to effect a 180° rotation in each direction of the lower lug.

3.6 Measurement of insulation resistance

Measure the insulation resistance of a new dry cable following application of a d.c. voltage of 48 V for 1 min.

3.7 Determination of the impedance of the cable (only for cables in accordance with ISO 8205-1)

Determine the impedance of the cable at 30°C by applying to its terminals an alternating voltage, as sinusoidal as possible, of frequency 50 Hz or 60 Hz, r.m.s value, U , and measuring, by means of a calibrated toroid, the intensity, I , of the current circulating in the cable. The impedance, Z , is then given by

$$Z = \frac{U}{I}$$

3.8 Determination of the resistance of the cable

Determine the resistance of the cable at 30°C and with no water in the cable, by applying to its terminals a permanent voltage, U , and measuring the intensity, I , of the current circulating in the cable. The resistance, R , is then given by

$$R = \frac{U}{I}$$

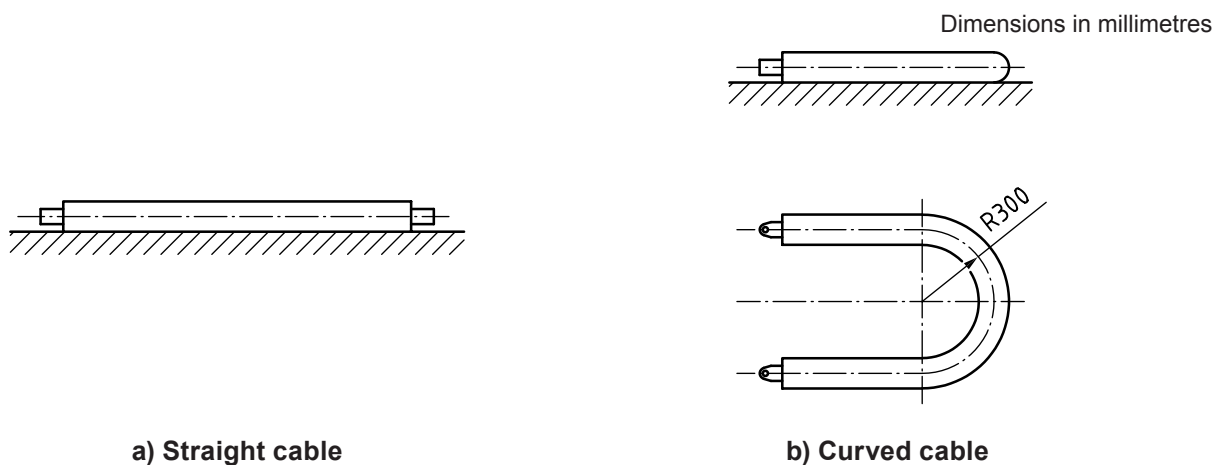


Figure 2 — Verification of water flow


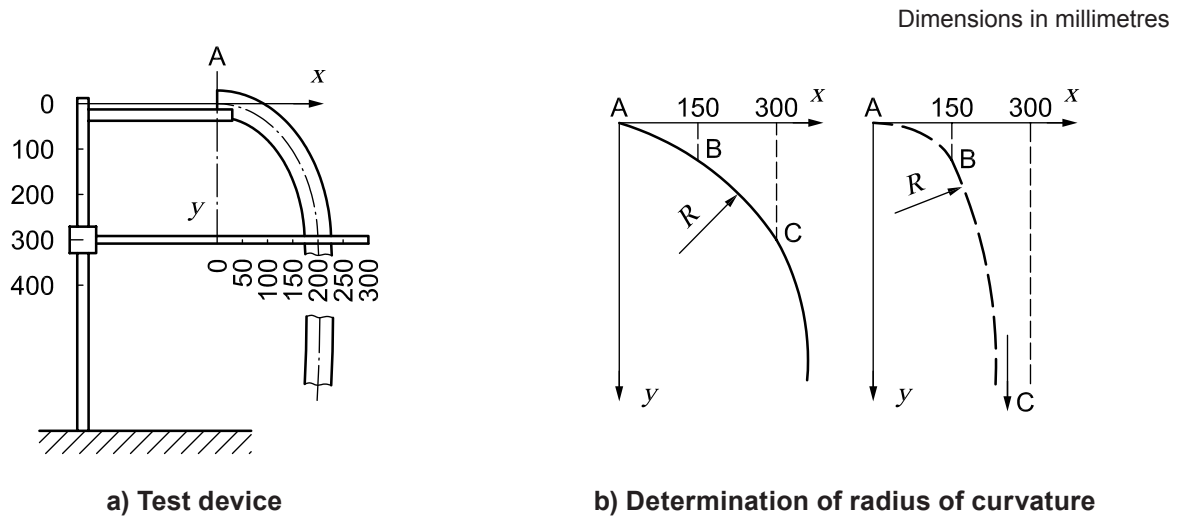


Figure 3 — Measurement of radius of curvature

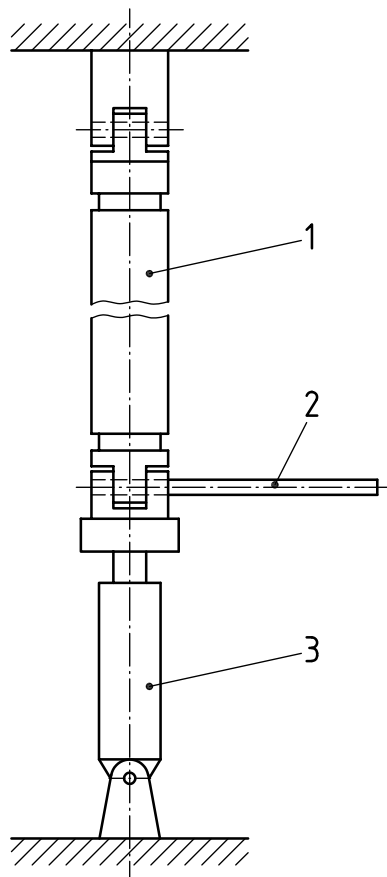

Key

- 1 cable
- 2 elastic proving device
- 3 cylinder — tensile load, 500 N

Figure 4 — Rig for torsion test

3.9 Calculation of $\cos \phi$ (only for cables in accordance with ISO 8205-1)

The value of $\cos \phi$ for the cable can then be calculated by using the values obtained in 3.7 and 3.8 as follows:

$$\cos \phi = \frac{R}{Z}$$

3.10 Endurance test

3.10.1 Principle

Estimation of the life of a type of low-reactance cable and the variation in time of its electrical resistance.

The cable is fixed to a test device which enables the displacements, tilting and twisting likely to occur in normal service to be reproduced and is supplied by a welding transformer and cooled. It is then subjected to a series of cycles comprising a fixed number of the various possible movements and pulse currents (referred to below as welding duration and current).

This type test shall be carried out on the length stated in Table 1.

Table 1 — Adjustment parameters for 2 500 mm long cables

Cross-sectional area of cable	Current	Duration of application of current	Number of current pulses per minute	Duty ratio	Duration of one welding cycle	Duration of test cycle
mm ²	kA	s		%	s	s
160	16	0,24	13	5,2	4,6	145
200	19	0,4	13	8,6	4,6	145
250	19	0,4	15	10	4	127
315	24	0,5	10	8,3	6	187

3.10.2 Test apparatus

Figure 5 gives an example of the test apparatus.

3.10.3 Adjustment parameters

The test shall be carried out on a 2 500 mm long cable. The adjustment parameters given in Table 1 for the various cross-sectional areas shall be used.

The cooling circuit shall be adjusted so as to obtain a pressure loss of 70 kPa (0,7 bar).

3.10.4 Test cycle

Each test cycle shall have the duration specified in Table 1 and shall comprise:

- one forward movement of the carriage over a distance of 700 mm;
- 15 torsional cycles consisting of a 90° twist in one direction, return to the initial position, a 90° twist in the opposite direction, and return to the initial position;
- 10 forward tilting movements over an angle of 90° followed by tilting in the opposite direction to return to the initial position;
- 30 applications of current for the duration specified in Table 1;
- one backward displacement of the carriage returning it to its initial position.

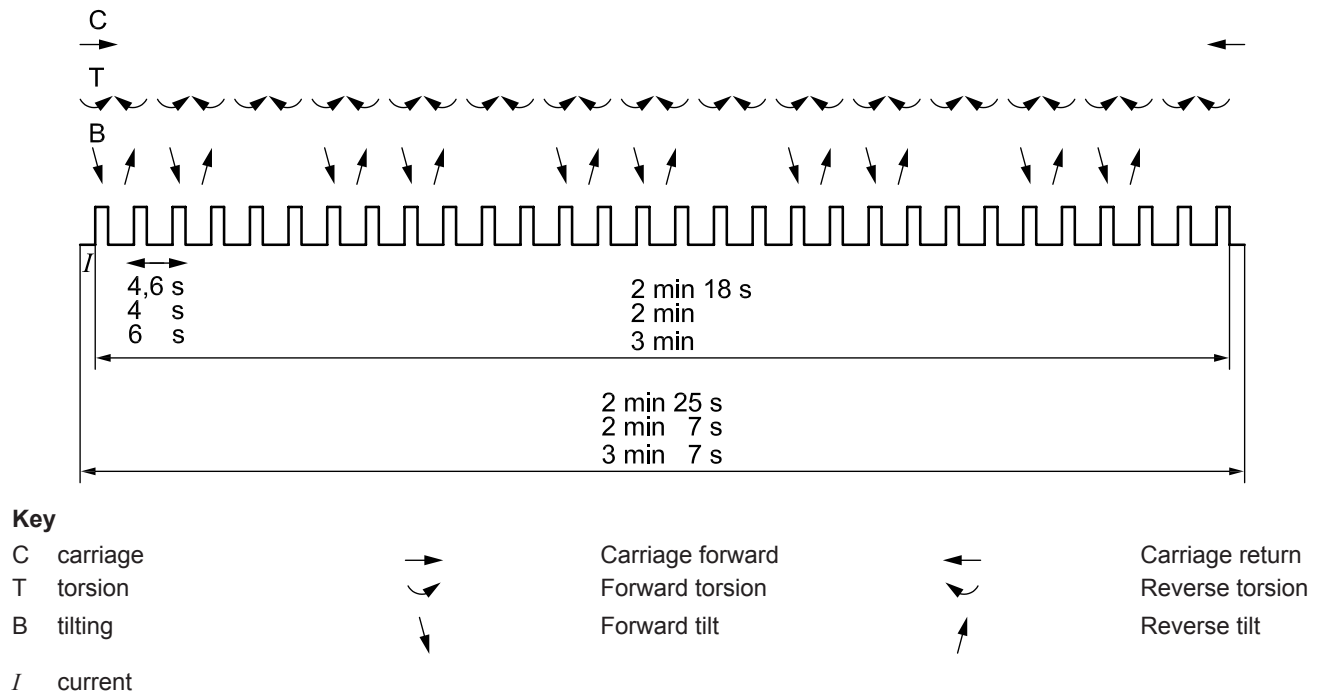


Figure 6 — Chart of test cycle

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™