

Petroleum and natural gas industries — Casing centralizers —

Part 1: Bow-spring casing centralizers

The European Standard EN ISO 10427-1:2001 has the status of a
British Standard

ICS 75.180.10

National foreword

This British Standard is the official English language version of EN ISO 10427-1:2001. It is identical with ISO 10427-1:2001.

The UK participation in its preparation was entrusted by Technical Committee PSE/17, Materials and equipment for petroleum and natural gas industries, to Subcommittee PSE/17/-/3, Drilling and completion fluids and well cements, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

BS EN ISO 10427-1 deals only with bow-spring casing centralizers, which are the most commonly applied types of centralizer for placing the casing more centrally in the wellbore. Bow-spring casing centralizers are made of bows which are like springs with sufficient stiffness to give suitable standoff downhole, but with enough flexibility for employment in holes of different diameters and shapes. Rigid centralizers are constructed with a fixed bow-height and are designed to fit a specific casing or wellbore size. It is intended that rigid centralizers will be covered by new standards in the ISO 10427 series.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled "International Standards Correspondence Index", or by using the "Search" facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN ISO title page, the EN ISO foreword page, the ISO title page, pages ii to v, a blank page, pages 1 to 10, an inside back cover and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments
14173 Corrigendum No. 1	15 October 2002	Correction to EN ISO foreword page

This British Standard, having been prepared under the direction of the Engineering Sector Policy and Strategy Committee, was published under the authority of the Standards Policy and Strategy Committee on 13 February 2002

© BSI 15 October 2002

ISBN 0 580 38994 4

ICS 07.018.10

English version

**Petroleum and natural gas industries - Casing centralizers - Part
1: Bow-spring casing centralizers (ISO 10427-1:2001)**

Industries du pétrole et du gaz naturel - Centreurs de tubes
- Partie 1: Centreurs de tubes de cuvelage (ISO 10427-
1:2001)

This European Standard was approved by CEN on 1 October 2001.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

CORRECTED 2002-09-25

Foreword

This document (EN ISO 10427-1:2001) has been prepared by Technical Committee ISO/TC 67 "Materials, equipment and offshore structures for petroleum and natural gas industries" in collaboration with Technical Committee CEN/TC 12 "Materials, equipment and offshore structures for petroleum and natural gas industries", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2002, and conflicting national standards shall be withdrawn at the latest by April 2002.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of ISO 10427-1:2001 has been approved by CEN as EN ISO 10427-1:2001 without any modifications.

INTERNATIONAL
STANDARD

ISO
10427-1

First edition
2001-10-01

**Petroleum and natural gas industries —
Casing centralizers —**

Part 1:
Bow-spring casing centralizers

*Industries du pétrole et du gaz naturel — Centreurs de tubes —
Partie 1: Centreurs de tubes de cuvelage*



Reference number
ISO 10427-1:2001(E)

Contents		Page
Foreword		iv
Introduction		v
1	Scope	1
2	Normative reference	1
3	Terms and definitions	1
4	Requirements	2
5	Testing equipment	3
6	Procedure for starting-force and running-force tests	5
7	Procedure for restoring-force test	6
8	Marking	7
Annex A (informative) Miscellaneous information		8
Bibliography		10

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 10427 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 10427-1 was prepared by Technical Committee ISO/TC 67, *Materials, equipment and offshore structures for petroleum and natural gas industries*, Subcommittee SC 3, *Drilling and completion fluids, and well cements*.

This first edition of ISO 10427-1 cancels and replaces, in part, the first edition of ISO 10427 (ISO 10427:1993), which has been technically revised.

ISO 10427 consists of the following parts, under the general title *Petroleum and natural gas industries — Casing centralizers*:

- *Part 1: Bow-spring casing centralizers*
- *Part 2: Centralizer placement and stop-collar testing*

Annex A of this part of ISO 10427 is for information only.

Introduction

This part of ISO 10427 is based on API Specification 10D, 5th edition, January 1995.

Users of this part of ISO 10427 should be aware that further or differing requirements may be needed for individual applications. This part of ISO 10427 is not intended to inhibit a vendor from offering, or the purchaser from accepting, alternative equipment or engineering solutions for the individual application. This may be particularly applicable where there is innovative or developing technology. Where an alternative is offered, the vendor should identify any variations from this part of ISO 10427 and provide details.

In this part of ISO 10427, where practical, U.S. Customary units are included in brackets after SI units for information.

Petroleum and natural gas industries — Casing centralizers —

Part 1: Bow-spring casing centralizers

1 Scope

This part of ISO 10427 provides minimum performance requirements, test procedures and marking requirements for bow-spring casing centralizers for the petroleum and natural gas industries. The procedures provide verification testing for the manufacturer's design, materials and process specifications, and periodic testing to confirm the consistency of product performance.

This part of ISO 10427 is not applicable to rigid or positive centralizers.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this part of ISO 10427. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 10427 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 11960, *Petroleum and natural gas industries — Steel pipes for use as casing or tubing for wells*

3 Terms and definitions

For the purposes of this part of ISO 10427, the following terms and definitions apply.

3.1 flexed

condition of a bow spring when a force three times the specified minimum restoring force ($\pm 5\%$) has been applied to it

3.2 holding device

device employed to fix the stop collar or centralizer to the casing

EXAMPLES Set screws, nails, mechanical dogs and epoxy resins.

3.3 holding force

maximum force required to initiate slippage of a stop collar on the casing

3.4 hole size

diameter of the wellbore

3.5

restoring force

force exerted by a centralizer against the casing to keep it away from the wellbore wall

NOTE Restoring force values can vary based on installation methods.

3.6

rigid centralizer

centralizer manufactured with bows that do not flex

3.7

running force

maximum force required to move a centralizer through a specified wellbore diameter

NOTE Running-force values can vary depending on the installation methods.

3.8

standoff

smallest distance between the outside diameter of the casing and the wellbore

3.9

standoff ratio

ratio of standoff to annular clearance

NOTE It is expressed as a percentage.

3.10

starting force

maximum force required to insert a centralizer into a specified wellbore diameter

NOTE Starting-force values can vary depending on the installation methods.

3.11

stop collar

device attached to the casing to prevent movement of a casing centralizer

NOTE A stop collar can be either an independent piece of equipment or integral with the centralizer.

4 Requirements

4.1 Functions of a centralizer

The purpose of a casing centralizer is to facilitate running casing to the desired depth and to assist in centring the casing in the wellbore. One of the main objectives of centralizing a casing string is to facilitate a good cementing, thereby isolating fluids from different zones. A bow-spring centralizer can be constructed in various ways, using various types, shapes and quantities of bow spring.

4.2 Starting force

The maximum starting force shall be less than the weight of 12,19 m (40 ft) of casing of medium linear mass as defined in Table 1. The maximum starting force shall be determined for a centralizer in new, fully assembled condition.

4.3 Restoring force

The minimum restoring force for a 67 % standoff ratio shall not be less than the values shown in Table 1. See A.2 for the derivation of the requirements.

Table 1 — Specifications — Casing centralizers

Casing diameter		Medium linear mass casing		Minimum restoring force at 67 % standoff ratio		Maximum starting force	
mm	(in)	kg/m	(lb/ft)	N	(lbf)	N	(lbf)
89	(3 1/2) ^a	14,7	(9,91) ^a	1 761	(396)	1 761	(396)
102	(4) ^a	16,9	(11,34) ^a	2 019	(454)	2 019	(454)
114	(4 1/2)	17,3	(11,6)	2 064	(464)	2 064	(464)
127	(5)	19,3	(13,0)	2 313	(520)	2 313	(520)
140	(5 1/2)	23,1	(15,5)	2 758	(620)	2 758	(620)
168	(6 5/8)	35,7	(24,0)	4 270	(960)	4 270	(960)
178	(7)	38,7	(26,0)	4 626	(1 040)	4 626	(1 040)
194	(7 5/8)	39,3	(26,4)	4 697	(1 056)	4 697	(1 056)
219	(8 5/8)	53,6	(36,0)	6 405	(1 440)	6 405	(1 440)
244	(9 5/8)	59,5	(40,0)	7 117	(1 600)	7 117	(1 600)
273	(10 3/4)	75,9	(51,0)	4 537	(1 020)	9 074	(2 040)
298	(11 3/4)	80,4	(54,0)	4 804	(1 080)	9 608	(2 160)
340	(13 3/8)	90,8	(61,0)	5 427	(1 220)	10 854	(2 440)
406	(16)	96,7	(65,0)	5 783	(1 300)	11 565	(2 600)
473	(18 5/8)	130,2	(87,5)	7 784	(1 750)	15 569	(3 500)
508	(20)	139,9	(94,0)	8 363	(1 880)	16 725	(3 760)

NOTE The specifications for starting and restoring forces for bow-type centralizers are based on the centralizer being installed as per manufacturer recommendations and tested with lugs on the casing. If the centralizer is tested over a casing collar, stop collar, or with an integral stop collar, the actual results obtained from that test can vary from the specifications. It should be noted on the test report how the centralizer was installed and the type of holding device used during the test. If a centralizer is tested in this manner, the test can no longer be considered a specification test and the results may or may not meet the specifications set forth in Table 1.

^a Liner sizes and plain-end weight.

4.4 Frequency of testing


4.4.1 Tests for design and process verification shall be performed for a minimum of six prototype centralizers. All of the tested centralizers shall conform to the performance requirements of Table 1.

4.4.2 For confirmation of the consistency of product performance, testing shall be performed at least annually for each size of centralizer manufactured to this part of ISO 10427 in quantities greater than 500 per year. Corrective action shall be implemented and documented for the centralizer size in question if the tested centralizer does not conform to the performance requirements of Table 1.

5 Testing equipment

5.1 Test stand


The test stand allows application of vertical loads and is capable of measuring these loads and vertical displacements. Examples of typical equipment are shown in Figures 1 and 2.

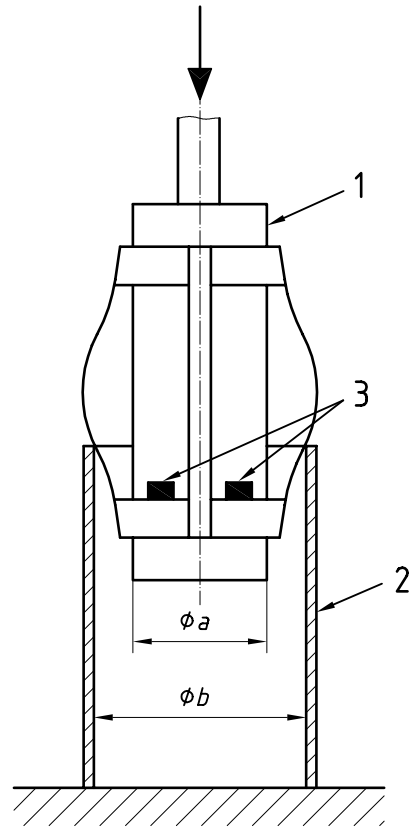

Key

- | | | | |
|---|---------------------|----------|-----------------|
| 1 | Inner pipe | <i>a</i> | Casing diameter |
| 2 | Outer pipe | <i>b</i> | Hole diameter |
| 3 | Equally spaced lugs | | |

Figure 1 — Example of casing centralizer starting-force test equipment

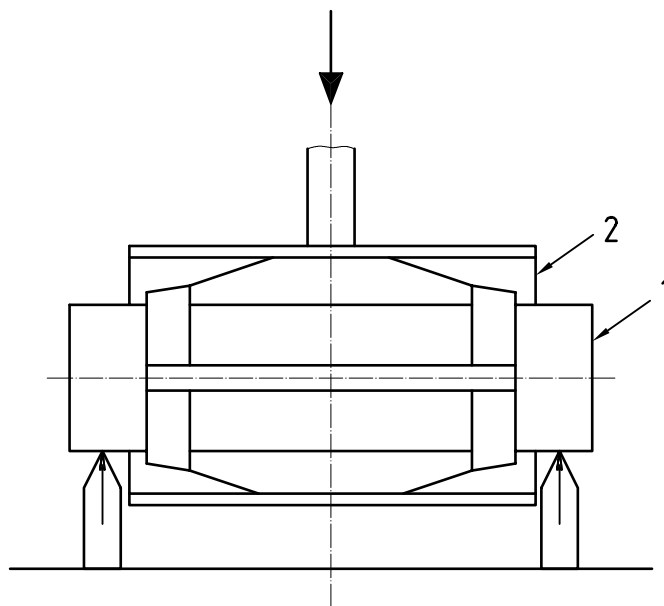

Key

- | | |
|---|------------|
| 1 | Inner pipe |
| 2 | Outer pipe |

Figure 2 — Example of casing centralizer restoring-force test equipment

5.2 Instrumentation

Instrumentation of the test stand shall allow displacement readings of 1,6 mm ($1/16$ in) or smaller.

5.3 Accuracy

5.3.1 Accuracy of load measurements shall be within 5 % of the measured value.

5.3.2 Accuracy of displacement measurements shall be within 0,8 mm ($1/32$ in).

5.3.3 Calibration of all measuring equipment shall be performed at least annually.

5.4 Test pipe

5.4.1 Inner pipe (see Figures 1 and 2)

The inner pipe shall be longer than the centralizer in the flexed condition and longer than the outer pipe. The outside diameter of the inner pipe shall be within the tolerances shown in ISO 11960 for non-upset pipe. Burrs or similar defects shall be removed.

Surfaces on the ends of the inner pipe, outside the length to be covered by the centralizer and other test components, are exempt from the above requirement.

5.4.2 Outer pipe (see Figures 1 and 2)

The outer pipe shall be longer than the centralizer bow spring in the flexed condition. The inside diameter of the outer pipe shall equal the hole size for which the centralizer is designed. Tolerances shall be within $+3,2$ mm ($+1/8$ in) to $-0,8$ mm ($-1/32$ in). Burrs or similar defects shall be removed. The upper end of the outer pipe used for the starting-force test may be bevelled on the inside to a maximum of 45°, with a maximum larger-pipe inside diameter of + 3,2 mm ($+ 1/8$ in).

The end of the outer pipe (other than the upper end used for starting-force tests), beyond the length covered by the centralizer when flexed during the restoring-force test, is exempt from the above requirements.

6 Procedure for starting-force and running-force tests

6.1 Starting-force test

6.1.1 The starting force represents the maximum force required to insert the inner pipe into the outer pipe (after compensating for the weight of the inner pipe and attachments). It is determined as described in 6.1.2 to 6.1.6.

6.1.2 Install a centralizer in new, fully assembled condition as shown in Figure 1 on the inner pipe over four equally spaced lugs, with each lug protruding not more than 6,4 mm ($1/4$ in) beyond the outer surface of the inner pipe.

NOTE Under field conditions, there are many different methods of attaching a centralizer to the casing. The starting and restoring forces for all types of holding devices may not be the same as the test results obtained using this procedure.

6.1.3 The test assembly shall be within 5° of vertical.

6.1.4 Lubricate the contacting surfaces with a petroleum-base grease before running the test.

6.1.5 With the centralizer resting on the edge of the outer pipe, apply a load to the inner pipe to pull the centralizer into the outer pipe.

6.1.6 Take readings of force used, from the time the load is first applied until the centralizer is completely inside the outer pipe. Report the maximum force as the starting force after compensation as in 6.1.1.

6.2 Running-force test

6.2.1 The running force represents the maximum force required to slide the inner pipe inside the outer pipe once the force reading has become steady (after compensating for the weight of the inner pipe and attachments).

6.2.2 The result of this test is not required to conform to a maximum value. However, the test shall be performed and the results recorded.

6.2.3 The running-force test may be performed with the starting-force test, or carried out separately.

6.2.4 Take readings of force used from the time the centralizer is inside the outer pipe until the inner pipe is completely in place. Report the maximum force as the running force after compensation as in 6.1.1.

7 Procedure for restoring-force test

7.1 Perform the test with the inner pipe and the outer pipe within 5° of horizontal, see Figure 2.

7.2 Prior to collecting the force data for the test, flex all bow springs 12 times.

7.3 Apply an external force to the outer pipe so that it will be transferred to the inner pipe vertically through the point of contact of the centralizer with the outer pipe, see Figure 2.

7.4 Apply load and record load-deflection readings at a minimum of 1,6 mm (¹/₁₆ in) increments until three times (± 5 %) the minimum restoring force has been obtained, see Table 1. The travel distance to obtain 67 % standoff shall be determined for each test position.

7.5 Repeat the process, testing the centralizer until each spring and each set of springs has been tested in positions 1 and 2 as shown in Figure 3.

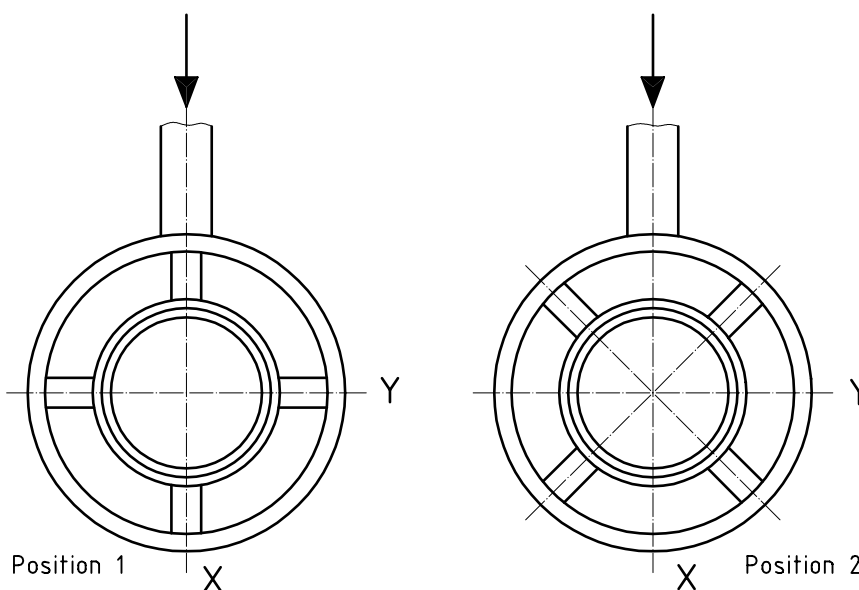


Figure 3 — Casing centralizer test positions

7.6 Calculate the total load at each deflection by compensating for the mass of the travelling pipe and attachments.

7.7 Prepare the final load-deflection curve using the arithmetic average of the force readings at corresponding deflections. Restoring force shall be determined from this curve at 67 % standoff ratio.

8 Marking

8.1 Casing centralizers performing in conformance with this part of ISO 10427 shall be marked by the manufacturer as specified in 8.2.

Additional markings as desired by the manufacturer or as required by the purchaser are not prohibited. The marking shall be die-stamped, paint-stencilled, or adhesive-labelled on the collars or the bow springs.

8.2 The casing centralizers shall be marked with the casing diameter on which to run the centralizers, followed by the hole diameter for which the centralizers were tested to this part of ISO 10427. The marking shall contain the designation ISO 10427-1.

For centralizers shipped pre-assembled, diameter marking may be applied to one bow or collar only. For centralizers shipped disassembled or separate shipments of bows and collars, conformance with this part of ISO 10427 shall be indicated on shipping documents; in this case, shipping documents shall indicate physical identification of respective components.

EXAMPLE A 140 mm (5 ½ in) centralizer meeting the requirements of this part of ISO 10427 in a hole of diameter 200 mm (7 7/8 in) shall be marked as follows:

140 mm × 200 mm ISO 10427-1

(or 5 ½ in × 7 7/8 in ISO 10427-1 if USC units are used)


Annex A
(informative)

Miscellaneous information

A.1 Load-deflection information

A typical load-deflection curve is shown in Figure A.1. The curve is prepared using the methods described in clause 7. The purpose of the curve is to provide operators with specific information on the performance of a centralizer in a given hole diameter. This information is useful for determining centralizer spacing in deviated wells.

Load vs. deflection curves may be considered to be proprietary information by the centralizer manufacturer. For this reason, publication of the curves is optional and is not required for compliance with this part of ISO 10427.

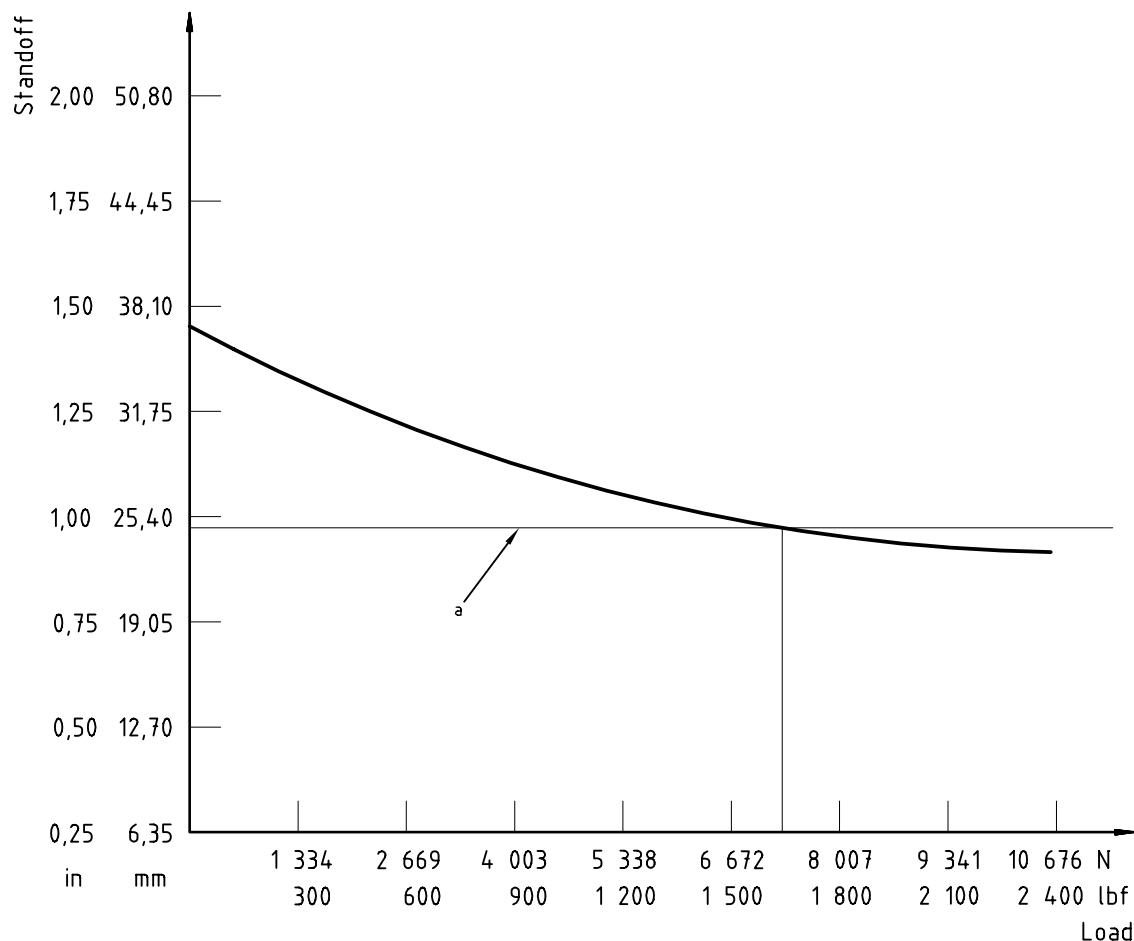

Starting force = 2 891 N (650 lbf)

Running force = 1 446 N (325 lbf)

^a 67 % stand-off

Figure A.1 — Load vs. deflection curve for a 178 mm (7 in) centralizer in 251 mm (9 7/8 in) hole

A.2 Determination of restoring-force requirements

Field observations indicate hole deviation from vertical on an average varies from zero to approximately 60°. Therefore, an average deviation of 30° is used to calculate restoring-force requirements.

For casing diameters 273 mm (10 ¾ in) through 508 mm (20 in), where casing strings are generally placed in relatively vertical hole sections, the minimum restoring force shall be not less than:

$$F_R = W \sin 30 = 0,5 W \quad (\text{A.1})$$

where

F_R is the minimum restoring force, expressed in newtons;

W is the weight of 12,19 m (40 ft) of medium linear-mass casing, expressed in newtons.

For casing diameters 114 mm (4 ½ in) through 244 mm (9 ⅝ in), where casing strings are generally placed in the deviated hole sections, the minimum restoring force shall be not less than:

$$F_R = 2 W \sin 30 = W \quad (\text{A.2})$$

A.3 67 % standoff ratio for field applications

The 67 % standoff ratio may or may not give adequate centralization of casing in field applications. The 67 % standoff ratio is used merely for the purpose of specifying minimum performance requirements that centralizers shall meet.

Bibliography

- [1] API Spec 10D, *Specification for bow-spring centralizers*, fifth edition, January 1995

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.