

Natural gas — Calculation of compression factor

**Part 3: Calculation using physical
properties (ISO 12213-3:2006)**

ICS 75.060

National foreword

This British Standard is the UK implementation of EN ISO 12213-3:2009. It is identical to ISO 12213-3:2006. It supersedes BS EN ISO 12213-3:2005 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee PTI/15, Natural gas and gas analysis.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2009

© BSI 2009

ISBN 978 0 580 67148 7

Amendments/corrigenda issued since publication

| Date | Comments |
|------|----------|
| | |
| | |
| | |
| | |

English Version

**Natural gas - Calculation of compression factor - Part 3:
Calculation using physical properties (ISO 12213-3:2006)**

Gaz naturel - Calcul du facteur de compression - Partie 3:
Calcul à partir des caractéristiques physiques (ISO 12213-
3:2006)

Erdgas - Berechnung von Realgasfaktoren - Teil 3:
Berechnungen basierend auf physikalischen
Stoffeigenschaften als Eingangsgrößen (ISO 12213-
3:2006)

This European Standard was approved by CEN on 13 August 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Foreword

The text of ISO 12213-3:2006 has been prepared by Technical Committee ISO/TC 193 "Natural gas" of the International Organization for Standardization (ISO) and has been taken over as EN ISO 12213-3:2009.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2010, and conflicting national standards shall be withdrawn at the latest by March 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 12213-3:2005.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of ISO 12213-3:2006 has been approved by CEN as a EN ISO 12213-3:2009 without any modification.

Contents

Page

| | |
|---|-----------|
| Foreword..... | iv |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions..... | 1 |
| 4 Method of calculation | 2 |
| 4.1 Principle..... | 2 |
| 4.2 The SGERG-88 equation | 2 |
| 4.3 Input variables..... | 3 |
| 4.4 Ranges of application..... | 3 |
| 4.5 Uncertainty | 5 |
| 5 Computer program | 6 |
| Annex A (normative) Symbols and units | 7 |
| Annex B (normative) Description of the SGERG-88 method | 10 |
| Annex C (normative) Example calculations | 21 |
| Annex D (normative) Conversion factors | 22 |
| Annex E (informative) Specification for pipeline quality natural gas | 25 |
| Annex F (informative) Performance over wider ranges of application | 28 |
| Annex G (informative) Subroutine SGERG.FOR in Fortran | 33 |
| Bibliography | 38 |

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12213-3 was prepared by Technical Committee ISO/TC 193, *Natural gas*, Subcommittee SC 1, *Analysis of natural gas*.

This second edition cancels and replaces the first edition (ISO 12213-3:1997), which has been technically revised. The revision includes changes to Subclause 4.4.1 and the addition of a new annex, Annex E.

ISO 12213 consists of the following parts, under the general title *Natural gas — Calculation of compression factor*:

- *Part 1: Introduction and guidelines*
- *Part 2: Calculation using molar-composition analysis*
- *Part 3: Calculation using physical properties*

Natural gas — Calculation of compression factor —

Part 3: Calculation using physical properties

1 Scope

ISO 12213 specifies methods for the calculation of compression factors of natural gases, natural gases containing a synthetic admixture and similar mixtures at conditions under which the mixture can exist only as a gas.

This part of ISO 12213 specifies a method for the calculation of compression factors when the superior calorific value, relative density and carbon dioxide content are known, together with the relevant pressures and temperatures. If hydrogen is present, as is often the case for gases with a synthetic admixture, the hydrogen content also needs to be known.

NOTE In principle, it is possible to calculate the compression factor when any three of the parameters superior calorific value, relative density, carbon dioxide content (the usual three) and nitrogen content are known, but subsets including nitrogen content are not recommended.

The method is primarily applicable to pipeline quality gases within the ranges of pressure p and temperature T at which transmission and distribution operations normally take place, with an uncertainty of about $\pm 0,1\%$. For wider-ranging applications the uncertainty of the results increases (see Annex F).

More detail concerning the scope and field of application of the method is given in ISO 12213-1.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6976:1995, *Natural gas — Calculation of calorific values, density, relative density and Wobbe index from composition*

ISO 12213-1, *Natural gas — Calculation of compression factor — Part 1: Introduction and guidelines*

ISO 80000-4, *Quantities and units — Part 4: Mechanics*

ISO 80000-5, *Quantities and units — Part 5: Thermodynamics*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 12213-1 apply.

4 Method of calculation

4.1 Principle

The method recommended uses equations which are based on the concept that pipeline quality natural gas may be uniquely characterized for calculation of its volumetric properties by an appropriate and distinctive set of measurable physical properties. These characteristics, together with the pressure and temperature, are used as input data for the method.

The method uses the following physical properties: superior calorific value, relative density and carbon dioxide content. The method is particularly useful in the common situation where a complete molar composition is not available, but may also be preferred for its relative simplicity. For gases with a synthetic admixture, the hydrogen content needs to be known.

4.2 The SGERG-88 equation

The calculation method using physical properties is based on the standard GERG 88 (SGERG-88) virial equation for natural gases [1], [2], [3]. The standard GERG 88 virial equation is derived from the master GERG 88 (MGERG-88) virial equation, which is a method of calculation based on a molar-composition analysis [4].

The SGERG-88 virial equation from which the compression factor Z is calculated may be written as

$$Z = 1 + B\rho_m + C\rho_m^2 \quad (1)$$

where

B and C are functions of the input data comprising the superior calorific value H_S , the relative density d , the contents of both inert and combustible non-hydrocarbon components of the gas mixture (CO_2 and H_2) and the temperature T ;

ρ_m is the molar density given by

$$\rho_m = p/(ZRT) \quad (2)$$

where

$$Z = f_1(p, T, H_S, d, x_{\text{CO}_2}, x_{\text{H}_2}) \quad (3)$$

However, the SGERG-88 method treats the natural-gas mixture internally as a five-component mixture consisting of an equivalent hydrocarbon gas (with the same thermodynamic properties as the sum of the hydrocarbons present), nitrogen, carbon dioxide, hydrogen and carbon monoxide. To characterize the thermodynamic properties of the hydrocarbon gas adequately, the hydrocarbon heating value H_{CH} is also needed. Therefore, the calculation of Z uses

$$Z = f_2(p, T, H_{\text{CH}}, x_{\text{CH}}, x_{\text{N}_2}, x_{\text{CO}_2}, x_{\text{H}_2}, x_{\text{CO}}) \quad (4)$$

In order to be able to model coke oven gas mixtures, the mole fraction of carbon monoxide is taken to have a fixed relation to the hydrogen content. If hydrogen is not present ($x_{\text{H}_2} < 0,001$), then set $x_{\text{H}_2} = 0$. The natural-gas mixture is then treated in the calculation method as a three-component mixture (see Annex B).

The calculation is performed in three steps:

First, the five-component composition from which both the known superior calorific value and the known relative density can be calculated satisfactorily may be found from the input data by an iterative procedure described in detail in Annex B.

Secondly, once this composition is known, B and C may be found using relationships also given in Annex B.

In the third step, Equations (1) and (2) are solved simultaneously for ρ_m and Z by a suitable numerical method.

A flow diagram of the procedure for calculating Z from the input data is shown in Figure B.1.

4.3 Input variables

4.3.1 Preferred input data set

The input variables required for use with the SGERG-88 equation are the absolute pressure, temperature and superior calorific value (volumetric basis), the relative density, the carbon dioxide content and the hydrogen content. Thus the physical properties used in the input data set (set A) are

$$H_S, d, x_{CO_2} \text{ and } x_{H_2}$$

Relative density is referred to normal conditions (101,325 kPa and 0 °C) and superior calorific value is referred to normal conditions (101,325 kPa and 0 °C) and a combustion temperature of 25 °C.

4.3.2 Alternative input data sets

Three alternatives to the preferred input data set (see 4.3.1) may be used with the standard GERG 88 virial equation:

$$x_{N_2}, H_S, d \text{ and } x_{H_2} \text{ (set B)}$$

$$x_{N_2}, x_{CO_2}, d \text{ and } x_{H_2} \text{ (set C)}$$

$$x_{N_2}, x_{CO_2}, H_S \text{ and } x_{H_2} \text{ (set D)}$$

The alternative input data sets are considered fully in GERG Technical Monograph TM5^[3]. Use of the alternative input data sets gives results which may differ at the fourth decimal place. This part of ISO 12213 recommends the use of input data set A.

4.4 Ranges of application

4.4.1 Pipeline quality gas

The ranges of application for pipeline quality gas are as defined below:

| | | | |
|---------------------------------|-----------------------|-----------------|------------------------------|
| absolute pressure | 0 MPa | $\leq p$ | ≤ 12 MPa |
| temperature | 263 K | $\leq T$ | ≤ 338 K |
| mole fraction of carbon dioxide | 0 | $\leq x_{CO_2}$ | $\leq 0,20$ |
| mole fraction of hydrogen | 0 | $\leq x_{H_2}$ | $\leq 0,10$ |
| superior calorific value | 30 MJ·m ⁻³ | $\leq H_S$ | ≤ 45 MJ·m ⁻³ |
| relative density | 0,55 | $\leq d$ | $\leq 0,80$ |

The mole fractions of other natural-gas components are not required as input. These mole fractions shall, however, lie within the following ranges (the ratio of successive mole fractions in the alkane homologous series is typically 3:1 — see Annex E):

$$\text{methane} \quad 0,7 \leq x_{CH_4} \leq 1,0$$

$$\text{nitrogen} \quad 0 \leq x_{N_2} \leq 0,20$$

| | |
|----------------------------------|---|
| ethane | $0 \leq x_{\text{C}_2\text{H}_6} \leq 0,10$ |
| propane | $0 \leq x_{\text{C}_3\text{H}_8} \leq 0,035$ |
| butanes | $0 \leq x_{\text{C}_4\text{H}_{10}} \leq 0,015$ |
| pentanes | $0 \leq x_{\text{C}_5\text{H}_{12}} \leq 0,005$ |
| hexanes | $0 \leq x_{\text{C}_6} \leq 0,001$ |
| heptanes | $0 \leq x_{\text{C}_7} \leq 0,000\ 5$ |
| octanes plus higher hydrocarbons | $0 \leq x_{\text{C}_{8+}} \leq 0,000\ 5$ |
| carbon monoxide | $0 \leq x_{\text{CO}} \leq 0,03$ |
| helium | $0 \leq x_{\text{He}} \leq 0,005$ |
| water | $0 \leq x_{\text{H}_2\text{O}} \leq 0,000\ 15$ |

The method applies only to mixtures in the single-phase gaseous state (above the dew point) at the conditions of temperature and pressure of interest. For pipeline quality gas, the method is applicable over wider ranges of temperature and pressure but with increased uncertainty (see Figure 1). In the computer implementation, the lower temperature limit is set at 250 K.

4.4.2 Wider ranges of application

The ranges of application tested beyond the limits given in 4.4.1 are:

| | |
|---------------------------------|--|
| absolute pressure | $0\ \text{MPa} \leq p \leq 12\ \text{MPa}$ |
| temperature | $263\ \text{K} \leq T \leq 338\ \text{K}$ |
| mole fraction of carbon dioxide | $0 \leq x_{\text{CO}_2} \leq 0,30$ |
| mole fraction of hydrogen | $0 \leq x_{\text{H}_2} \leq 0,10$ |
| superior calorific value | $20\ \text{MJ}\cdot\text{m}^{-3} \leq H_{\text{S}} \leq 48\ \text{MJ}\cdot\text{m}^{-3}$ |
| relative density | $0,55 \leq d \leq 0,90$ |

The allowable mole fractions of other major natural-gas components are extended to:

| | |
|----------|---|
| methane | $0,5 \leq x_{\text{CH}_4} \leq 1,0$ |
| nitrogen | $0 \leq x_{\text{N}_2} \leq 0,50$ |
| ethane | $0 \leq x_{\text{C}_2\text{H}_6} \leq 0,20$ |
| propane | $0 \leq x_{\text{C}_3\text{H}_8} \leq 0,05$ |

The limits for other minor natural-gas components remain as given in 4.4.1 for pipeline quality gas.


The method is not applicable outside these ranges; the computer implementation described in Annex B will not allow violation of the limits of composition quoted here.

4.5 Uncertainty

4.5.1 Uncertainty for pipeline quality gas

The uncertainty in the prediction of the compression factor ΔZ (for the temperature range 263 K to 338 K) is $\pm 0,1\%$ at pressures up to 10 MPa and $\pm 0,2\%$ between 10 MPa and 12 MPa for natural gases with $x_{N_2} \leq 0,20$, $x_{CO_2} \leq 0,09$, $x_{C_2H_6} \leq 0,10$ and $x_{H_2} \leq 0,10$, and for $30 \text{ MJ}\cdot\text{m}^{-3} \leq H_S \leq 45 \text{ MJ}\cdot\text{m}^{-3}$ and $0,55 \leq d \leq 0,80$ (see Figure 1).

For gases with a CO_2 content exceeding a mole fraction of 0,09, the uncertainty of $\pm 0,1\%$ is maintained for pressures up to 6 MPa and for temperatures between 263 K and 338 K. This uncertainty level is determined by comparison with the GERG databank on measurements of the compression factor for natural gases [5], [6] and with the Gas Research Institute data [9].

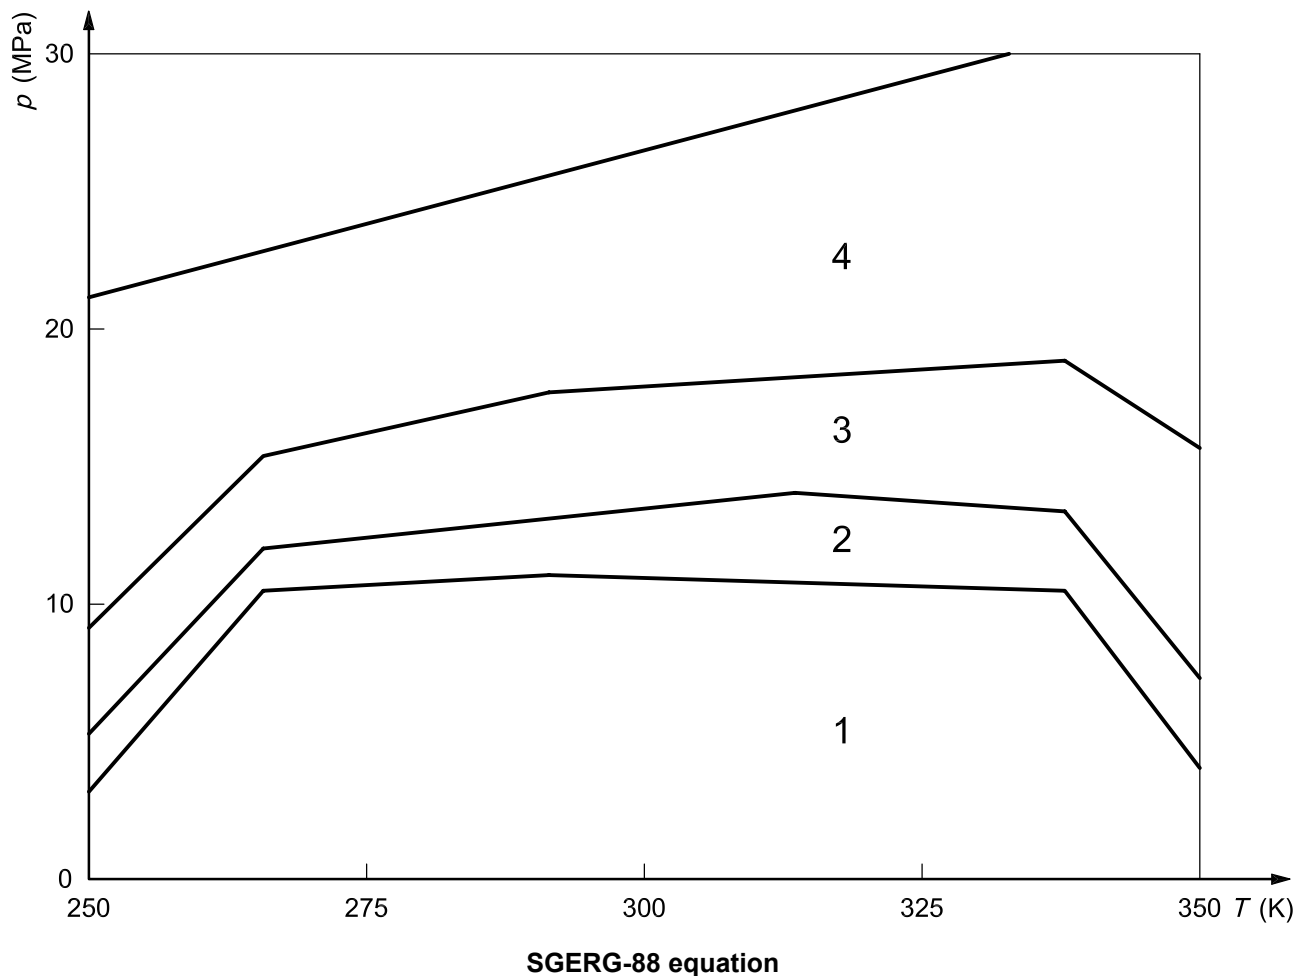

Key

p pressure

T temperature

1 $\Delta Z \leq \pm 0,1\%$

2 $\Delta Z \pm 0,1\%$ to $\pm 0,2\%$

3 $\Delta Z \pm 0,2\%$ to $\pm 0,5\%$

4 $\Delta Z \pm 0,5\%$ to $\pm 3,0\%$

Figure 1 — Uncertainty limits for the calculation of compression factors

(The uncertainty limits given are expected to be valid for natural gases and similar gases with $x_{N_2} \leq 0,20$; $x_{CO_2} \leq 0,09$; $x_{C_2H_6} \leq 0,10$ and $x_{H_2} \leq 0,10$, and for $30 \text{ MJ}\cdot\text{m}^{-3} \leq H_S \leq 45 \text{ MJ}\cdot\text{m}^{-3}$ and $0,55 \leq d \leq 0,80$)

4.5.2 Uncertainty for wider ranges of application

The estimated uncertainties involved in calculations of compression factors beyond the limits of quality given in 4.5.1 are discussed in Annex F.

4.5.3 Impact of uncertainties of input variables

Listed in Table 1 are typical values for the uncertainties of the relevant input variables. These values may be achieved under optimum operating conditions.

As a general guideline only, an error propagation analysis using the above uncertainties in the input variables produces an additional uncertainty of about $\pm 0,1$ % in the result at 6 MPa and within the temperature range 263 K to 338 K. Above 6 MPa, the additional uncertainties are greater and increase roughly in direct proportion to the pressure (see Reference [3]).

4.5.4 Reporting of results

Results for the compression factor shall be reported to four places of decimals, together with the pressure and temperature values and the calculation method used (ISO 12213-3, SGERG-88 equation). For verification of calculation procedures, it is useful to carry extra digits.

Table 1 — Uncertainties of input variables

| Input variable | Absolute uncertainty |
|---------------------------------|-------------------------------|
| Absolute pressure | $\pm 0,02$ MPa |
| Temperature | $\pm 0,15$ K |
| Mole fraction of carbon dioxide | $\pm 0,002$ |
| Mole fraction of hydrogen | $\pm 0,005$ |
| Relative density | $\pm 0,001$ 3 |
| Superior calorific value | $\pm 0,06$ MJ·m ⁻³ |

5 Computer program

Software which implements this International Standard has been prepared. Users of this part of ISO 12213 are invited to contact ISO/TC 193/SC 1, either directly or through their ISO member body, to enquire about the availability of this software.

Annex A (normative)

Symbols and units

The symbols specified in this annex are those which are used in both the main text and in Annex B. The units specified here are those which give consistency with the values of the coefficients given in Annex B.

| Symbol | Meaning | Units |
|-------------|--|---|
| b_{H0} | Zero-order (constant) term in the molar heating value (H_{CH}) expansion of B_{11} [Equation (B.20)] | $\text{m}^3 \cdot \text{kmol}^{-1}$ |
| b_{H1} | First-order (linear) term in the molar heating value (H_{CH}) expansion of B_{11} [Equation (B.20)] | $\text{m}^3 \cdot \text{MJ}^{-1}$ |
| b_{H2} | Second-order (quadratic) term in the molar heating value (H_{CH}) expansion of B_{11} [Equation (B.20)] | $\text{m}^3 \cdot \text{kmol} \cdot \text{MJ}^{-2}$ |
| $b_{H0(0)}$ | Terms in the temperature expansion of b_{H0} [Equation (B.21)] | $\text{m}^3 \cdot \text{kmol}^{-1}$ |
| $b_{H0(1)}$ | | $\text{m}^3 \cdot \text{kmol}^{-1} \cdot \text{K}^{-1}$ |
| $b_{H0(2)}$ | | $\text{m}^3 \cdot \text{kmol}^{-1} \cdot \text{K}^{-2}$ |
| $b_{H1(0)}$ | Terms in the temperature expansion of b_{H1} [Equation (B.21)] | $\text{m}^3 \cdot \text{MJ}^{-1}$ |
| $b_{H1(1)}$ | | $\text{m}^3 \cdot \text{MJ}^{-1} \cdot \text{K}^{-1}$ |
| $b_{H1(2)}$ | | $\text{m}^3 \cdot \text{MJ}^{-1} \cdot \text{K}^{-2}$ |
| $b_{H2(0)}$ | Terms in the temperature expansion of b_{H2} [Equation (B.21)] | $\text{m}^3 \cdot \text{kmol} \cdot \text{MJ}^{-2}$ |
| $b_{H2(1)}$ | | $\text{m}^3 \cdot \text{kmol} \cdot \text{MJ}^{-2} \cdot \text{K}^{-1}$ |
| $b_{H2(2)}$ | | $\text{m}^3 \cdot \text{kmol} \cdot \text{MJ}^{-2} \cdot \text{K}^{-2}$ |
| $b_{ij(0)}$ | Terms in the temperature expansion of b_{ij} [Equation (B.22)] | $\text{m}^3 \cdot \text{kmol}^{-1}$ |
| $b_{ij(1)}$ | | $\text{m}^3 \cdot \text{kmol}^{-1} \cdot \text{K}^{-1}$ |
| $b_{ij(2)}$ | | $\text{m}^3 \cdot \text{kmol}^{-1} \cdot \text{K}^{-2}$ |
| B | Second virial coefficient [Equation (1)] | $\text{m}^3 \cdot \text{kmol}^{-1}$ |
| B_{ij} | Second virial coefficient for binary interaction between component i and component j [Equation (B.22)] | $\text{m}^3 \cdot \text{kmol}^{-1}$ |
| c_{H0} | Zero-order (constant) term in the molar heating value (H_{CH}) expansion of C_{111} [Equation (B.29)] | $\text{m}^6 \cdot \text{kmol}^{-2}$ |
| c_{H1} | First-order (linear) term in the molar heating value (H_{CH}) expansion of C_{111} [Equation (B.29)] | $\text{m}^6 \cdot \text{kmol}^{-1} \cdot \text{MJ}^{-1}$ |
| c_{H2} | Second-order (quadratic) term in the molar heating value (H_{CH}) expansion of C_{111} [Equation (B.29)] | $\text{m}^6 \cdot \text{MJ}^{-2}$ |

| Symbol | Meaning | Units |
|-------------------|---|--|
| $c_{H0}(0)$ | Terms in the temperature expansion of c_{H0} [Equation (B.30)] | $\text{m}^6 \cdot \text{kmol}^{-2}$ |
| $c_{H0}(1)$ | | $\text{m}^6 \cdot \text{kmol}^{-2} \cdot \text{K}^{-1}$ |
| $c_{H0}(2)$ | | $\text{m}^6 \cdot \text{kmol}^{-2} \cdot \text{K}^{-2}$ |
| $c_{H1}(0)$ | Terms in the temperature expansion of c_{H1} [Equation (B.30)] | $\text{m}^6 \cdot \text{kmol}^{-1} \cdot \text{MJ}^{-1}$ |
| $c_{H1}(1)$ | | $\text{m}^6 \cdot \text{kmol}^{-1} \cdot \text{MJ}^{-1} \cdot \text{K}^{-1}$ |
| $c_{H1}(2)$ | | $\text{m}^6 \cdot \text{kmol}^{-1} \cdot \text{MJ}^{-1} \cdot \text{K}^{-2}$ |
| $c_{H2}(0)$ | Terms in the temperature expansion of c_{H2} [Equation (B.30)] | $\text{m}^6 \cdot \text{MJ}^{-2}$ |
| $c_{H2}(1)$ | | $\text{m}^6 \cdot \text{MJ}^{-2} \cdot \text{K}^{-1}$ |
| $c_{H2}(2)$ | | $\text{m}^6 \cdot \text{MJ}^{-2} \cdot \text{K}^{-2}$ |
| $c_{ijk}(0)$ | Terms in the temperature expansion of c_{ijk} [Equation (B.31)] | $\text{m}^6 \cdot \text{kmol}^{-2}$ |
| $c_{ijk}(1)$ | | $\text{m}^6 \cdot \text{kmol}^{-2} \cdot \text{K}^{-1}$ |
| $c_{ijk}(2)$ | | $\text{m}^6 \cdot \text{kmol}^{-2} \cdot \text{K}^{-2}$ |
| C | Third virial coefficient [Equation (1)] | $\text{m}^6 \cdot \text{kmol}^{-2}$ |
| C_{ijk} | Third virial coefficient for ternary interaction between components i, j and k [Equation (B.31)] | $\text{m}^6 \cdot \text{kmol}^{-2}$ |
| d | Relative density [$d(\text{air}) = 1$; Equation (B.1)] | — |
| DH_{CH} | Change in the molar heating value H_{CH} during iteration [Equations (B.10) and (B.11)] | $\text{MJ} \cdot \text{kmol}^{-1}$ |
| H_{S} | Superior calorific value [gas at normal conditions (0 °C, 1,013 25 bar), combustion temperature 25 °C] | $\text{MJ} \cdot \text{m}^{-3}$ |
| H | Molar heating value (combustion temperature 25 °C) | $\text{MJ} \cdot \text{kmol}^{-1}$ |
| M | Molar mass [Equations (B.5) and (B.8)] | $\text{kg} \cdot \text{kmol}^{-1}$ |
| p | Absolute pressure | bar |
| R | (Universal) gas constant | $\text{m}^3 \cdot \text{bar} \cdot \text{kmol}^{-1} \cdot \text{K}^{-1}$ |
| T | Absolute temperature | K |
| t | Celsius temperature [= $T - 273,15$; Equation (B.27)] | °C |
| V_{m} | Molar volume (= $1/\rho_{\text{m}}$) | $\text{m}^3 \cdot \text{kmol}^{-1}$ |
| x | Mole fraction of a component | — |
| y | Combination rule parameters for the binary unlike-interaction virial coefficients B_{12} and B_{13} (Table B.2) and the ternary unlike-interaction virial coefficient C_{ijk} [Equation (B.32)] | — |
| Z | Compression factor | — |
| ρ | Mass density [Equations (B.8) and (B.42)] | $\text{kg} \cdot \text{m}^{-3}$ |
| ρ_{m} | Molar density (= V_{m}^{-1}) | $\text{kmol} \cdot \text{m}^{-3}$ |

Additional subscripts

| | |
|-----------------|--|
| n | Value at normal conditions ($T_n = 273,15$ K, $p_n = 1,013 25$ bar) |
| CH | For the equivalent hydrocarbon |
| CO | For carbon monoxide |
| CO ₂ | For carbon dioxide |
| H ₂ | For hydrogen |
| N ₂ | For nitrogen |

Additional qualifiers

| | |
|--------------|--|
| (air) | For dry air of standard composition [Equation (B.1)] |
| (<i>D</i>) | For special value of ρ used in Equation (B.11) |
| 1 | For the equivalent hydrocarbon [Equations (B.12) and (B.15)] |
| 2 | For nitrogen [Equations (B.12) and (B.16)] |
| 3 | For carbon dioxide [Equations (B.12) and (B.17)] |
| 4 | For hydrogen [Equations (B.12) and (B.18)] |
| 5 | For carbon monoxide [Equations (B.12) and (B.19)] |
| (id) | Ideal gas state |
| (<i>u</i>) | Iteration counter (B.2.1) |
| (<i>v</i>) | Iteration counter (B.2.2) |
| (<i>w</i>) | Iteration counter (B.4) |

Annex B (normative)

Description of the SGERG-88 method

This annex gives the equations for, and numerical values of, coefficients which together specify completely the SGERG method for calculation of compression factors.

It also describes iteration procedures adopted by GERG [3] for implementing the method in the verified Fortran 77 subroutine SGERG.FOR. This subroutine provides the correct solution; other computational procedures are acceptable provided that they can be demonstrated to yield identical numerical results. The calculated results shall agree to at least the fourth place of decimals with the examples given in Annex C.

Other implementations which are known to produce identical results are as follows:

- a) A BASIC version, described in GERG TM5 [3], which may be used with a variety of metric reference conditions. This programme was designed mainly for PC applications.
- b) A version in C, described in German DVGW Directives, sheet G486 [8].
- c) A version in Turbo Pascal.

All these programmes have been verified to give the same results to within 10^{-5} . The availability of the programmes and the conditions which apply to their use are discussed in Part 1 of this International Standard.

B.1 Basic structure of the calculation method

As described in 4.2, the calculation proceeds in three steps, which are shown schematically in Figure B.1.

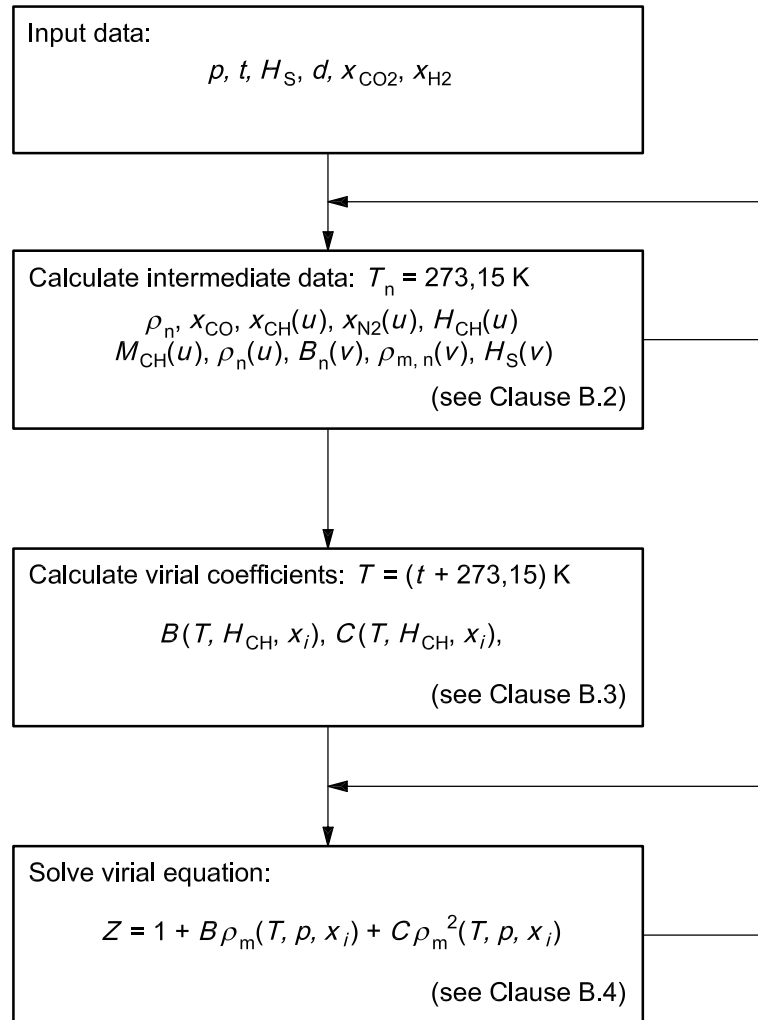


Figure B.1 — Flow diagram for standard GERG-88 calculation method
 (x_i = mole fraction of component i)

The calculation is described below in the order in which these three steps are carried out.

Step I

The input data are pressure, temperature, gross calorific value, relative density and the mole fractions of carbon dioxide and hydrogen. If the values of the first three parameters are in any units other than bar, °C and MJ/m³, they shall first be converted precisely to values in bar, °C and MJ/m³, respectively, using the guidelines set out in Annex D.

The input data are then used to calculate the following intermediate data:

Mole fraction of:

| | |
|---|-----------|
| hydrocarbon gas | x_{CH} |
| nitrogen | x_{N_2} |
| carbon monoxide | x_{CO} |
| Molar heating value of the equivalent hydrocarbon | H_{CH} |

| | |
|---|--------------|
| Molar mass of the equivalent hydrocarbon | M_{CH} |
| Second virial coefficient ($T_n = 273,15$ K) | B_n |
| Molar density at normal conditions | $\rho_{m,n}$ |
| Mass density at normal conditions | ρ_n |
| Superior calorific value of the gas | H_S |

In Equations (B.1) to (B.46), each symbol represents a physical quantity divided by its selected unit (see Annex A), such that their quotient is the dimensionless value of the quantity.

Step II

The intermediate data are used to calculate the second and third virial coefficients for the natural gas at the required temperature, $B(T, H_{CH}, x_i)$ and $C(T, H_{CH}, x_i)$.

Step III

The second and third virial coefficients determined in the second step are inserted in the virial equation, and the compression factor Z is calculated for a given pressure and temperature.

The symbols used are defined in Annex A.

B.2 Calculation of intermediate data

The eight intermediate-data values (x_{CH} , x_{N_2} , x_{CO} , H_{CH} , M_{CH} , B_n , $\rho_{m,n}$, ρ_n) are determined from Equations (B.1) to (B.8) using the iterative method presented in Figure B.2. Values of the constants used in these equations are given in Table B.1.

$$\rho_n = d \rho_n(\text{air}) \quad (\text{B.1})$$

$$x_{CO} = 0,0964 x_{H_2} \quad (\text{B.2})$$

$$V_{m,n}(\text{id}) = RT_n / p_n \quad (\text{B.3})$$

$$\rho_{m,n}(v) = [V_{m,n}(\text{id}) + B_n(v)]^{-1} \quad (\text{B.4})$$

$$M_{CH}(u) = -2,709328 + 0,021062199 H_{CH}(u - 1) \quad (\text{B.5})$$

$$x_{CH}(u) = H_S / [H_{CH}(u - 1) \rho_{m,n}(v)] - [(x_{H_2} H_{H_2} + x_{CO} H_{CO}) / H_{CH}(u - 1)] \quad (\text{B.6})$$

$$x_{N_2}(u) = 1 - x_{CH}(u) - x_{CO_2} - x_{H_2} - x_{CO} \quad (\text{B.7})$$

$$\rho_n(u) = [x_{CH}(u) M_{CH}(u) + x_{N_2}(u) M_{N_2}] \rho_{m,n}(v) + (x_{CO_2} M_{CO_2} + x_{H_2} M_{H_2} + x_{CO} M_{CO}) \rho_{m,n}(v) \quad (\text{B.8})$$

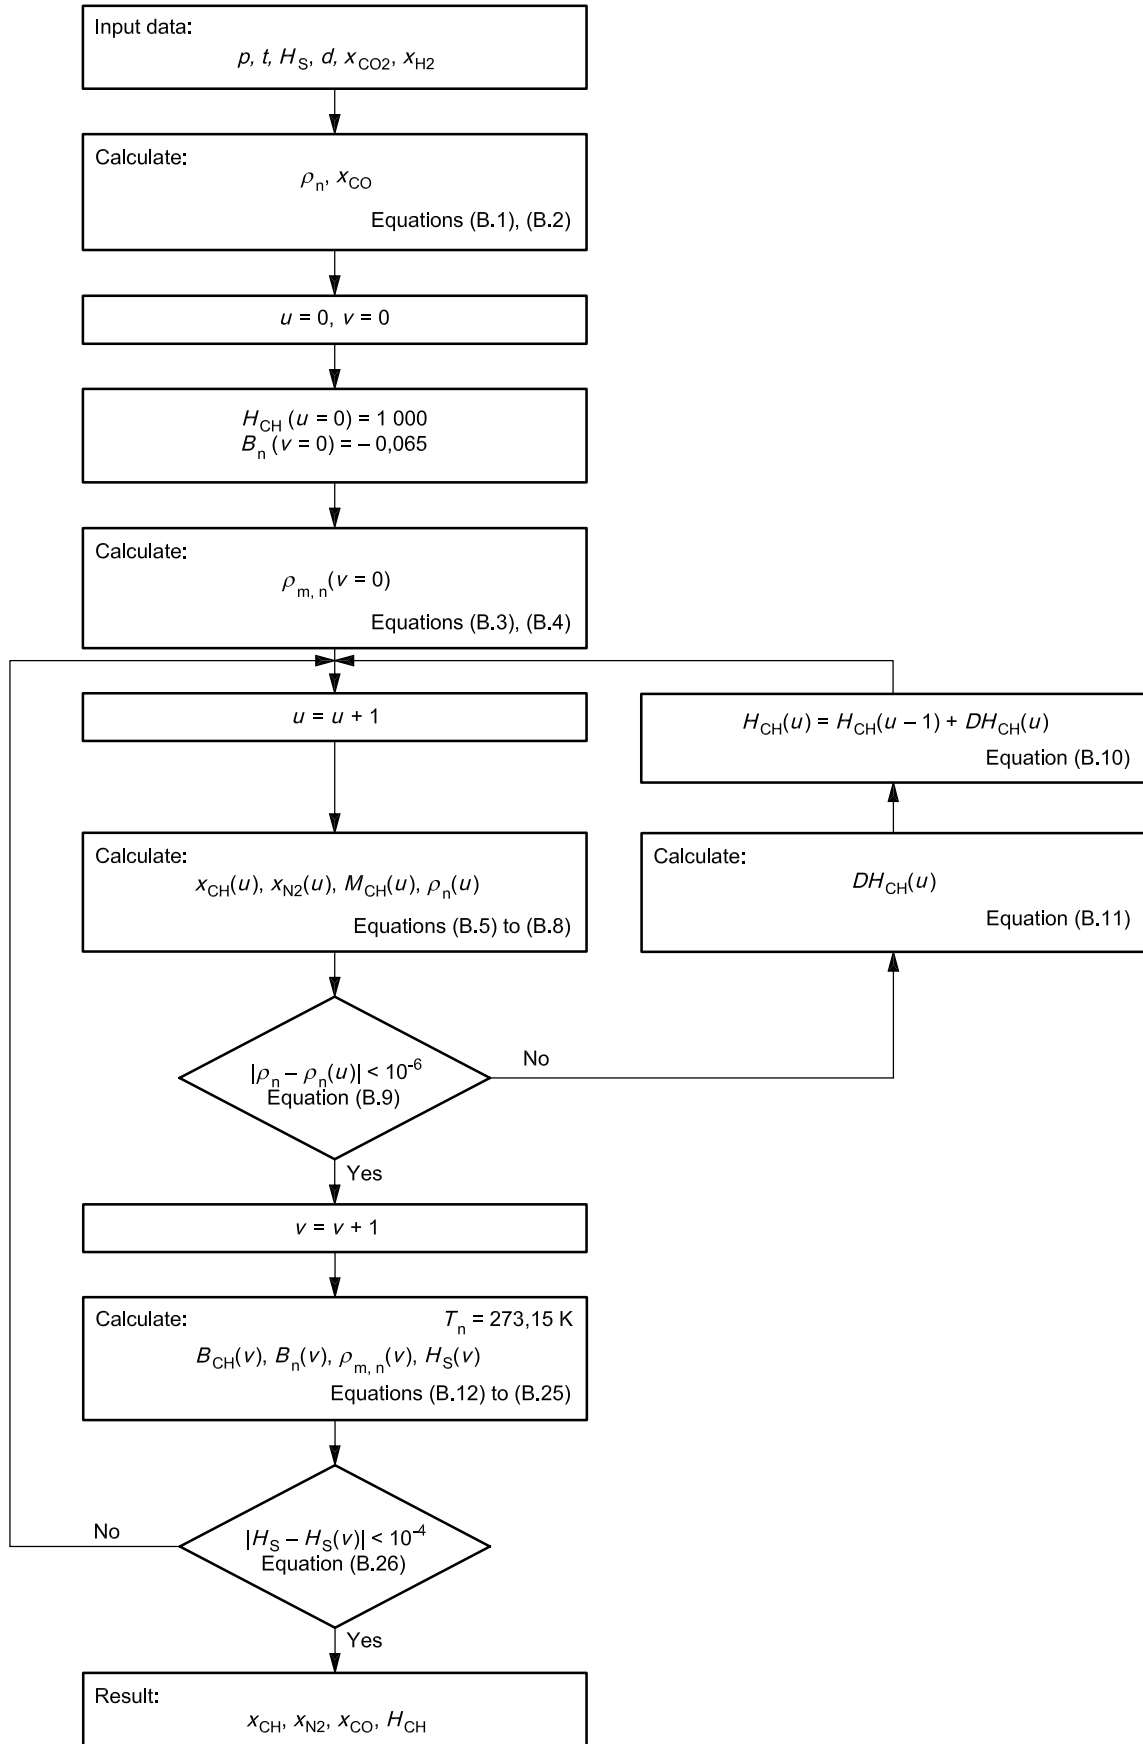


Figure B.2 — Flow diagram for computing intermediate data by iteration

Table B.1 — Values of the constants used in Equations (B.1) to (B.8)
 (adjusted to conform with the molar masses and molar calorific values in ISO 6976:1995)

| | | |
|----------------------|---------------|---|
| H_{H_2} | = 285,83 | MJ·kmol ⁻¹ |
| H_{CO} | = 282,98 | MJ·kmol ⁻¹ |
| M_{N_2} | = 28,013 5 | kg·kmol ⁻¹ |
| M_{CO_2} | = 44,010 | kg·kmol ⁻¹ |
| M_{H_2} | = 2,015 9 | kg·kmol ⁻¹ |
| M_{CO} | = 28,010 | kg·kmol ⁻¹ |
| R | = 0,083 145 1 | m ³ ·bar·kmol ⁻¹ ·K ⁻¹ |
| $V_{m,n}(id)$ | = 22,414 097 | m ³ ·kmol ⁻¹ |
| $\rho_n(\text{air})$ | = 1,292 923 | kg·m ⁻³ |

B.2.1 Iteration with the molar heating value H_{CH} (inner loop)

Equations (B.1) to (B.8) are applied in sequence so as to obtain the first approximation in the u th iteration step. The starting values are:

$$H_{CH}(u = 0) = 1\,000 \text{ MJ}\cdot\text{kmol}^{-1}$$

$$B_n(v = 0) = -0,065 \text{ m}^3\cdot\text{kmol}^{-1}$$

The values of the other constants used in Equations (B.1) to (B.8) are given in Table B.1.

The convergence criterion for this inner iteration loop is that the absolute difference between the calculated density of the gas at normal conditions $\rho_n(u)$ and the known density (either measured directly or determined from the relative density) of the gas at normal conditions ρ_n is less than 10^{-6} , i.e.

$$|\rho_n - \rho_n(u)| < 10^{-6} \quad (\text{B.9})$$

If this condition is not satisfied, then an improved value of the molar heating value $H_{CH}(u)$, for use in Equations (B.5) to (B.8), is calculated using Equation (B.10) as follows:

$$H_{CH}(u) = H_{CH}(u - 1) + DH_{CH}(u) \quad (\text{B.10})$$

where

$$DH_{CH}(u) = [\rho_n - \rho_n(u)] [\rho(D) - \rho_n(u)]^{-1} \quad (\text{B.11})$$

$\rho_n(u)$ being the density value for the current iteration step [commencing with $H_{CH}(u - 1)$],

$\rho(D)$ being the density determined by Equations (B.4) to (B.8) using $[H_{CH}(u - 1) + 1]$ as input for the molar heating value.

When the left-hand side of Equation (B.9) is less than 10^{-6} , this iteration loop is terminated and iteration with the second virial coefficient begins.

B.2.2 Iteration with the second virial coefficient B_n (outer loop)

The intermediate values $x_{\text{CH}}(u)$, $x_{\text{N}_2}(u)$, x_{CO} and $H_{\text{CH}}(u)$ from the preceding iteration and the input data x_{CO_2} and x_{H_2} are used to determine an improved value for the second virial coefficient $B_n(v)$ for the whole gas at normal conditions.

The second virial coefficient for the natural gas is given by the following equation:

$$B(T) = x_1^2 B_{11} + 2x_1x_2 B_{12} + 2x_1x_3 B_{13} + 2x_1x_4 B_{14} + 2x_1x_5 B_{15} + x_2^2 B_{22} + 2x_2x_3 B_{23} + 2x_2x_4 B_{24} + x_3^2 B_{33} + x_4^2 B_{44} + x_5^2 B_{55} \quad (\text{B.12})$$

Some of the terms that are missing in Equation (B.12), i.e. B_{25} , B_{34} , etc., have been found not to improve the accuracy of the calculation if included and are therefore set at zero.

$$B_n(v) = B(T_n) \quad (\text{B.13})$$

where

$$T = T_n = 273,15 \quad (\text{B.14})$$

$$x_1 = x_{\text{CH}}(u) \quad (\text{B.15})$$

$$x_2 = x_{\text{N}_2}(u) \quad (\text{B.16})$$

$$x_3 = x_{\text{CO}_2} \quad (\text{B.17})$$

$$x_4 = x_{\text{H}_2} \quad (\text{B.18})$$

$$x_5 = x_{\text{CO}} \quad (\text{B.19})$$

$$B_{11} = b_{H0} + b_{H1}H_{\text{CH}}(u) + b_{H2}H_{\text{CH}}^2(u) \quad (\text{B.20})$$

where the coefficients b_{H0} , b_{H1} and b_{H2} are second-degree polynomials as a function of temperature

$$B_{11} = b_{H0}(0) + b_{H0}(1)T + b_{H0}(2)T^2 + [b_{H1}(0) + b_{H1}(1)T + b_{H1}(2)T^2]H_{\text{CH}}(u) + [b_{H2}(0) + b_{H2}(1)T + b_{H2}(2)T^2]H_{\text{CH}}^2(u) \quad (\text{B.21})$$

and the second virial coefficients B_{14} , B_{15} , B_{22} , B_{23} , B_{24} , B_{33} , B_{34} , B_{44} and B_{55} are also second-degree polynomials as a function of temperature, in the general form

$$B_{ij} = b_{ij}(0) + b_{ij}(1)T + b_{ij}(2)T^2 \quad (\text{B.22})$$

The unlike-interaction virial coefficients B_{12} and B_{13} are given by

$$B_{12} = [0,72 + 1,875 \times 10^{-5}(320 - T)^2](B_{11} + B_{22})/2 \quad (\text{B.23})$$

$$B_{13} = -0,865(B_{11}B_{33})^{1/2} \quad (\text{B.24})$$

The coefficients in Equations (B.21) to (B.24) are given in Table B.2.

Table B.2 — Numerical values for the coefficients $b(0)$, $b(1)$ and $b(2)$ in the temperature expansion of the second virial coefficient for pure gases and of the unlike-interaction virial coefficients
(The units of B are $\text{m}^3\cdot\text{kmol}^{-1}$ when the temperature is in kelvins.)

| | ij | $b(0)$ | $b(1)$ | $b(2)$ |
|------------------------------|------|--|-----------------------------|------------------------------|
| CH | $H0$ | $-4,254\ 68 \times 10^{-1}$ | $2,865\ 00 \times 10^{-3}$ | $-4,620\ 73 \times 10^{-6}$ |
| CH | $H1$ | $8,771\ 18 \times 10^{-4}$ | $-5,562\ 81 \times 10^{-6}$ | $8,815\ 10 \times 10^{-9}$ |
| CH | $H2$ | $-8,247\ 47 \times 10^{-7}$ | $4,314\ 36 \times 10^{-9}$ | $-6,083\ 19 \times 10^{-12}$ |
| N_2 | 22 | $-1,446\ 00 \times 10^{-1}$ | $7,409\ 10 \times 10^{-4}$ | $-9,119\ 50 \times 10^{-7}$ |
| CO_2 | 33 | $-8,683\ 40 \times 10^{-1}$ | $4,037\ 60 \times 10^{-3}$ | $-5,165\ 70 \times 10^{-6}$ |
| H_2 | 44 | $-1,105\ 96 \times 10^{-3}$ | $8,133\ 85 \times 10^{-5}$ | $-9,872\ 20 \times 10^{-8}$ |
| CO | 55 | $-1,308\ 20 \times 10^{-1}$ | $6,025\ 40 \times 10^{-4}$ | $-6,443\ 00 \times 10^{-7}$ |
| CH + N_2 | 12 | $y = 0,72 + 1,875 \times 10^{-5}(320 - T)^2$ | | |
| CH + CO_2 | 13 | $y = -0,865$ | | |
| CH + H_2 | 14 | $-5,212\ 80 \times 10^{-2}$ | $2,715\ 70 \times 10^{-4}$ | $-2,500\ 00 \times 10^{-7}$ |
| CH + CO | 15 | $-6,872\ 90 \times 10^{-2}$ | $-2,393\ 81 \times 10^{-6}$ | $5,181\ 95 \times 10^{-7}$ |
| N_2 + CO_2 | 23 | $-3,396\ 93 \times 10^{-1}$ | $1,611\ 76 \times 10^{-3}$ | $-2,044\ 29 \times 10^{-6}$ |
| N_2 + H_2 | 24 | $1,200\ 00 \times 10^{-2}$ | 0,000 00 | 0,000 00 |

The value of $B_n(v)$ obtained from Equation (B.13) is used to calculate the v th approximation of $\rho_{m,n}$ using Equation (B.4).

Equation (B.6) is then used, in the inverse way to that in which it was used previously, to obtain a value for $H_S(v)$, i.e.

$$H_S(v) = [x_1(u)H_{\text{CH}}(u-1) + x_4H_4 + x_5H_5] \rho_{m,n}(v) \quad (\text{B.25})$$

where $H_4 (= H_{\text{H}_2})$ and $H_5 (= H_{\text{CO}})$ are the molar heating values at 298,15 K of hydrogen and carbon monoxide, respectively. The convergence criterion for the outer iteration loop (iteration counter v) is that the absolute difference between the measured superior calorific value H_S and the calculated calorific value $H_S(v)$ is less than 10^{-4} , i.e.

$$|H_S - H_S(v)| < 10^{-4} \quad (\text{B.26})$$

If this criterion is not satisfied, then the value for $B_n(v)$ determined from Equation (B.13) is used as a new input value for Equation (B.4) and the whole iteration procedure, i.e. the inner iteration loop (iteration counter u), is restarted from Equation (B.5) using the current values of $H_{\text{CH}}(u-1)$ and $\rho_{m,n}(v)$.

When both convergence criterion (B.9) and convergence criterion (B.26) are satisfied simultaneously, the final intermediate data for the mole fractions x_{CH} and x_{N_2} and for the molar heating value H_{CH} have been determined.

B.3 Calculation of virial coefficients

The second and third virial coefficients $B(T)$ and $C(T)$ of a natural gas are now determined from the mole fractions x_{CO_2} and x_{H_2} (input data) and x_{CH} , x_{N_2} and x_{CO} (intermediate data) and the molar heating value H_{CH} (see Figures B.1 and B.3).

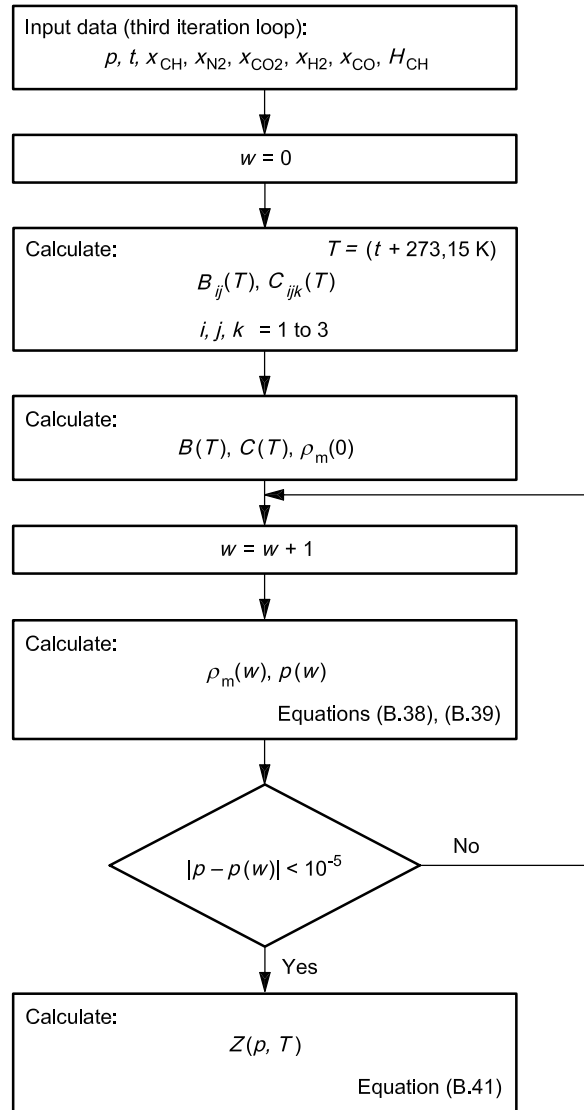


Figure B.3 — Flow diagram for compression factor calculation

B.3.1 Calculation of $B(T)$

The second virial coefficient $B(T)$ is calculated from Equation (B.12) by the procedure described in B.2.2 for a temperature

$$T = t + 273,15 \quad (\text{B.27})$$

B.3.2 Calculation of $C(T)$

The third virial coefficient for a natural gas at a temperature T is determined using the following equation:

$$\begin{aligned}
 C(T) = & x_1^3 C_{111} + 3x_1^2 x_2 C_{112} + 3x_1^2 x_3 C_{113} + 3x_1^2 x_4 C_{114} + 3x_1^2 x_5 C_{115} + 3x_1 x_2^2 C_{122} + 6x_1 x_2 x_3 C_{123} + \\
 & + 3x_1 x_3^2 C_{133} + x_2^3 C_{222} + 3x_2^2 x_3 C_{223} + 3x_2 x_3^2 C_{233} + x_3^3 C_{333} + x_4^3 C_{444}
 \end{aligned} \quad (\text{B.28})$$

The possible additional terms that are missing in Equation (B.28) have been found not to improve the accuracy of the calculation if included and have therefore been set at zero.

Furthermore, in Equation (B.28):

$$C_{111} = c_{H0} + c_{H1}H_{CH} + c_{H2}H_{CH}^2 \quad (B.29)$$

where c_{H0} , c_{H1} and c_{H2} are second-degree polynomials as a function of temperature, viz:

$$C_{111} = c_{H0}(0) + c_{H0}(1)T + c_{H0}(2)T^2 + [c_{H1}(0) + c_{H1}(1)T + c_{H1}(2)T^2]H_{CH} + [c_{H2}(0) + c_{H2}(1)T + c_{H2}(2)T^2]H_{CH}^2 \quad (B.30)$$

as are C_{222} , C_{333} , C_{444} , C_{115} , C_{223} and C_{233} , viz:

$$C_{ijk} = c_{ijk}(0) + c_{ijk}(1)T + c_{ijk}(2)T^2 \quad (B.31)$$

The coefficients in Equations (B.30) and (B.31) are given in Table B.3.

Table B.3 — Numerical values of the coefficients $c(0)$, $c(1)$ and $c(2)$ in the temperature expansion of the third virial coefficient for pure gases and of the unlike-interaction virial coefficients
(The units of C are $\text{m}^6 \cdot \text{kmol}^{-2}$ when the temperature is in kelvins.)

| | ijk | $c(0)$ | $c(1)$ | $c(2)$ |
|--|-------|-----------------------------|---------------------------------|------------------------------|
| CH | $H0$ | $-3,024\ 88 \times 10^{-1}$ | $1,958\ 61 \times 10^{-3}$ | $-3,163\ 02 \times 10^{-6}$ |
| CH | $H1$ | $6,464\ 22 \times 10^{-4}$ | $-4,228\ 76 \times 10^{-6}$ | $6,881\ 57 \times 10^{-9}$ |
| CH | $H2$ | $-3,328\ 05 \times 10^{-7}$ | $2,231\ 60 \times 10^{-9}$ | $-3,677\ 13 \times 10^{-12}$ |
| N_2 | 222 | $7,849\ 80 \times 10^{-3}$ | $-3,989\ 50 \times 10^{-5}$ | $6,118\ 70 \times 10^{-8}$ |
| CO_2 | 333 | $2,051\ 30 \times 10^{-3}$ | $3,488\ 80 \times 10^{-5}$ | $-8,370\ 30 \times 10^{-8}$ |
| H_2 | 444 | $1,047\ 11 \times 10^{-3}$ | $-3,648\ 87 \times 10^{-6}$ | $4,670\ 95 \times 10^{-9}$ |
| CH + CH + N_2 | 112 | | $y = 0,92 + 0,001\ 3 (T - 270)$ | |
| CH + CH + CO_2 | 113 | | $y = 0,92$ | |
| CH + CH + H_2 | 114 | | $y = 1,20$ | |
| CH + CH + CO | 115 | $7,367\ 48 \times 10^{-3}$ | $-2,765\ 78 \times 10^{-5}$ | $3,430\ 51 \times 10^{-8}$ |
| CH + N_2 + N_2 | 122 | | $y = 0,92 + 0,001\ 3 (T - 270)$ | |
| CH + N_2 + CO_2 | 123 | | $y = 1,10$ | |
| CH + CO_2 + CO_2 | 133 | | $y = 0,92$ | |
| N_2 + N_2 + CO_2 | 223 | $5,520\ 66 \times 10^{-3}$ | $-1,686\ 09 \times 10^{-5}$ | $1,571\ 69 \times 10^{-8}$ |
| N_2 + CO_2 + CO_2 | 233 | $3,587\ 83 \times 10^{-3}$ | $8,066\ 74 \times 10^{-6}$ | $-3,257\ 98 \times 10^{-8}$ |

The other unlike-interaction virial coefficients used are given by

$$C_{ijk} = y_{ijk} (C_{iii}C_{jjj}C_{kkk})^{1/3} \quad (B.32)$$

where y_{ijk} is given by

$$y_{112} = y_{122} = 0,92 + 0,001\ 3(T - 270) \quad (B.33)$$

$$y_{113} = y_{133} = 0,92 \quad (B.34)$$

$$y_{114} = 1,20 \quad (\text{B.35})$$

$$y_{123} = 1,10 \quad (\text{B.36})$$

Equation (B.32) shows that the temperature dependence of the unlike-interaction virial coefficients is determined essentially by the temperature dependence of the third virial coefficients for the pure components.

B.4 Calculation of the compression factor and molar density

The very last stage in the calculation of the compression factor and the molar density is to solve Equations (1) and (2) simultaneously for the given value of the pressure p . For the first approximation in the iteration using w , ρ_m is given by

$$\rho_m^{-1}(w=0) = RT/p + B \quad (\text{B.37})$$

where the second virial coefficient B is defined by Equation (B.12) for a temperature T (see Figure B.3). An improved value $\rho_m(w)$ is then given by

$$\rho_m^{-1}(w) = (RT/p) \left[1 + B\rho_m(w-1) + C\rho_m^2(w-1) \right] \quad (\text{B.38})$$

where the third virial coefficient C for the mixture is defined by Equation (B.28) for a given temperature T . The convergence criterion for the iteration using w is that the absolute difference between the calculated pressure $p(w)$ given by Equation (B.39) and the given pressure p is less than 10^{-5} [see Equation (B.40)].

$$p(w) = RT\rho_m(w) \left[1 + B\rho_m(w) + C\rho_m^2(w) \right] \quad (\text{B.39})$$

$$|p - p(w)| < 10^{-5} \quad (\text{B.40})$$

If this condition is not satisfied, then the current value for the molar density $\rho_m(w)$ is used as the new value $\rho_m(w-1)$ in Equation (B.38) and an improved value of the molar density $\rho_m(w)$ is calculated.

However, if the left-hand side of Equation (B.40) is less than 10^{-5} , the iteration routine is ended, and $\rho_m(w)$ is the final molar density ρ_m . The compression factor is then given by

$$Z = 1 + B\rho_m + C\rho_m^2 \quad (\text{B.41})$$

NOTE The mass density can be calculated as follows:

$$\rho = \left[d\rho_n(\text{air})pZ_n T_n / (p_n Z T) \right] \quad (\text{B.42})$$

Z and Z_n being rounded to four places of decimals before being used in the density calculation.

Report the density to three significant figures.

B.5 Consistency checks on the SGERG-88 method

The following tests, which provide partial consistency checks on the input data, shall be applied when carrying out calculations by the SGERG method.

- a) The input data shall satisfy the following condition:

$$d > 0,55 + 0,97x_{\text{CO}_2} - 0,45x_{\text{H}_2} \quad (\text{B.43})$$

- b) The intermediate calculated value for the mole fraction of nitrogen shall satisfy the following conditions:

$$-0,01 \leq x_{\text{N}_2} \leq 0,5 \quad (\text{B.44})$$

$$x_{\text{N}_2} + x_{\text{CO}_2} \leq 0,5 \quad (\text{B.45})$$

- c) Furthermore, the internal consistency of the input data for the third iteration loop shall satisfy the condition:

$$d > 0,55 + 0,4x_{\text{N}_2} + 0,97x_{\text{CO}_2} - 0,45x_{\text{H}_2} \quad (\text{B.46})$$

Annex C (normative)

Example calculations

The following example calculations shall be used for the validation of computer implementations of the SGERG-88 method not cited in Annex B. The calculations have been carried out using the validated executable programme GERG-88.EXE, which incorporates the subroutine SGERG.FOR described in Annex B.

Table C.1 — Input data

| | Gas 1 | Gas 2 | Gas 3 | Gas 4 | Gas 5 | Gas 6 |
|-----------------------------|-------|-------|-------|-------|-------|-------|
| x_{CO_2} | 0,006 | 0,005 | 0,015 | 0,016 | 0,076 | 0,011 |
| x_{H_2} | 0,000 | 0,000 | 0,000 | 0,095 | 0,000 | 0,000 |
| d | 0,581 | 0,609 | 0,650 | 0,599 | 0,686 | 0,644 |
| H_S (MJ·m ⁻³) | 40,66 | 40,62 | 43,53 | 34,16 | 36,64 | 36,58 |

Table C.2 — Results (Z -values)

| Conditions | | Gas 1 | Gas 2 | Gas 3 | Gas 4 | Gas 5 | Gas 6 |
|------------|-----------|----------|----------|----------|----------|----------|----------|
| p bar | t °C | | | | | | |
| 60 | - 3,15 | 0,840 84 | 0,833 97 | 0,794 15 | 0,885 69 | 0,826 64 | 0,854 06 |
| 60 | 6,85 | 0,862 02 | 0,856 15 | 0,822 10 | 0,901 50 | 0,850 17 | 0,873 88 |
| 60 | 16,85 | 0,880 07 | 0,875 00 | 0,845 53 | 0,915 07 | 0,870 03 | 0,890 71 |
| 60 | 36,85 | 0,908 81 | 0,904 91 | 0,882 23 | 0,936 84 | 0,901 24 | 0,917 36 |
| 60 | 56,85 | 0,929 96 | 0,926 90 | 0,908 93 | 0,953 02 | 0,923 94 | 0,936 90 |
| 120 | - 3,15 | 0,721 46 | 0,711 40 | 0,643 22 | 0,808 43 | 0,695 57 | 0,749 39 |
| 120 | 6,85 | 0,759 69 | 0,750 79 | 0,690 62 | 0,836 13 | 0,738 28 | 0,784 73 |
| 120 | 16,85 | 0,792 57 | 0,784 72 | 0,731 96 | 0,859 99 | 0,774 63 | 0,814 90 |
| 120 | 36,85 | 0,844 92 | 0,838 77 | 0,797 78 | 0,898 27 | 0,831 66 | 0,862 66 |
| 120 | 56,85 | 0,883 22 | 0,878 32 | 0,845 54 | 0,926 62 | 0,872 69 | 0,897 49 |

These gases are the same as the six gases in ISO 12213-2:2006, Annex C, where the complete molar compositions are given.

Annex D (normative)

Conversion factors

D.1 Reference conditions

The reference conditions for which the standard GERG 88 virial equation was developed and which the SGERG.FOR computer subroutine uses internally are

Calorific value by combustion at $T_1 = 298,15 \text{ K}$ ($t_1 = 25 \text{ °C}$)

$p = 101,325 \text{ kPa}$

gas metered at $T_2 = 273,15 \text{ K}$ ($t_2 = 0 \text{ °C}$)

$p = 101,325 \text{ kPa}$

The latter set of conditions are also the reference conditions for relative density.

Considerable care is needed to ensure that correctly referenced inputs are used for calorific value and relative density. Several countries normally use the above conditions, but others use alternative conditions. This can easily cause confusion, particularly since the unit of calorific-value measurement in each case may still be $\text{MJ}\cdot\text{m}^{-3}$. Table D.1 is a guide to which of the major international gas-trading countries use which reference conditions.

For those using non-metric units for calorific value (i.e. $\text{Btu}\cdot\text{ft}^{-3}$), conversion both of units and of reference conditions is required.

The conversion factors used are taken from Reference [3].

Table D.1 — Nationally adopted metric reference conditions for the measurement of calorific value

| | t_1 (°C) | t_2 (°C) |
|--------------------------|--|------------|
| Australia | 15 | 15 |
| Austria | 25 | 0 |
| Belgium | 25 | 0 |
| Canada | 15 | 15 |
| Denmark | 25 | 0 |
| France | 0 | 0 |
| Germany | 25 | 0 |
| Ireland | 15 | 15 |
| Italy | 25 | 0 |
| Japan | 0 | 0 |
| Netherlands | 25 | 0 |
| Russia | 25 | 0 or 20 |
| United Kingdom | 15 | 15 |
| United States of America | 15 | 15 |
| NOTE 1 | In all countries the reference pressure is 101,325 kPa (= 1,013 25 bar). | |
| NOTE 2 | t_1 is the combustion reference temperature. | |
| NOTE 3 | t_2 is the gas-metering reference temperature. | |

D.2 Units and conversion factors for pressure and temperature

If the input variables p and t are not in the necessary units of bar and °C, then conversions must be made in order to use the Fortran implementation. A selection of appropriate conversion factors is given in Table D.2.

Table D.2 — Conversion factors for pressure and temperature

| | |
|--------------------|--|
| Pressure | |
| p (bar) | $= [p(\text{kPa})]/100$ |
| p (bar) | $= [p(\text{MPa})] \times 10$ |
| p (bar) | $= [p(\text{atm})] \times 1,013\ 25$ |
| p (bar) | $= [p(\text{psia})]/14,503\ 8$ |
| p (bar) | $= [p(\text{psig}) + 14,695\ 9]/14,503\ 8$ |
| Temperature | |
| t (°C) | $= T(\text{K}) - 273,15$ |
| t (°C) | $= [t(°\text{F}) - 32]/1,8$ |
| t (°C) | $= [t(°\text{R})]/1,8 - 273,15$ |

D.3 Units and conversion of calorific value and density between reference conditions

Because both superior calorific value and relative density are functions of the composition of a gas mixture, and because the thermophysical properties of the individual components depend upon temperature and pressure in individual ways, it is in principle impossible (without knowledge of the composition) to convert the calorific value and the relative density known at one set of reference conditions to exact corresponding values for any other set of reference conditions.

However, because the relevant reference conditions are always thermodynamically close together, and because natural gases do not vary in their composition to any major extent, it is possible in practice to give conversion factors which may be applied to any typical natural gas with essentially no loss of accuracy in the converted physical properties.

D.3.1 Conversion factors for the units

If the input variable H_S is not in the necessary units $\text{MJ}\cdot\text{m}^{-3}$, then a conversion must be made.

The appropriate conversion factors for calorific values at a given set of reference conditions (see Clause D.1) are given in Table D.3.

Table D.3 — Conversion factors for calorific value

| | |
|---|--|
| H_S ($\text{MJ}\cdot\text{m}^{-3}$) | $= [H_S(\text{kWh}\cdot\text{m}^{-3})] \times 3,6$ |
| H_S ($\text{MJ}\cdot\text{m}^{-3}$) | $= [H_S(\text{Btu}\cdot\text{ft}^{-3})]/26,839\ 2$ |

D.3.2 Conversion between different reference conditions

If the input variables H_S and d are not at the correct reference conditions (see Clause D.1), then a conversion must be made. Table D.4 gives the conversion factors appropriate to the reference conditions in Table D.1.

Table D.4 — Conversion factors for calorific value and relative density

| |
|--|
| <p>Calorific value H_S at reference conditions $t_1 = 25\text{ °C}$, $t_2 = 0\text{ °C}$, $p_2 = 1,013\ 25\text{ bar}$:</p> <p>$H_S = H_S (t_1 = 0\text{ °C}, t_2 = 0\text{ °C}, p_2 = 1,013\ 25\text{ bar}) \times 0,997\ 4$</p> <p>$H_S = H_S (t_1 = 15\text{ °C}, t_2 = 15\text{ °C}, p_2 = 1,013\ 25\text{ bar}) \times 1,054\ 3$</p> <p>$H_S = H_S (t_1 = 60\text{ °F}, t_2 = 60\text{ °F}, p_2 = 1,015\ 92\text{ bar}) \times 1,053\ 5$</p> <p>$H_S = H_S (t_1 = 60\text{ °F}, t_2 = 60\text{ °F}, p_2 = 1,015\ 60\text{ bar}) \times 1,053\ 9$</p> <p>Relative density d at reference conditions $t_2 = 0\text{ °C}$, $p_2 = 1,013\ 25\text{ bar}$:</p> <p>$d = d (t_2 = 15\text{ °C}, p_2 = 1,013\ 25\text{ bar}) \times 1,000\ 2$</p> <p>$d = d (t_2 = 60\text{ °F}, p_2 = 1,015\ 92\text{ bar or } 1,015\ 60\text{ bar}) \times 1,000\ 2$</p> |
| <p>NOTE $p = 1,015\ 60\text{ bar} = 14,73\text{ psia}$ (units of pressure customary in US).</p> |

Annex E (informative)

Specification for pipeline quality natural gas

E.1 Maximum limits for mole fractions

The SGERG-88 calculation method^[3] is a simplification of the MGERG-88 method^[4], for which a full component analysis (CH₄ to C₈H₁₈, N₂ and CO₂ and, if present, H₂ and CO) is required in order to permit the calculation of compression factor or density. This part of ISO 12213 defines various maximum limits for individual mole fractions for the SGERG-88 method (see Table E.1). Column 2 of Table E.1 shows the range of application verified by means of experiment, column 3 lists the maximum mole fractions for pipeline quality natural gas and column 4 defines “wider ranges” of application. The range of natural gas mole fractions with values of compression factor supported by experiment is smaller than the range of pipeline quality natural gas, and also smaller than the wider ranges of application. For pressures up to 10 MPa and the composition limits given in column 2, the experimental values from the GERG databank are reproduced with an uncertainty of 0,1 % (95 % confidence limits).

Table E.1 — Ranges of application of SGERG-88 method (maximum limits of mole fractions)

| | Range of application verified by experiment (see Figure 1) | Range for pipeline quality natural gas (see 4.4.1) | Wider ranges of application (see 4.4.2) |
|--------------------------------|--|--|---|
| N ₂ | 0,20 | 0,20 | 0,50 |
| CO ₂ | 0,09 | 0,20 | 0,30 |
| C ₂ H ₆ | 0,10 | 0,10 | 0,20 |
| C ₃ H ₈ | 0,035 | 0,035 | 0,05 |
| C ₄ H ₁₀ | 0,015 | 0,015 | 0,015 |
| H ₂ | 0,10 | 0,10 | 0,10 |


ISO 12213 introduces the term “pipeline quality natural gas” to describe natural gases of the kind usually distributed through natural-gas grids (see Table E.1, column 3). For these natural gases, the maximum limit for the mole fraction of carbon dioxide is given as 0,20. However, for this CO₂ content, the 0,1 % uncertainty limit is only observed up to a pressure of 6 MPa (see 4.5.1).

E.2 Consistency check and specification of input variables

Clause B.5 presents a consistency check of the input variables d , x_{CO_2} , x_{N_2} and x_{H_2} for the SGERG-88 method as a binding (i.e. normative) requirement.

In various publications on the SGERG-88 method^{[1], [2], [3]} and in this part of ISO 12213, it has been emphasized that the method has been derived for natural gases showing the kinds of correlation between higher hydrocarbons which are typical of natural gases. This means, in effect, that the ratio of successive mole fractions in the alkane homologous series is typically 3:1. This rule of thumb has been substantiated and consolidated^[10] through a comparison with the GERG databank^{[5], [6]}.

In Figures E.1 and E.2, the respective mole fractions $x_{C_3H_8}$ and x_{C_4+} have been plotted as functions of the mole fraction of ethane $x_{C_2H_6}$ for the natural gases taken from the GERG databank (TM4, 1990 [5]) as data points (open circles) that meet the pipeline quality natural gas criterion given in Table E.1 (see Table 10 in TM7, 1996 [6]). For both mole fraction ratios, this gives a range of values within which the SGERG-88 method can always be applied safely. The dashed lines in Figures E.1 and E.2 illustrate the one-third rule for the ratios, with 0,3 for $x_{C_3H_8}/x_{C_2H_6}$ and 0,1 for $x_{C_4+}/x_{C_2H_6}$. The limiting lines on either side show a range of $\pm 0,01$ for the propane mole fraction and $\pm 0,003$ for the butane+ mole fraction, respectively, within which virtually all the data points from the GERG database can be found. The absolute tolerance limits selected here define the data situation much better than relative tolerance limits [10].

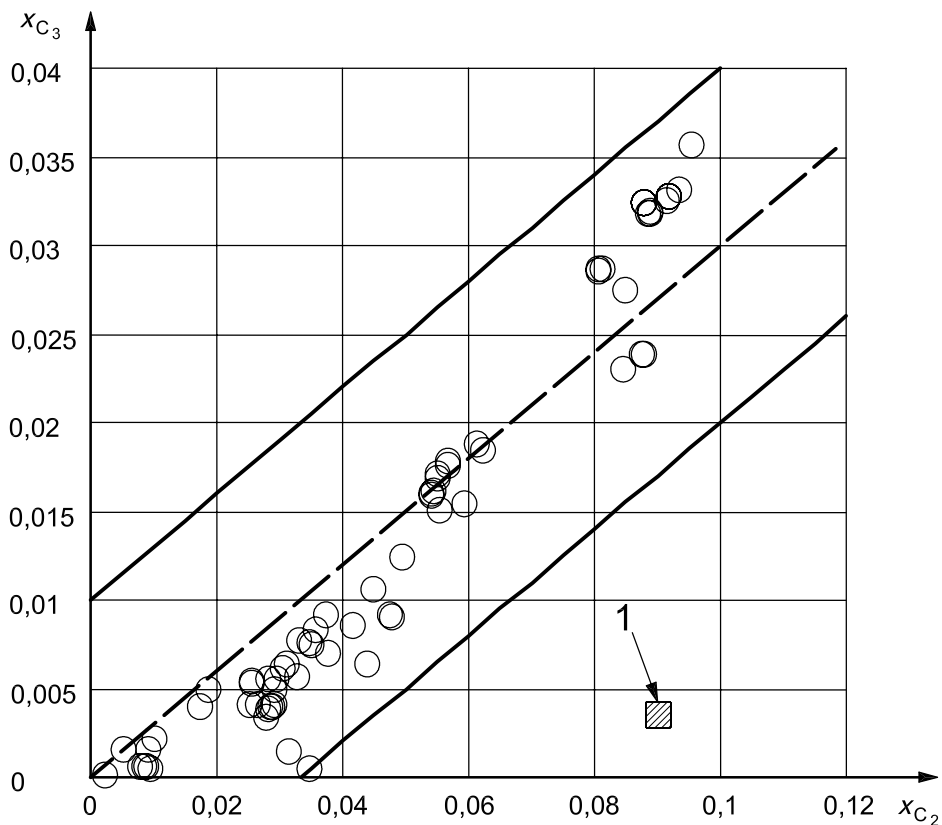


Key

x_{C_3} mole fraction of propane

x_{C_2} mole fraction of ethane

1 03-4605 gas (a North Sea gas) (see text)

Figure E.1 — Mole fraction of propane for natural gases as a function of the mole fraction of ethane

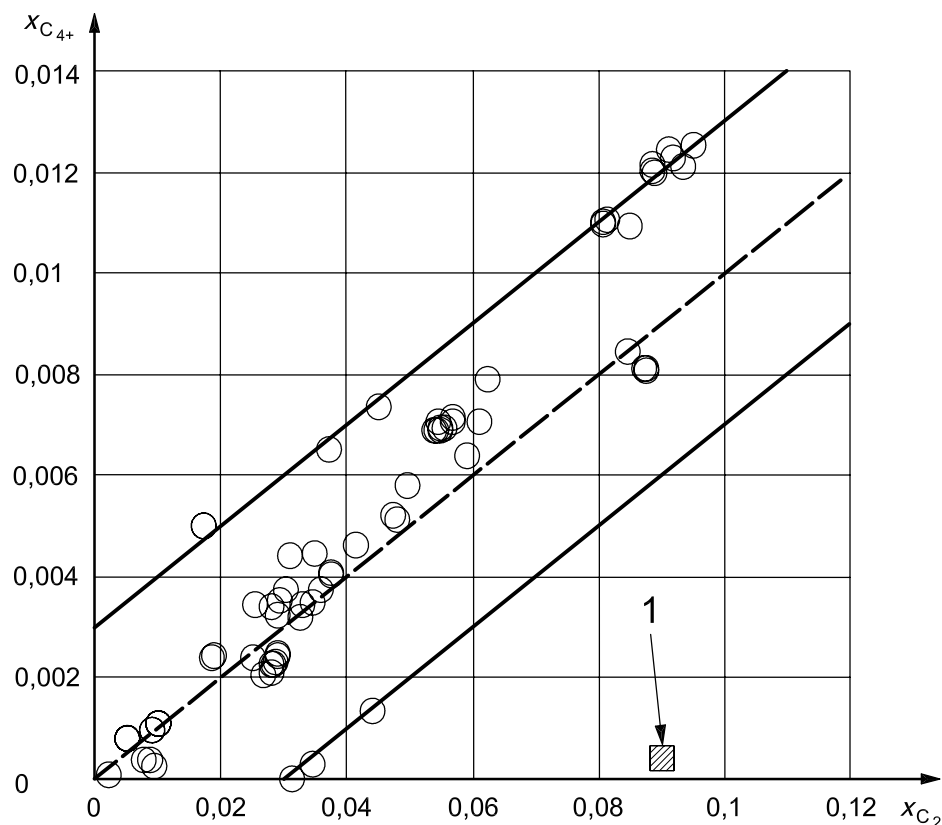

Key

$x_{C_{4+}}$ mole fraction of butane+ components

x_{C_2} mole fraction of ethane

1 03-4605 gas (a North Sea gas) (see text)

Figure E.2 — Mole fraction of butane+ for natural gases as a function of the mole fraction of ethane

Where a natural-gas analysis shows mole fractions that are not covered by the ranges indicated in Figures E.1 and E.2, it is recommended that the applicability of the SGERG-88 method be checked by comparison with other equations of state [4], [7], [11], which will however require a complete component analysis in order to obtain a description of the gas quality.

For one such example (a North Sea gas, designated 03-4605, containing 0,090 2 mole fraction ethane, 0,003 5 mole fraction propane and 0,000 16 mole fraction butanes — see shaded square in Figures E.1 and E.2), a number of comparative calculations have been made [10] with other equations of state [4], [7], [11]. In this case, the SGERG-88 method shows deviations of up to +0,5 % at a pressure of 10 MPa and temperatures of 275 K to 280 K.

Measurements with a gas density measurement system [10] on the same isotherms show that the experimental density values agree with the density values calculated from a complete analysis [4], [7], [11] within the total measurement uncertainty of 0,04 % and, therefore, that the SGERG-88 method is inappropriate in this particular and unusual instance. The total measurement uncertainty is composed in equal parts of the uncertainty in the density measurement and the measurement uncertainty in the analysis of the natural-gas sample examined.

In cases where the SGERG-88 method should not be employed, it is recommended that the AGA8-DC92 [7] method from Part 2 of this International Standard, or the GERG-2004 equation of state [11], be used, but these options are only open if a complete component analysis is available.

Annex F (informative)

Performance over wider ranges of application

The standard GERG virial equation has been comprehensively tested, over the temperature range 263 K to 338 K and at pressures up to 12 MPa, with the GERG databank [5] and the Gas Research Institute data [9] for gases within the ranges of composition, superior calorific value and relative density given for pipeline quality gases (see 4.4.1). Within these limits, the uncertainties are as given in 4.5.


Rough estimates of the uncertainties involved in calculations of compression factors for wider ranges of application are plotted in Figures F.1 to F.4 as pressure-composition plots for nitrogen, carbon dioxide, ethane and propane, respectively.

In Figures F.1 to F.4, the performance of the SGERG equation is illustrated up to a maximum pressure of 30 MPa. This is for informative purposes only and is not intended to imply a recommendation that the equation be used routinely or uncritically above the normal specified limits. The uncertainty limits are dependent upon pressure, temperature and composition, and are also strongly affected by the proximity of the phase boundary. The estimated uncertainty limits presented below are based upon less comprehensive data, published as a supplement to the GERG databank [6], and upon the databanks in References [5] and [9].

The worst-case limits have always been chosen. Dashed lines are used to separate two regions of estimated uncertainty when the experimental evidence is not sufficient to determine the position of the boundary. The detailed composition of the gas will have a strong influence on the position of the phase boundary and the user should, therefore, make his own phase boundary calculation.

The overall results at pressures up to 10 MPa and temperatures within the range 263 K to 338 K can be summarized as follows. Only gases having mole fractions within the limits given below will have uncertainties within $\pm 0,1\%$, $\pm 0,2\%$ and $\pm 0,5\%$, respectively, within the given pressure and temperature domain.

| Component | Mole fraction for an uncertainty within | | |
|----------------|---|-------------|-------------|
| | $\pm 0,1\%$ | $\pm 0,2\%$ | $\pm 0,5\%$ |
| Nitrogen | < 0,20 | < 0,50 | — |
| Carbon dioxide | < 0,09 | < 0,12 | < 0,23 |
| Ethane | < 0,10 | < 0,11 | < 0,12 |
| Propane | < 0,035 | < 0,04 | < 0,045 |

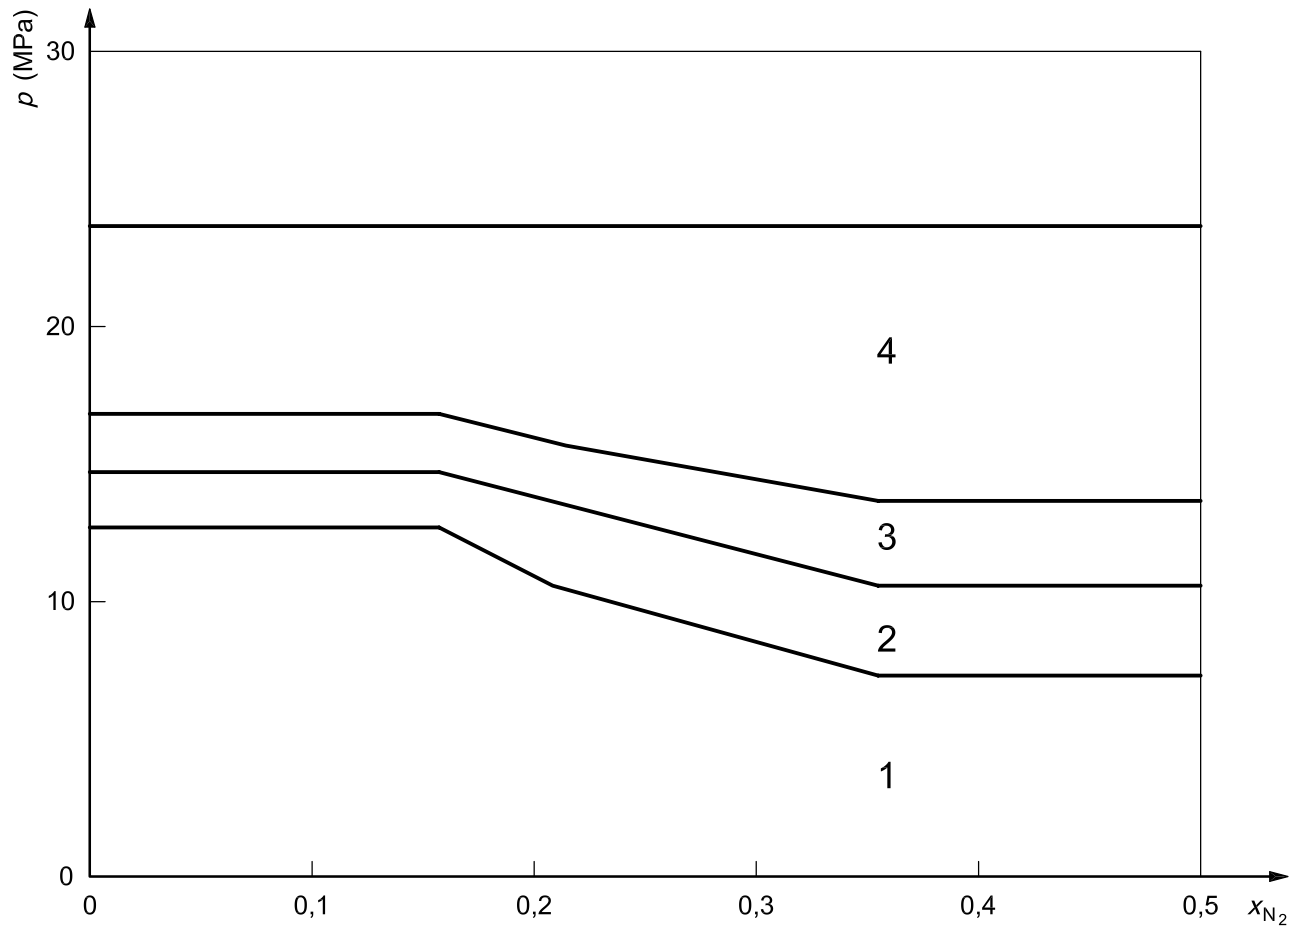

SGERG-88 equation ($T = 263 \text{ K to } 338 \text{ K}$)

Key

p pressure

x_{N_2} mole fraction of nitrogen


1 $\Delta Z \leq \pm 0,1 \%$

2 $\Delta Z \pm 0,1 \%$ to $\pm 0,2 \%$

3 $\Delta Z \pm 0,2 \%$ to $\pm 0,5 \%$

4 $\Delta Z \pm 0,5 \%$ to $\pm 3,0 \%$

Figure F.1 — Estimated uncertainty limits for the calculation of compression factors of natural gases with a high nitrogen content

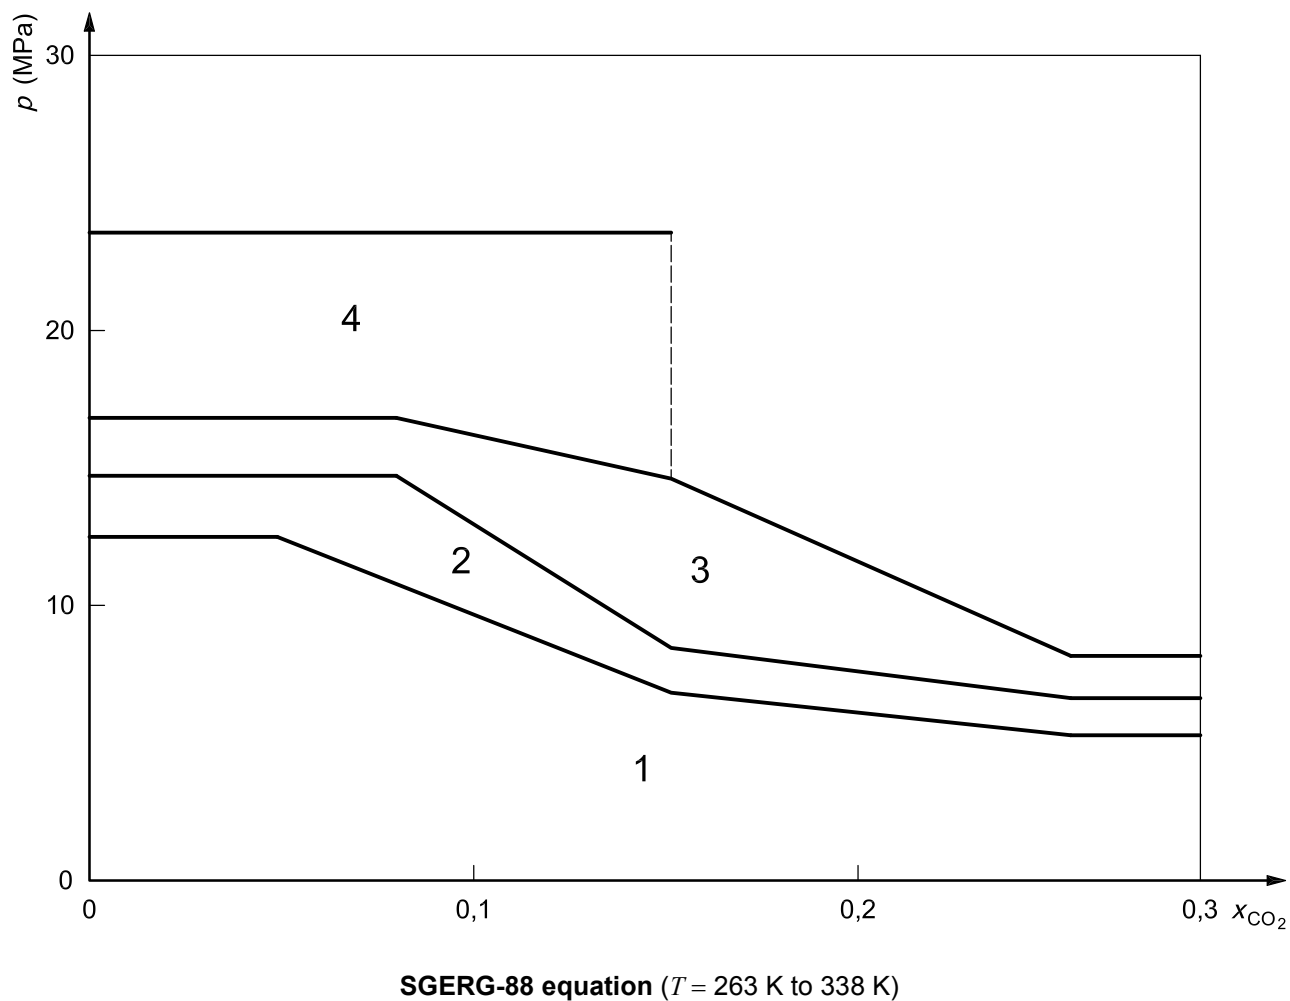


Key

p pressure

x_{CO_2} mole fraction of carbon dioxide

- 1 $\Delta Z \leq \pm 0,1 \%$
- 2 $\Delta Z \pm 0,1 \%$ to $\pm 0,2 \%$
- 3 $\Delta Z \pm 0,2 \%$ to $\pm 0,5 \%$
- 4 $\Delta Z \pm 0,5 \%$ to $\pm 3,0 \%$

Figure F.2 — Estimated uncertainty limits for the calculation of compression factors of natural gases with a high carbon dioxide content

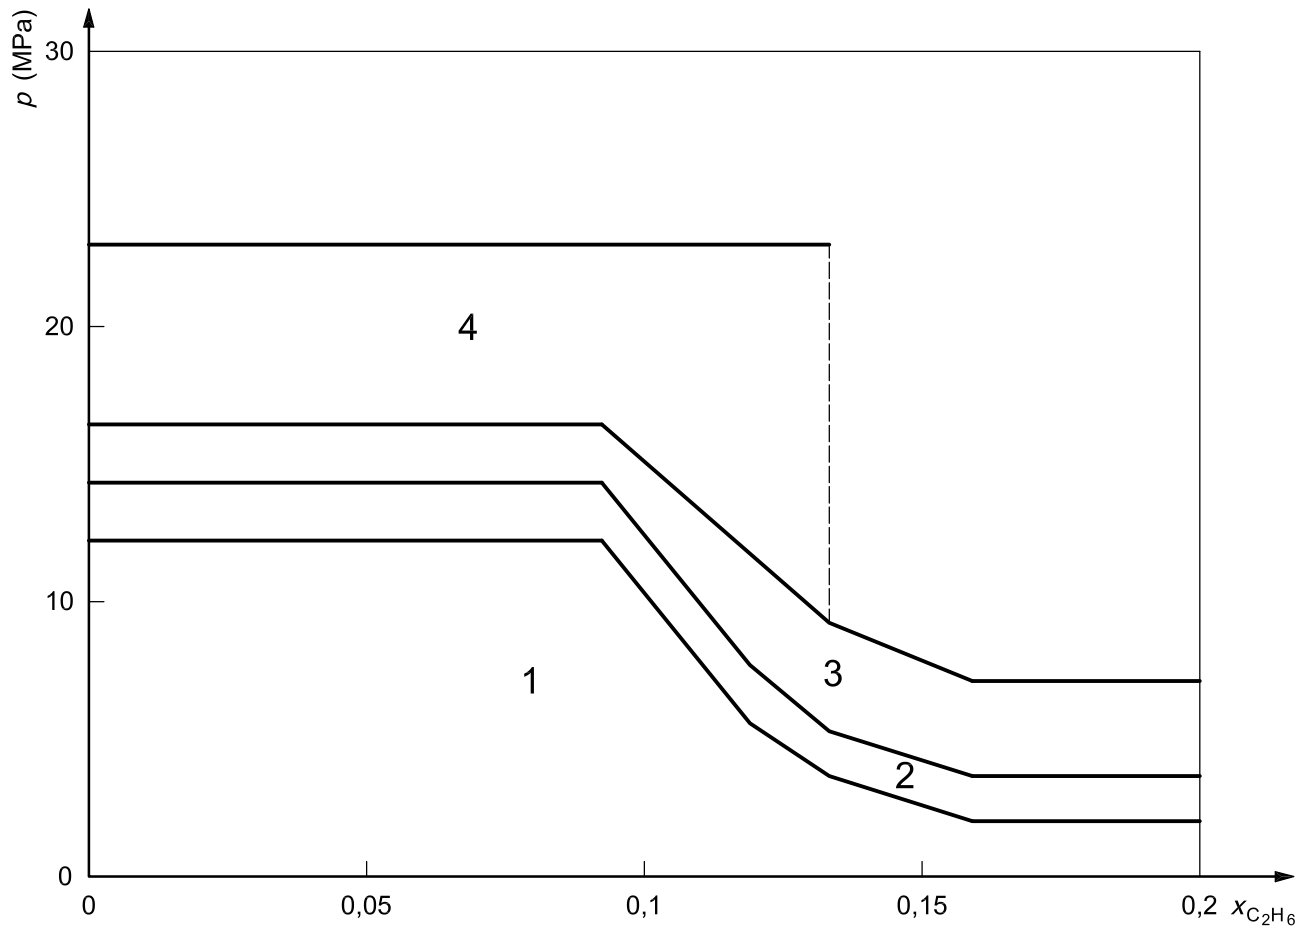

SGERG-88 equation ($T = 263 \text{ K to } 338 \text{ K}$)

Key

p pressure

$x_{\text{C}_2\text{H}_6}$ mole fraction of ethane


1 $\Delta Z \leq \pm 0,1 \%$

2 $\Delta Z \pm 0,1 \%$ to $\pm 0,2 \%$

3 $\Delta Z \pm 0,2 \%$ to $\pm 0,5 \%$

4 $\Delta Z \pm 0,5 \%$ to $\pm 3,0 \%$

Figure F.3 — Estimated uncertainty limits for the calculation of compression factors of natural gases with a high ethane content

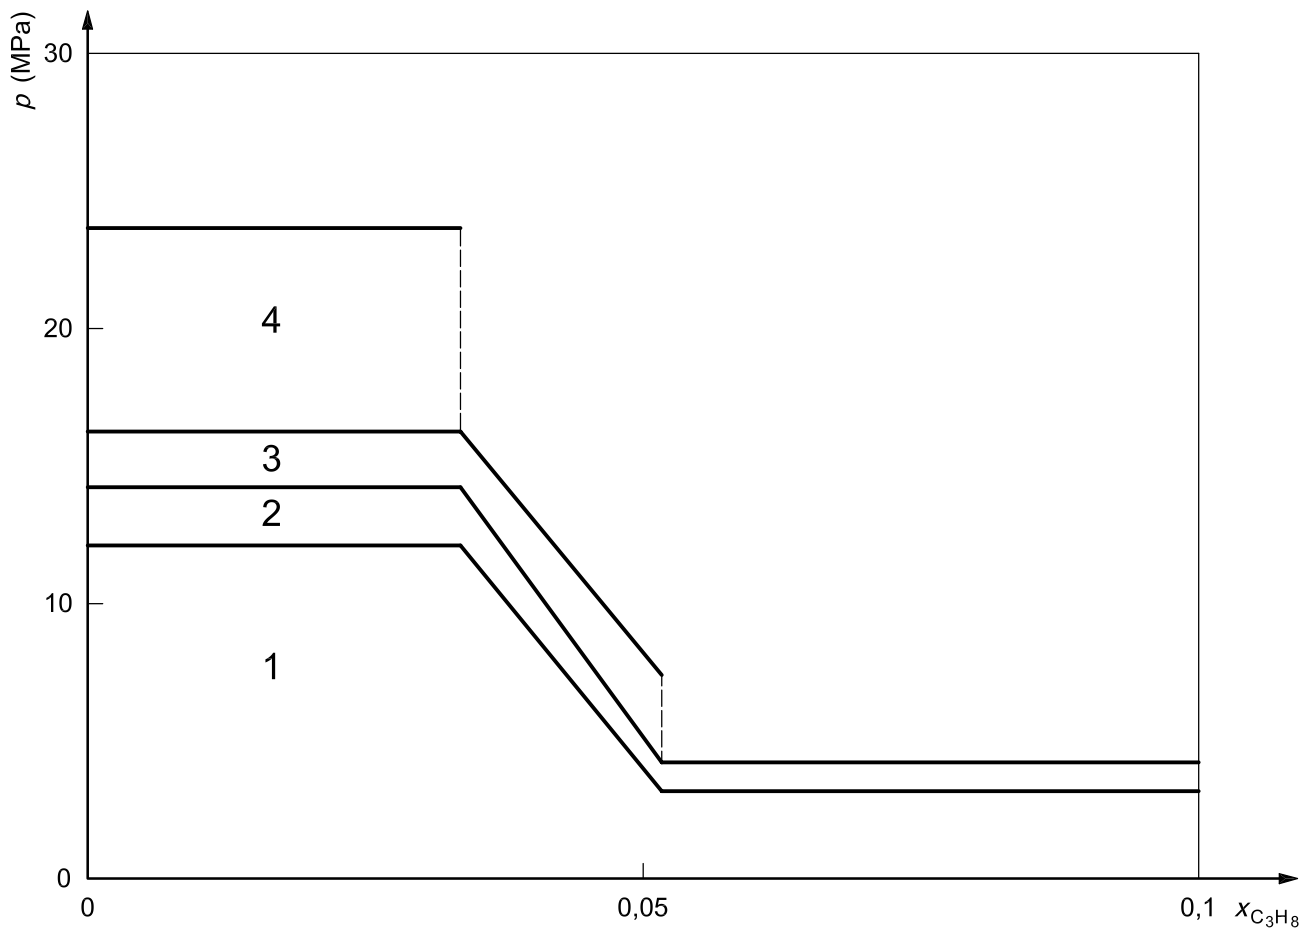

SGERG-88 equation ($T = 263$ K to 338 K)

Key

p pressure

$x_{C_3H_8}$ mole fraction of propane

- 1 $\Delta Z \leq \pm 0,1 \%$
- 2 $\Delta Z \pm 0,1 \%$ to $\pm 0,2 \%$
- 3 $\Delta Z \pm 0,2 \%$ to $\pm 0,5 \%$
- 4 $\Delta Z \pm 0,5 \%$ to $\pm 3,0 \%$

Figure F.4 — Estimated uncertainty limits for the calculation of compression factors of natural gases with a high propane content


```

IMPLICIT DOUBLE PRECISION (A-H,O-Z)
IF( P.LT. 0.0 .OR. P .GT.120.0) STOP ' PRESSURE OUT OF RANGE'
IF(TC.LT.-23.0 .OR. TC.GT .65.0) STOP ' TEMPERATURE OUT OF RANGE'
CALL SGERG1 (P,TC,X2,X3,X5,HS,RM,Z,D)
RETURN
END
C *****
SUBROUTINE SGERG1 (P,TC,Q2,Q3,Q5,QM,RM,Z,D)
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
COMMON /RBLOK/ AMOL,HS
COMMON /XBLOK/ X1,X2,X3,X11,X12,X13,X22,X23,X33
> ,X5,X7,X15,X17,X25,X55,X77
COMMON /MBLOK/ GM1R0,GM1R1,GM2,GM3,GM5,GM7,FA,FB,RL,T0,H5,H7,R
HS = QM
X3 = Q3
X5 = Q5
C IF(RM.LT. 0.55.OR. RM.GT. 0.90) STOP 'REL. MASS OUT OF RANGE'
C IF(X3.LT. 0.0 .OR. X3.GT. 0.30) STOP 'CO2 OUT OF RANGE'
C IF(HS.LT.20.0 .OR. HS.GT.48.0 ) STOP 'CALOR. VALUE OUT OF RANGE'
IF((0.55+0.97*X3-0.45*X5).GT.RM)STOP 'CONFLICTING INPUT'
SM = RM*RL
X7 = X5*0.0964D0
X33 = X3*X3
X55 = X5*X5
X77 = X7*X7
BEFF= -0.065D0
H = 1000.0D0
AMOL= 1.0D0/(FA+BEFF)
K = 0
KK = 0
1 CALL SMBER(H,SMT1)
IF (ABS(SM-SMT1) .GT. 1.D-6) THEN
CALL SMBER(H+1.0D0,SMT2)
DH= (SM-SMT1)/(SMT2-SMT1)
H = H+DH
KK = KK+1
IF(KK.GT.20)STOP ' NO CONVERGENCY #1'
GO TO 1
END IF
X11 = X1*X1
X12 = X1*X2
X13 = X1*X3
X22 = X2*X2
X23 = X2*X3
X25 = X2*X5
X15 = X1*X5
X17 = X1*X7
CALL B11BER(T0,H,B11)
CALL BBER(T0,B11,BEFF)
AMOL= 1.0D0/(FA+BEFF)
HSBER = X1*H*AMOL+(X5*H5+X7*H7)*AMOL
IF (ABS(HS-HSBER) .GT.1.0D-4) THEN
K = K+1
IF(K.GT.20)STOP 'NO CONVERGENCY #2'
GO TO 1
END IF
IF(X2.LT.-0.01 .OR. X2.GT.0.5) STOP 'CALC. N2 OUT OF RANGE'
IF(X2+X3.GT.0.5) STOP 'N2 + CO2 OUT OF RANGE'
IF(0.55+.4*X2+0.97*X3-0.45*X5).GT.RM)
+ STOP 'CONFLICTING RESULT FOR N2'
Q2 = X2
T = TC+T0
CALL B11BER(T,H,B11)
CALL BBER(T,B11,B)
CALL CBER(T,H,C)

```



```

CALL ITER(P,T,B,C,V,Z)
D = 1.0D0/V
END
SUBROUTINE SMBER(H,SM)
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
COMMON /RBLOK/ AMOL,HS
COMMON /XBLOK/ X1,X2,X3,X11,X12,X13,X22,X23,X33
> ,X5,X7,X15,X17,X25,X55,X77
COMMON /MBLOK/ GM1R0,GM1R1,GM2,GM3,GM5,GM7,FA,FB,RL,T0,H5,H7,R
GM1= GM1R0+GM1R1*H
X1 = (HS - (X5*H5+X7*H7)*AMOL)/H/AMOL
X2 = 1.0D0-X1-X3-X5-X7
SM = (X1*GM1+X2*GM2+X3*GM3+X5*GM5+X7*GM7)*AMOL
END

C
C *****
SUBROUTINE B11BER(T,H,B11)
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
COMMON /BBLOK/ BR11H0(3), BR11H1(3), BR11H2(3), BR22(3), BR23(3),
+ BR33(3), BR15(3), BR17(3), BR55(3), BR77(3), B25
T2=T*T
B11=BR11H0(1) + BR11H0(2)*T + BR11H0(3)*T2
+ (BR11H1(1) + BR11H1(2)*T + BR11H1(3)*T2)*H
+ (BR11H2(1) + BR11H2(2)*T + BR11H2(3)*T2)*H*H
END

C *****
SUBROUTINE BBER(T,B11,BEFF)
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
COMMON /BBLOK/ BR11H0(3), BR11H1(3), BR11H2(3), BR22(3), BR23(3),
+ BR33(3), BR15(3), BR17(3), BR55(3), BR77(3), B25
COMMON /ZETA/ Z12,Z13,Y12,Y13,Y123,Y115
COMMON /XBLOK/ X1,X2,X3,X11,X12,X13,X22,X23,X33
> ,X5,X7,X15,X17,X25,X55,X77
T2=T*T
B22=BR22(1) + BR22(2)*T + BR22(3)*T2
B23=BR23(1) + BR23(2)*T + BR23(3)*T2
B33=BR33(1) + BR33(2)*T + BR33(3)*T2
B15=BR15(1) + BR15(2)*T + BR15(3)*T2
B55=BR55(1) + BR55(2)*T + BR55(3)*T2
B17=BR17(1) + BR17(2)*T + BR17(3)*T2
B77=BR77(1) + BR77(2)*T + BR77(3)*T2
BA13= B11*B33
IF (BA13 .LT. 0.0) STOP ' NO SOLUTION'
ZZZ=Z12+(320.0D0-T)**2*1.875D-5
BEFF = X11*B11 + X12*ZZZ*(B11+B22) + 2.0D0*X13*Z13*DSQRT(BA13)
> +X22*B22 + 2.0D0*X23*B23 + X33*B33 + X55*B55
> +2.0D0*X15*B15 + 2.0D0*X25*B25 + 2.0D0*X17*B17 + X77*B77
END

C *****
SUBROUTINE CBER(T,H,CEFF)
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
COMMON /CBLOK/ CR111H0(3), CR111H1(3), CR111H2(3), CR222(3),
+ CR223(3), CR233(3), CR333(3), CR555(3), CR117(3)
COMMON /ZETA/ Z12,Z13,Y12,Y13,Y123,Y115
COMMON /XBLOK/ X1,X2,X3,X11,X12,X13,X22,X23,X33
> ,X5,X7,X15,X17,X25,X55,X77
T2=T*T
C111=CR111H0(1) + CR111H0(2)*T + CR111H0(3)*T2
+ (CR111H1(1) + CR111H1(2)*T + CR111H1(3)*T2)*H
+ (CR111H2(1) + CR111H2(2)*T + CR111H2(3)*T2)*H*H
C222 = CR222(1) + CR222(2)*T + CR222(3)*T2
C223 = CR223(1) + CR223(2)*T + CR223(3)*T2
C233 = CR233(1) + CR233(2)*T + CR233(3)*T2
C333 = CR333(1) + CR333(2)*T + CR333(3)*T2
C555 = CR555(1) + CR555(2)*T + CR555(3)*T2

```

```

C117 = CR117(1) + CR117(2)*T + CR117(3)*T2
CA112=C111*C111*C222
CA113=C111*C111*C333
CA122=C111*C222*C222
CA123=C111*C222*C333
CA133=C111*C333*C333
CA115=C111*C111*C555
IF (CA112.LT.0.0 .OR. CA113.LT.0.0 .OR. CA122.LT.0.0
+ .OR. CA123.LT.0.0 .OR. CA133.LT.0.0 .OR. CA115. LT. 0.0)
+ STOP ' NO SOLUTION'
D3REP=1.0D0/3.0D0
CEFF=X1*X1*C111 +3.0D0*X11*X2*(CA112)**D3REP*(Y12+(T-270.0D0)
+ *0.0013D0)
+ + 3.0D0*X11*X3 *(CA113)**D3REP *Y13
+ + 3.0D0*X1*X15 *(CA115)**D3REP *Y115
+ + 3.0D0*X1*X22 *(CA122)**D3REP *(Y12+(T-270.0D0)*0.0013D0)
+ +6.0D0*X1*X2*X3*(CA123)**D3REP *Y123
+ +3.0D0*X1*X33 *(CA133)**D3REP *Y13
+ +X22*X2*C222 + 3.0D0*X22*X3*C223 + 3.0D0*X2*X33*C233
+ +X3*X33*C333 + X5*X55*C555 + 3.0D0*X11*X7*C117

```

RETURN
END

C *****

```

SUBROUTINE ITER(P,T,B,C,V,Z)
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
COMMON /MBLOK/ GM1R0,GM1R1,GM2,GM3,GM5,GM7,FA,FB,RL,T0,H5,H7,R
RT = R*T
RTP= RT/P
V = RTP+B
KK = 0
5 V = RTP*(1.0D0+B/V+C/V**2)
KK = KK+1
IF (KK .GT. 20) STOP ' NO CONVERGENCY #3 '
Z = 1.0D0+B/V+C/V**2
PA = RT/V*Z
IF (ABS(PA-P) .GE. 1.D-5)GO TO 5
RETURN
END

```

C *****

```

BLOCK DATA
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
COMMON /BBLOK/ BR11H0(3), BR11H1(3), BR11H2(3), BR22(3), BR23(3),
+ BR33(3), BR15(3), BR17(3), BR55(3), BR77(3), B25
COMMON /CBLOK/ CR111H0(3), CR111H1(3), CR111H2(3), CR222(3),
+ CR223(3), CR233(3), CR333(3), CR555(3), CR117(3)
COMMON /ZETA/ Z12,Z13,Y12,Y13,Y123,Y115
COMMON /MBLOK/ GM1R0,GM1R1,GM2,GM3,GM5,GM7,FA,FB,RL,T0,H5,H7,R
DATA BR11H0/-0.425468D0, 0.286500D-2, -.462073D-5 /,
+ BR11H1/0.877118D-3, -.556281D-5, 0.881510D-8 /,
+ BR11H2/-.824747D-6, 0.431436D-8, -.608319D-11/,
+ BR22 / -.144600D0, 0.740910D-3, -.911950D-6 /,
+ BR23 / -.339693D0, 0.161176D-2, -.204429D-5 /,
+ BR33 / -.868340D0, 0.403760D-2, -.516570D-5 /,
+ BR15 / -.521280D-1, 0.271570D-3, -.25 D-6 /,
+ BR17 / -.687290D-1, -.239381D-5, 0.518195D-6 /,
+ BR55 / -.110596D-2, 0.813385D-4, -.987220D-7 /,
+ BR77 / -.130820D0, 0.602540D-3, -.644300D-6 /,
+ B25 / 0.012D0 /
DATA CR111H0/ -.302488D0, 0.195861D-2, -.316302D-5 /,
+ CR111H1/ 0.646422D-3, -.422876D-5, 0.688157D-8 /,
+ CR111H2/ -.332805D-6, 0.223160D-8, -.367713D-11/,
+ CR222 / 0.784980D-2, -.398950D-4, 0.611870D-7 /,
+ CR223 / 0.552066D-2, -.168609D-4, 0.157169D-7 /,
+ CR233 / 0.358783D-2, 0.806674D-5, -.325798D-7 /,
+ CR333 / 0.205130D-2, 0.348880D-4, -.837030D-7 /,

```

```
+      CR555 /  0.104711D-2, -.364887D-5,  .467095D-8 /,  
+      CR117 /  0.736748D-2, -.276578D-4,  .343051D-7 /  
DATA  Z12 /  0.72D0 /, Z13 / -.865D0/,  
+      Y12 /  0.92D0 /, Y13 /  0.92D0/, Y123 /1.10D0/,  
+      Y115/  1.2D0/  
DATA  GM1R0/-2.709328D0/, GM1R1/.021062199D0/,  
+      GM2  / 28.0135D0/, GM3  /  44.010D0/,  
+      GM5  /  2.0159D0/, GM7  /  28.010D0/,  
+      FA   /22.414097D0/, FB   / 22.710811D0/,  
+      RL   / 1.292923D0/, T0   /  273.15D0/,  
+      H5   /  285.83D0/, H7   /  282.98D0/  
+      R    /0.0831451D0/  
      END
```

C
C

Bibliography

- [1] SCHOUTEN, J.A., MICHELS, J.P.J., JAESCHKE, M. "Calculation of the Compressibility Factor of Natural Gases Based on the Calorific Value and the Specific Gravity", *Int. J. Thermophys.*, **11** (1), pp. 145-156 (1990)
- [2] JAESCHKE, M., AUDIBERT, S., VAN CANEGHEM, P., HUMPHREYS, A.E., JANSSEN-VAN ROSMALEN, R., PELLEI, Q., SCHOUTEN, J.A., MICHELS, J.P.J. "Simplified GERG Virial Equation for Field Use", *SPE Product Eng.*, **6** (3), pp. 350-355 (1991)
- [3] JAESCHKE, M., HUMPHREYS, A.E. "Standard GERG Virial Equation for Field Use: Simplification of the Input Data Requirements for the GERG Virial Equation — An alternative Means of Compressibility Factor Calculation for Natural Gases and Similar Mixtures", GERG Technical Monograph TM5 (1991) and Fortschritt-Berichte VDI, Series 6, No. 266 (1992)
- [4] JAESCHKE, M., AUDIBERT, S., VAN CANEGHEM, P., HUMPHREYS, A.E., JANSSEN-VAN ROSMALEN, R., PELLEI, Q., MICHELS, J.P.J., SCHOUTEN, J.A., TEN SELDAM, C.A. "High Accuracy Compressibility Factor Calculation for Natural Gases and Similar Mixtures by Use of a Truncated Virial Equation", GERG Technical Monograph TM2 (1988) and Fortschritt-Berichte VDI, Series 6, No. 231 (1989)
- [5] JAESCHKE, M., HUMPHREYS, A.E. "The GERG Databank of High Accuracy Compressibility Factor Measurements", GERG Technical Monograph TM4 (1990) and Fortschritt-Berichte VDI, Series 6, No. 251 (1991)
- [6] JAESCHKE, M., HINZE, H.M., HUMPHREYS, A.E. "Supplement to the GERG Databank of High Accuracy Compressibility Factor Measurements", GERG Technical Monograph TM7 (1996) and Fortschritt-Berichte VDI, Series 6, No. 355 (1997)
- [7] STARLING, K.E., SAVIDGE, J.L. "Compressibility Factors for Natural Gas and Other Related Hydrocarbon Gases", American Gas Association (AGA) Transmission Measurement Committee Report No. 8, American Petroleum Institute (API) MPMS, Chapter 14.2, Second edition, November 1992
- [8] Deutscher Verein des Gas- und Wasserfaches e.V. (DVGW). "The Gas Law Deviation Factors and Natural Gas Compressibility Factors — Calculation and Application", Gasmengenmessung, Technische Regeln, DVGW Arbeitsblatt G486, August 1992
- [9] SCHOUTEN, J.A., MICHELS, J.P.J. "Evaluation of PVT Reference Data on Natural Gas Mixtures — Final report", Appendix to Gas Research Institute Report No. GRI/93-006, September 1992
- [10] JAESCHKE, M. "Realgasverhalten von speziell aufbereiteten Erdgasen", *GWF-Gas/Erdgas*, **146** (2005), No. 1, pp. 58-63
- [11] KUNZ, O., KLIMECK, R., WAGNER, W., JAESCHKE, M. "The GERG-2004 Wide-Range Reference Equation of State for Natural Gases", To be published in: GERG Technical Monograph 16 (2006), and in Fortschritt-Berichte VDI, VDI-Verlag, Düsseldorf

BSI - British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: orders@bsigroup.com You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com