



BSI Standards Publication

# Soil quality — Parameters for geochemical modelling of leaching and speciation of constituents in soils and materials

Part 1: Extraction of amorphous iron oxides and hydroxides with ascorbic acid

**National foreword**

This British Standard is the UK implementation of EN ISO 12782-1:2012.

The UK participation in its preparation was entrusted to Technical Committee EH/4, Soil quality.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012. Published by BSI Standards Limited 2012

ISBN 978 0 580 66911 8

ICS 13.080.05

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 June 2012.

**Amendments issued since publication**

Date	Text affected
------	---------------

---

English Version

Soil quality - Parameters for geochemical modelling of leaching  
and speciation of constituents in soils and materials - Part 1:  
Extraction of amorphous iron oxides and hydroxides with  
ascorbic acid (ISO 12782-1:2012)

Qualité du sol - Paramètres pour la modélisation  
géochimique de la lixiviation et de la spéciation des  
constituants des sols et des matériaux - Partie 1: Extraction  
des oxydes et hydroxydes de fer amorphe à l'acide  
ascorbique (ISO 12782-1:2012)

Bodenbeschaffenheit - Parameter zur geochemischen  
Modellierung der Elution und Speziation von Bestandteilen  
in Böden und Materialien - Teil 1: Extraktion amorpher  
Eisenoxide und -hydroxide mittels Ascorbinsäure (ISO  
12782-1:2012)

This European Standard was approved by CEN on 31 May 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

## Foreword

This document (EN ISO 12782-1:2012) has been prepared by Technical Committee ISO/TC 190 "Soil quality" in collaboration with Technical Committee CEN/TC 345 "Characterization of soils" the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2012, and conflicting national standards shall be withdrawn at the latest by December 2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

### Endorsement notice

The text of ISO 12782-1:2012 has been approved by CEN as a EN ISO 12782-1:2012 without any modification.

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12782-1 was prepared by Technical Committee ISO/TC 190, *Soil quality*, Subcommittee SC 7, *Soil and site assessment*.


ISO 12782 consists of the following parts, under the general title *Soil quality — Parameters for geochemical modelling of leaching and speciation of constituents in soils and materials*:

- *Part 1: Extraction of amorphous iron oxides and hydroxides with ascorbic acid*
- *Part 2: Extraction of crystalline iron oxides and hydroxides with dithionite*
- *Part 3: Extraction of aluminium oxides and hydroxides with ammonium oxalate/oxalic acid*
- *Part 4: Extraction of humic substances from solid samples*
- *Part 5: Extraction of humic substances from aqueous samples*

## Introduction

In addition to leaching procedures for subsequent chemical and ecotoxicological testing of soil and other materials including waste, predictive models are becoming indispensable tools in the environmental risk assessment of these materials. Models are particularly required when the results of laboratory leaching tests are to be translated to specific scenarios in the field, with regard to assessing the risks of both contaminant migration and bioavailability.

In the past few years, geochemical models have been shown to be valuable tools to be combined with the data obtained from characterization leaching standards, such as pH-dependence and percolation tests. These models have the advantage of being based on fundamental thermodynamic parameters that have general validity. In order to enable extrapolation of laboratory leaching data to the mobility and/or bioavailability of a constituent in a specific field scenario, these models require additional input parameters for specific soil properties (see Figure 1).

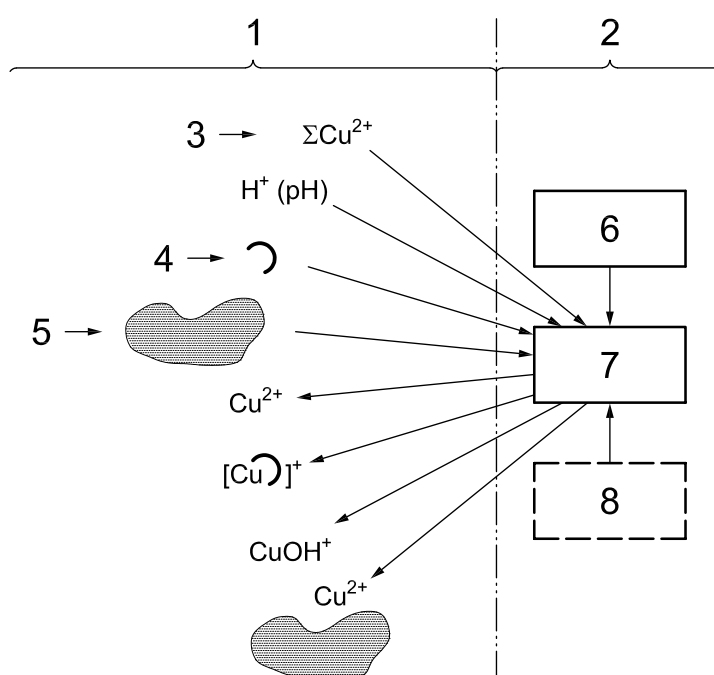

### Key

- 1 experiment
- 2 geochemical speciation modelling
- 3 available metal concentration
- 4 dissolved humic substances
- 5 reactive (solid) surfaces
- 6 database with stability constants
- 7 computer program
- 8 assumptions

**Figure 1 — Relationships between experimental data, as obtained from laboratory leaching/extraction tests, and geochemical modelling of the speciation of a heavy metal in the environment (modified after M. Gfeller & R. Schulin, ETH, Zürich)**

Characterization leaching standards provide information on the concentrations of the contaminant of interest as a function of, in particular, pH and liquid/solid (L/S) ratio. In addition, a more complete analysis of the leachates also provides information on the major ion composition and dissolved organic carbon (DOC), parameters that are particularly important for the chemical speciation of constituents through processes such as precipitation, complexation and competition for adsorption on reactive mineral and organic surfaces in the soil. As illustrated

in Figure 1 for the example of copper, geochemical modelling enables calculation of the metal distribution among these different chemical species in the system of interest. This provides necessary information for risk-assessment purposes, as these different chemical forms play distinct roles in the mobility and bioavailability of the metal in the soil. In addition to information obtained from the leaching standards (in their current state of development/definition), the following two additional types of information are required.

- a) The “available” (sometimes also referred to as “active” or “exchangeable”) concentration of the constituent in the solid phase, as opposed to the total concentration determined by acid destruction of the solid matrix. This “available” concentration can be obtained by leaching at low pH, a condition that can be obtained by extending the pH range in the pH-dependent leaching test (ISO/TS 21268-4) down to  $\text{pH} \approx 0,5$  to  $\text{pH} \approx 1$ .
- b) The concentration of reactive organic and mineral surfaces in the soil, which constitute the major binding (adsorption) sites for most constituents in the soil matrix.

The major reactive surfaces that control the binding of constituents by sorption processes to the soil matrix are particulate organic matter and iron and aluminium (hydr)oxides. It is generally accepted that the reactivity of these mineral and organic surfaces can strongly vary as a function of their specific surface area/crystallinity [iron and aluminium (hydr)oxides] and composition (organic matter). When the results are intended to be used for the above-described purposes of geochemical modelling in conjunction with leaching tests, it is important that the methods be selective for reactive surfaces for which generic thermodynamic adsorption parameters are also available for the most important major and trace elements.

This part of ISO 12782 aims to determine the content of “reactive” iron in the form of *amorphous* iron oxides and hydroxides in soil and materials using an ascorbic acid extract. The procedure is based on Reference [5], described in Reference [6], while generic thermodynamic adsorption parameters for amorphous iron (hydr)oxide are available in Reference [7].

Thermodynamic parameters for adsorption models other than those used in Reference [7] are also available in the literature and may also be used to model the binding of constituents to amorphous iron (hydr)oxides.

Iron can be present in several forms in soils, of which the most important for the binding of trace constituents are well-crystallized and insoluble oxides and hydroxides (e.g. goethite, haematite, magnetite) and the poorly ordered, more soluble oxides and hydroxides (e.g. ferrihydrite, hydrous ferric oxide). Amorphous and crystalline forms have a different reactivity towards binding of trace constituents as a result of differences in specific surface areas and characteristics of the binding “sites” on the surface.





# Soil quality — Parameters for geochemical modelling of leaching and speciation of constituents in soils and materials —

## Part 1: Extraction of amorphous iron oxides and hydroxides with ascorbic acid

### 1 Scope

This part of ISO 12782 specifies the determination of the content of “reactive” iron in the form of amorphous iron oxides and hydroxides in soil and other materials by extraction with ascorbic acid. Other materials also include waste. The content of “reactive” iron can be used as input in geochemical models to represent the content of amorphous iron (hydr)oxides.

**NOTE** Although the ammonium oxalate/oxalic acid extraction (ISO 12782-3) is commonly used to estimate “reactive” iron in the form of iron oxides and hydroxides, this part of ISO 12782, in conjunction with ISO 12782-2, has been shown to be more specific for the extraction of amorphous and crystalline iron (hydr)oxides, respectively.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3696, *Water for analytical laboratory use — Specification and test methods*

ISO 5667-3, *Water quality — Sampling — Part 3: Preservation and handling of water samples*

ISO 10381-1, *Soil quality — Sampling — Part 1: Guidance on the design of sampling programmes*

ISO 10381-2, *Soil quality — Sampling — Part 2: Guidance on sampling techniques*

ISO 10381-3, *Soil quality — Sampling — Part 3: Guidance on safety*

ISO 10381-4, *Soil quality — Sampling — Part 4: Guidance on the procedure for investigation of natural, near-natural and cultivated sites*

ISO 10381-5, *Soil quality — Sampling — Part 5: Guidance on the procedure for the investigation of urban and industrial sites with regard to soil contamination*

ISO 10381-6, *Soil quality — Sampling — Part 6: Guidance on the collection, handling and storage of soil under aerobic conditions for the assessment of microbiological processes, biomass and diversity in the laboratory*

ISO 11464, *Soil quality — Pretreatment of samples for physico-chemical analysis*

ISO 11465, *Soil quality — Determination of dry matter and water content on a mass basis — Gravimetric method*

EN 14899, *Characterization of waste — Sampling of waste materials — Framework for the preparation and application of a sampling plan*

EN 15002, *Characterization of waste — Preparation of test portions from the laboratory sample*

CEN/TR 15310-3, *Characterization of waste — Sampling of waste materials — Part 3: Guidance on procedures for sub-sampling in the field*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

#### 3.1 water content mass fraction

$w_w$   
mass of water evaporating from one soil sample when dried to constant mass at 105 °C, divided by the dry mass of the soil sample

[ISO 11074:2005]

#### 3.2 laboratory sample

sample intended for laboratory inspection or testing

NOTE 1 When the laboratory sample is further prepared (reduced) by subdividing, mixing, grinding, or by combinations of these operations, the result is the test sample. When no preparation of the laboratory sample is required, the laboratory sample is the test sample. A test portion is removed from the test sample for the performance of the test or for analysis.

NOTE 2 The laboratory sample is the final sample from the point of view of sample collection but it is the initial sample from the point of view of the laboratory.

NOTE 3 Several laboratory samples may be prepared and sent to different laboratories or to the same laboratory for different purposes.

[ISO 11074:2005]

#### 3.3 test sample

sample, prepared from the laboratory sample, from which the test portions are removed for testing or for analysis; this portion of material, resulting from the laboratory sample by means of an appropriate method of sample pretreatment, and having the size (volume/mass) necessary for the desired testing or analysis

NOTE Adapted from ISO 11074:2005.

#### 3.4 test portion analytical portion

quantity of material, of proper size, for measurement of the concentration or other property of interest, removed from the test sample

NOTE 1 The test portion may be taken from the primary sample or from the laboratory sample directly if no preparation of sample is required (e.g. with liquids), but usually it is taken from the prepared test sample.

NOTE 2 A unit or increment of proper homogeneity, size, and fineness, needing no further preparation, may be a test portion.

[ISO 11074:2005]

#### 3.5 material

excavated soil, dredged material, manufactured soil, treated soil and fill material, and other relevant materials, including soil amendments and waste materials

### 4 Principle

The extraction principle is based mainly on the reduction of Fe(III) phases to the more soluble Fe(II) phases, as well as on the complexing affinity of ascorbate to extract iron from short-range ordered materials.

The analysis should be carried out using the ICP-AES technique, e.g. in accordance with ISO 11885.

## 5 Apparatus

The following apparatus shall be used. All materials that come into contact with the sample (material or reagents) should not contaminate the compounds to be determined or adsorb the compounds of interest.

**5.1 Centrifuge tubes**, e.g. polycarbonate, of appropriate size, rinsed in accordance with ISO 5667-3.

**5.2 Centrifuge**, preferably at 3 000*g*. For other appropriate conditions, see Annex A.

**5.3 End-over-end shaking machine** (5 min<sup>-1</sup> to 10 min<sup>-1</sup>)

NOTE Other shaking methods can be used provided they can be shown to provide equivalent results.

**5.4 Filter holders for syringes**, 0,2 µm, cellulose acetate, diameter 30 mm, cleaned with at least 10 ml of distilled water before use.

**5.5 Usual laboratory glass or plastic ware**, rinsed in accordance with ISO 5667-3.

**5.6 Plastic syringe**, 50 ml, rinsed in accordance with ISO 5667-3.

**5.7 Balance**, with an accuracy of at least 1 mg.

**5.8 Sieving equipment**, with a nominal screen size of 2 mm or 4 mm.

NOTE Due to sieving, contamination of the sample may occur to an extent which affects the leaching of some constituents of concern, e.g. cobalt and tungsten from tungsten carbide equipment or chromium, nickel and molybdenum from stainless-steel equipment.

**5.9 Sample splitter**, for sub-sampling of laboratory samples (optional).

**5.10 Crushing equipment**: jaw crusher or cutting device.

NOTE Due to crushing, contamination of the sample may occur to an extent which affects the leaching of some constituents of concern, e.g. cobalt and tungsten from tungsten carbide equipment or chromium, nickel and molybdenum from stainless-steel equipment.

**5.11 Equipment for deaeration with nitrogen gas** (N<sub>2</sub>, purity 99,999 %, O<sub>2</sub> < 0,000 3 %).

Apply the nitrogen gas as a constant stream, e.g. using a pressure valve.

**5.12 pH-meter**, with a measurement accuracy of at least ±0,05 pH units.

## 6 Reagents

The reagents used shall be of analytical grade and the water used shall comply with grade 3 in accordance with ISO 3696.

**6.1 Water**: use distilled and demineralized water with a specific conductivity of at most 0,2 mS/cm at 25 °C and a pH > 5,6.

**6.2 Sodium hydrogen carbonate**,  $M(\text{NaHCO}_3) = 84,01 \text{ g/mol}$ .

**6.3 Trisodium citrate dihydrate**,  $M(\text{C}_6\text{H}_5\text{Na}_3\text{O}_7 \cdot 2\text{H}_2\text{O}) = 294,1 \text{ g/mol}$ .

**6.4 L(+)** ascorbic acid, suitable for biochemistry,  $M(\text{C}_6\text{H}_8\text{O}_6) = 176,13 \text{ g/mol}$ .

**6.6 Nitric acid**,  $c(\text{HNO}_3) = 0,1 \text{ mol/l}$ .

## 7 Sample pretreatment

### 7.1 Sample size

Sampling shall be performed in accordance with the guidelines for preparing a sampling plan for soil materials, as specified in ISO 10381-1 to ISO 10381-6 and for waste in accordance with EN 14899, in order to obtain representative laboratory samples. Obtain a representative laboratory sample of at least 200 g (dry matter) for soil and soil materials and 2 kg (dry matter) for waste material. Follow instructions for sample pretreatment:

- for soil and soil materials according to ISO 11464;
- for waste according to CEN/TR 15310-3 and EN 15002.

Use a sample splitter (5.9) or apply coning and quartering to split the sample.

**NOTE** The required size of the laboratory sample is dependent on the particle size distribution of the soil or material to be analysed (see ISO 11277). The specified sample size is generally adequate. In specific cases, a smaller sample size can be accepted — for instance if, for specific reasons, less material is available — provided that the test can be carried out as specified in 7.2 and 7.3.

Any deviation(s) to accommodate sample size or volume requirements shall be recorded in the test report.

### 7.2 Particle size reduction

#### 7.2.1 General

The tests shall be carried out preferably on material as received.

#### 7.2.2 Particle size reduction of soil and soil material

For soil and soil material, the test portion to be prepared shall have a grain size  $\leq 2 \text{ mm}$ . If oversized material is not of natural origin and exceeds 5 % (mass fraction), the entire oversized fraction shall be separated by sieving (see 5.8) and crushed using suitable crushing equipment (5.10). On no account shall the material be finely ground. Oversized material of natural origin (e.g. stones, pebbles, twigs) in the sample shall be separated and discarded. Irrespective of any necessary size reduction, the separate fractions, with the exception of non-crushable and discarded material, shall be mixed to constitute the test sample. If the laboratory sample cannot be crushed or sieved because of its water content, it is permitted, in this case only, to reduce the water content until the laboratory sample can be sieved. The drying temperature shall not exceed 25 °C.

#### 7.2.3 Particle size reduction of waste

For waste, the test shall be carried out on material with a grain size of at least 95 % (mass fraction)  $< 4 \text{ mm}$ . Therefore, the laboratory sample shall be sieved (see 5.8). If oversized material exceeds 5 % (mass fraction), the entire oversized fraction shall be crushed using crushing equipment (5.10). On no account shall the material be finely ground. Non-crushable material (e.g. metallic parts such as nuts, bolts, scrap) in the sample shall be separated and the mass and nature of the material shall be recorded. The method of size reduction applied shall be documented and recorded in the test report. Irrespective of any necessary size reduction, the separate fractions, with the exception of the non-crushable material and the material that may be used according to the second paragraph after Note 1, shall be mixed to constitute the test sample. If the laboratory sample cannot be crushed or sieved because of its moisture content, it is permitted, in this case only, to reduce the water content until the laboratory sample can be sieved. The drying temperature shall not exceed 25 °C. Any necessary deviation in the drying procedure shall be given in the test report.

**NOTE 1** Fibrous materials and plastics can often be reduced in size after cryogenic treatment.

Any drying step can change other properties of the waste. Care should be taken to minimize such changes.

In order to minimize a possible contamination during sieving, fragmentation and splitting, it is recommended, before preparing the test sample, that a portion of the laboratory sample be processed through the devices for sieving, fragmentation, splitting, discarding the material thereafter. This recommendation does not cover the possible contamination described in the Notes in 5.8 and 5.10.

NOTE 2 Important differences may occur in the leaching test results for a given material, depending on the crushing procedure and the waste material being crushed. Particle-size-related differences may be made evident by determining the particle size distribution. It is to be noted that, in the case of a very narrow size distribution, such differences in the leaching result may be enhanced, especially in the upper part of the size range.

### 7.3 Determination of the water content

Determine the water content of the sample on a separate test portion at  $(105 \pm 5)$  °C in accordance with ISO 11465. If the soil sample is air-dried prior to testing, the dry matter content of the air-dried sample shall be determined as well.

## 8 Procedure

### 8.1 Preparation of the extraction solution

Prepare a solution of 50 g of sodium hydrogen carbonate (6.2) and 50 g of trisodium citrate dihydrate (6.3) per litre of water. Deaerate with nitrogen gas (5.11) for 4 h. Add 20 g of L(+) ascorbic acid (6.4) per litre. Deaerate with nitrogen gas (5.11) again until a final pH of 8,0 is reached.

Prepare this extraction solution freshly for each experiment as it cannot be stored.

### 8.2 Extraction

Using a balance (5.7), weigh a test portion equivalent to 10 g (for materials  $\leq 2$  mm) or 25 g (for materials  $< 4$  mm) of dry matter and transfer it to a dry bottle. Add 200 ml (for materials  $\leq 2$  mm) or 500 ml (for materials  $< 4$  mm) of the extraction solution (8.1) and close the bottle tightly. Shake (see 5.3) for 24 h at room temperature. Centrifuge an appropriate volume for analysis for 30 min at 3 000g or at appropriate centrifugation conditions, as given in Annex A.

Take off the supernatant using a syringe and filtrate the supernatant through a 0,2  $\mu$ m filter (5.4). Discard the first 3 ml and collect the remainder of the filtrate in a bottle. Preserve the filtrate in accordance with ISO 5667-3 and analyse (8.3).

NOTE Larger test portions can be used when there are indications that the material is too heterogeneous to obtain an adequate reproducibility of the results. If a larger test portion is used, it is necessary to increase the volume of the extraction solution (8.1) proportionally.

Include blanks of the extraction.

### 8.3 Analytical determination

Analyse the acidified filtrate (see 8.2) using the ICP-AES technique, e.g. in accordance with ISO 11885.

## 9 Calculation

Calculate the concentration of iron, in millimoles per kilogram (mmol/kg) of dry soil, using Equation (1).

$$c_{\text{Fe}} = (\rho_{\text{Fe}} - \rho_{\text{Fe,b}}) \times \frac{V}{m} \times \frac{(100 + w_w)}{100} \times \frac{1}{55,85} \quad (1)$$

where

- $c_{\text{Fe}}$  is the concentration of extracted iron in the sample on a dry-matter basis, in millimoles per kilogram (mmol/kg);
- $\rho_{\text{Fe}}$  is the mass concentration of iron in the filtrates, in milligrams per litre (mg/l);
- $\rho_{\text{Fe,b}}$  is the mass concentration of iron in the blank, in milligrams per litre (mg/l);
- $V$  is the volume of the extractant used, in millilitres (ml);
- $m$  is the mass of the test portion, in grams (g);
- $w_{\text{w}}$  is the water content determined in accordance with ISO 11465, as a percentage (%) on a mass basis.

## 10 Expression of results

Report the concentration of extracted iron in the sample on a dry-matter basis, in millimoles per kilogram (mmol/kg).

## 11 Test report

The test report shall include at least the following details:

- a) a reference to this part of ISO 12782;
- b) any information necessary for the complete identification of the sample;
- c) a reference to the method used for the analytical determination, e.g. ISO 11885;
- d) the result of the determination;
- e) any details that are optional or deviations from the specifications of this part of ISO 12782, and any effects which may have affected the results.

## Annex A (informative)

### Conditions regarding centrifugation

#### A.1 General

According to this part of ISO 12782, the first step of the solid/liquid separation shall be done by centrifugation. It is recommended centrifuging at 3 000*g* for 30 min.

However, it is possible to get the same separation efficiency at other centrifugation conditions (shorter centrifugation time at higher centrifugation speed or extended centrifugation time at lower centrifugation speed). In order to ensure reproducibility of the centrifugation, the following principles shall be considered when deviating from the recommended centrifugation procedure.

Generally, the relative centrifugal force ( $F_{C,r}$ , in *g*) depends on the rotor speed,  $n$  (revolutions per minute,  $\text{min}^{-1}$ ), and the rotor radius,  $r$  (in cm), and is calculated using Equation (A.1):

$$F_{C,r} = 0,000\,011\,18 \times (n)^2 \times r \quad (\text{A.1})$$

Drawing on this, each rotor has a specific  $k$ -factor that describes its pelleting efficiency. The lower the  $k$ -factor, the more efficient the pelleting will be.

This factor can be used to determine the time required for reproducible centrifugation at different rotor speeds. The  $k$ -factor can be calculated using Equation (A.2):

$$k = \frac{2,53 \times (\ln r_{\max} - \ln r_{\min})}{(n)^2} \times 10^{11} \quad (\text{A.2})$$

where

- $k$  is the rotor-specific factor;
- $r_{\max}$  is the maximum radius from the axis, in centimetres (cm);
- $r_{\min}$  is the minimum radius from the axis, in centimetres (cm);
- $n$  is the rotor speed, in revolutions per minute ( $\text{min}^{-1}$ ).

To calculate the time needed at different rotor speeds to get the same centrifugation result, the  $k$ -factors for both rotor speeds shall be calculated. Using Equation (A.3), the times can be determined:

$$t_a = t_b \cdot \frac{k_a}{k_b} \quad (\text{A.3})$$

where

- $k_a$  is the rotor-specific factor at rotor speed a;
- $k_b$  is the rotor-specific factor at rotor speed b;
- $t_a$  is the centrifugation time for rotor speed a, needed to achieve the same separation efficiency as for rotor speed b in the time  $t_b$ , in minutes (min);
- $t_b$  is the centrifugation time for rotor speed b, in minutes (min).

## A.2 Example for calculation

Rotor dimension:  $r_{\max} = 9$  cm,  $r_{\min} = 3$  cm,  $\bar{r} = 6$  cm

$n$  needed for  $F_{c,r} = 3\,000g$  [see Equation (A.1)]:

$$n = \sqrt{\frac{3\,000}{0,000\,011\,18 \times 6}} = 6\,694 \text{ min}^{-1}$$

Desired  $n$ :  $3\,000 \text{ min}^{-1}$

Question:  $6\,694 \text{ min}^{-1}$  for 30 min correspond to  $3\,000 \text{ min}^{-1}$  for  $x$  min.

Calculation of  $k$ -factors [see Equation (A.2)]:

a)  $6\,694 \text{ min}^{-1}$ :

$$k_{6694} = \frac{2,53 \times (\ln 9 - \ln 3)}{6694^2} \times 10^{11} = 6203$$

b)  $3\,000 \text{ min}^{-1}$ :

$$k_{3000} = \frac{2,53 \times (\ln 9 - \ln 3)}{3000^2} \times 10^{11} = 30883$$


Time needed at  $3\,000 \text{ min}^{-1}$  [see Equation (A.3)]:

$$t_{3000} = 30 \times \frac{30883}{6203} = 149,4 \text{ min}$$

Answer: at  $3\,000 \text{ min}^{-1}$  the centrifugation time shall be 149 min.

Figure A.1 shows a plot of the centrifugation time,  $t$ , versus the rotation speed,  $n$ , for the rotor dimension described above (based on  $3\,000g$  for 30 min):



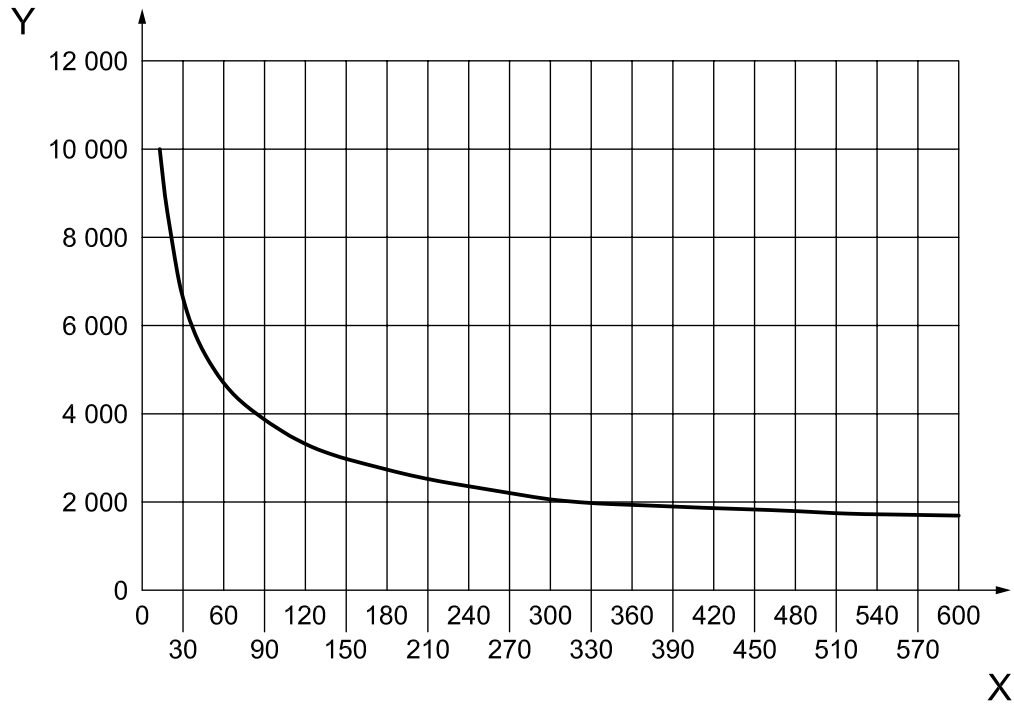

**Key**

- X centrifugation time, in min
- Y rotor speed, in r/min

**Figure A.1 — Plot of the centrifugation time,  $t$ , versus the rotation speed,  $n$ , for the rotor dimension described above**

## Bibliography

- [1] ISO 11074:2005, *Soil quality — Vocabulary*
- [2] ISO 11277, *Soil quality — Determination of particle size distribution in mineral soil material — Method by sieving and sedimentation*
- [3] ISO 11885, *Water quality — Determination of selected elements by inductively coupled plasma optical emission spectrometry (ICP-OES)*
- [4] ISO/TS 21268-4, *Soil quality — Leaching procedures for subsequent chemical and ecotoxicological testing of soil and soil materials — Part 4: Influence of pH on leaching with initial acid/base addition*
- [5] FERDELMAN, D.G. *The distribution of sulphur, iron, manganese, copper, and uranium in a saltmarsh sediment core as determined by a sequential extraction method*. MSc thesis, University of Delaware, 1988
- [6] KOSTKA, J.E., LUTHER III, G.W., 1994. Partitioning and speciation of solid phase iron in saltmarsh sediments. *Geochimica et cosmochimica acta*, Vol 58 (7), pp. 1701-1710
- [7] DZOMBAK, D.A., MOREL, F.M.M. *Surface complexation modelling: hydrous ferric oxide*; John Wiley & Sons: New York, 1990
- [8] GFELLER, M., SCHULIN, R., ETH Zürich, <http://www.randomdots.net>







# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™