

BS EN ISO 13355:2016



BSI Standards Publication

**Packaging — Complete, filled
transport packages and unit
loads — Vertical random
vibration test (ISO 13355:2016)**

National foreword

This British Standard is the UK implementation of EN ISO 13355:2016. It supersedes BS EN ISO 13355:2003 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee PKW/0, Packaging.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016. Published by BSI Standards Limited 2016

ISBN 978 0 580 80775 6

ICS 55.180.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2016.

Amendments issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN ISO 13355

NORME EUROPÉENNE

EUROPÄISCHE NORM

August 2016

ICS 55.180.40

Supersedes EN ISO 13355:2003

English Version

Packaging - Complete, filled transport packages and unit loads - Vertical random vibration test (ISO 13355:2016)

Emballages - Emballages d'expédition complets et pleins et charges unitaires - Essais de vibration verticale aléatoire (ISO 13355:2016)

Verpackung - Versandfertige Packstücke und Ladeeinheiten - Schwingprüfung mit vertikaler rauschförmiger Anregung (ISO 13355:2016)

This European Standard was approved by CEN on 23 August 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

This document (EN ISO 13355:2016) has been prepared by Technical Committee ISO/TC 122 “Packaging” in collaboration with Technical Committee CEN/TC 261 “Packaging” the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2017, and conflicting national standards shall be withdrawn at the latest by February 2017.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 13355:2003.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 13355:2016 has been approved by CEN as EN ISO 13355:2016 without any modification.

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Principle	1
4 Apparatus	1
4.1 Vibration table.....	1
4.2 Vibration measurement, data storage and control system	2
5 Sampling	2
5.1 Test specimen preparation.....	2
5.2 Conditioning.....	2
6 Procedure	2
7 Test report	3
Annex A (normative) Power spectral density in generic transportation	5
Annex B (informative) Power spectral densities derived from recorded data	6
Bibliography	9

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 122, *Packaging*, Subcommittee SC 3, *Performance requirements and tests for means of packaging, packages and unit loads*.

This second edition cancels and replaces the first edition (ISO 13355:2003), which has been technically revised.

Some of the major modification points are listed as follows:

- a) [Annex A](#) has been changed from Informative to Normative;
- b) in [Table A.1](#), 0,048 (m/s²)² at 3 Hz, Slope between 3 Hz to 6 Hz, 1,154 (m/s²)² at 6 Hz to 18 Hz has been changed to 0,048 (m/s²)² at 2 Hz, Slope between 2 Hz to 4 Hz, 1,154 (m/s²)² at 4 Hz to 18 Hz;
- c) [Annex B](#) has been added.

Introduction

A random vibration test is a more realistic method in reproducing environmental vibration during transportation than sinusoidal vibration test. For this reason, if suitable laboratory facilities are available, a vibration test is more preferable than any fixed or swept frequency sinusoidal vibration tests similar to those given in ISO 2247 and ISO 8318.

Packaging — Complete, filled transport packages and unit loads — Vertical random vibration test

1 Scope

This International Standard specifies a method to carry out a vertical random vibration test on a complete, filled transport package(s) and unit loads using random excitation¹⁾. This document also provides methods for assessing the performance of a package in terms of its strength or the protection that it offers to its contents when it is subjected to vertical vibration. The test discussed in this document can be performed either as a single test to investigate the effects of vertical vibration, or as a part of a sequence of tests designed to measure the ability of a test specimen to withstand a distribution system that includes a vibration hazard.

NOTE In this International Standard, a package or unit load is referred to as test specimen.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2206, *Packaging — Complete, filled transport packages — Identification of parts when testing*

ISO 2233, *Packaging — Complete, filled transport packages and unit loads — Conditioning for testing*

ISO 2234, *Packaging — Complete, filled transport packages and unit loads — Stacking tests using a static load*

3 Principle

The test specimen is placed on a vibration table and made to vibrate using random excitation with an effective frequency range for the test specimen. Atmospheric conditions, test duration, acceleration power spectral density, attitude of the test specimen and method of restraint are predetermined.

Specific requirements for mounting a test specimen on the vibrating platform are given in ISO 4180:2009, 10.7.1.

NOTE When required, a load is superimposed on the test specimen to simulate the conditions at the bottom of a stack.

4 Apparatus

4.1 Vibration table

A table of sufficient size and performance (in terms of power, displacement, frequency range) capable of being stiff (its lower resonant frequency shall be higher than the higher test frequency) and remaining horizontal during the test.

¹⁾ Random vibration theory is discussed in IEC 60068-2-64.

The frequency range shall be 2 Hz to 200 Hz, with a resolution of at least 1 Hz. By considering the resonance frequency of the seismic-base of the test equipment, the frequency range at the low end may be modified based on the agreement between the involved stakeholders or on the technical instruction of the test equipment.

The table may be equipped with the following components:

- Low fences restricting sideways and endways movements during testing;
- High fences or other means of maintaining a superimposed load in position on the test specimen during testing.

Furthermore, the apparatus shall meet the requirements and tolerances of [Clause 6](#).

4.2 Vibration measurement, data storage and control system

A system comprising accelerometers, signal conditioners and a computer, capable of:

- generating vibration with the required power spectral density;
- controlling the motion of the vibration table by feeding back the signal from the control accelerometer which monitors the table acceleration;
- performing the analysis with at least 120 statistical degrees of freedom; and
- having data acquisition and control channels with a response accurate to 5 % over the frequency range specified for the test.

5 Sampling

5.1 Test specimen preparation

The test specimen shall normally be filled with its intended contents. However, simulated or substituted contents may be used, provided that the dimensions and physical properties of such contents are as close as possible to those of the intended contents.

Ensure that the test specimen is closed normally, as if ready for distribution. If simulated or substituted contents are used, ensure that the normal method of closure is still employed.

5.2 Conditioning

Condition the test specimen in accordance with ISO 2233.

6 Procedure

Carry out the test in the same atmospheric conditions as used for conditioning where this is critical to the performance of the test specimen.

In other circumstances, the test shall be carried out in atmospheric conditions which are as near as practicable to those used for conditioning.

Place the test specimen in the predetermined attitude on the vibration table (see [4.1](#)), with the centre of gravity placed as near as practicable to the centre of the table; if the test specimen is not secured to the table it may be fenced. If a superimposed load is required, the loading procedure shall comply with ISO 2234.

Measure the imposed acceleration of the vibration table as closely as possible to the test specimen.

Ensure the horizontal components of the acceleration are no greater than 20 % of the value of the vertical component.

Start the test at 6 dB below the test level to allow the system to equalize the power spectral density profile, then carefully adjust the level to reach full test level and continue the test for the predetermined duration.

The test duration and the power spectral density of the vibration table, in absence of experimental data concerning the effects of transportation to be reproduced, should be chosen as indicated in [Annex A](#).

When distribution system and intensity of vibration acceleration are partly known, the test duration and the power spectral density of the vibration table may be chosen from [B.1](#) or [B.2](#), as indicated.

NOTE Vibration spectra depend very much on the transport conditions such as road conditions or vehicle type which selected. Therefore, whenever possible, perform tests with spectra obtained from measured data of the particular transportation conditions.

The test schedule may be changed as agreed by the involved stakeholders. In this case, the change and the reason should be added to the test report.

The tolerance on root mean square acceleration shall not exceed 15 %; the obtained acceleration power spectral density of the test control signal shall not deviate by more than ± 3 dB over the entire test frequency range.

Tests may be interrupted at any time to allow visual inspection of the test specimen, or for any other purpose.

7 Test report

The test report shall include the following information:

- reference to this International Standard, i.e. ISO 13355;
- name and address of the testing laboratory and of the customer;
- unique identification of the report;
- date of receipt of the test specimens and the date(s) of performance of test;
- name, title and signature of the person(s) accepting responsibility for the test report;
- note stating that test results relate only to the specimens tested;
- note stating that the report shall not be reproduced, except in full, without the written approval of the testing laboratory;
- number of test specimens tested;
- full description, including dimensions, mass, structural and material specifications of the test specimen and its fittings, cushioning, blocking, closure or reinforcing arrangements, in accordance with ISO 2206;
- description of the contents, i.e. if simulated or substituted contents were used, full details shall be given;
- gross mass of the test specimen;
- relative humidity, temperature and time of conditioning, as well as the temperature and relative humidity of the test area at the time of test, noting whether these values conform to the requirements of ISO 2233;

- duration of the test, frequency range, applied acceleration power spectral density and obtained root mean square acceleration value;
- whether a superimposed load was used; if so, the mass, in kilograms, of the superimposed load and the period of time during which the test specimen was under load;
- method of restraint, and whether low or high fences were used;
- any deviations from the test method specified in this International Standard;
- test results and any observations which may assist in correct interpretation;
- attitude(s) in which the test specimen was tested, using the method of identification as given in ISO 2206;
- a list of equipment and their respective serial numbers (include calibration data, if required).

Annex A (normative)

Power spectral density in generic transportation

Table A.1 and Figure A.1 give the power spectral density levels that can be used to simulate generic (mainly road) transportation when experimental recordings are not available.

Table A.1 — Spectral density

Frequency, f (Hz)	Level (m/s^2) ² /Hz	Level g^2/Hz	Slope dB/oct
$f = 2$	0,048	0,000 5	—
$2 < f < 4$	—	—	+13,75
$4 \leq f \leq 18$	1,154	0,012	—
$18 < f < 40$	—	—	-9,34
$f = 40$	0,096	0,001	—
$40 < f < 200$	—	—	-1,29
$f = 200$	0,048	0,000 5	—

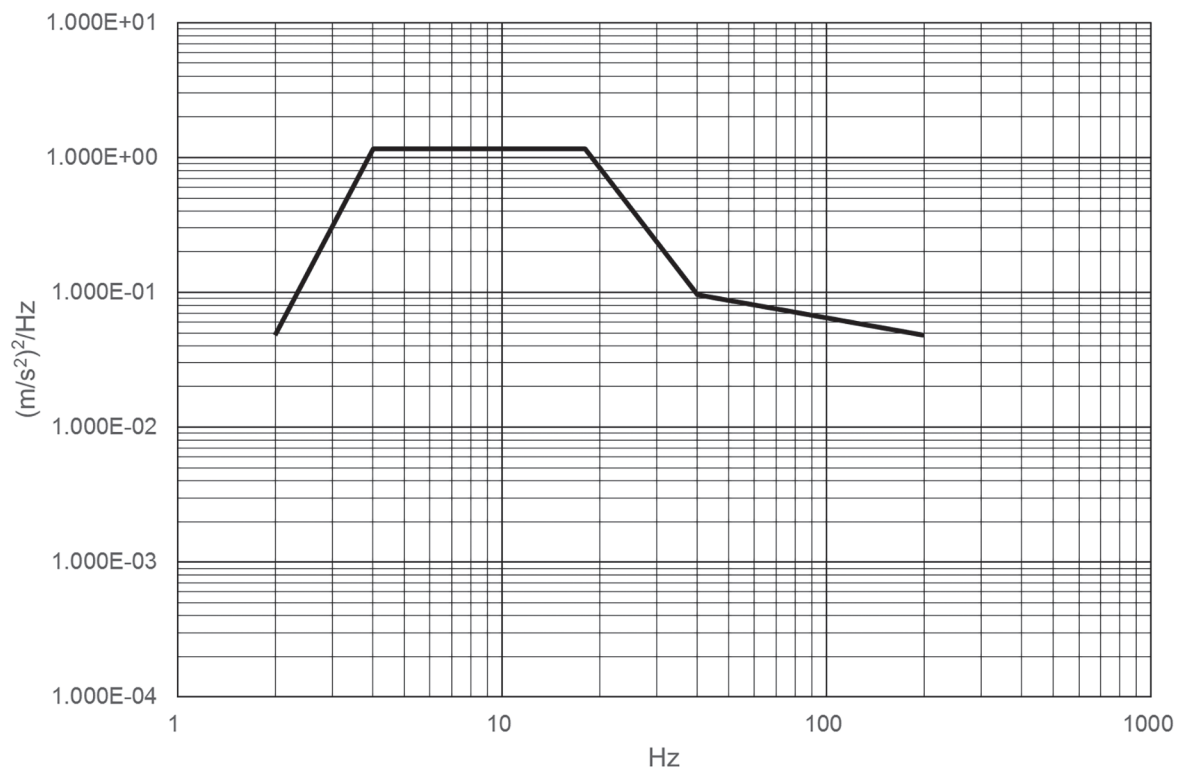


Figure A.1 — PSD profile

The total root mean square acceleration value of the frequency range is 5,926 m/s^2 rms (0,604 g rms).

The minimum recommended test duration is 30 min for each test specimen attitude to be tested. The correlation between transport distance and test duration is not addressed in this International Standard.

Annex B (informative)

Power spectral densities derived from recorded data

B.1 PSD derived from recorded data (Europe)

The test data in [Table B.1](#) and [Figure B.1](#) simulate 12 h of transportation on the road. This is a multilevel test where all three levels are performed in sequence and in any order. To reduce testing time, the levels can be increased by multiplying the values of all power spectral densities with the factors given in [Table B.2](#).

The three test levels may also be used independently, when suitable. See Reference [5].

Table B.1 — Vibration spectrum for road transportation

Frequency Hz	Power spectral density (m/s ²) ² /Hz			Power spectral density g ² /Hz		
	Level 1 (m/s ²) ² /Hz	Level 2 (m/s ²) ² /Hz	Level 3 (m/s ²) ² /Hz	Level 1 g ² /Hz	Level 2 g ² /Hz	Level 3 g ² /Hz
3	0,185	0,364	0,577	0,001 920	0,003 780	0,006 000
5	0,308	0,606	0,962	0,003 200	0,006 300	0,010 000
11	—	—	0,962	—	—	0,010 000
24	0,048	0,092	—	0,000 500	0,000 960	—
38	0,005	0,010	—	0,000 052	0,000 100	—
48	—	—	0,029	—	—	0,000 300
61	0,004	0,008	—	0,000 044	0,000 087	—
71	—	—	0,029	—	—	0,000 300
80	—	—	0,014	—	—	0,000 150
98	0,001	0,003	—	0,000 014	0,000 028	—
200	0,001	0,003	0,014	0,000 014	0,000 028	0,000 150
Test duration (h:min:s)	07:12:00	03:36:00	01:12:00	07:12:00	03:36:00	01:12:00
Percentage of test duration	60	30	10	60	30	10
3 to 200 Hz m/s ² rms (g rms)	1,775	2,481	4,070	(0,181)	(0,253)	(0,415)
5 to 200 Hz m/s ² rms (g rms)	1,638	2,285	3,874	(0,167)	(0,233)	(0,395)

NOTE 1 Peak to peak displacement may exceed 25,4 mm by testing with low frequencies.

NOTE 2 A frequency range from 5 Hz to 200 Hz may be sufficient for the testing of small specimens.

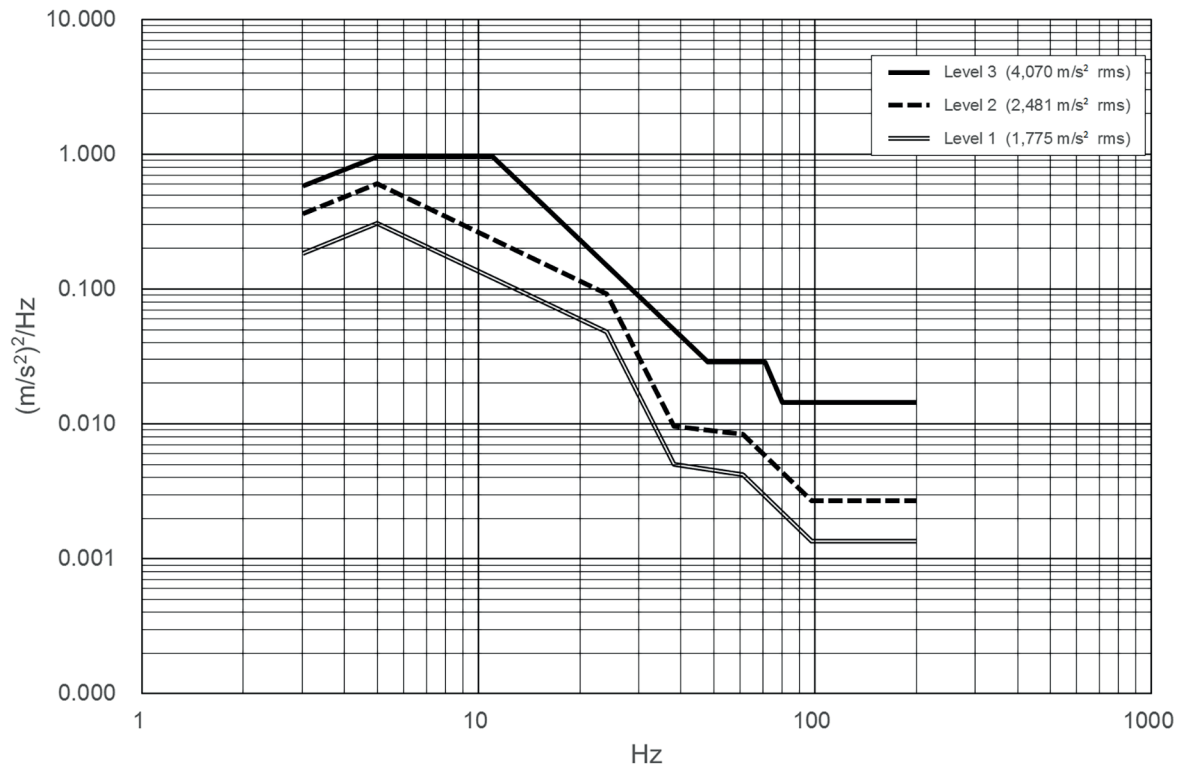


Figure B.1 — PSD profile

Table B.2 — Factors to increase the vibration level and reduce the test duration, based on 12 h of transportation

Test duration, T_2 h:min	Level increase factor li
0:30	1,89
1:00	1,64
2:00	1,43
3:00	1,32
4:00	1,25
6:00	1,15
9:00	1,06
12:00	1,00

The minimum recommended test duration per relevant axis is 30 min.

B.2 PSD derived from recorded data (Japan)

[Table B.3](#) and [Figure B.2](#) give a power spectral density derived from measured data from transport within Japan with 20 tonnes, half loaded, leaf-spring truck. The test duration depends on the length of the journey to be simulated, and is given in [Table B.4](#).

See Reference [6].

Table B.3 — Random vibration test PSD

Frequency, f (Hz)	PSD (m/s ²) ² /Hz	PSD g ² /Hz
$f = 2$	0,385	0,004
$3 \leq f \leq 16$	0,962	0,01
$f = 200$	0,001	0,000 01

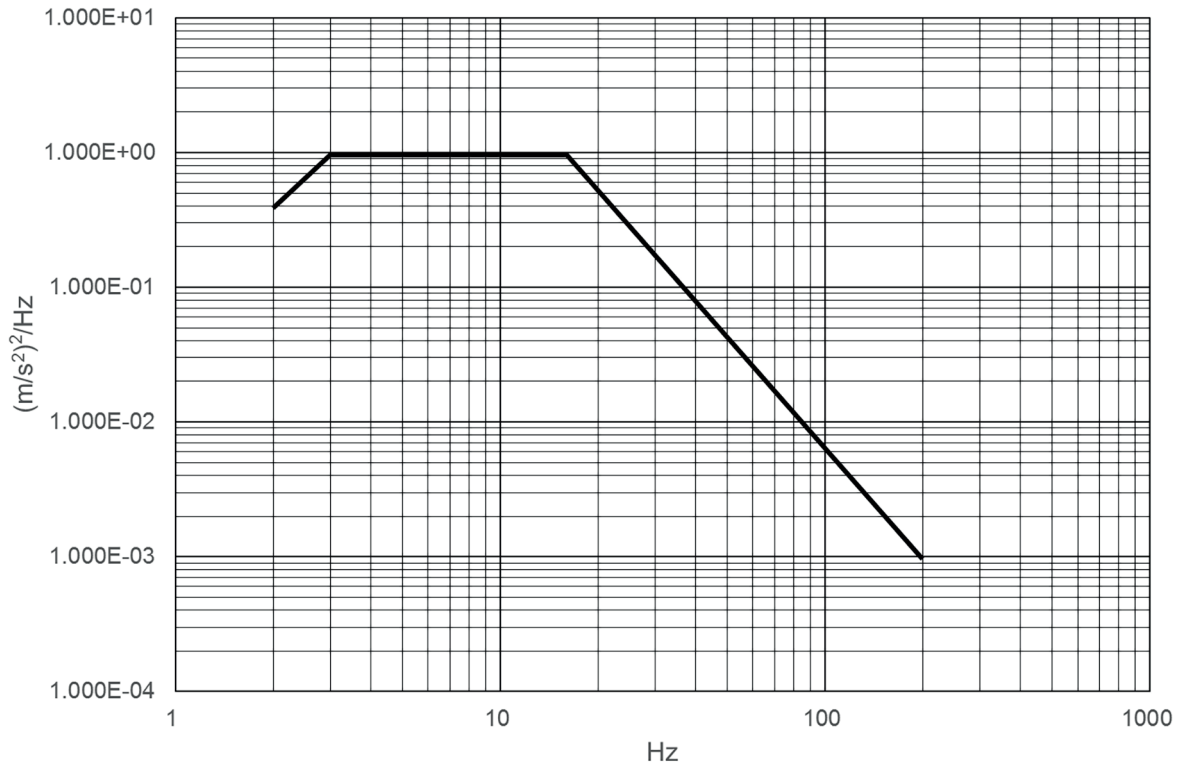


Figure B.2 — PSD profile

The total root mean square acceleration value of the frequency range is 4,707 m/s² rms (0,48 g rms).

Table B.4 — Random vibration test duration

Journey length, l (km)	Test duration h:min
$l \leq 200$	0:15
$200 < l \leq 500$	0:30
$500 < l \leq 1\ 000$	1:00
$1\ 000 < l \leq 1\ 500$	1:30
$1\ 500 < l \leq 2\ 000$	2:00
$2\ 000 < l \leq 2\ 500$	2:30
$2\ 500 < l$	3:00

Bibliography

- [1] ISO 2247, *Packaging — Complete, filled transport packages and unit loads — Vibration tests at fixed low frequency*
- [2] ISO 4180:2009, *Packaging — Complete, filled transport packages — General rules for the compilation of performance test schedules*
- [3] ISO 8318, *Packaging — Complete, filled transport packages and unit loads — Sinusoidal vibration tests using a variable frequency*
- [4] IEC 60068-2-64, *Environmental testing — Part 2-64: Tests — Test Fh: Vibration, broadband random and guidance*
- [5] Source Reduction by European Testing Schedules (SRETS), [viewed 2015-11-16]. Available from <<http://www.ceees.org/downloads/reports/SRETS%20Source%20Reduction%20by%20European%20Testing%20Schedules.pdf>>
- [6] Derivation of PSD profiles for random vibration test based on the field data obtained in Japan, [viewed 2015-11-16]. Available from <http://www.jpi.or.jp/english/pdf/report2014_en.pdf>

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK