Incorporating corrigendum February 2007

Geotechnical investigation and testing — Identification and classification of soil —

Part 2: Principles for a classification

ICS 93.020



National foreword

This British Standard is the UK implementation of EN ISO 14688-2:2004+A1:2013. It is identical to ISO 14688-2:2004, incorporating amendment 1:2013. It supersedes BS EN ISO 14688-2:2004, which is withdrawn. It partially supersedes BS 5930:1999+A2:2010.

The UK participation in its preparation was entrusted by Technical Committee B/526, Geotechnics, to Subcommittee B/526/3, Site investigation and ground testing.

A list of organizations represented on the subcommittee can be obtained on request to its secretary.

Table 4 provides some scale of density terms based on the Density Index. It needs to be made clear whether the terms "very loose", "loose", "medium dense", "dense" and "very dense" have been derived from this table or from SPT N values, the latter being more commonly used in the UK.

Table 5 provides a scale of undrained shear strength values based on test results. This scale has no descriptive element, and uses different terms to those previously used in UK practice and as given in BS 5930:1999+A2:2010. It is suggested that where test results are available the terms in Table 5 be used in preference to the field descriptive terms given in 5.14 of BS EN ISO 14688-1:2002.

Annex B provides an example of a soil classification based on grading alone. This is not an approach that suits UK practice and so it is recommended that a method of classification which also includes other characteristics such as plasticity, water content and density is used.

The publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 25 January 2006

© The British Standards Institution 2013. Published by BSI Standards Limited 2013

Amendments/corrigenda issued since publication

Amd. No.	Date	Comments
16928 Corrigendum No. 1	28 February 2007	Revision of National foreword
	30 November 2013	Implementation of ISO amendment 1:2013, with CEN endorsement A1:2013: Clause 4.5 modified, Table 3 title updated

ISBN 978 0 580 73733 6

EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM

EN ISO 14688-2:2004+A1

September 2013

ICS 93.020

English version

Geotechnical investigation and testing - Identification and classification of soil - Part 2: Principles for a classification (ISO 14688-2:2004)

Reconnaissance et essais géotechniques - Dénomination, description et classification des sols - Partie 2: Principes pour une classification (ISO 14688-2:2004) Geotechnische Erkundung und Untersuchung -Benennung, Beschreibung und Klassifizierung von Boden -Teil 2: Grundlagen von Bodenklassifizierung (ISO 14688-2:2004)

This European Standard was approved by CEN on 24 June 2004.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Foreword

This document (EN ISO 14688-2:2004) has been prepared by Technical Committee ISO/TC 182 "Geotechnics" in collaboration with Technical Committee CEN/TC 341 "Geotechnical Investigation and Testing", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by January 2005, and conflicting national standards shall be withdrawn at the latest by January 2005.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Endorsement notice

The text of ISO 14688-2:2004 has been approved by CEN as EN ISO 14688-2:2004 without any modifications.

Foreword to amendment A1

This document (EN ISO 14688-2:2004/A1:2013) has been prepared by Technical Committee ISO/TC 182 "Geotechnics" in collaboration with Technical Committee CEN/TC 341 "Geotechnical Investigation and Testing" the secretariat of which is held by ELOT.

This Amendment to the European Standard EN ISO 14688:2004 shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2014, and conflicting national standards shall be withdrawn at the latest by March 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 14688-2:2004/Amd 1:2013 has been approved by CEN as EN ISO 14688-2:2004/A1:2013 without any modification.

INTERNATIONAL STANDARD

ISO 14688-2

First edition 2004-07-15

Geotechnical investigation and testing — Identification and classification of soil —

Part 2: **Principles for a classification**

Reconnaissance et essais géotechniques — Dénomination, description et classification des sols —

Partie 2: Principes pour une classification



Cont	Contents Page			
1	Scope	1		
2	Normative references	1		
3	Terms and definitions	2		
4 4.1 4.2 4.3 4.4 4.5	Principles of soil classifications General Fractions Particle size distribution (grading) Plasticity Organic content	4 4 5 5		
5 5.1 5.2 5.3 5.4 5.5	Other principles suitable for soil classification General Correlations of density terms for sands and gravels Undrained shear strength of fine soils Consistency index Other suitable parameters	5 6 7		
Annex	A (informative) Principles of soil classifications	8		
	B (informative) Example of a classification of soils, based on grading alone			
RIDIIO	raphy	13		

Geotechnical investigation and testing — Identification and classification of soil —

Part 2:

Principles for a classification

1 Scope

This part of ISO 14688, together with ISO 14688-1, establishes the basic principles for the identification and classification of soils on the basis of those material and mass characteristics most commonly used for soils for engineering purposes. The relevant characteristics may vary and therefore, for particular projects or materials, more detailed subdivisions of the descriptive and classification terms may be appropriate.

Identification and description of soil are covered by ISO 14688-1.

The classification principles established in this part of ISO 14688 permit soils to be grouped into classes of similar composition and geotechnical properties and, with respect to their suitability for geotechnical engineering purposes, such as

- foundations,
- ground improvements,
- roads,
- embankments,
- dams, and
- drainage systems.

This part of ISO 14688 is applicable to natural soil and similar man-made material *in situ* and redeposited, but it is not a classification of soil by itself.

Identification and description of rock are covered by ISO 14689-1.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3310-1, Test sieves — Technical requirements and testing — Part 1: Test sieves of metal wire cloth

ISO 3310-2, Test sieves — Technical requirements and testing — Part 2: Test sieves of perforated metal plate

ISO 14688-1, Geotechnical investigation and testing — Identification and classification of soil — Part 1: Identification and description

ISO 14689-1, Geotechnical investigation and testing — Identification and classification of rock — Part 1: Identification and description

3 Terms and definitions

For the purposes of this document, the terms and definitions of ISO 14688-1 and the following apply.

3.1

soil classification

assignment of soil into soil groups on the basis of certain characteristics, criteria and genesis

3.2

soil group

a particular collection of soils of similar composition and geotechnical properties

3.3

uniformity coefficient

 $C_{\rm II}$

measure of the shape of the grading curve within the range from d_{10} to d_{60}

 $C_{\rm U} = d_{60}/d_{10}$

NOTE d_{10} and d_{60} are the particle sizes corresponding to the ordinates 10 % and 60 % by mass of the percentage passing.

3.4

coefficient of curvature

 $C_{\mathbf{C}}$

measure of the shape of the grading curve within the range from d_{10} , d_{30} to d_{60}

 $C_{\rm C} = (d_{30})^2 / (d_{10} \cdot d_{60})$

3.5

water content

W

mass of water which can be removed from the soil, usually by drying, expressed as a percentage of the dry mass

3.6

liquid limit

 w_{T}

water content at which a fine soil passes from the liquid to the plastic condition, as determined by the liquid limit test

3.7

plastic limit

 $w_{\mathbf{p}}$

water content at which a fine soil becomes too dry to be in a plastic condition, as determined by the plastic limit test

3.8

plasticity index

. I.

numerical difference between the liquid limit and plastic limit of a fine soil

$$I_{\rm P} = w_{\rm L} - w_{\rm P}$$

3.9

liquidity index

 $I_{\rm L}$

numerical difference between the natural water content and the plastic limit expressed as a percentage ratio of the plasticity index

$$I_{\rm L} = (w - w_{\rm P})/I_{\rm P}$$

3.10

consistency index

 $I_{\rm C}$

numerical difference between the liquid limit and the natural water content expressed as a percentage ratio of the plasticity index

$$I_{\rm C} = (w_{\rm L} - w)/I_{\rm P}$$

3.11

density index

 $I_{\rm D}$

 $\langle \text{coarse soils (sands and gravels)} \rangle$ index dependent upon the void ratio (e) and the void ratios corresponding to the minimum density (e_{max}) and the maximum density (e_{min}), as measured in the laboratory

$$I_D = (e_{\text{max}} - e)/(e_{\text{max}} - e_{\text{min}})$$

3.12

undrained shear strength

 c_{u}

shear resistance of soil in the undrained condition

3.13

void ratio

ratio of the volume of voids to the volume of solids of a soil

3.14

compressibility index

 C_{ι}

compressibility index is defined according to the relation

$$C_c = -\frac{\Delta e}{\lg \left[\left(\sigma' + \Delta \sigma' \right) / \sigma' \right]} = -\frac{\Delta e}{\Delta (\lg \sigma')}$$

NOTE Δe is the change in void ratio (negative value when Δe decreases) and $\frac{\Delta e}{\Delta(\lg \sigma')}$ is the change in void ratio Δe for a relative increase of effective stress from $\lg \sigma'$ to $\lg(\sigma' + \Delta \sigma')$.

4 Principles of soil classifications

4.1 General

Soils shall be classified into soil groups on the basis of their nature which is the composition only, irrespective of their water content or compactness, taking into account the following characteristics:

- particle size distribution (grading);
- plasticity;
- organic content;
- genesis.

NOTE Some principles for soil classification are given in Annex A.

4.2 Fractions

Soil is a mixture of materials of different particle size, which are grouped into fractions as specified in ISO 14688-1.

Classification of coarse and very coarse soils is to be based on the particle size distribution alone (see 4.3 and Table 1).

Percent by mass Fraction **Term** Boulders < 5 low boulder content medium boulder content 5 to 20 > 20 high boulder content Cobbles < 10 low cobble content 10 to 20 medium cobble content > 20 high cobble content

Table 1 — Classification of very coarse soil

NOTE The classification of very coarse soils requires a very large sample. It is not possible to recover representative samples from boreholes to use this classification.

In the case of soils composed of both fine and coarse material, classification is to be based on both plasticity and particle size distribution (see 4.3 and 4.4).

4.3 Particle size distribution (grading)

The particle sizes and their distribution in a soil are determined by mechanical analysis carried out as follows:

- the separation of the coarser fractions by sieving on a series of standard sieves according to ISO 3310-1 and ISO 3310-2;
- the determination of the finer fractions by an accepted process (e.g. sedimentation, optical methods).

NOTE An example of how this can be done is given in Annex B.

The results of the sieving and sedimentation process are plotted as a grading curve.

When designating the coarse fractions, a distinction may be drawn between well graded, poorly graded and gap-graded particle size distributions. In this connection the coefficient of curvature ($C_{\rm C}$) and the uniformity coefficient ($C_{\rm U}$) provide quantitative means for describing the shape of the grading curve. If certain grain sizes are absent, the term gap-graded is used. The median d_{50} of the grading curve, together with $C_{\rm U}$ and $C_{\rm C}$ may also be used to indicate the particle size grading (see Table 2).

Table 2 — Shape of grading curve

Shape of grading curve	$C_{ m U}$	$C_{ m C}$	
Multi-graded	> 15	1 < C _C < 3	
Medium-graded	6 to 15	< 1	
Even-graded	< 6	< 1	
Gap-graded	Usually high	Any (usually < 0,5)	

4.4 Plasticity

The fine fractions of soil, represented by clay and silt and containing clay minerals (see also ISO 14688-1), both alone or in mixtures with coarser material, are usually classified according to their plasticity characteristics. This is carried out on the basis of laboratory tests to determine the liquid limit $w_{\rm L}$ and plastic limit $w_{\rm P}$.

The degree of plasticity of fine soils should be classified using the following terms:

- a) non-plastic;
- b) low plasticity;
- c) intermediate plasticity;
- d) high plasticity.

4.5 Organic content

When soils with organic constituents are classified according to their organic content (see Table 3), a distinction is to be made between organic soils and mineral soils with an organic content.

Table 3 — Classification of soils ≤ 2 mm with organic constituents

Soil	Organic content		
	(\leqslant 2 mm) % of dry mass		
Low-organic	2 to 6		
Medium-organic	6 to 20		
High-organic	> 20		

Classification of soils > 2 mm is based on the type of organic matter and that of organic soils on the genetic origin and the degree of decomposition of the organic constituents.

5 Other principles suitable for soil classification

5.1 General

There is a variety of quantifying terms which can be used to describe soils which include density, undrained shear strength and consistency index.

5.2 Correlations of density terms for sands and gravels

The terms used for the classification of density index $I_{\rm D}$ are very loose, loose, medium dense, dense and very dense (see Table 4). Density index can be related to the results of field tests (see, for example, EN 1997-2). Such field tests are, for example, Dynamic Probing (DP) according to ISO 22476-2, Standard Penetration Test (SPT) according to ISO 22476-3, cone penetration tests (CPT) according to ISO 22476-1 and pressuremeter tests (PMT) according to ISO 22476-4, ISO 22476-6 and ISO 22476-8. These documents are being prepared.

Table 4 — Correlations to classify density terms

Term	Density index	
	$I_{ m D}$	
	%	
Very loose	0 to 15	
Loose	15 to 35	
Medium dense	35 to 65	
Dense	65 to 85	
Very dense	85 to 100	

5.3 Undrained shear strength of fine soils

The terms to be used for the designation of the undrained shear strength according to the results of laboratory and field tests are given in Table 5.

Table 5 — Undrained shear strength of fine soils

Undrained shear strength of clays	Undrained shear strength		
	$c_{ m u}$		
	kPa		
Extremely low	< 10		
Very low	10 to 20		
Low	20 to 40		
Medium	40 to 75		
High	75 to 150		
Very high	150 to 300		
Extremely high ^a	> 300		

^a Materials with shear strength greater than 300 kPa may behave as weak rocks and should be described as rocks according to ISO 14689-1.

NOTE When making an immediate (field) examination, the strength is estimated by manual tests or measured by a simple field test, e.g. pocket penetrometer or small vane apparatus.

Fine soils may also be classified according to their sensitivity, the ratio between the undisturbed and remoulded undrained shear strengths. The sensitivity is low (< 8), medium (8 - 30) or high (> 30); soils with sensitivities > 50 are described as quick clays.

5.4 Consistency index

Terms to be used for the designation of the consistency index $(I_{\rm C})$ of silts and clays where appropriate, are given in Table 6.

Table 6 — Consistency index $I_{\rm C}$ of silts and clays

Consistency of silts and clays	Consistency index $I_{\rm C}$
Very soft	< 0,25
Soft	0,25 to 0,50
Firm	0,50 to 0,75
Stiff	0,75 to 1,00
Very stiff	> 1,00

These subdivisions may be approximate, particularly in materials of low plasticity. Also, the strength of a clay may not be constant at a given consistency index. The liquidity index may be used as an alternative.

5.5 Other suitable parameters

Some other parameters may be used for soil classification for specific purposes such as:

- dry density;
- clay activity;
- mineralogical nature,
- saturation index;
- permeability;
- compressibility index $C_{\rm C}$;
- swelling index;
- carbonate index.

Annex A (informative)

Principles of soil classifications

The most common approach to classification is to divide the soils on the basis of particle size grading and plasticity. The division is made on the relative size fractions present for the coarser soil fractions, determined on the whole sample, and on the plasticity of the finer fractions (e.g. Table A.1).

The principles for establishing classifications to suit particular geological conditions or engineering problems are given in this standard.

Extensions or amplification of these principles at national or project level are possible and an example is given in Table A.1.

Particular classifications would normally be expected to quantify the boundaries or rules for categorization.

Table A.1 — Principles of a classification of soils

Criterion	Soil group	Quantification	Denomination	n into groups of	f similiar properties	Further subdivision as appropriate by
		most particles > 200 mm	Во	хВо		
Wet soil does not stick together	very coarse			boCo	соВо	Requires special consideration
		most particles > 63 mm	Со	saCo, grCo	sagrCo	
		most particles > 2 mm	Gr	coGr	cosaGr	Particle size (grading) Shape of grading curve
	coarse			saGr, grSa	sasiGr, grsiSa	Relative density Permeability
		most particles > 0,063 mm	Sa	siGr, clGr orSa	siSa, clSa, saclGr	(Mineralogy) (Particle shape)
	fine	low plasticity dilatant	Si	saSi	sagrSi saclSi	Plasticity Water content
Wet soils sticks together				clSi, siCl		Strength, sensitivity Compressibility, stiffness
		plastic non-dilatant	CI	orSi, orCl	sagrCl	(Clay mineralogy)
Dark colour, low density	organic		Or	saOr, siOr	clOr	Requires special consideration
Not naturally	Made ground	deposited	Mg	xMg	Man-made material	Requires special consideration
					Relaid natural materials	As for natural soils
Key to symbols Soil Boulders Cobbles Gravel Sand Silt Clay Organic Made ground	Principal Bo Co Gr Sa Si Cl Or	bo co gr Gr(gr) ar sa or coarse si cl or -	ondary or tertiary component Gr(gr) and Sa(sa) can be subdivided into fine F(f), medium M(m) or coarse C(c) any combination of components			Cases requiring special consideration should be classified according to national or project requirements

Annex B (informative)

Example of a classification of soils, based on grading alone

Figure B.1 and Table B.1 give an example of a possible soil classification, based on grading alone.

Key

sand content

fines content

(grain size < 63 mm)

clay content in % of

mixed-grained soils

(silty or clayey gravel and

(< 0,063 mm)

(0,063 mm to 2 mm)

1 63 mm)

3

5

6

sand) 7

sand)

soil

See also Table A.1.

S

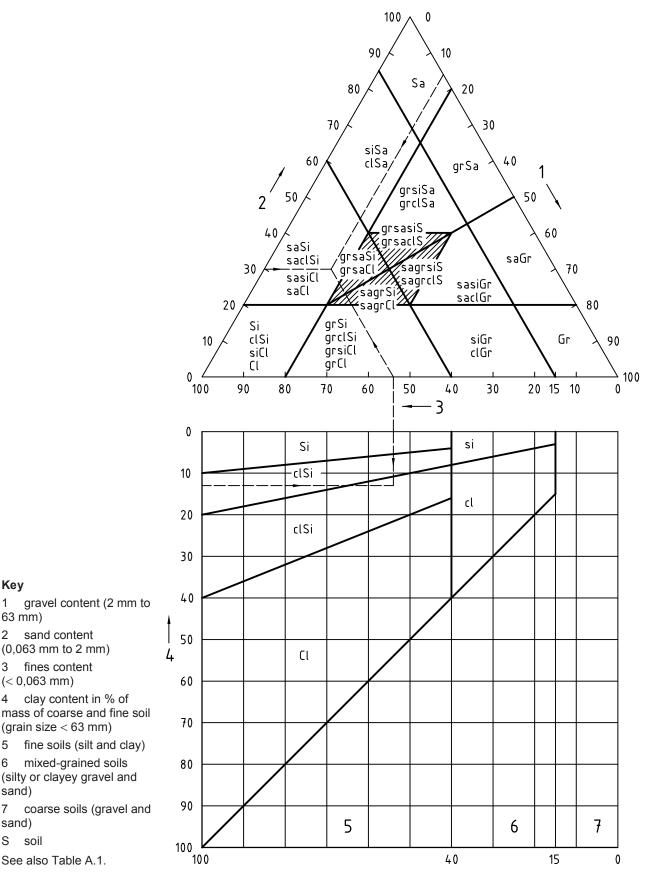


Figure B.1 — Classification of soils, based on grading alone

Table B.1 — Guiding values for the division of mineral soils on a basis of the contents of various fractions

Fraction	Content of fraction in	Content of fraction in	Name of soil	
	wt % of material ≤ 63 mm	wt % of material ≤ 0,063 mm	Modifying term	Main term
Gravel	20 to 40 > 40		gravelly	gravel
Sand	20 to 40 > 40		sandy	sand
Silt + clay (fine soil)	5 to 15	< 20 ≥ 20	slightly silty slightly clayey	
	15 to 40 > 40	< 20 ≥ 20 < 10 10 to 20	silty clayey clayey	silt silt
		20 to 40 > 40	silty	clay clay

Bibliography

- [1] ISO 22476-1, Geotechnical investigation and testing Field testing Part 1: Electrical cone and piezocone penetration tests
- [2] ISO 22476-2, Geotechnical investigation and testing Field testing Part 2: Dynamic probing
- [3] ISO 22476-3, Geotechnical investigation and testing Field testing Part 3: Standard penetration test
- [4] ISO 22476-4, Geotechnical investigation and testing Field testing Part 4: Menard pressuremeter test
- [5] ISO 22476-6, Geotechnical investigation and testing Field testing Part 6: Self-boring pressuremeter test
- [6] ISO 22476-8, Geotechnical investigation and testing Field testing Part 8: Full displacement pressuremeter test
- [7] EN 1997-2, Eurocode 7: Geotechnical design Part 2: Design assisted by laboratory testing

BS EN ISO 14688-2:2004 +A1:2013

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at http://www.bsi-global.com.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.

Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at http://www.bsi-global.com/bsonline.

Further information about BSI is available on the BSI website at http://www.bsi-global.com.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means — electronic, photocopying, recording or otherwise — without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager. Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553. Email: copyright@bsi-global.com.

BSI 389 Chiswick High Road London W4 4AL