

# Fasteners — Quality assurance system

The European Standard EN ISO 16426:2002 has the status of a  
British Standard

ICS 21.060.01

## National foreword

This British Standard is the official English language version of EN ISO 16426:2002. It is identical with ISO 16426:2002.

The UK participation in its preparation was entrusted to Technical Committee FME/9, Bolts, nuts and accessories (+ QA and hose clamps), which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

### Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

**Compliance with a British Standard does not of itself confer immunity from legal obligations.**

This British Standard, having been prepared under the direction of the Engineering Sector Policy and Strategy Committee, was published under the authority of the Standards Policy and Strategy Committee on 10 December 2002

### Summary of pages

This document comprises a front cover, an inside front cover, the EN ISO title page, the EN ISO foreword page, the ISO title page, pages ii to iv, pages 1 to 12, the Annex ZA page and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

### Amendments issued since publication

Amd. No.	Date	Comments
14383 Corrigendum No. 1	21 February 2003	Correction to EN ISO foreword page and addition of Annex ZA page

© BSI 21 February 2003

ICS 21.060.01

English version

## Fasteners - Quality assurance system (ISO 16426:2002)

Eléments de fixation - Système d'assurance qualité (ISO  
16426:2002)

Verbindungselemente - Qualitätssicherungssystem (ISO  
16426:2002)

This European Standard was approved by CEN on 15 October 2002.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**Management Centre: rue de Stassart, 36 B-1050 Brussels**

**CORRECTED 2003-02-05**

## **Foreword**

This document (EN ISO 16426:2002) has been prepared by Technical Committee ISO/TC 2 "Fasteners" in collaboration with Technical Committee CEN/TC 185 "Threaded and non-threaded mechanical fasteners and accessories", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2003, and conflicting national standards shall be withdrawn at the latest by May 2003.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

## **Endorsement notice**

The text of ISO 16426:2002 has been approved by CEN as EN ISO 16426:2002 without any modifications.

NOTE Normative references to International Standards are listed in Annex ZA (normative).

INTERNATIONAL  
STANDARD

**ISO**  
**16426**

First edition  
2002-11-15

---

---

**Fasteners — Quality assurance system**

*Éléments de fixation — Système d'assurance qualité*



Reference number  
ISO 16426:2002(E)



## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 16426 was prepared by Technical Committee ISO/TC 2, *Fasteners*.

Annex A of this International Standard is for information only.

## **Introduction**

This International Standard is the second in a series of two standards for mechanical fastener quality using a detection system and a prevention system respectively.

- ISO 3269 deals with acceptance inspection based on statistical sampling of fasteners at a given AQL level at the time of receiving and constitutes a detection system intended primarily for use by the customer.
- ISO 16426 deals with fully traceable mechanical fasteners which have been produced under a verifiable quality assurance system and constitutes a prevention system intended primarily for use by the fastener manufacturer.



# Fasteners — Quality assurance system

## 1 Scope

This International Standard specifies requirements for a fastener quality assurance system to be met by the fastener manufacturers and distributors. These requirements are intended to reduce or prevent the production of non-conforming fasteners with the objective of approaching zero defects for the characteristics specified.

This International Standard outlines the requirements from receipt of raw material through the manufacturing process to delivery at the distributor or the user, who is the installer.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 3269:2000, *Fasteners — Acceptance inspection*

ISO 9000:2000, *Quality management systems — Fundamentals and vocabulary*

ISO 15330:1999, *Fasteners — Preloading test for the detection of hydrogen embrittlement — Parallel bearing surface method*

## 3 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

### 3.1

#### **advanced quality planning**

process that facilitates an interpretation of design objectives into design requirements that are an integral part of the fastener quality plan, including process failure mode and effects analysis and control plans

### 3.2

#### **alter**

to perform any step after original manufacture which changes the geometry, mechanical properties or the performance characteristics of a mechanical fastener

### 3.3

#### **$C_{pk}$ value**

measure of the capability of the process in relation to the process average based on the distance in units of standard deviation between the process average and the closest specification limit for characteristics that have a normal distribution pattern

**3.4**

**customer**

organization or person that receives a product

NOTE The customer may be the user or a distributor.

[ISO 9000]

**3.5**

**commingling**

mixing of identical fasteners from different manufacturing lots in the same container or bin

**3.6**

**control plan**

outline of the fastener manufacturing process which identifies control points that provide procedures for controlling and minimizing process and product variation

**3.7**

**defect**

non-fulfilment of a requirement related to an intended or specified use

NOTE In the presence of a defect, the fastener will not function in its expected or intended use.

[ISO 9000]

**3.8**

**distributor (stockist)**

organization or person that purchases finished fasteners for resale to others and of which there are three types:

**3.8.1**

**alteration distributor**

distributor who alters fasteners prior to delivery

**3.8.2**

**pass-through distributor**

distributor who resells original manufacturer's containers of fasteners without repackaging or alteration of the fasteners

**3.8.3**

**repackaging distributor**

distributor who only repackages fasteners prior to delivery

**3.9**

**fastener characteristic**

dimensional, mechanical or performance feature of the fastener

**3.10**

**fastener quality assurance system**

fastener manufacturing system that generally incorporates such elements as a written control plan, which includes provisions for prototype development, initial production and full production, including **advanced quality planning** (3.1), continual improvement, defect prevention, and in-process controls of dimensional, mechanical and performance characteristics of the fastener

**3.11**

**lot contamination**

introduction of dissimilar fasteners or foreign substances or products into a manufacturing lot of fasteners

**3.12**

**manufacturer**

organization which purchases raw material and converts the material into a finished mechanical fastener

**3.13****manufacturing lot**

quantity of fasteners of a single designation including product grade, property class and size, manufactured from bar, wire, rod or flat product from a single cast, processed through the same or similar steps at the same time or over a continuous time period through the same heat treatment and/or coating process, if any

NOTE 1 Same heat treatment or coating process means:

- for a continuous process, the same treatment cycle without any setting modification;
- for a discontinuous process, the same treatment cycle for identical consecutive loads (batches).

NOTE 2 The manufacturing lot may be split into a number of manufacturing batches for processing purposes and then reassembled into the same manufacturing lot.

[ISO 15330]

**3.14****manufacturing lot number**

unique number assigned by the manufacturer and which allows full traceability from the finished product back through all previous manufacturing operations to a given heat or cast number of the raw material of manufacture

**3.15****non-conformity**

non-fulfilment of a requirement

[ISO 9000]

**3.16****non-conforming fastener**

fastener with one or more non-conformities

**3.17****non-conforming parts per million (ppm)**

number of non-conforming parts in a finished manufacturing lot of fasteners related to 1 million pieces

**3.18****product continual improvement**

orderly process intended to reduce variation, waste and testing frequencies while improving productivity, quality and customer satisfaction

**3.19****selected product characteristic**

characteristic which is critical for assembling and/or for the function of the fastener and is designated by the customer

**3.20****supplier**

organization or person that provides a product

NOTE The supplier may be the manufacturer or a distributor.

[ISO 9000]

**3.21****trace number**

alphanumeric code assigned by a distributor, which identifies the original manufacturer and manufacturing lot number

## 3.22

### **traceability of fasteners**

ability to determine or verify the history of a finished fastener through records of its identification, to establish its shipment, manufacturing process and the specific heat number of raw material from which it was manufactured

## 3.23

### **user**

organization or person that purchases or otherwise acquires fasteners and installs them for purposes of assembly or overhaul and maintenance

## 3.24

### **zero defect conception**

conception that establishes an objective that no fasteners with defects are present, within a given mechanical fastener lot, which impair their expected or intended use

## 4 Information to be provided by the customer

The customer shall specify this International Standard at the time of the order.

The order shall designate the selected product characteristics, if any, considering the intended application, or a reasonably foreseeable application and its consequence.

## 5 Requirements

### 5.1 General

The selected product characteristics as designated by the customer shall be included in the written control plan. This control plan is part of the quality assurance system to be used by the manufacturer.

The manufacturer and the customer shall agree on appropriate ppm and/or  $C_{pk}$  values and a method for evaluation for each respective selected characteristic.

For all other characteristics, the manufacturer may use the quality plan of his choice and the customer shall rely on ISO 3269 to evaluate the level of conformance of the purchased fasteners.

Fasteners manufactured under the conditions of this International Standard shall be delivered in manufacturing lots.

Fasteners shall correspond to the description and/or designation on the shipping document. The shipping document shall include at least the designation of the fasteners and the manufacturing lot number or trace number.

The label on the package shall include the manufacturer's or distributor's name or identification (including country of origin) and the manufacturing lot number or trace number, as well as the necessary information concerning the description and/or designation of the fasteners.

The manufacturer shall be able to provide documentation for any manufacturing lot, to prove the compliance of the fasteners to the specifications, and this shall include at least:

- heat analysis (chemical composition);
- heat treatment if applicable;
- mechanical properties;
- performance characteristics if applicable;
- dimensions;
- finish if applicable.

Documentation shall be provided to the purchaser only upon request. The manufacturer shall be able to provide full manufacturing lot documentation for a ten-year period from the date of the sale to the customer, provided the customer gives the manufacturing lot number to the manufacturer. The distributor shall be able to provide full manufacturing lot documentation for a ten year period from the date of the sale to the customer, provided the customer gives the manufacturing lot number or the trace number to the distributor.

## **5.2 Traceability**

Fasteners shall be traceable. The documentation for traceability shall be preserved by the manufacturer for at least ten years from the date of sale to the customer. The party responsible for alteration and/or repackaging of the fasteners shall also maintain full traceability for at least ten years from the date of sale to the customer.

In case of dispute, the supplier shall be able to provide all necessary information relating to the manufacturing lot number. The customer, upon opening the original packaging, assumes full responsibility for all subsequent traceability.

## **5.3 Lot integrity**

To maintain lot integrity, fastener manufacturing lots shall not be commingled.

## **5.4 Delivery**

All fasteners shall be delivered to the user in the manufacturer's or distributor's original, unopened, sealed package unless otherwise agreed with the user. Fasteners manufactured to specific ppm and/or  $C_{pk}$  values shall not be repacked.

## **5.5 Product continual improvement**

For those selected characteristics for which a reduction in ppm levels through product continual improvement is to be achieved, it is desirable that the user return to the manufacturer all non-conforming parts from a given lot discovered during assembly. They shall be analysed by the manufacturer in order to gain knowledge on how to improve the process.

# **6 Summary of responsibilities**

## **6.1 Responsibilities of the manufacturer**

The manufacturer shall:

- provide and maintain full documentation in accordance with 5.1;
- maintain traceability in accordance with 5.2;
- maintain lot integrity in accordance with 5.3.

## **6.2 Responsibilities of the distributor**

### **6.2.1 General**

The distributor of fasteners shall maintain lot traceability for each lot of fasteners purchased from a manufacturer who complies with this International Standard.

### **6.2.2 Responsibilities of the alteration distributor**

Any alteration carried out by the distributor transfers the responsibilities from the manufacturer to the alteration distributor.

### **6.2.3 Responsibilities of the repackaging distributor**

The repackaging distributor shall have in place verifiable procedures to prevent lot contamination, and to maintain all the original fastener characteristics as supplied by the manufacturer. Any repackaging carried out by the distributor transfers the responsibilities from the manufacturer to the distributor for those characteristics which may be affected by the repackaging operation.

## **6.3 Responsibilities of the user**

The user shall supply all the information required in clause 4.

Additionally, the user shall take all prudent measures to assure the integrity of the fasteners purchased in accordance with this International Standard.

## **7 Disposition of nonconforming lots**

### **7.1 General**

Records of disposition shall be maintained by the fastener supplier.

### **7.2 Manufacturer's options**

The manufacturer may choose one of the following options for the disposal of fastener lots that have been found to contain fasteners with non-conformities on his manufacturing plant.

- They may be scrapped.
- They may be 100 % inspected and any detected non-conforming parts removed.
- They may be reworked or reprocessed to correct the non-conforming characteristic(s).
- The user may be informed of the non-conformity or non-conformities and his advice requested on their disposal. If the user considers that the degree to which the characteristic(s) deviate(s) from specified requirements will have no significant effect on the assembly or performance of the fasteners in their service application, the user may authorize a written release of the fasteners for completion of production or for shipment, as applicable.

### **7.3 User's options**

Taking into consideration economical consequences, the user may agree with the supplier on one of the following options for the disposal of those fastener lots that have been rejected after delivery.

- If the user considers that the degree to which the characteristic(s) deviate(s) from specified requirements will have no significant effect on their performance in the intended service application, the user may authorize release of the parts or fastener lots for that use and advise the manufacturer in writing.
- They may be scrapped.
- They may be 100 % inspected and any detected non-conforming parts removed.
- They may be reworked or reprocessed to correct the non-conforming characteristic(s).
- They all may be returned.

If the supplier is a distributor, then the rework, inspection or reprocessing should be agreed with the fastener manufacturer.

#### **7.4 Distributor's options**

Taking into consideration economical consequences, the distributor may agree with the manufacturer on one of the following options for the disposal of those fastener lots that have been rejected after delivery.

- They may be scrapped.
- They may be 100 % inspected and any detected non-conforming parts removed.
- They may be reworked or reprocessed to correct the non-conforming characteristic(s).
- They all may be returned.

#### **7.5 Re-inspection**

All fastener lots that have been reworked and/or reprocessed shall be re-inspected for the characteristic(s) found to be non-conforming and all other characteristics that would be affected by the reworking or reprocessing operation(s). If no parts inspected are found to be non-conforming, the fastener lots may be approved for delivery or use as applicable.

## Annex A (informative)

### Considerations to achieve ppm values

#### A.1 State of the art in the production of fasteners

##### A.1.1 Aspects of mass production

With the requirements put upon the delivery quality of fasteners, by the customers, the special features of mass production are taken into account. The machines used today in the production of fasteners (e.g. presses, rollers) allow a flow rate of 60 parts per minute to 800 parts per minute depending on the type, size and operating cycle of the machine in use. The number of parts produced by a manufacturer can amount to up to several million per day, which requires special measures for maintaining the process capability. In addition, the parts are transferred into other vessels many times during the production process, the number of transfer operations depending on the length of the production chain (e.g., for cold heading, thread rolling, washing, quenching and tempering, surface treatment, applying corrosion protection, etc.) more than 20 times is not unusual. Special measures are taken to prevent mechanical damage (especially at points of impact) and to avoid contamination.

The quality objective, zero defects, cannot be realized with today's state-of-the-art methods. To achieve this aim, intermediate objectives are set by specifying criteria for evaluating the delivered quality of fasteners. In this International Standard, such criteria are based on non-conforming parts per million (ppm) and/or process capability ( $C_{pk}$ ) for specified characteristics.

##### A.1.2 Influences of the production process

The requirements on measurements and tolerances for certain characteristics are based on the production process applied (cold-forming processes, metal cutting treatment, heat treatment, etc.). Some examples are given below to illustrate this.

In the manufacture of fasteners, a number of production processes are reached by means of cold forming. The adherence to the tolerances depends not only on the material used but also on a number of other influencing factors; e.g., contours produced by means of free forming in open dies do not usually strictly adhere to tolerances as do those contours made by means of flowing material into closed dies. Sharp edges cannot always be avoided with certain cold forming processes. In such cases, it is often not possible to give clearly-defined tolerances or limit values.

In the production of threaded fasteners, there are differences in the screw threads based on the method in which the threads are formed which affect geometry, tolerances, roughness, thread laps, etc.

For screws with large length:diameter ratio, there is an increasing probability of warping (especially if the last stage of production involves a quenching and tempering heat treatment). The corresponding tolerances are specified considering the individual part and production method.

When coating the parts for corrosion protection, differences in the local thickness of the coating cannot be avoided and will vary depending on the part size and the coating method, and may cause differences in the local salt spray corrosion resistance. In such cases, depending on the type and geometry of the fastener, corrosion resistance is based on significant surfaces of the fastener. Adherence to completion of salt spray testing prior to shipment is not always practical because of the testing time required which may exceed several hundred hours. For this reason, corrosion resistance is assured by means of suitable production management measures utilizing in-process control. A quality judgement of this characteristic by evaluation of ppm is not possible. The same applies for the application of lubricants on fasteners to meet specified limits of coefficients of friction. The adherence to such a specification (e.g.,  $\mu_{tot} = 0,08$  to  $0,14$ ) can only be ensured by means of suitable production management measures utilizing in-process control, and checked by means of random testing.



These examples illustrate the need for close collaboration between the manufacturer, distributor and user.

## A.2 Repackaging considerations

Repackaging increases the risk of introduction of dissimilar fasteners or foreign parts and that of mechanical damage.

## A.3 Sources of non-conforming items and means to achieve specified ppm values

There are three sources of non-conforming item namely:

- fasteners with non-conforming characteristics;
- foreign or mixed parts (dissimilar fasteners);
- contaminants (metallic or non-metallic) which are not fasteners.

It is common practice to include only fasteners with non-conforming characteristics and dissimilar fasteners in the establishment of ppm values unless otherwise agreed. This is schematically illustrated in Figure A.1.

Foreign or mixed parts can result either from the manufacturer's production chain or the production chain of another party or from other sources.

Parts with non-conformities in measurements, geometry and other properties result from unsystematic or systematic process characteristics.

Examples of unsystematic process characteristics are:

- cracks in raw material, occlusions;
- welding points in wire;
- sporadic chipping in an extrusion die;
- parts with missing characteristics such as parts without threads or without knurl;
- threads with pitch errors;
- internal drive with excessive coating material, etc.

Examples of systematic process characteristics are measurement and/or tolerance deviations.


While unsystematic non-conformities cannot be recognized by statistical process control (SPC), systematic non-conformities can usually be limited by the application of SPC.

The application of SPC cannot guarantee the delivery of fasteners with non-conformities, on a statistical basis. If, for instance, a  $C_{pk}$  value of 1,33 for a single characteristic is assumed, this means that 99,994 % of the fasteners are within the specification for this particular characteristic. If the process is exactly centered, statistically, 0 to 60 fasteners per one million fasteners may then be outside the tolerance limits.

## A.4 Inspection

### A.4.1 General

To achieve specified ppm values one of the following inspection options may be applied, where inspection means to check parts for selected characteristics and to remove detected parts with non-conformities.

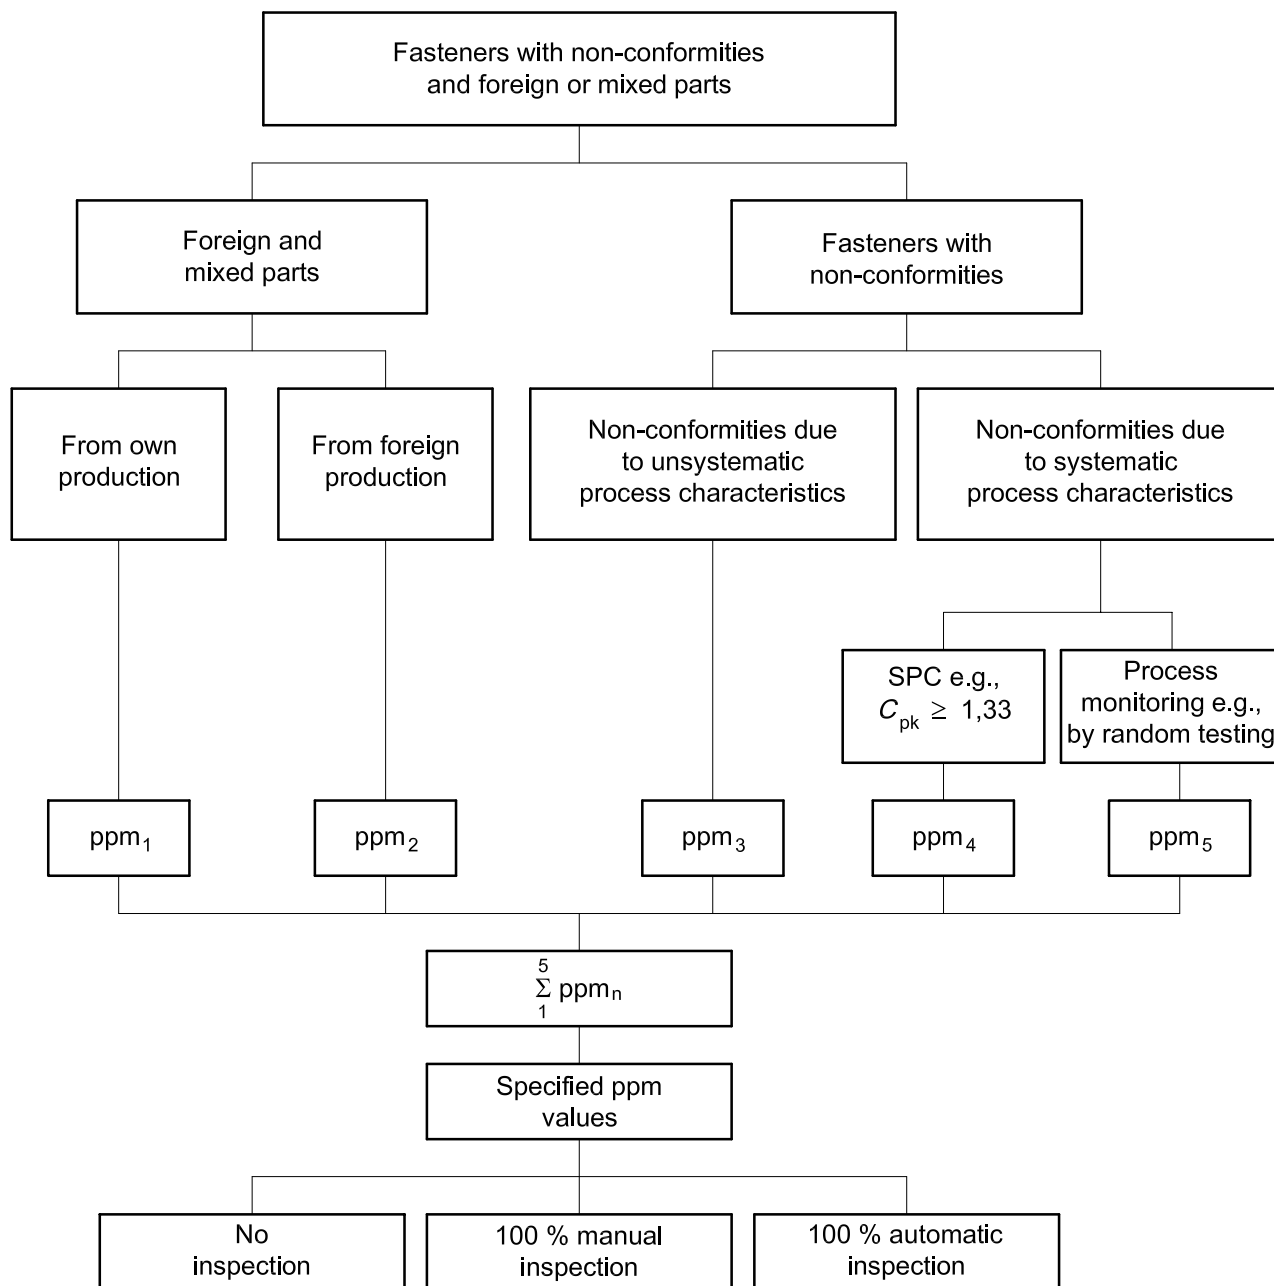

### A.4.2 Automatic inspection

With automatic inspection, individual or multiple characteristics can be inspected. Experience has shown that for one single specified characteristic, after automatic inspection there is still an average remaining level of non-conformities of about 10 ppm. With an automatic inspection process, usually four or five characteristics are checked simultaneously. So for these fasteners, on average, 50 ppm can be expected.

### A.4.3 Manual inspection

After 100 % manual inspection, remaining ppm values may be about 10 times higher than for fasteners which have been automatically inspected.

### A.4.4 Inspection limitations

There are characteristics where an evaluation of ppm values of a production or delivery lot by the manufacturer is not practical because these characteristics cannot be 100 % inspected. This applies, e.g., for characteristics that require destructive testing, such as testing for corrosion resistance, tensile testing, or testing for torque/tension relationship to check coefficients of friction. The requirements for such characteristics are assured by means of a suitable monitoring process, based on a written control plan.

If a characteristic is specified and is considered critical with respect to its intended use, all concerned parties are expected to take prudent measures to approach zero defects.

## A.5 Examples of characteristics for the establishment of quality criteria

Table A.1 shows some characteristics that the manufacturer and customer may include in an agreement for specified ppm values and/or  $C_{pk}$  values.

**Table A.1 — Examples of characteristics which may be specified**

Dimensions	Functions and forms	Mechanical and physical properties
Length	Thread	Hardness
Thread length	Internal drive	Tensile strength
Thread diameter	External drive	Surface discontinuities
Flange diameter	Prevailing torque element	Proof load
Head diameter	Form and position tolerances	
Shank diameter	Pilot point	
Head height	Washers present	
Nut height		
Depth of internal driving feature		
Width across flats		
Width across corners		

### A.6 Restriction for the establishment of $C_{pk}$ values

In the case of foreign and mixed parts, the specification of  $C_{pk}$  values is not possible since they are not statistically distributed. Only ppm values may be established for foreign or mixed parts.

## **Bibliography**

- [1] ISO 9001:2000, Quality management systems — Requirements

**Annex ZA**  
(normative)

**Normative references to international publications  
with their relevant European publications**

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

NOTE Where an International Publication has been modified by common modifications, indicated by (mod.), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN</u>	<u>Year</u>
ISO 3269	2000	Fasteners - Acceptance inspection	EN ISO 3269	2000
ISO 9000	2000	Quality management systems - Fundamentals and vocabulary	EN ISO 9000	2000
ISO 15330	1999	Fasteners - Preloading test for the detection of hydrogen embrittlement - Parallel bearing surface method	EN ISO 15330	1999

---

---

## BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

### Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001. Email: [orders@bsi-global.com](mailto:orders@bsi-global.com). Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

### Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: [info@bsi-global.com](mailto:info@bsi-global.com).

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001. Email: [membership@bsi-global.com](mailto:membership@bsi-global.com).

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

### Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager. Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553. Email: [copyright@bsi-global.com](mailto:copyright@bsi-global.com).