

BS EN ISO 16495:2013

Incorporating corrigendum February 2014



BSI Standards Publication

Packaging — Transport packaging for dangerous goods — Test methods (ISO 16495:2013)

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of EN ISO 16495:2013. It supersedes BS EN ISO 16104:2003 and BS EN ISO 16467:2003, which are withdrawn.

The UK participation in its preparation was entrusted by Technical Committee PKW/0, Packaging, to Subcommittee PKW/0/4, Packaging – Dangerous Goods.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014.

Published by BSI Standards Limited 2014

ISBN 978 0 580 84733 2

ICS 13.300; 55.020

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2013.

Amendments/corrigenda issued since publication

Date	Text affected
28 February 2014	Implementation of CEN correction notice 28 August 2013: Updates supersession information
	Implementation of ISO corrected text 1 September 2013: See ISO foreword for details

English Version

**Packaging - Transport packaging for dangerous goods - Test
methods (ISO 16495:2013)**

Emballages - Emballages de transport pour marchandises
dangereuses - Méthodes d'essai (ISO 16495:2013)

Verpackung - Verpackungen zur Beförderung gefährlicher
Güter - Prüfverfahren (ISO 16495:2013)

This European Standard was approved by CEN on 12 July 2013.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Foreword

This document (EN ISO 16495:2013) has been prepared by Technical Committee ISO/TC 122 "Packaging" in collaboration with Technical Committee CEN/TC 261 "Packaging" the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2014, and conflicting national standards shall be withdrawn at the latest by February 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 16104:2003, EN ISO 16467:2003.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 16495:2013 has been approved by CEN as EN ISO 16495:2013 without any modification.

Contents

Page

Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Test report.....	2
5 Selection and preparation of packaging, IBCs and large packaging for testing.....	2
5.1 Selection of packaging, IBCs and large packaging.....	2
5.2 Information to be provided with packaging, IBCs and large packaging.....	2
5.3 Selection of contents and filling of packaging, IBCs and large packaging prior to testing.....	3
5.4 Closing packaging, IBCs and large packaging.....	5
5.5 Check of design type specification with requirements.....	6
5.6 Conformity check of test samples with design type specification.....	6
6 Test methods.....	7
7 Facilities for testing.....	7
7.1 General requirements.....	7
7.2 Accuracy of measurement equipment.....	7
7.3 Accuracy of measurements in testing.....	8
7.4 Climatic conditions.....	8
Annex A (normative) Test report.....	9
Annex B (normative) Packaging specifications.....	11
Annex C (normative) IBC specifications.....	22
Annex D (normative) Large packaging specifications.....	29
Annex E (informative) Type of contents.....	32
Annex F (normative) Drop test.....	33
Annex G (normative) Leakproofness test.....	36
Annex H (normative) Hydraulic pressure test.....	38
Annex I (normative) Stacking test.....	40
Annex J (normative) Water spray test.....	44
Annex K (normative) Bottom lift test.....	45
Annex L (normative) Top lift test.....	46
Annex M (normative) Tear test.....	47
Annex N (normative) Topple test.....	48
Annex O (normative) Righting test.....	49
Annex P (normative) Puncture test.....	50
Annex Q (normative) Vibration test.....	51
Bibliography.....	52

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

The committee responsible for this document is CEN/TC 261, *Packaging*, in collaboration with Technical Committee ISO/TC 122, *Packaging*, Subcommittee SC 3, *Performance requirements and tests for means of packaging, packages and unit loads* in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This first edition of ISO 16495 cancels and replaces ISO 16104:2003 and ISO 16467:2003, which have been technically revised.

This corrected version includes the above revision details, which were missing in the original.

Introduction

This International Standard was developed to provide requirements and test procedures to meet the multi-modal United Nations Recommendations on the Transport of Dangerous Goods Model Regulations referred to as “UN recommendations” throughout this International Standard, and successful passing of the tests may lead to the allocation of an appropriate UN packaging mark. The UN Recommendations have been developed by the United Nations Sub Committee of Experts on the Transport of Dangerous Goods as a ‘model regulation’ in the light of technical progress, the advent of new substances and materials, the exigencies of modern transport systems and, above all, the need to ensure the safety of people, property and the environment. Amongst other aspects, the UN Recommendations cover principles of classification and definition of classes, listing of the principal dangerous goods, general packing requirements, testing procedures, marking, labelling or placarding, and shipping documents. There are in addition special recommendations related to particular classes of goods.

The UN Recommendations are given legal entity by the provisions of a series of international modal agreements and national legislation for the transport of dangerous goods. The international agreements include the following:

- The European Agreement concerning the International Carriage of Dangerous Goods by Road (ADR) (covering most of Europe).^[1]
- Regulations concerning the International Carriage of Dangerous Goods by Rail (RID) (covering most of Europe, parts of North Africa and the Middle East).^[2]
- The International Maritime Dangerous Goods Code (IMDG Code) (worldwide).^[3]
- The International Civil Aviation Organization’s Technical Instructions for the Safe Transport of Dangerous Goods by Air (ICAO TIs) (worldwide).^[4]

The application of this International Standard will need to take account the requirements of these international agreements and the relevant national regulations for domestic transport of dangerous goods.

It is important to note that there will be certain modal differences from the UN Recommendations and that the schedule for revision of the Recommendations and modal provisions may lead to temporary inconsistencies with this International Standard.

It is noted that success in the tests and the allocation of an official UN mark do not on their own authorize the use of a packaging for any dangerous goods, which are subject to the packing instructions published in the various modal regulations.

This International Standard is based on Revision 17 of the UN Recommendations.

Packaging — Transport packaging for dangerous goods — Test methods

1 Scope

This International Standard specifies the information needed for the design type testing of packaging, Intermediate Bulk Containers (IBCs) and large packaging intended for use in the transport of dangerous goods.

NOTE 1 This International Standard can be used in conjunction with one or more of the international regulations set out in the Bibliography.

NOTE 2 The term “packaging” includes packaging for Class 6.2 infectious substances according to the United Nations.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2206:1987, *Packaging — Complete, filled transport packages — Identification of parts when testing*

ISO 2248:1985, *Packaging — Complete, filled transport packages — Vertical impact testing by dropping*

ISO 2875:2000, *Packaging — Complete, filled transport packages and unit load — Water-spray test*

ISO/IEC 17025:2005, *General requirements for the competence of testing and calibration laboratories*

United Nations Recommendations on the Transport of Dangerous Goods — Model Regulations

3 Terms and definitions

For the purposes of this document, the terms and definitions given in the UN Recommendations, Chapter 1.2.1, and the following apply.

3.1

brimful capacity

volume of water in litres held by the packaging, IBC, inner packaging of a combination packaging and/or large packaging, when filled through the designed filling orifice to the point of overflowing in its normal position of filling, and considered for testing purposes as maximum capacity

3.2

nominal capacity

capacity in litres which, by convention, is used to represent a class of packaging of a similar brimful capacity

3.3

single packaging

means of packaging that does not require an inner packaging to be capable of performing its containment function and it includes composite packaging

4 Test report

All packaging, IBCs and large packaging tested for conformity with the UN Recommendations shall be the subject of a test report (in accordance with [Annex A](#)) which should include a specification check prepared in accordance with [Annex B, C](#) or D. It shall be possible to specifically identify the packaging, IBC and large packaging relative to each test report, either by the retention of uniquely referenced packaging, IBCs and large packaging or by inclusion of sufficient photographs and/or drawings with unique references to enable identification of the packaging, IBCs and large packaging and all its components.

5 Selection and preparation of packaging, IBCs and large packaging for testing

For the selection and preparation of packaging, IBCs and large packaging for testing the type of contents, (liquid, viscous or solid) is decisive.

NOTE Guidance on the determination of the type of contents given in [Annex E](#).

5.1 Selection of packaging, IBCs and large packaging

Sufficient numbers of packaging, IBCs and large packaging per design type shall be selected for testing and

- a) shall be examined for damage which might invalidate the tests, in which event the packaging, IBCs and large packaging shall be replaced,
- b) shall be marked with a test reference which shall also be entered on the test record and later used on the test report, and
- c) the different parts of the packaging shall be identified in accordance with ISO 2206, and
- d) shall be individually weighed to establish the tare or filled gross mass.

NOTE 1 The form of such weighing can vary according to whether the packaging, IBCs and large packaging have been supplied full or empty to the test station. Where the masses of individual empty packaging, IBCs and large packaging are recorded, it is necessary to record only a typical filled gross mass (or vice versa).

NOTE 2 Under some circumstances it can be desirable to have a range of packaging, IBCs and large packaging tested.

Examples include

- in a number of different sizes but of the same construction,
- with variety of closures,
- for use with a range of solid contents.

In such situations selective testing procedure can be used to avoid testing of every possible permutation. The competent authority can allow this procedure after consultation.

5.2 Information to be provided with packaging, IBCs and large packaging

5.2.1 General

Each packaging, IBCs and large packaging type shall be accompanied by a specification for that design type containing the data set outlined in [Annex B, C](#) or D and by the following additional information contained in [5.2.2](#) to [5.2.6](#) as appropriate.

5.2.2 Test contents - Using water and non-dangerous substances

Where the tests are to be carried out using water or other non-dangerous substances, a statement of the packing group for which the packaging is to be tested shall be provided, together with data, enabling

appropriate selection of inert test contents. For liquids, such data shall include the required maximum relative density for the tests together with data on, for instance, the internal pressure test required. For solids, such data shall include mass, grain size and any other relevant characteristics, for example, bulk density, angle of repose etc., to clearly show equivalence of physical characteristics.

5.2.3 Test contents - Using the dangerous substance

Where the tests are to be carried out using the dangerous substance(s) to be transported, a statement of their packing group and their physical characteristics shall be provided. (See for example Safety Data Sheet) Liquids shall be defined by their relative density together with viscosity and method of determination. Solids shall be defined by their mass and grain size and any other relevant characteristic, for example, bulk density, angle of repose etc. to ensure physical characteristics are sufficiently identified and included. This data shall be recorded in the test report (see [Annex A](#)).

Where the tests are carried out using the actual substance to be transported then they shall be applicable for other substances having the same or similar characteristics.

5.2.4 Vapour pressure

For liquids, the vapour pressure (at a given temperature) of the substance to be carried or the hydraulic pressure to be achieved during the tests shall be provided.

5.2.5 Test contents - Using articles

Where the packaging and large packaging is intended for the transport of (an) article(s), a statement of the packing group, an appropriate description and drawing(s) of the article(s) and or photographs and details of the way in which dummy articles were filled for the purpose of testing shall be provided.

5.2.6 Closing instructions

Any special filling or closing instructions including, where relevant, the closure torque, or taping patterns shall be provided.

5.2.7 Handling characteristics of IBCs and large packaging

Each IBC and large packaging design shall be accompanied by a statement of its mechanical handling characteristics. This shall relate to bottom lift, top lift or both, as applicable, and number of identical items to be stacked during transport.

5.3 Selection of contents and filling of packaging, IBCs and large packaging prior to testing

5.3.1 General

Single packaging, IBCs, the inner packaging of combination packaging and large packaging shall be filled for drop and stacking tests to not less than

- 98 % of brimful capacity for liquids, and
- 95 % of brimful capacity for solids.

NOTE There can be exceptions, some flexible packaging (see [5.3.4](#)) and some packaging designed to be transported part full (see [5.3.5](#)).

Packaging, IBCs, the inner packaging of combination packaging and large packaging for liquids, or those capable of containing liquids, shall have their capacity determined as in [5.3.3](#). Other packages the capacity shall be determined by other suitable means e.g. by calculation.

5.3.2 Packaging, IBC, inner packaging of combination packaging and large packaging to contain liquids

5.3.2.1 Determination of brimful capacity

The brimful capacity is determined for example by: weighing the empty packaging/IBC/inner packaging including closures (mass empty (m) in kg) and weighing the packaging/IBC/inner packaging full (mass brimful (W) in kg). The packaging/IBC/inner packaging shall be filled with water until the water just overflows and then fitting the closure and any surplus mopped up. No steps shall be taken, e.g. by tilting or tapping the packaging/IBC/inner packaging, to enable water to penetrate into a hollow handle/lifting feature or other design feature above the closure.

The following formula expresses the brimful capacity:

$$b = \frac{W - m}{d}$$

where

- b is the brimful capacity in litres;
- W is the mass in kilograms, of packaging/IBC/inner packaging when brimful with water;
- m is the mass in kilograms, of the empty packaging/IBC/inner packaging;
- d is the density of water (=1) in kg/l.

5.3.2.2 Filling of the packaging/IBC/inner packaging

When filling test samples of the above with liquids, at least one sample shall have its capacity and filling level determined as below. Further samples of that design type shall be filled using a dipstick calibrated on the first sample or by mass or volume. The calculation of required volume of liquids for testing shall be:

$$C = \frac{b \times 98}{100}$$

where

- C is the required volume of water in litres;
- b is the brimful capacity in litres.

5.3.3 Rigid packaging, rigid IBCs, inner packaging of combination packaging and large packaging to contain solids

Where the packaging/IBC/inner packaging is capable of containing liquids the capacity shall be determined as in [5.3.2.1](#).

The calculation of required mass of solids for testing shall be:

$$M = \frac{(b \times d) \times 95}{100}$$

where

- M* is the required mass in kilograms, of solids;
- b* is the brimful capacity either measured or calculated in litres;
- d* is the bulk density of the test contents in kg/l.

Alternatively, for cylindrical packaging/IBC/inner packaging the level of fill required to fill the packaging/IBC/inner packaging to at least 95 % of its brimful capacity shall be calculated from its internal height, taking into account any reduction in height caused by the fitting of the closure.

This procedure is not suitable for bags (see [5.3.5](#)).

5.3.4 Flexible packaging, flexible inner packaging and flexible IBCs to contain solids

Flexible packaging/ flexible inner packaging (bags) and flexible IBCs shall be filled to the required testing mass at which the designer of the flexible packaging/ flexible inner packaging and flexible IBCs intends it to be used or, if known, to the capacity which the user intends to employ using either the substance to be transported or solids of similar characteristics in respect of mass, grain size and flow characteristics; the test contents used shall be recorded in the test report.

5.3.5 Packaging/inner packaging designed to be used part full

Packaging/inner packaging designed to be transported with filling test levels less than 98 % for liquids or less than 95 % for solids shall be filled as prepared for transport to the capacity the user intends to employ. The filled volume and mass shall be recorded in the test report.


5.4 Closing packaging, IBCs and large packaging

5.4.1 Drums, jerricans, composites and inner packaging, IBCs

Screw type closures shall be tightened to the torque specified by the applicant where appropriate before conditioning, or when specified during or after the conditioning period and shall be recorded in the test report.

Closure torque shall be the same for all tests. If it is necessary to revise a closure torque following a failure in one test, then all tests shall be completed using that torque setting.

Where vented closures are intended for use in the packaging, they shall be fitted for drop and stacking tests. Packaging fitted with vented closures shall be filled and after closing be inverted or laid on their side (see [Figure 1](#)) and observed for leakage for a period of 5 min. Leakage from the closure vent will result in termination of the test.

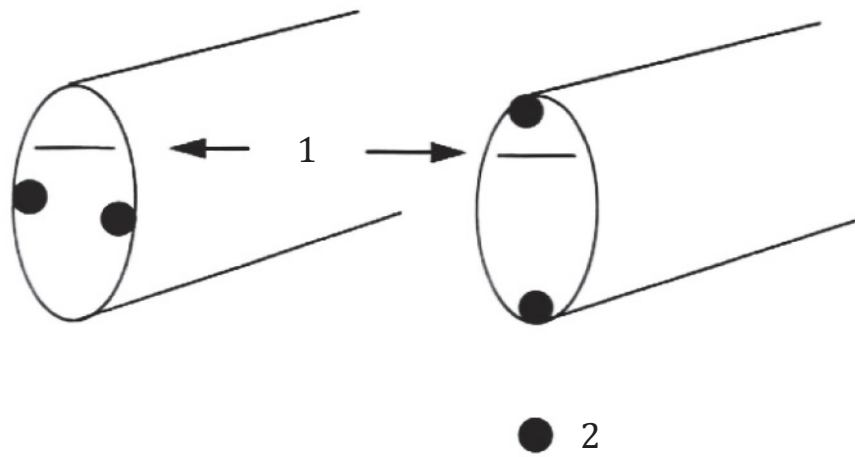

a) acceptable

b) unacceptable

Key

- 1 liquid level
- 2 closure

Figure 1 — Packaging fitted with vented closure, laid on their side

5.4.2 Bags

The packaging shall be closed as it would be for transport.

To ensure that the test packagings are closed in a manner representative of production packaging, the same equipment and the same filling time should be used whenever practicable.

5.4.3 Other packaging

Packaging for solids shall be filled as in [5.3.4](#) and closed in accordance with any special instructions including any fitments, cushioning etc.

The closure elements used to secure the packaging (e.g. closure tape, where applicable), shall be defined in accordance with the specifications (see [Annex B, C](#) or D).

5.5 Check of design type specification with requirements

Following receipt of the samples(s) and their specification (see [5.2.1](#)), a check shall be made that the design type corresponds with the definition of the type and all additional constructional requirements set out for the type in the UN Recommendations.

5.6 Conformity check of test samples with design type specification

The specification of a representative sample of the packaging, IBC and large packaging to be tested shall be checked by visual inspection and actual measurements as detailed in [Annex B, C](#) or D. Aspects such as external dimensions shall be checked at this preparatory stage. A record of each specification check shall be included in the test report. Where a checked sample is found to be outside of the specification tolerances the samples shall not be accepted as the same design type.

NOTE Aspects (other than external dimensions), such as measurements of material thickness, can be carried out on completion of the test(s).

6 Test methods

Test methods to be followed are specified in the UN Recommendations on the Transport of Dangerous Goods. Additional provisions are described in the following annexes:

[Annex F](#) Drop test

[Annex G](#) Leakproofness test

[Annex H](#) Hydraulic pressure test

[Annex I](#) Stacking test

[Annex J](#) Water spray test

[Annex K](#) Bottom lift test

[Annex L](#) Top lift test

[Annex M](#) Tear test

[Annex N](#) Topple test

[Annex O](#) Righting test

[Annex P](#) Puncture test

[Annex Q](#) Vibration test

7 Facilities for testing

7.1 General requirements

Tests shall be carried out at a testing facility capable of meeting the operational provisions specified in Clause 5 of ISO/IEC 17025:2005.

NOTE 1 This does not imply a requirement for accreditation but if appropriate such external approval can be obtained from either a national accreditation body or from the competent authority.

NOTE 2 Testing staff can find it useful to have knowledge of the principles of the dangerous goods regulations as set out in the UN Recommendations.

7.2 Accuracy of measurement equipment

The accuracy of measuring equipment shall be more precise than the accuracy of the measurements in testing, as specified in [7.3](#), unless otherwise approved by the competent authority. The measuring equipment shall be calibrated in accordance with ISO/IEC 17025.

7.3 Accuracy of measurements in testing

Measurement equipment shall be selected such that the uncertainties of individual measurements shall not exceed the following values:

Mass in kilograms (kg):	± 2 %
Pressure in kilopascals (kPa):	± 3 %
Distance/ length in millimetres (mm):	± 2 %
Temperature in degrees Celsius (°C):	± 1 °C
Humidity in percentage (%):	Tolerances are as specified in the agreed test methods
Time in minutes (min):	± 3 %
Torque in Newton metres (Nm):	± 10 %

NOTE For some measurements the tolerances can be lower in order to have meaningful measurements, e.g. when measuring masses or dimensions of empty packaging.

Where only maximum or minimum values are specified in this International standard and the UN recommendations, tolerances are one-sided.

7.4 Climatic conditions

There shall be adequate climatic facilities to meet the requirements of conditioning during tests.

Annex A **(normative)**

Test report

A.1 Test facility (name and address)

This shall be the organization that undertook the actual testing. The front page of the report shall be on the headed paper of the test facility. If headed paper is not available the report shall be clearly traceable to the author and the test facility.

A.2 Applicant (name and address)

The applicant can be the manufacturer, the user of the packaging/IBC/large packaging or any person in the packaging chain.

A.3 Report number

This shall be a number which enables full traceability back to the original test facility working documents that refer to the original test. The report number shall appear on every page of the report and any annexes. Any subsequent amendments shall include the number and clearly show it is an amendment to or an addition to the original report.

A.4 Date

This shall be the date the report was completed, rather than the date that testing was completed. The report shall also include the date of the start and completion of the tests and the date of receipt of test items.

A.5 Manufacturer

The test report shall include the manufacturer of the packaging.

Note: As packaging/IBC/large packaging specifications (see [Annex B/C/D](#)) are a part of the report, the manufacturer's name in the main body of the report can be ignored, provided that this is clearly stated in one of the annexes which can be clearly linked to the main report.

A.6 Packaging/IBC/large packaging description

The description of the packaging design type (including dimensions, closures) shall include the method of manufacture (e.g. blow moulding).

The main report shall include a general description of the packaging/IBC/large packaging. Full details of the packaging/IBC/large packaging components and material shall be included either in the specification (see [Annex B, C](#) or [D](#)) (provided there is a clear link between it and the main report) or in the main report. A check for conformity with the relevant definition in the regulations shall be included.

NOTE It can also include drawing(s) and/or photographs.

A.7 Capacities

The test report shall include the nominal capacity and the brimful capacity as defined in 3.1 in litres. For packaging/IBC/large packaging for liquids, the test report shall include brimful capacity in litres. For packaging/IBC/large packaging for solids (including inner packaging and articles) the test report shall include the gross mass in kg.

A.8 Test contents

Characteristics of test contents shall include, for example, viscosity and relative density for liquids and bulk density, particle size for solids and angle of repose.

A.9 Test description and results

The report shall identify the number of packaging/IBC/large packagings as submitted for testing.. Each packaging/IBC/large packaging sample shall have a unique identification number which shall be documented. There shall be a description of each test and how it was performed.

The report shall include a conclusion clearly indicating the packing group and the test levels achieved particularly hydraulic pressure for liquid packaging/IBC and the maximum gross mass and density for combination packaging/large packaging.

Where a competent authority has agreed to deviations from the standard methods set out in this International Standard, reference to such authorization shall be included in the test report.

A.10 Signature

The test report shall be signed with the name and status of the signatory.

The person who was responsible for the testing, shall sign the report against his/her typed name and position in the laboratory. That person might be the tester or his/her supervisor.

The report shall include the following statements:

‘This packaging was tested as prepared for transport in accordance with the provisions of part ... of Chapter ... of the UN Recommendations, in particular sections’

‘The use of other packaging methods or components shall render it invalid.’

A copy of the test report shall be available to the competent authority.

NOTE 1 The competent authority can require the test report to be retained for a specified period of time.

NOTE 2 The competent authority can require the reference to relevant regulations.

Annex B (normative)

Packaging specifications

To assist in the identification of a packaging, following the issue of a test report it is necessary to have a detailed specification. The following [Tables B.1](#) to [B.4](#), correlate the different packaging types with data that is necessary for the identification of test packagings by users, test facilities and competent authorities. There are four parts to this annex:

- 1 Drums, jerricans, and composite packagings [Table B.1](#);
- 2 Boxes and composite packagings (in the shape of a box) [Table B.2](#);
- 3 Bags [Table B.3](#);
- 4 Inner receptacles of composite packagings [Table B.4](#).

Examples of how this specification data may be represented in paper form are to be found at <http://standards.iso.org/iso/16495/>

The specification check shall be done visually and where relevant by measuring main dimensions and thicknesses. The specification check data as measured on the test samples shall be recorded and shall be compared with the design type specification including manufacturing tolerances.

Table B.1 — Specification detail single packaging – Drums, Jerricans, Composite packagings

		Single Packaging and outer packaging of combination packagings																		Remov- able fittings in combina- tion packag- ings	Perma- nent fittings in combina- tion packag- ings		
		1 Drum									3 Jerrican						6 Composite Packaging						
Nr		A1	A2	B1	B2	D	G	H1	H2	N	A1	A2	B1	B2	H1	H2	P	HA1	HB1	HD1	HG1	HH1	
1	Packaging description (code and, if nec., trade name)	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
2	Manufacturer's name and address and manu- facturing facility (if dif- ferent)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3	Method of construction	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
4	Nominal capacity	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
5	Brimful capacity	+	+	+	+			+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
6	Diameter, nominal (cylindrical) internal	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•
7	Diameter, external at widest point	+	+	+	+	+	+	+	+	+								+	+	+	+	+	+
8	Narrowest diameter(s) (conical i.e. pails)	+	+	+	+	+	+	+	+	+													
9	Body/section dimensions (non-circular)										+	+	+	+	+	+	+						
10	Recess of ends	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].

• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.

∇ Minimum wall thickness has to be measured.
empty = not applicable.

Table B.1 (continued)

		Single Packaging and outer packaging of combination packagings														Remov- able fittings in combina- tion packag- ings	Perma- nent fittings in combina- tion packag- ings						
		1 Drum							3 Jerrican									6 Composite Packaging					
Nr		A1	A2	B1	B2	D	G	H1	H2	N	A1	A2	B1	B2	H1	H2	P	HA1	HB1	HD1	HG1	HH1	
11	Height overall	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
12	Stacking height	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
13	End seams type	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
14	Side seam type	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
15	Handles, material type, number and position	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
16	Closure(s), diameter(s) and design	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
17	Closure(s), (or neck(s)) position(s)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
18	Closure(s), material(s)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
19	Closure(s), type, identification (marking)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
20	Closure(s), thread, type and pitch	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
22	Closure manufacturer's name and address	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
23	Closure torque(s)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].

• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.

∇ Minimum wall thickness has to be measured.

empty = not applicable.

Table B.1 (continued)

		Single Packaging and outer packaging of combination packagings																		Remov- able fittings in combina- tion packag- ings	Perma- nent fittings in combina- tion packag- ings		
		1 Drum									3 Jerrican											6 Composite Packaging	
Nr		A1	A2	B1	B2	D	G	H1	H2	N	A1	A2	B1	B2	H1	H2	P	HA1	HB1	HD1	HG1	HH1	
24	Type of overseal	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
25	Closure(s)/Lid seal, material	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
26	Neck internal diameter	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
28	Neck height (external)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
31	Tare mass	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
32	Wall thickness, top head, bottom head, body, removable head	+	+	+	+	+	+	∇	∇	+	+	+	+	+	∇	∇		+	+	+	+	+	+
33	Material type and grade (polymer), top head, bottom head, body, removable head	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
39	Body corrugations, number	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
40	Body corrugation, heights	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
41	Rolling hoops, number, height and location	•	•	•	•	•	•	•	•	•													

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].

• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.

∇ Minimum wall thickness has to be measured.

empty = not applicable.

Table B.1 (continued)

		Single Packaging and outer packaging of combination packagings																		Remov- able fittings in combina- tion packag- ings	Perma- nent fittings in combina- tion packag- ings					
		1 Drum									3 Jerrican											6 Composite Packaging				
Nr		A1	A2	B1	B2	D	G	H1	H2	N	A1	A2	B1	B2	H1	H2	P	HA1	HB1	HD1	HG1	HH1				
42	Closing ring, descrip- tion, material	•		•	•	•	•		•							•										
43	Closing ring material	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
44	Thickness closing ring	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
45	Number of plies / Gram- mage per ply body, and combined (body)					•																				
47	Inner lining or coating type and material	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
48	Chime reinforcement					•																				
49	Method of lid retention (other than closing ring)					•																				
50	[Mass of body / inner receptacles]							+	+						+	+	+	+	+	+	+	+	+			
51	Design standard, draw- ing, or style	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
52	Dimension (l x w x h)																						+			

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].

• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.

∇ Minimum wall thickness has to be measured.
empty = not applicable.

Table B.1 (continued)

		Single Packaging and outer packaging of combination packagings																		Remov- able fittings in combina- tion packag- ings	Perma- nent fittings in combina- tion packag- ings					
		1 Drum									3 Jerrican											6 Composite Packaging				
Nr		A1	A2	B1	B2	D	G	H1	H2	N	A1	A2	B1	B2	H1	H2	P	HA1	HB1	HD1	HG1	HH1				
58	Grammage by paper and paper type																							•		
60	Corrugated combined grammage																								+	
86	Manufacturer of the inner receptacle and the outer packaging Responsible company for the assembling of the complete container																•	•	•	•	•	•	•			
87	Quantity or number																							•	•	
88	Location(s)																							•	•	
89	Means of fixing to pack-aging																								•	
90	Orientation and arrange-ment of inner packagings in outer packaging																							•		
+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].																										
• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.																										
▽ Minimum wall thickness has to be measured.																										
empty = not applicable.																										

Table B.2 — Specification detail single packaging – Boxes, Composite packaging

		Single Packaging														Removable fittings in combination packagings	Permanent fittings in combination packagings	
Nr		4 Box								6 Composite Packaging								
		A	B	C	D	F	G	H1	H2	N	HA2	HB2	HC	HD2	HG2			HH2
1	Packaging description (code and, if necessary, trade name)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
2	Manufacturer's name and address	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3	Method of construction	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
9	Dimension internal l × w × h	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
12	Stacking height	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
15	Handles, material type, number and position	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
31	Tare mass	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	
32	Wall thickness, top head, bottom head, body, removable head	+	+	+	+	+	+	∇	+	+	+	+	+	+	+	+	+	
33	Material type and grade, for various parts top head, bottom head, body, removable head	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].

• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.

∇ Minimum wall thickness has to be measured.

■ Has not been clarified yet.

empty = not applicable.

Table B.2 (continued)

		Single Packaging														Removable fittings in combination packagings	Permanent fittings in combination packagings
		4 Box							6 Composite Packaging								
Nr		A	B	C	D	F	G	H1	H2	N	HA2	HB2	HC	HD2	HG2	HH2	
51	Design standard, drawing, or style	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	■
52	Dimension (l x w x h)								+								+
53	Closures, number, type, position and materials	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
54	Reinforcements, type, position and materials	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
55	Material ends	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
56	Method of joining elements	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
57	Manufacturing join(s)																
58	Grammage by paper and paper type																■
59	Corrugated flute type																
60	Corrugated combined grammage																■
61	Edge compression test (ECT)																
62	Burst strength																

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].

• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.

▽ Minimum wall thickness has to be measured.

■ Has not been clarified yet.

empty = not applicable.

Table B.2 (continued)

Nr	Single Packaging														Removable fittings in combination packagings	Permanent fittings in combination packagings		
	4 Box							6 Composite Packaging										
	A	B	C	D	F	G	H1	H2	N	HA2	HB2	HC	HD2	HG2	HH2			
63							•											
64						•								•				
65						•								•				
66						•								•				
67						•								•				
87																		■
88																		■
89																		■
90																		■
91						+									+			

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].

• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.

▽ Minimum wall thickness has to be measured.

■ Has not been clarified yet.

empty = not applicable.

Table B.3 — Specification detail single packaging – Bags

Single Packaging										
Nr		5 Bags								
		H1	H2	H3	H4	L1	L2	L3	M1	M2
1	Packaging description (code and, if nec., trade name)	•	•	•	•	•	•	•	•	•
2	Manufacturer's name and address	•	•	•	•	•	•	•	•	•
3	Method of construction	•	•	•	•	•	•	•	•	•
31	Tare mass	+	+	+	+	+	+	+	+	+
52	Dimension external (l × w)	+	+	+	+	+	+	+	+	+
68	Style	•	•	•	•	•	•	•	•	•
69	Gusset, open width	+	+	+	+	+	+	+	+	+
70	Bottom width, flat unopened	+	+	+	+	+	+	+	+	+
71	Valve width	+	+	+	+	+	+	+	+	+
73	Closure method (top, base, side)	•	•	•	•	•	•	•	•	•
74	Perforations	•	•	•	•	•	•	•	•	•
75	Sewing, style and density of stitches	•	•	•	•	•	•	•	•	•
76	Type of thread and minimum breaking load	•	•	•	•	•	•	•	•	•
78	Adhesive, type	•	•	•	•	•	•	•	•	•
79	Fabric (warp/weft), tapes per 100 mm					•	•	•		
82	Coating material, thickness/weight	•	•	•	•	•	•	•	•	•
83	Liner material, thickness	•	•	•	•	•	•	•	•	•
84	Material strength, elongation	•	•	•	•					
85	Material strength, tensile(energy absorption)								•	•
<p>+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].</p> <ul style="list-style-type: none"> • Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets. <p>empty = not applicable.</p>										

Table B.4 — Specification detail inner packaging of combination packaging

Inner Packaging of Combination Packaging			
		Removable fittings	Permanent fittings
Nr			
1	Description	•	•
27	Tare mass	+	
30	Material type and grade	•	•
32	Nominal thickness	+	
51	Design standard or drawing	•	•
52	Dimensions	+	
58	Grammage by paper and paper type	•	
60	Corrugated combined grammage	+	
87	Quantity or number	•	•
88	Location(s)		•
89	Means of fixing to packaging		•
90	Orientation and arrangement of inner packagings	•	
<p>+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].</p> <p>• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.</p> <p>empty = not applicable.</p>			

Annex C **(normative)**

IBC specifications

To assist in the identification of an IBC, following the issue of a test report, it is necessary to have a detailed specification.

The attached matrix correlates the different IBC types with data that are necessary for the identification of test IBCs by users, test facilities and competent authorities.

The specification check shall be done visually and, where relevant, by measuring main dimensions and thicknesses.

The specification check data as measured on the test samples should be recorded and compared with the design type specification including manufacturing tolerances. Because of the range and variety of IBCs there may be additional items that should be specified and specification checked for a particular IBC and similarly some items shown as required on the specification may not be present. Users should endeavour to ensure all the required data (where appropriate) is given.

Table C.1 (continued)

		IBCs																																
		11 Rigid for solids										21 Rigid for solids							31 Rigid for liquids							13 Flexible								
Nr		A	B	C	D	F	G	H1	H2	HZ1	HZ2	N	A	B	H1	H2	HZ1	HZ2	N	A	B	H1	H2	H3	H4	H5	L1	L2	L3	L4	M1	M2		
44	Closing ring thickness	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
45	Number of plies				•																											•	•	
46	Grammage of material per square metre				•																					•						•	•	
47	Inner lining or coating material			•	•	•	•																											
49	Method of lid retention (other than closing ring)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
51	Design standard or drawing																																•	
52	Dimensions of the empty IBC																																•	+
53	Fastening system: Number, position, material			•	•	•	•																											
54	Reinforcements: Type, position, material			•	•	•	•																											
56	Method of joining panels			•	•	•																												
59	Corrugated flute type																																	
60	Corrugated combined grammage																																	
61	Edge compression test (ECT)																																	
75	Sewing: Style and density of stitches																																	•

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].
• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.
empty = not applicable.

Annex D (normative)

Large packaging specifications

To assist in the identification of a packaging, following the issue of a test report, it is necessary to have a detailed specification.

The attached table matrices, [D.1](#) to [D.2](#), correlate the different packaging types with data which are necessary for the identification of test packagings by users, test facilities and competent authorities.

There are two parts to this annex:

- 1) Specification detail large packaging — [Table D.1](#).
- 2) Specification detail inner packaging of large packaging — [Table D.2](#).

The specification check shall be done visually and, where relevant, by measuring main dimensions and thicknesses.

The specification check data as measured on the test samples shall be recorded and compared with the design type specification including manufacturing tolerances.

Table D.1 — Specification detail large packaging - 50A, 50B, 50C, 50D, 50F, 50G, 50H, 50N, 51H, 51M

Large Packaging											
Nr		50 Rigid								51 Flexible	
		A	B	C	D	F	G	H	N	H	M
1	Packaging description (code and trade name)	+	+	+	+	+	+	+	+	+	+
2	Manufacturer's name and address	•	•	•	•	•	•	•	•	•	•
3	Method of construction	•	•	•	•	•	•	•	•	•	•
4	Nominal capacity									•	•
9	Dimension internal (length, breadth, height)	•	•	•	•	•	•	•	•		
15	Handles, material type, number and position	+	+	+	+	+	+	+	+		
31	Mass empty box	+	+	+	+	+	+	+	+		
32	Nominal thickness and material type and grade, head or lid, side walls, base	+	+	+	+	+	+	+	+	+	
32a	Material type and grade									•	•
35	Material type and grade (polymer), lid, body, base							•			
35a	Type of film grade									•	
<p>+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].</p> <p>• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.</p> <p>∇ Minimum wall thickness has to be measured.</p> <p>empty = not applicable.</p>											

Table D.1 (continued)

Large Packaging											
Nr		50 Rigid								51 Flexible	
		A	B	C	D	F	G	H	N	H	M
38	Material lid gasket	•	•					•	•		
45	Number of plies										+
46	Grammage of plies									+	+
51	Design standard or drawing	•	•	•	•	•	•	•	•	•	•
52	Dimensions external (length, breadth, height), flat unopened	+	+	+	+	+	+	+	+	+	+
53	Closures, number, type, position and materials	+	+	+	+	+	+	+	+		
54	Reinforcements, type, position and materials	+	+	+	+	+	+	+	+		
55	Material end				•	•	•				
56	Method of joining panels			+	+	+					
57	Manufacturer's join body						+				
58	Grammage by paper and paper type						+				
59	Corrugated flute type						+				
60	Corrugated combined grammage						+				
61	Corrugated edgewise crush resistance						+				
62	Burst strength						+				
63	Density							+			
64	Inner top flap gap						•				
65	Outer top flap gap or overlap						•				
66	Inner bottom flap gap						•				
67	Outer bottom flap gap or overlap						•				
68	Style									•	•
69	Gusset, open width									+	+
70	Bottom width, flat unopened									+	+
71	Valve width									+	+
73	Closure method (top, base, side)									+	+
74	Perforations									•	•
75	Sewing, style and density of stitches									+	+
76	Type of thread and minimum breaking load									•	•
77	Filter cord									•	•

+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].

• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.

∇ Minimum wall thickness has to be measured.

empty = not applicable.

Table D.1 (continued)

Large Packaging												
Nr		50 Rigid								51 Flexible		
		A	B	C	D	F	G	H	N	H	M	
78	Adhesive, type										•	•
79	Fabric (warp/weft), tapes per 100 mm										+	
82	Coating, material, thickness, mass										•	•
83	Liner, material, thickness										+	+
84	Material strength elongation										•	
85	Material strength tensile (energy absorption)											•
91	Puncture resistance							+				
<p>+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].</p> <p>• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.</p> <p>∇ Minimum wall thickness has to be measured.</p> <p>empty = not applicable.</p>												

Table D.2 — Specification detail inner packaging of large packaging

Inner Packaging of Large Packaging					
Nr		Removable fittings		Permanent fittings	
1	Description		+		+
27	Tare mass		+		
30	Material type and grade		•		•
32	Nominal thickness		+		
51	Design standard or drawing		•		•
52	Dimensions		+		
58	Grammage by paper and paper type		+		
60	Corrugated combined grammage		+		
87	Quantity or number		+		+
88	Location(s)				+
89	Means of fixing to packaging				+
90	Orientation and arrangement of inner packagings		•		
<p>+ Required in specification checks. [Data in component drawing (reference value) has to be compared with actual (measured) value, if applicable].</p> <p>• Data to be mentioned in test report. Data is part of the component drawing, or, if necessary, in manufacturer's specification sheets.</p> <p>empty = not applicable.</p>					

Annex E

(informative)

Type of contents

The substances packed in packaging include free-flowing liquids, pastes, viscous substances, powders and granules. The choice of tests for any packaging depends crucially on whether the design type is to be tested for liquids or solids. There is, however, no simple, absolute and natural distinction between the two. Moreover, some substances which are solids at say 20 °C becomes liquid at 55 °C which is the reference temperature for that which may be experienced in transport. General guidance on whether a design type should be tested for liquids or solids is provided in a) of this note with specific advice on substances which may become liquid during a journey in b) and on phlegmatized substances in c).

- a) As indicated, the UN Recommendations and the international agreements contain definitions making the distinction between liquids and solids from measurements of specific melting point or by penetrometer testing. Such measurements are rarely necessary in relation to packaging testing which may be carried out in a facility not equipped to make such measurements. In most instances there should be little difficulty in choosing between testing for liquid or for solid contents. In many instances a packaging should be designed for liquids and tested using water as contents without reference to any specific dangerous liquid to be carried. Similarly, a packaging should be designed for solids and tested using, for example, a mixture of plastics granules and fine powder without reference to any specific dangerous solid to be carried. In such circumstances it is appropriate for each user of the packaging to check that the testing has been suitable for the dangerous substance. In other instances, however, the design type tests for a packaging should be undertaken in relation to a specific dangerous substance; if that substance should be borderline between a liquid and a solid, then it is recommended that the appropriate data on it should be obtained before tests are selected and commenced.
- b) Packaging being tested for solids which are likely to melt during the intended journey should be tested as for liquids.
- c) Packaging being tested for solids which require phlegmatizing with a liquid for safe transport, such that there is free liquid in the packaging, should be subjected to the appropriate tests for liquids with the test contents being a representative mixture of solids and liquids.

Annex F (normative)

Drop test

F.1 Applicability

This is for all types of packaging, IBCs and large packaging.

F.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

The elapsed time between the removal of the packaging/IBC/large packaging from conditioning and performance of the test shall be kept as short as possible and in any event not more than 5 min.

NOTE Conditioning can be carried out immediately before, or after filling the package with the test contents provided that such a procedure would not affect the test results.

For the cold drop test, the temperature of the test sample contents shall be taken immediately after the test.

Non-plastics packagings (such as fibreboard or metal packagings) with plastics closures are not required to undergo the cold drop test.

Packagings made of materials not specifically requiring a cold drop test may be considered for this test when the closures are made of plastics and greater than 7 cm.

F.3 Test method

F.3.1 General

The tests shall be carried out in accordance with ISO 2248:1985 except for [7.2](#), the drop heights, drop attitude and number of samples to be tested shall be determined from the UN Recommendations. For drops performed on packaging other than flat drops, the centre of gravity shall be vertically over the point of impact.

Prior to carrying out the test, ensure that the drop area is clean and dry.

ISO 2248:1985, 4.4, does not apply. Impact surfaces shall be in accordance with the UN Recommendations.

NOTE For packaging, a suitable impact surface can have a mass at least 50 times the mass of the test item and have a maximum length of 5 times of its thickness. This note does not apply to IBCs or large packaging.

F.3.2 Information drops for packaging

To assess the weakest point, information drops may be performed. Where such investigation drops are undertaken they may be done with packaging already used in other tests. Each packaging shall strike the target in an orientation designed to investigate the weakest part. The orientations to be taken into account vary with designs. Information drops should be used to seek an alternative orientation where the design is not a common design.

NOTE 1 Failure in an information drop does not constitute failure of the design type test.

NOTE 2 When packaging is available there is no objection to information drops being carried out on other packaging other than those used for the first drop.

NOTE 3 When packaging under test is of a new or significantly modified design, more than three investigatory drops can be conducted.

NOTE 4 The drop can take place on an area of the packaging not already tested.

NOTE 5 Where information drops have been undertaken they can be reported in the test records.

F.3.3 Corrections to the drop height for packaging/large packaging with inner packaging containing liquids of different densities

Where the inner packaging contains liquid substances of various densities, the drop test shall be based on the most severe packing group (of the liquid substances to be transported) and the average density.

The average density shall be calculated by multiplying the filling volume of each inner packaging by the relative density of the contents to be transported in that packaging and aggregating the results. The correction for density should be applied using the aggregate result in accordance with UN recommendations.

F.4 Method of assessment

F.4.1 General

Following each drop, there shall be an assessment of the result. Single packaging/IBC containing liquids or solids shall be assessed according to procedures in F.4.2 and combination packaging, packaging containing articles or large packaging shall be assessed according to F.4.3.

F.4.2 Single packaging/IBC for liquids or solids

Observation should be made at the time of impact for discharge. If such a discharge is observed it shall be recorded in the test report.. The packaging/IBC shall be visually examined for leakage and rupture. Any packaging/IBC containing liquids shall have the internal pressure equalized with the atmospheric pressure, normally by loosening / retightening a closure, or by making a small hole in the body or end of the packaging/IBC. Impacted closures or closures suspected of leaking during the drop shall not be disturbed. When there is only one closure and it is suspected of leakage, pressure equalization shall be achieved by making a small hole in the body or end of the packaging/IBC. If there is dampness in the dropping area the packaging/IBC may be moved carefully to a suitable place and maintained in the same orientation for examination of any leakage which may occur (e.g. moved so that it is on a surface such as clean fibreboard where drips should be apparent). Examination shall start after equalization and last up to 5 minutes. Where a packaging/IBC for solids undergoes a drop test, the packaging/IBC shall pass the test if the entire contents are retained by an inner receptacle (e.g. a plastics bag), even if the closure is no longer sift proof. Where a packaging/IBC undergoes a cold drop test, immediately after dropping the first specimen the temperature of the packaging/IBC and/or its contents shall be checked and recorded in the test report. Subsequent packaging shall not need the temperature checked unless the first sample had not achieved the required temperature

F.4.3 Combination packaging, and large packaging

Observation should be made at the time of impact for discharge.

NOTE 1 For inner packaging or articles discharge might appear as dampness in the drop test area, or on the outer packaging (e.g. a stain).

NOTE 2 For inner packaging or articles containing solids discharge might appear as loose solid in the drop test area or within the outer packaging.

The combination packaging/large packaging shall be visually examined for leakage and rupture e.g. escapes of the inner packaging/articles. Where a combination packaging/large packaging containing

inner packaging or articles undergoes a drop test, the combination packaging/large packaging shall pass the test if the entire contents are retained by the inner packaging or inner receptacle (e.g. plastics bag) even if the closure is no longer sift proof. If there is dampness in the dropping area, the combination packaging/large packaging shall be moved carefully to a suitable place for examination of any leakage that may occur (e.g. moved so that it is on a surface such as clean fibreboard where drips should be apparent). Examination shall last up to 5 minutes. Where a combination packaging/large packaging undergoes a cold drop test, immediately after dropping the first combination packaging/large packaging, the temperature of the package and/or its contents shall be checked and recorded in the test report. Subsequent packaging does not need the temperature checked unless the first sample had not achieved the required temperature.

Annex G **(normative)**

Leakproofness test

G.1 Applicability

For all types of packaging intended to contain liquids, except the inner packaging of combination packaging and large packagings.

For all types of IBCs intended to contain liquids and all types of IBCs intended to contain solids filled or discharged by pressure.

G.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

The method of making pressure connections shall not affect the results of the test e.g. a connection through a closure shall not reinforce that part of the packaging or IBC. There are two methods as follows:

- a) Drill two holes into each packaging or IBC. One hole shall be used to connect the packaging or IBC to an adequate air supply, the second hole shall be used to connect a pressure gauge reading the test pressure in the packaging or IBC; or
- b) Drill one hole into each packaging or IBC. The gauge shall be connected to the air supply line between the source of the air supply and the packaging or IBC and as near as possible to the packaging or IBC; the gauge shall only be read under no flow conditions.

It shall be assured that the gauge is pressurized and that the supply line to the gauge is not blocked

NOTE In some cases an existing connection in a closure (e.g. a valve in an IBC) can be used for making the pressure connection.

Each packaging or IBC shall be closed according to any special instructions. When relevant, closures shall be tightened to the appropriate torque.

Vented closures shall be replaced with non-vented closures of the same specification or the vent shall be sealed. Pressure relief devices shall be removed and their apertures plugged, or shall be rendered inoperative.

The test shall be carried out on the complete packaging or IBC and before the fitting of any thermal insulation equipment.

For composite packaging or IBCs, any leakage from the inner receptacle shall be allowed to escape through the outer packaging or casing, e.g. by drilling a hole in the outer. In this case it is possible that entrapped air escapes, before any leakage can be detected.

Alternatively, for composite packaging and IBCs, the inner receptacle may be tested without the outer packaging, provided the test results are not affected. When the test is carried out on the inner receptacle in this way, this fact shall be recorded in the test report.

G.3 Test method

Each packaging or IBC shall be placed in a tank of water and shall be restrained just below the surface (the method of restraint shall not affect the test results). Air shall be applied continuously and gradually

up to the required pressure, which shall remain at or slightly above the predetermined level for the required period of time.

In order to take account of the hydrostatic test pressure, the packaging shall be turned regularly or the internal pressure increased to account for hydrostatic pressure.

NOTE Where turning is the desired option, turning is not necessary when the hydraulic pressure due to immersion, is negligible. Taking into account a maximum measurement tolerance of 3 %, which corresponds to 0.6 kPa (at 20 kPa overpressure), the maximum total depth of water, after immersion, for which turning is not required, would be 60 mm.

Alternatively, a correction factor shall be applied to the test pressure as illustrated in the following example:

EXAMPLE After immersion, if the lowest part of the test item is 2,5 m below the surface of the water then the test pressure should be increased with the hydraulic pressure, which is 25 kPa.

For packagings or IBCs, alternatively to placing the IBC in a tank of water, the seams and joints are covered with a suitable soap solution. It is also possible to surround part of the IBC with water (e.g. the bottom valve). Other alternative methods may also be acceptable.

When using this method it is desirable to take special care with closures and the connection between the closures and the IBC.

G.4 Method of assessment

Observation should be made for the escape of air bubbles throughout the test.

Air bubbles considered to arise from entrapped air (e.g. air held initially in seams or in the thread of closures) cannot be considered as leakage: these include any bubbles which do not appear regularly or produced at intervals exceeding 1 min. If necessary, the test period should be extended to allow entrapped air to be expelled.

Annex H **(normative)**

Hydraulic pressure test

H.1 Applicability

For all types of metal, plastics and composite packaging intended to contain liquids except inner packaging of combination packaging and large packagings.

For all types of metal, plastics and composite IBCs used for liquids.

For all types of metal, plastics and composite IBCs used for solids filled or discharged under pressure.

H.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

Each packaging or IBC shall be completely filled with water and shall be closed according to any special instructions when relevant. Closures shall be tightened to the appropriate torque.

Vented closures shall be replaced with non-vented closures of the same specification or the vent shall be sealed. Pressure relief devices shall be removed and their apertures plugged, or shall be rendered inoperative.

NOTE Steps can be taken to ensure that no air (or other gas) remains inside the packaging above the level of the closure by, for example, tilting the packaging when filling.

The test with IBCs shall be carried out before the fitting of any thermal insulation material.

H.3 Test method

The packaging and IBCs shall be pressurized continuously and gradually up to the required test pressure with water.

NOTE For packaging this can be done within the time of not less than 2 min and not more than 15 min. For IBCs this can be done within the time of not less than 5 min and not more than 30 min.

The test pressure in the packaging or IBCs shall be held continuously and evenly for the appropriate required test period, depending on the type of packaging and IBC. The test pressure in the packaging or IBCs shall remain at or slightly above the required level.

The manner in which packaging are supported shall not invalidate the test.

The IBCs shall not be mechanically restrained during the test.

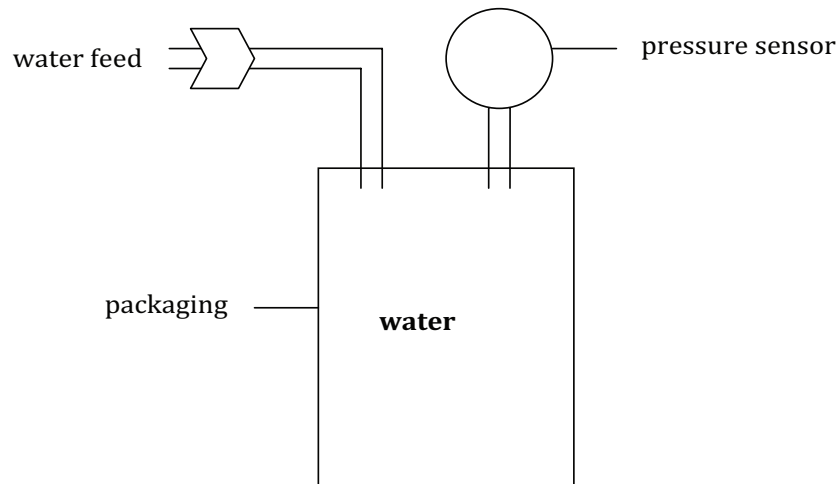


Figure H.1 — Schematic representation of the test arrangement

H.4 Test conditions for all plastics packaging and plastics IBCs, including all composite packaging and composite IBCs with inner plastics receptacles

The temperature of the water shall be a minimum of 12 °C.

Where the water temperature is above 12 °C the following correction factors may be applied:

Table H.1 — Water temperature adjustment factors for plastics packagings and plastics IBCs

Water temperature °C	Pressurization factor
12 + 2	1,000
≥14	0,976
15	0,964
16	0,952
17	0,940
18	0,928
19	0,917
≥20	0,906

The conditions of the test shall be recorded in the test report (applied pressure and water temperature).

NOTE The UN mark awarded in respect of hydraulic pressure is based on the actual pressure achieved.

H.5 Method of assessment

Observation should be made throughout the test for any leakage of water.

NOTE Water drops originating from water held initially in seams in the thread or in gaskets cannot be considered as leakage – as a guide not more than one drop of water every two minutes.

Annex I (normative)

Stacking test

I.1 Applicability

For all types of packaging except for bags, and IBCs and large packaging intended for stacking during transport.

I.2 Sample Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

NOTE For fibreboard packagings the stack test can be conducted in a conditioned environment meeting the UN Recommendations.

I.3 Calculation of the stacking load for packaging

I.3.1 General

In the following calculations, where the design type has an interstacking feature, an allowance shall be made. This usually takes the form of a small reduction in effective packaging height.

I.3.2 Solids, articles, or liquids to be transported

Where the contents are solids, articles, or the liquid to be transported, the stacking load to be superimposed on each packaging shall be calculated as follows:

$$M_1 = \left(\frac{H}{h} - 1 \right) \cdot M$$

where

M_1 is the stacking load in kilograms (kg) (with closure included; see Note);

M is the mass in kilograms (kg) of the complete, filled and closed packaging as prepared for transport;

H is the relevant stack height in millimetres (mm);

h is the overall height in millimetres (mm) of packaging to be tested, allowing for any interstacking features.

NOTE Newtons can be used as a unit of force.

I.3.3 Other liquids

Where any other liquid is used as test contents, the stacking load to be superimposed on each packaging shall be calculated from the following:

$$M_1 = \left(\frac{H}{h} - 1 \right) \cdot (C \cdot d \cdot n + m)$$

where

M_1 is the stacking load in kilograms (kg) (see NOTE);

H is the relevant stack height in millimetres (mm);

h is the overall height of the packaging in millimetres (mm), allowing for any interstacking features;

C is the volume of water in litres (l) required to occupy 98 % of the capacity where the packaging is brimful or, for a combination packaging, 98 % of the capacity of one inner packaging that is brimful;

d is the relative density of the substance to be transported;

m is the mass in kilograms (kg) of the empty packaging (including its closures) or, for a combination packaging, the mass of all the components of one package, including any empty inner packaging (see [1]);

n is the one or pieces of inner packaging (combination packaging only).

NOTE Newtons can be used as a unit of force.

I.4 Test method

I.4.1 Test methods for packaging

I.4.1.1 General

Any one of three methods shall be used by agreement between the test laboratory and the client:

- a) A guided load on packaging(s);
- b) An unguided load on an individual packaging;
- c) An unguided load on three packaging forming one layer.

NOTE 1 Where b or c has been followed and the packaging did not pass the stacking test, the Guided load can be used, and if it passes this test, then the result can be valid.

NOTE 2 Where the packaging has an interstacking feature, the stack loading can be applied using a reproduction of the packaging base shape as the lowest component of the stack.

The method used shall be stated in the test report.

I.4.1.2 Guided load on packaging(s)

A suitable guided load rig shall be used. Such a rig shall take the form of

- a conventional compression testing machine with the facility of maintaining a constant load (as calculated in I.3) for the required period,

NOTE Such equipment can have short-term fluctuations of $\pm 4\%$ in accordance with ISO 12048:1994.

- a purpose-made rig, e.g. two frameworks with the upper framework being free to move vertically and with a minimum of friction in relation to the lower framework and to take the appropriate load.

For each test, the upper framework shall be loaded so that its total mass is as calculated in I.3. Except where the interstacking design is taken into account, the load shall be applied via a rigid top plate extending beyond the outermost edges of the pieces of packaging.

I.4.1.3 Unguided load on an individual packaging

The packaging shall be placed on a firm level surface. The predetermined load calculated in accordance with I.3 shall be placed centrally on the top for the period of time as required for the particular packaging type.

The load shall typically be made out of concrete or steel masses. Except where the interstacking design is taken into account, the load shall be applied via a rigid top plate extending beyond the outermost edges of the pieces of packaging.

The load shall be free to move when and if the packaging collapses.

NOTE For safety reasons, however, the load can have restricted movement, e.g. suspended by chains from overhead, but with sufficient slack in the chains not to affect the integrity of the test. Measurements of the deflection and angle of the plate with the horizontal level are normally made

- a) immediately before and after placing the load on the plate,
- b) where appropriate, at intervals throughout the duration of the test, and
- c) on completion of the test.

I.4.1.4 Unguided load on three packaging forming one layer

The packaging shall be placed in the same direction on a firm level surface as illustrated in [Figure I.1](#).




Figure I.1 — Plan view of drums stacked

The spacing between the packaging shall be as close as possible but separated to ensure that they cannot come into contact with one another when deformed.

A steel plate shall be placed over the pieces of packaging and its position shall be carefully checked. The load consists of the plate and suitable masses evenly distributed on it. The load shall have a mass three times as big as that calculated in 3 for one packaging ($M_1 \times 3$). Except where the interstacking design is taken into account, the load shall be applied via a rigid top plate extending beyond the outermost edges of the pieces of packaging.

NOTE Measurements of the deflection and angle of the plate with the horizontal level can be made

- a) immediately before and after placing the load on the plate,
- b) where appropriate, at intervals throughout the duration of the test, and
- c) on completion of the test.

I.4.2 Test methods for large packaging and IBC

The IBC / large packaging shall be placed on its base on level hard ground and subjected to a uniformly distributed superimposed load. The test load shall be calculated as required by the regulations.

The test load shall be applied by any one of the following methods:

- a) a number of samples of IBCs / large packaging of the same type;
- b) appropriate weights loaded onto either a flat plate or a reproduction of the base of the IBC/large packaging, which is stacked on the IBC/large packaging being tested;
- c) an appropriate compression test machine.

I.5 Method of assessment

Observation should be made for leakage and deformation of packaging, inner packaging, large packaging and IBCs (excluding flexible IBCs).

Observation should be made for deterioration of the body and leakage of flexible IBCs.

A suitable method for guided loads is as follows. The packagings are removed from the stack rig. For stackable packaging, two filled of the same type should be placed centrally on the tested packaging. For not individually stackable packaging the stacked samples may be arranged as [Figure I.1](#) on which two identical layers are placed on top using intermediate plates of suitable material. In both cases the packaging should maintain their position for one hour.

Where unguided loads have been used, this may be assessed by the angle of the top plate. An angle of 5° or more may be considered to show significant deformation. The 5° criterion has been found to accord with the UN requirements in relation to stack stability.

Annex J **(normative)**

Water spray test

J.1 Applicability

For all types of outer fibreboard packaging intended to contain dangerous goods of division 6.2 infectious substance - Category A (UN2814 and UN2900).

NOTE Can also be used for packaging for Biological Substances of Category B (UN3373).

It is done to pre-condition a packaging prior the drop tests to investigate reduction in strength caused by exposure to water as a part of a test sequence.

J.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

J.3 Test method

The test shall be carried out in accordance with ISO 2875:2000 or another suitable method.

Test area conditions shall be in accordance with method A (continuous spraying), Clause 5 of ISO 2875:2000

The procedure of ISO 2875:2000, 7.1 shall be followed except that 7.1.4 shall read as follows:

The time taken for the first overflow shall not exceed that represented by a rate of 60 mm/h; that of the last shall not be less than that represented by 40 mm/h.

The sprays shall be turned on and shall simulate exposure to rainfall as specified in the requirements with a tolerance of $\pm 20\%$.

NOTE 1 When using rain gauges they can have a minimum capacity of 60 mm/h with a minimum accuracy of 5 mm/h.

NOTE 2 The following conversion rate applies: 1 mm/h = 1 l/(m²·h).

J.4 Method of assessment

Not applicable.

Annex K **(normative)**

Bottom lift test

K.1 Applicability

For all types of fibreboard and wooden IBCs.

For all types of IBCs and large packaging which are fitted with means of lifting from the base.

K.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

K.3 Test method

The IBC or large packaging shall be raised and lowered using the equipment specified and employed in the prescribed manner. The number and direction of the tests shall be as prescribed.

Failure, when it occurs, often takes place during the initial acceleration of a lift. Neither the height nor the rate of elevating is specified. It is normally adequate (taking safety into account) to raise the IBC for a distance of at least 200 mm. A convenient rate of lifting results in a 200 mm lift being completed in between 5 s and 10 s. It is recommended that, after the final test, the IBC should then be lowered, the forks placed fully underneath it and the IBC lifted to a convenient height for examination of the base.

When a design of rectangular pallet can be entered from each of four sides the test should be undertaken from all sides.

K.4 Method of assessment

Observation should be made for deformation and loss of contents.

Annex L **(normative)**

Top lift test

L.1 Applicability

For all types of IBCs designed to be lifted from the top.

For all types of large packaging fitted with means of lifting from the top.

For all types of flexible IBCs designed to be lifted from the top or the side.

L.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

As an example An FIBC 1.2 m × 0.9 m × 0.9 m is designed to transport 1 000 kg of fine granules, so for test the FIBC is filled with 6 000 kg of test contents. Using 1 mm diameter lead shot with a bulk density of 7,6 g/cm³ and 3 mm diameter polyethylene granules with a bulk density of 0.54 g/cm³, an 80/20 mixture is required as test contents to give the correct load.

L.3 Test method

The duration of the test time and the number of lifts shall be as determined by the UN Recommendations.

When equivalence can be demonstrated from previous tests on IBCs of similar design the approval of the Competent Authority, the test on rigid plastics and composite IBCs may be reduced. When reduced testing is permitted it shall be recorded in the test report.

NOTE An equivalent method for FIBCs can be found in ISO 21898.

L.4 Method of assessment

L.4.1 Observation should be made for deformation or loss of content of the IBC or large packaging, including any base pallet.

L.4.2 In addition, for FIBCs observation should be made for damage to its lifting devices.

Annex M **(normative)**

Tear test

M.1 Applicability

This is for all types of FIBCs.

M.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

M.3 Test method

The test sample shall be tested as determined by the UN Recommendations.

M.4 Method of assessment

Observation should be made for propagation of the cut.

Annex N

(normative)

Topple test

N.1 Applicability

This is for all types of FIBCs.

N.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

N.3 Test method

N.3.1 Impact surface

The topple area impact surface shall be horizontal and flat, massive enough to be immovable and rigid enough to be non-deformable under test conditions and sufficiently large to ensure that the test IBC falls entirely upon the surface.

N.3.2 Topple test height

Test height shall be as prescribed in the UN Recommendations.

N.3.3 Procedure

The FIBC is placed on a flat surface from which it shall be caused to topple in accordance with the UN Recommendations.

During the topple test, the FIBC may not pass the rotating edge which is at a height above the impact surface corresponding to the topple height. External forces applied during the topple test may not deform the FIBC.

N.4 Method of assessment

Observation should be made for loss of contents including any discharge from closures or stitch holes, upon impact.

Annex O (normative)

Righting test

0.1 Applicability

This is for all types of FIBCs that are designed to be lifted from the top or the side.

0.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

NOTE The test starts with the FIBC on its side and is often done immediately following the Topple test.

0.3 Test method

The test sample shall be righted as determined by the UN Recommendations.

The top lift device(s) uppermost and most accessible shall be used.

0.4 Method of assessment

Observation should be made for damage to the lifting devices.

Annex P

(normative)

Puncture test

P.1 Applicability

For all types of packagings intended to be used for the carriage of dangerous goods of division 6.2: infectious substances of Category A (UN2814 and UN2900).

P.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

P.3 Test method

Packaging parts intended to be tested shall be identified according to ISO 2206:1987 and recorded in the test report.

The test shall be carried out according to the UN Recommendations.

In the case of packagings with a gross mass of 7 kg or less, a guide for the cylindrical steel rod may be used with the minimum of friction to impact the primary receptacle (on the appropriate part on the packaging).

P.4 Method of Assessment

Observation shall be made after each impact for any leakage from the primary receptacle(s).

Annex Q (normative)

Vibration test

Q.1 Applicability

For all types of IBC intended to be used for the transport of dangerous goods liquids.

Q.2 Preparation

Samples for this test shall be prepared in accordance with the UN Recommendations and the relevant parts of [Clause 5](#) of this International Standard.

Q.3 Test method

The test shall be carried out according to the UN Recommendations.

NOTE ISO 2247:2000 Packaging — Complete, filled transport packages and unit loads — Vibration tests at fixed low frequency can be used as reference.

The desired vibration amplitude should be selected and the vibration started at a frequency of 2 Hz and slowly increased until the package separates repeatedly from the vibration table. That frequency shall be recorded in the test report. Any resonance shall be avoided by slightly changing the set frequency.

Q.4 Method of Assessment

Observation shall be made throughout the test for any rupture or leakage of water from the IBC.

Bibliography

- [1] European Agreement concerning the International Carriage of Dangerous Goods by Road (ADR), as amended, Geneva, 30 September 1957
- [2] Regulations concerning the International Carriage of Dangerous Goods by Rail (RID), appearing as Appendix C to the Convention concerning International Carriage by Rail (COTIF), as amended, Vilnius, 3 June 1999
- [3] International Maritime Dangerous Goods Code (IMDG- Code), as amended, London International Maritime Organisation
- [4] Technical Instructions for the Safe Transport of Dangerous Goods by Air (ICAO), as amended, Montreal International Civil Aviation Organization
- [5] Directive 2008/68/EC of the European Parliament and of the Council of 24 September 2008 on the inland transport of dangerous goods, as amended

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™