

BS EN ISO 17855-1:2014



BSI Standards Publication

# Plastics — Polyethylene (PE) moulding and extrusion materials

Part 1: Designation system and basis for  
specifications (ISO 17855-1:2014)

**bsi.**

...making excellence a habit.™

**National foreword**

This British Standard is the UK implementation of EN ISO 17855-1:2014. It supersedes BS EN ISO 1872-1:1999 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee PRI/82, Thermoplastic materials.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014. Published by BSI Standards Limited 2014

ISBN 978 0 580 77186 6

ICS 83.080.20

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2014.

**Amendments issued since publication**

Date	Text affected
------	---------------

---

EUROPEAN STANDARD

EN ISO 17855-1

NORME EUROPÉENNE

EUROPÄISCHE NORM

October 2014

ICS 83.080.20

Supersedes EN ISO 1872-1:1999

English Version

Plastics - Polyethylene (PE) moulding and extrusion materials -  
Part 1: Designation system and basis for specifications (ISO  
17855-1:2014)

Plastiques - Polyéthylène (PE) pour moulage et extrusion -  
Partie 1: Système de désignation et base de spécification  
(ISO 17855-1:2014)

Kunststoffe - Polyethylen (PE)-Formmassen - Teil 1:  
Bezeichnungssystem und Basis für Spezifikationen (ISO  
17855-1:2014)

This European Standard was approved by CEN on 13 September 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels**

## Foreword

This document (EN ISO 17855-1:2014) has been prepared by Technical Committee ISO/TC 61 "Plastics" in collaboration with Technical Committee CEN/TC 249 "Plastics" the secretariat of which is held by NBN..

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2015, and conflicting national standards shall be withdrawn at the latest by April 2015.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 1872-1:1999.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

## Endorsement notice

The text of ISO 17855-1:2014 has been approved by CEN as EN ISO 17855-1:2014 without any modification.

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Designation and specification system</b> .....	<b>2</b>
3.1 Data block 1 .....	2
3.2 Data block 2 .....	3
3.3 Data block 3 .....	3
3.4 Data block 4 .....	4
3.5 Data block 5 .....	6
<b>4 Examples of designations</b> .....	<b>7</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. [www.iso.org/directives](http://www.iso.org/directives)

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. [www.iso.org/patents](http://www.iso.org/patents)

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 61, *Plastics*, Subcommittee SC 9, *Thermoplastic materials*.

This first edition of ISO 17855-1 cancels and replaces ISO 1872-1:1993, which has been technically revised to introduce a new designation system.

ISO 17855 consists of the following parts, under the general title *Plastics — Polyethylene (PE) moulding and extrusion materials*:

- *Part 1: Designation system and basis for specifications*
- *Part 2: Preparation of test specimens and determination of properties*

# Plastics — Polyethylene (PE) moulding and extrusion materials —

## Part 1: Designation system and basis for specifications

### 1 Scope

**1.1** This part of ISO 17855 establishes a system of designation for polyethylene thermoplastic material, which may be used as the basis for specifications.

**1.2** The types of polyethylene plastics are differentiated from each other by a classification system based on appropriate levels of the designatory properties

a) density,

b) melt mass-flow rate,

and on information about the intended application and/or method of processing, important properties, additives, colorants, fillers and reinforcing materials.

**1.3** This part of ISO 17855 is applicable to all polyethylene homopolymers and to copolymers of ethylene having a content of other 1-olefinic monomers of less than 50 % (mass fraction) and a content of non-olefinic monomers with functional groups up to a maximum of 3 % (mass fraction).

It applies to materials ready for normal use in the form of powder, granules or pellets, unmodified or modified by colorants, additives, fillers, etc.

This part of ISO 17855 does not apply to masterbatches or to EPM rubber. This part of ISO 17855 also does not apply to PE-UHMW. It should reference to ISO 11542-1 for PE-UHMW.

**1.4** It is not intended to imply that materials having the same designation give necessarily the same performance. This part of ISO 17855 does not provide engineering data, performance data or data on processing conditions which may be required to specify a material for a particular application and/or method of processing.

If such additional properties are required, they shall be determined in accordance with the test methods specified in ISO 1872-2, if suitable.

**1.5** In order to specify a thermoplastic material for a particular application or to ensure reproducible processing, additional requirements may be given in data block 5 (see [Clause 3](#), introductory paragraph).

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1043-1, *Plastics — Symbols and abbreviated terms — Part 1: Basic polymers and their special characteristics*

ISO 1133-1, *Plastics — Determination of the melt mass-flow rate (MFR) and melt volume-flow rate (MVR) of thermoplastics — Part 1: Standard method*

ISO 1183-1, *Plastics — Methods for determining the density of non-cellular plastics — Part 1: Immersion method, liquid pycnometer method and titration method*

ISO 1183-2, *Plastics — Methods for determining the density of non-cellular plastics — Part 2: Density gradient column method*

ISO 1183-3, *Plastics — Methods for determining the density of non-cellular plastics — Part 3: Gas pycnometer method*

ISO 1872-2, *Plastics — Polyethylene (PE) moulding and extrusion materials — Part 2: Preparation of test specimens and determination of properties*

ISO 11542-1, *Plastics — Ultra-high-molecular-weight polyethylene (PE-UHMW) moulding and extrusion materials — Part 1: Designation system and basis for specifications*

### 3 Designation and specification system

The designation and specification system for thermoplastics is based on the following standardized pattern:

Designation						
Designation block (optional)	Identity block					
	International Standard number block	Individual-item block				
		Data block 1	Data block 2	Data block 3	Data block 4	Data block 5

The designation consists of an optional description block, reading “Thermoplastics”, and an identity block comprising the International Standard number and an individual-item block. For unambiguous designation, the individual-item block is subdivided into five data blocks comprising the following information:

Data block 1: Identification of the plastic by its symbol PE-VLD, PE-LD, PE-LLD, PE-MD or PE-HD in accordance with ISO 1043-1 (see [3.1](#)).

Data block 2: Fillers or reinforcing materials and their nominal content (see [3.2](#)).

Data block 3: Position 1: Intended application or method of processing (see [3.3](#)).

Positions 2 to 8: Important properties, additives and supplementary information (see [3.3](#)).

Data block 4: Designatory properties (see [3.4](#)).

Data block 5: For the purpose of specifications, a fifth data block may be added containing additional information.

The first character of the individual-item block shall be a hyphen. The data blocks shall be separated from each other by commas.

If a data block is not used, this shall be indicated by doubling the separation sign, i.e. by two commas (,,).

#### 3.1 Data block 1

In this data block, after the hyphen, polyethylene plastics are identified by the symbol “PE-VLD, PE-LD, PE-LLD, PE-MD or PE-HD”, in accordance with ISO 1043-1.



### 3.2 Data block 2

In this data block, the type of filler and/or reinforcing material is represented by a single code-letter in position 1 and its physical form by a second code-letter in position 2, the code-letters being as specified in [Table 1](#). Subsequently (without a space), the mass content may be given by a 2-figure number in positions 3 and 4.

**Table 1 — Code-letters for fillers and reinforcing materials in data block 2**

Code-letter	Material	Code-letter	Form
<b>B</b>	Boron	<b>B</b>	Balls, beads, spheres
<b>C</b>	Carbon <sup>a</sup>	<b>D</b>	Powder
		<b>F</b>	Fibre
<b>G</b>	Glass	<b>G</b>	Ground (ground fibres also)
		<b>H</b>	Whiskers
<b>K</b>	Calcium carbonate		
<b>L</b>	Cellulose <sup>a</sup>		
<b>M</b>	Mineral <sup>a</sup> ,metal <sup>a</sup>		
<b>S</b>	Synthetic organic <sup>a</sup>	<b>S</b>	Scales, flakes
<b>T</b>	Talc		
<b>W</b>	Wood		
<b>X</b>	Not specified	<b>X</b>	Not specified
<b>Z</b>	Others <sup>a</sup>	<b>Z</b>	Others <sup>a</sup>

<sup>a</sup> These materials may be further defined by their chemical symbol, for example, or additional symbols defined in the relevant International Standard. In the case of metals (M), it is essential to indicate the type of metal by means of its chemical symbol.

Mixtures of materials and/or forms may be indicated by combining the relevant codes using the sign “+” and placing the whole between parentheses. For example, a mixture of 25 % glass fibres (GF) and 10 % mineral powder (MD) would be indicated by (GF25+MD10).

### 3.3 Data block 3

In this data block, information about the intended application and/or method of processing is given in position 1 and information about important properties, additives and colour in positions 2 to 8. The code-letters used are specified in [Table 2](#).

Since many PE grades are used in multiple applications and processing techniques, only the primary application and/or processing method is given in position 1.

If information is presented in positions 2 to 8 and no specific information is given in position 1, the letter X shall be inserted in position 1.

**Table 2 — Code-letters used in data block 3**

Code-letter	position 1	Code-letter	position 2 to 8
		<b>A</b>	Processing stabilized
<b>B</b>	Blow moulding	<b>B</b>	Antiblocking
<b>C</b>	Calendering	<b>C</b>	Coloured
		<b>D</b>	Powder
<b>E</b>	Extrusion of pipes, profiles and sheets	<b>E</b>	Expandable
<b>F</b>	Extrusion of films	<b>F</b>	Special burning characteristics
<b>G</b>	General use	<b>G</b>	Pellets, granules
<b>H</b>	Coating	<b>H</b>	Heat ageing stabilized
<b>J</b>	Cable and wire insulating	<b>J</b>	Elevated heat performance
<b>K</b>	Cable and wire sheathing	<b>K</b>	Metal deactivated
<b>L</b>	Monofilament extrusion	<b>L</b>	Light or weather stabilized
<b>M</b>	Injection moulding	<b>M</b>	Nucleated
		<b>N</b>	Natural (no colour added)
		<b>P</b>	Impact modified
<b>Q</b>	Compression moulding		
<b>R</b>	Rotational moulding	<b>R</b>	Mould release agent
<b>S</b>	Sintering	<b>S</b>	Lubricated
<b>T</b>	Tape manufacture	<b>T</b>	Improved transparency
<b>X</b>	No indication	<b>X</b>	Crosslinkable
		<b>Y</b>	Increased electrical conductivity
		<b>Z</b>	Antistatic

### 3.4 Data block 4

#### 3.4.1 General

In this data block, the density is represented by a 2-figure code-number (see 3.4.2) and melt mass-flow rate by a code-letter and a 3-figure code-number (see 3.4.3). The two code-numbers are separated from each other by hyphens.

If a property value falls on or near a range limit, the manufacturer shall state which range will designate the material. If subsequent individual test values lie on, or on either side of, the range limit because of manufacturing tolerances, the designation is not affected.

NOTE Not all the combinations of the values of designatory properties are provided by currently available polymers.

#### 3.4.2 Density

The density shall be determined on a piece of melt-indexer extrudate.

The sample, uncoloured and unfilled, is extruded from a standard melt indexer at 190 °C in accordance with the method described in ISO 1133-1 under suitable conditions in order to obtain a strand of suitable length, free of voids, with a smooth surface. After being cut off, the strand is allowed to fall on a cool metal plate. It is subsequently annealed by immersing it in 200 ml of boiling water in a beaker, boiled for 30 min, and allowed to cool for 1 h by keeping the beaker and contents in the laboratory atmosphere.

The density of the specimen is then determined within 24 h in accordance with ISO 1183-1 or ISO 1183-2 or ISO 1183-3.

The possible values of density are divided into 13 ranges, each represented by a 2-figure code-number as specified in [Table 3](#).

NOTE To materials which are modified by colorants and/or fillers, density for designation should be the density value of the polyethylene resins (base polymer).

**Table 3 — Code-numbers used for density in data block 4**

Code-number	Range of density at $(23 \pm 2) ^\circ\text{C}$ kg/m <sup>3</sup>	Class
<b>00</b>	$\leq 901$	Polyethylene, very low density, PE-VLD
<b>03</b>	$>901$ but $\leq 906$	
<b>08</b>	$>906$ but $\leq 911$	
<b>13</b>	$>911$ but $\leq 916$	Polyethylene, low density, PE-LD, or polyethylene, linear low density, PE-LLD
<b>18</b>	$>916$ but $\leq 921$	
<b>23</b>	$>921$ but $\leq 925$	
<b>27</b>	$>925$ but $\leq 930$	Polyethylene, medium density, PE-MD
<b>33</b>	$>930$ but $\leq 936$	
<b>38</b>	$>936$ but $\leq 940$	
<b>44</b>	$>940$ but $\leq 948$	Polyethylene, high density, PE-HD
<b>50</b>	$>948$ but $\leq 954$	
<b>57</b>	$>954$ but $\leq 960$	
<b>62</b>	$>960$	

### 3.4.3 Melt mass-flow rate

The melt mass-flow rate shall be determined in accordance with ISO 1133-1 under the test conditions specified in [Table 4](#).

**Table 4 — Test conditions for determination of melt mass-flow rate**

Code-letter	Temperature °C	Nominal load kg
<b>D</b>	190	2,16
<b>T</b>	190	5,00
<b>G</b>	190	21,6

Set of conditions T is used only for materials having an MFR  $< 0,1$  g/10min when tested under set of conditions D. Set of conditions G is used only for materials having an MFR  $< 0,1$  g/10min when tested under set of conditions T.

The possible values of melt mass-flow rate are divided into 15 ranges, each represented by a 3-figure code-number as specified in [Table 5](#). The test conditions used shall be indicated by a single code-letter, as specified in [Table 4](#), immediately preceding the code-number indicating the range.

**Table 5 — Code-numbers used for melt mass-flow rate in data block 4**


Code-number	Range of MFR g/10 min
000	≤ 0,10
001	> 0,10 but ≤ 0,20
003	> 0,20 but ≤ 0,40
006	> 0,40 but ≤ 0,80
012	> 0,80 but ≤ 1,5
022	> 1,5 but ≤ 3,0
045	> 3,0 but ≤ 6,0
090	> 6,0 but ≤ 12
200	> 12 but ≤ 25
400	> 25 but ≤ 50
600	> 50 but ≤ 75
800	> 75 but ≤ 100
900	> 100 but ≤ 130
910	> 130 but ≤ 160
920	> 160 but ≤ 200

### 3.5 Data block 5

Indication of additional requirements in this optional data block is a way of transforming the designation of a material into a specification for a particular application. This shall be done for example by reference to a suitable national standard or to a standard-like, generally established specification.


## 4 Examples of designations

**4.1** A low density polyethylene thermoplastic material (PE-LD), intended for extrusion of film (F) with antiblocking (B) and natural (not coloured) (N), having a density of 918 kg/m<sup>3</sup> (18) and a melt mass-flow rate (MFR 190/2,16) (D) of 3,5 g/10 min (045), would be designated:

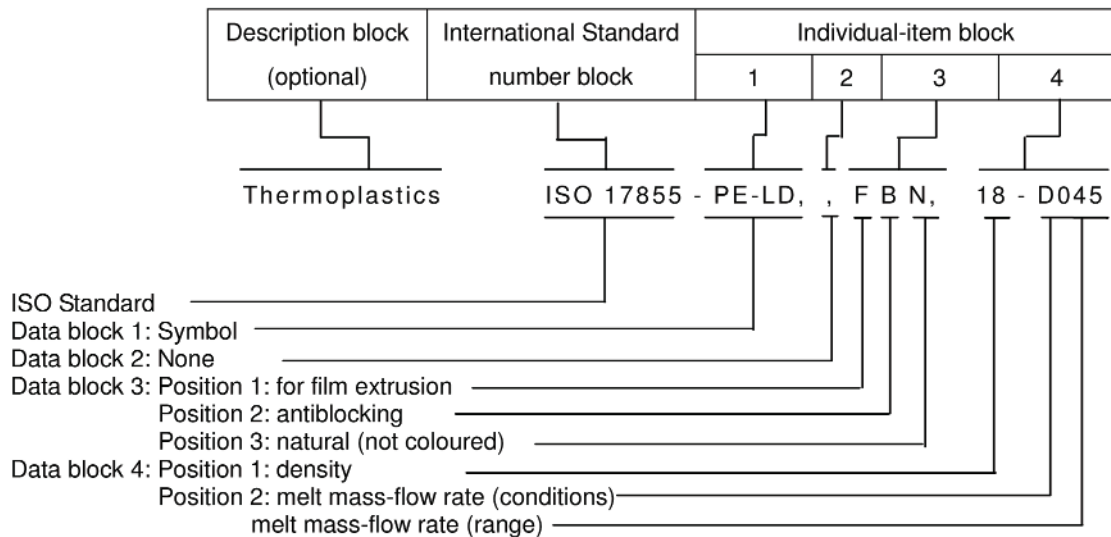


**Designation:** (Thermoplastics) ISO 17855-PE-LD,, FBN, 18-D045

**4.2** A high density polyethylene thermoplastic material (PE-HD), intended for blow moulding (B) without special additives and having a density of 952 kg/m<sup>3</sup> (50) and a melt mass-flow rate (MFR 190/21,6) (G) of 0,5 g/10 min (006), would be designated:

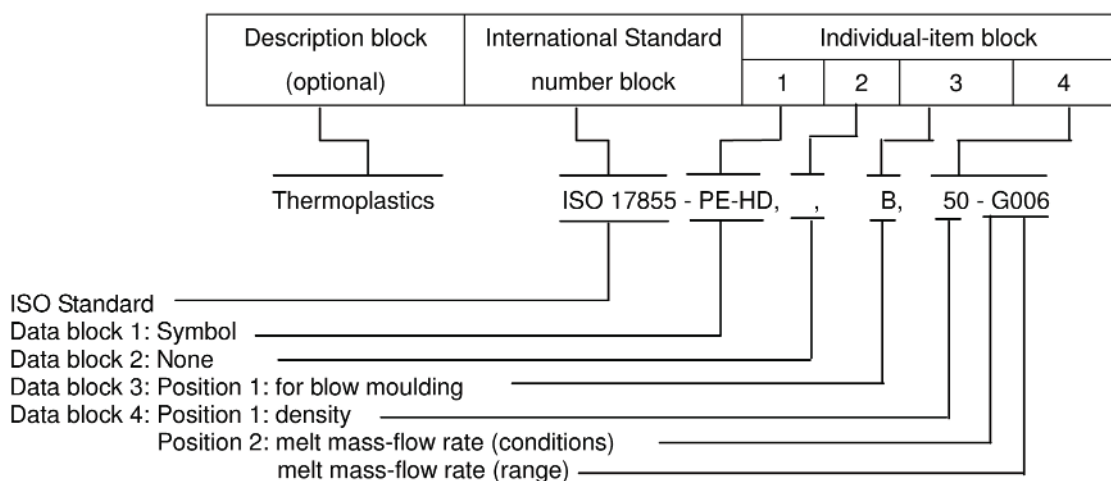


**Designation:** (Thermoplastics) ISO 17855-PE-HD,, B, 50-G006

4.3 A linear low density polyethylene thermoplastic material (PE-LLD), intended for cable sheathing (K), weather stabilized (L), coloured (C), having a density (base polymer) of 920 kg/m<sup>3</sup> (18) and a melt mass-flow rate (MFR 190/2,16) (D) of 0,22 g/10 min (003), would be designated:

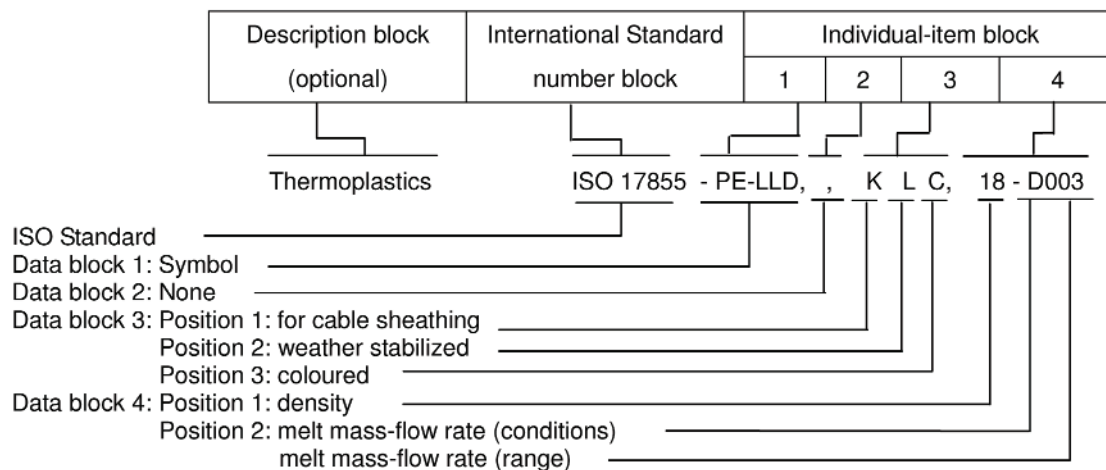


**Designation:** (Thermoplastics) ISO 17855-PE-LLD,, KLC, 18-D003

4.4 A medium density polyethylene thermoplastic material (PE-MD), intended for extrusion of pipe (E), weather stabilized (L), coloured (C), having a density (base polymer) of 935 kg/m<sup>3</sup> (33) and a melt mass-flow rate (MFR 190/5) (T) of 0,5 g/10 min (006), would be designated:

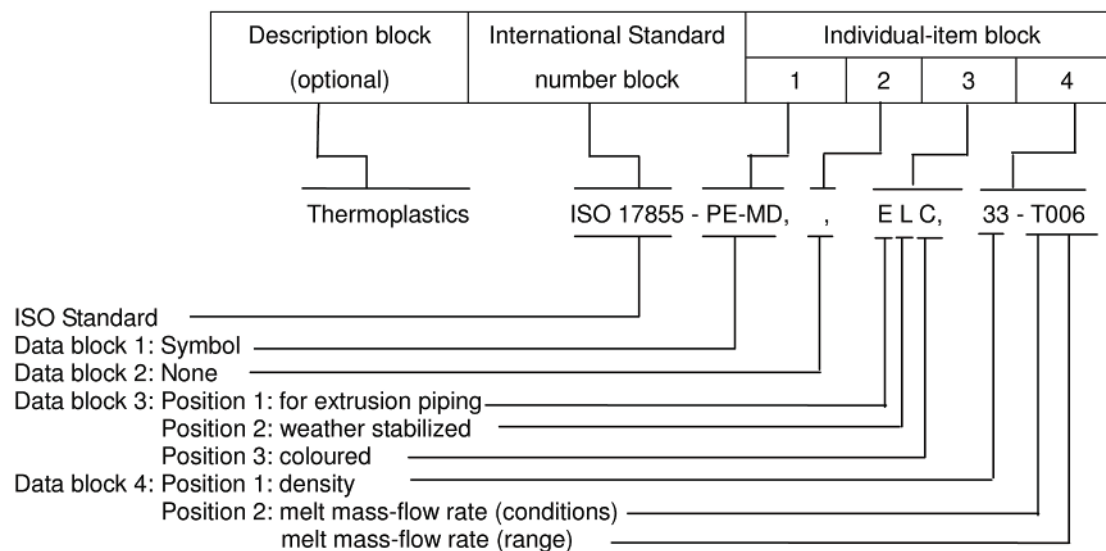

**Designation:** (Thermoplastics) ISO 17855-PE-MD,, ELC, 33-T006

**4.5** A high density polyethylene thermoplastic material (PE-HD), intended for injection moulding (M), antistatic (Z), coloured (C), a mixture of 25 % glass fibres (GF) and 10 % mineral powder (MD), having a density (base polymer) of 946 kg/m<sup>3</sup> (44) and a melt mass-flow rate (MFR 190/2,16) (D) of 36 g/10 min (400), would be designated:

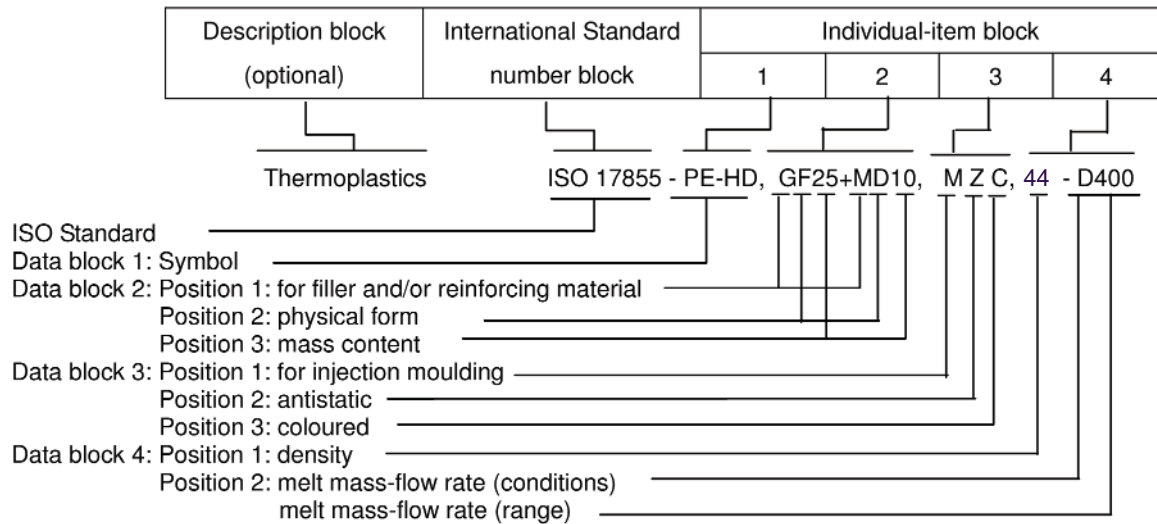

**Designation:** (Thermoplastics) ISO 17855-PE-HD, GF25+MD10, MZC, 44 -D400







# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™