

BS EN ISO 22854:2016
BS 2000-566:2016



BSI Standards Publication

**Liquid petroleum products —
Determination of hydrocarbon
types and oxygenates
in automotive-motor
gasoline and in ethanol
(E85) automotive fuel
— Multidimensional gas
chromatography method (ISO
22854:2016)**

bsi.

National foreword

This British Standard is the UK implementation of EN ISO 22854:2016. It supersedes BS EN ISO 22854:2014/BS 2000-566:2014 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee PTI/13, Petroleum Testing and Terminology.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 91216 0

ICS 75.080

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2016.

BS 2000 Series

Energy Institute, under the brand of IP, publishes and sells all Parts of BS 2000, and all BS EN and BS ISO petroleum test methods that would be part of BS 2000, both in its annual publication "IP Standard Test Methods for analysis and testing of petroleum and related products, and British Standard 2000 Parts" and individually.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Liquid petroleum products - Determination of hydrocarbon types and oxygenates in automotive-motor gasoline and in ethanol (E85) automotive fuel - Multidimensional gas chromatography method (ISO 22854:2016)

Produits pétroliers liquides - Détermination des groupes d'hydrocarbures et des composés oxygénés de l'essence pour moteurs automobiles et du carburant pour automobiles éthanol (E85) - Méthode par chromatographie multidimensionnelle en phase gazeuse (ISO 22854:2016)

Flüssige Mineralölerzeugnisse - Bestimmung der Kohlenwasserstoffgruppen und der sauerstoffhaltigen Verbindungen in Kraftstoffen für Kraftfahrzeugmotoren und in Ethanolkraftstoff (E85) - Multidimensionales gaschromatographisches Verfahren (ISO 22854:2016)

This European Standard was approved by CEN on 20 February 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

This document (EN ISO 22854:2016) has been prepared by Technical Committee ISO/TC 28 "Petroleum products and lubricants" in collaboration Technical Committee CEN/TC 19 "Gaseous and liquid fuels, lubricants and related products of petroleum, synthetic and biological origin" the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2016, and conflicting national standards shall be withdrawn at the latest by October 2016.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 22854:2014.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 22854:2016 has been approved by CEN as EN ISO 22854:2016 without any modification.

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	2
3 Terms and definitions	2
4 Principle	3
5 Reagents and materials	3
6 Apparatus	4
7 Sampling	5
8 Procedure	5
8.1 Conditioning.....	5
8.2 Sample preparation.....	5
8.2.1 Procedure B only – Sample dilution.....	5
8.2.2 Procedure A and B – Sample cooling.....	5
8.3 Test sample injection volume.....	5
8.4 Verification of the apparatus and test conditions.....	5
8.5 Validation.....	5
8.6 Preparation of the test sample.....	6
8.7 Preparation of the apparatus and test conditions.....	6
9 Calculation	6
9.1 General.....	6
9.2 Calculation as % (<i>m/m</i>).....	6
9.3 Calculation as % (<i>V/V</i>).....	7
9.4 Calculation of total oxygen content in % (<i>m/m</i>).....	9
9.5 Data report according to automotive motor gasoline specification.....	9
10 Expression of results	9
10.1 Procedure A.....	9
10.2 Procedure B.....	10
11 Precision	10
11.1 General.....	10
11.2 Repeatability, <i>r</i>	10
11.3 Reproducibility, <i>R</i>	10
12 Test report	11
Annex A (informative) Instrument specifications	12
Annex B (informative) Examples of typical chromatograms	14
Bibliography	19

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 28, *Petroleum products and related products of synthetic or biological origin*.

This third edition cancels and replaces the second edition (ISO 22854:2014), which contained a serious mistake in the scope regarding the levels of oxygen content.

Introduction

This International Standard is a small update of the second edition (ISO 22854:2014), which in turn was a revision to extend the scope of the first edition. Originally ISO 22854:2008 (and its predecessor EN 14517:2004) was used for determination of saturated, olefinic, aromatic and oxygenated hydrocarbons in automotive motor gasoline according to European fuel specifications. Recent round-robin work has shown that the scope of the method can be updated without alteration to include petrol with higher oxygen percentages than mentioned in the first edition and will now be applicable for automotive motor gasoline up to and including E10.

An interlaboratory study organized by CEN has shown that the method can also be used for high-ethanol gasoline [also called ethanol (E85) automotive fuel], provided that the sample is diluted with a component that will not interfere with any of the components or group of components that need to be analysed. Details of how to perform such analysis are given in 8.2.

The derived precision data for methanol do not comply with the precision calculation as presented in this International Standard. No precision calculation for methanol has been established as the need for such data has not been expressed. If methanol is present in the automotive motor gasoline sample, it is recommended that its contents is verified by the use of an appropriate test method, for instance as given in EN 228^[1].

The test method described in this International Standard is harmonized with ASTM D6839^[2].

Liquid petroleum products — Determination of hydrocarbon types and oxygenates in automotive-motor gasoline and in ethanol (E85) automotive fuel — Multidimensional gas chromatography method

1 Scope

This International Standard specifies the gas chromatographic (GC) method for the determination of saturated, olefinic and aromatic hydrocarbons in automotive motor gasoline and ethanol (E85) automotive fuel. Additionally, the benzene content, oxygenate compounds and the total oxygen content can be determined.

NOTE 1 For the purposes of this document, the terms % (m/m) and % (V/V) are used to represent respectively the mass fraction, μ , and the volume fraction, φ .

This International Standard defines two procedures, A and B.

Procedure A is applicable to automotive motor gasoline with total aromatics of up to 50 % (V/V); total olefins from about 1,5 % (V/V) up to 30 % (V/V); oxygenates from 0,8 % (V/V) up to 15 % (V/V); total oxygen from about 1,5 % (m/m) to about 3,7 % (m/m); and benzene of up to 2 % (V/V). The system can be used for ethers with 5 or more C atoms up to 22 % (V/V) but the precision has not been established up to this level.

Although this test method can be used to determine higher-olefin contents of up to 50 % (V/V), the precision for olefins was tested only in the range from about 1,5 % (V/V) to about 30 % (V/V).

Although specifically developed for the analysis of automotive motor gasoline that contains oxygenates, this test method can also be applied to other hydrocarbon streams having similar boiling ranges, such as naphthas and reformates.

NOTE 2 For Procedure A, precision data have been established for the oxygenate compounds in automotive motor gasoline samples containing ethyl-tert-butyl ether (ETBE), methyl-tert-butyl ether (MTBE), tert-amyl-methyl ether (TAME), *iso*-propanol, *iso*-butanol, tert-butanol, methanol and ethanol. The derived precision data for methanol do not comply with the precision calculation as presented in this International Standard. Applicability of this International Standard has also been verified for the determination of *n*-propanol, acetone, and di-isopropyl ether (DIPE). However, no precision data have been determined for these compounds.

Procedure B describes the procedure for the analysis of oxygenated groups (ethanol, methanol, ethers, C3 – C5 alcohols) in ethanol (E85) automotive fuel containing ethanol between 50 % (V/V) and 85 % (V/V). The gasoline is diluted with an oxygenate-free component to lower the ethanol content to a value below 20 % (V/V) before the analysis by GC. If the ethanol content is unknown, it is advisable to use a dilution of 4:1 when analysing the sample.

The sample can be fully analysed including hydrocarbons. Precision data for the diluted sample are only available for the oxygenated groups.

NOTE 3 For Procedure B, the precision can be used for an ethanol fraction from about 50 % (V/V) up to 85 % (V/V). For the ether fraction, the precision as specified in Table 6 can be used for samples containing at least 11 % (V/V) of ethers. For the higher alcohol fraction, too few data were obtained to derive a full precision statement and the data presented in Table 6 are therefore only indicative.

NOTE 4 While developing this test method, the final boiling point was limited to 215 °C.

NOTE 5 An overlap between C9 and C10 aromatics can occur. However, the total is accurate. Isopropyl benzene is resolved from the C8 aromatics and is included with the other C9 aromatics.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3170, *Petroleum liquids — Manual sampling*

ISO 3171, *Petroleum liquids — Automatic pipeline sampling*

ISO 4259, *Petroleum products — Determination and application of precision data in relation to methods of test*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1 hydrocarbon group

family of hydrocarbons such as saturated hydrocarbons, olefinic hydrocarbons, etc

3.1.1 saturated hydrocarbon saturate

type of hydrocarbon that contains no double bonds with a carbon number of 3 to 12

EXAMPLE *n*-Paraffins, *iso*-paraffins, naphthenes and poly-naphthenes.

3.1.2 olefinic hydrocarbon olefin

type of hydrocarbon that contains double or triple bonds with a carbon number of 3 to 10

EXAMPLE *n*-Olefins, *iso*-olefins and cyclic olefins.

3.1.3 aromatic hydrocarbon aromatic

type of cyclic hydrocarbon with alternating double and single bonds between carbon atoms forming the rings

EXAMPLE Benzene, toluene and higher homologous series with a carbon number of 6 to 10 and naphthalenes, with a carbon number of up to 12.

3.2 oxygenate oxygenated compound

type of hydrocarbon that contains an oxygen group, the addition of which is allowed according to current petrol specifications

EXAMPLE Alcohols and ethers.

Note 1 to entry: See Clause 1, Note 2.

3.3 partial group PG

one carbon number in an individual group, being either a single compound like toluene or an isomeric mixture

EXAMPLE *n*-Butane and *iso*-butane.

4 Principle

4.1 Procedure A and Procedure B use the same separation technique and analysis procedure. The difference between the parts is that for Procedure B the sample is diluted. The diluting solvent is not considered in the integration. This makes it possible to report the results of the undiluted sample after normalization to 100 %.

4.2 The automotive motor gasoline sample being analysed is separated into hydrocarbon groups by means of GC analysis using special column-coupling and column-switching procedures.

The automotive motor gasoline sample is injected into the GC system and, after vaporization, is separated into the different groups. Detection is always done by a flame ionization detector (FID).

4.3 The mass concentration of each detected compound or hydrocarbon group is determined by the application of relative response factors (see 9.2) to the area of the detected peaks, followed by normalization to 100 %. For automotive motor gasoline samples containing oxygenates that cannot be determined by this test method, the hydrocarbon results are normalized to 100 % minus the value of oxygenates as determined by another method. The liquid volume concentration of each detected compound or hydrocarbon group is determined by the application of density values (see 9.3) to the calculated mass concentration of the detected peaks followed by normalization to 100 %.

IMPORTANT — It is essential to the correct execution of the method that great care be taken to ensure that all compounds are correctly identified. This is especially true for the identification of oxygen - containing compounds because of their wide range of response factors. It is, therefore, highly recommended for correct identification to verify possibly unknown oxygenates using a reference mixture that contains these pure compounds.

4.4 After this analysis, the automotive motor gasoline is separated into hydrocarbon groups and then by carbon number. By the use of the corresponding relative response factors, the mass distributions of the groups in the automotive motor gasoline sample can be calculated.

5 Reagents and materials

5.1 Gases

Installation of suitable moisture filters is recommended for hydrogen, helium and nitrogen lines.

5.1.1 Hydrogen, 99,995 % pure.

DANGER — Hydrogen is explosive when mixed with air at concentration between 4 % (V/V) and 75 % (V/V). See the equipment manufacturers' manuals concerning leaks in the system.

5.1.2 Helium or nitrogen, 99,995 % pure.

The system's operating parameters such as column and trap temperatures, carrier gas flows and valve switching times are depending on the type of carrier gas used. The use of nitrogen as carrier gas is not possible on all configurations. Contact the equipment manufacturer for specific information or instructions on the use of nitrogen.

5.1.3 Compressed air.

5.2 Vials, airtight and inert, e.g. with rubber-membrane caps covered with self-sealing polytetrafluoroethylene (PTFE).

5.3 Reference solutions, finished automotive motor gasoline(s) used as reference and which contain components and concentration levels comparable to those of the test sample.

The composition of the reference solution should have been determined in a round robin or by other methods.

DANGER — Flammable. Harmful if inhaled.

5.4 Diluting solvent, used in Procedure B, shall not interfere with any other component in gasoline being analysed. Dodecane (C₁₂H₂₆) or tridecane (C₁₃H₂₈) are recommended solvents.

6 Apparatus

6.1 Gas chromatograph, computer-controlled, multidimensional GC equipment, injector, FID, suitable columns, traps and hydrogenation catalysts, of which an example is given in Annex A.

6.2 Switching valves, suitable switching valves that are used for the transfer of compounds from one column to the other in the gas chromatograph.

They shall have a chemically inactive surface and a small dead volume.

6.3 Traps, suitable short columns (see Annex A for an example) used for retaining certain selected chemical groups of the automotive motor gasoline using temperature control.

The absorption of the trapped compounds shall be reversible.

EXAMPLE A typical sequence is the following:

— The alcohols and higher-boiling aromatics are absorbed in a trap (sulfate column I). The remaining aromatics are separated from the other components by means of a polar column (for example, OV 275).

— The ethers are separated from the remaining fraction by means of another trap (sulfate column II).

— The olefins are separated from the saturates by the olefin trap (for example, silver salt) in two steps. This is necessary due to the limited capacity of such traps to retain high amounts of butene or total olefins. If the trap capacity is sufficient for the olefin concentration, the separation may be performed in one step.

— The remaining saturated hydrocarbons are separated into paraffins and naphthenes according to their carbon number using a 13X molecular sieve column.

— The ethers are then eluted from the trap (sulfate column II) and separated and detected according to boiling point.

— The olefins are desorbed from the olefin trap and hydrogenated in the Pt-column. They are separated and detected as the corresponding saturated compounds using a 13X molecular sieve.

— The alcohols and higher-boiling aromatics are eluted from the polar column and the trap (sulfate column I), separated using a non-polar column (for example, OV 101 methyl silicone) and detected according to boiling point.

Examples of typical chromatograms with this order of elution of the hydrocarbon fractions are shown in Figures B.1 and B.2. Specifically for Procedure B, a typical chromatogram is shown in Figure B.6.

IMPORTANT — Sulfur-containing compounds are irreversibly adsorbed in the olefins trap and can reduce its capacity to retain olefins. Sulfur can also be adsorbed in the alcohol and ether-alcohol-aromatic traps. Although the effect of low amounts of sulfur components on the various traps or columns is very small, it is important to exercise care with automotive motor gasoline samples with high levels of sulfur.

7 Sampling

Unless otherwise required by national fuel specification standards or by the regulations for the sampling of automotive motor gasoline, samples shall be taken in accordance with ISO 3170 for manual sampling or in accordance with ISO 3171 for automatic pipeline sampling.

8 Procedure

8.1 Conditioning

Condition the apparatus according to the manufacturer's instructions after shutdowns.

8.2 Sample preparation

8.2.1 Procedure B only – Sample dilution

The procedure as described in this subclause is used to analyse gasoline samples containing higher amounts of ethanol such as ethanol (E85) automotive fuel with ethanol content between 50 % (V/V) and 85 % (V/V).

As the sulfate column I trap (see Table A.1) cannot trap high amounts of ethanol, the sample shall be diluted. The selected dilutant (5.4) shall not interfere with the analysis. The level of dilution should be chosen in such a way that the final amount of ethanol does not exceed 20 % (V/V). If the ethanol content is unknown, it is advised to use a dilution ratio of 4:1 when analysing the sample.

8.2.2 Procedure A and B – Sample cooling

Cool the test sample to prevent loss by evaporation. Transfer a sufficient portion of the test sample to a vial (5.2) and immediately tightly close and seal it using the self-sealing PTFE cap (see 5.2). It is advised to cool the test sample to a temperature between 0 °C and 5 °C.

8.3 Test sample injection volume

Size the injection volume of the test sample in such a way that the capacity of the columns is not exceeded and that the linearity of the detector is valid.

NOTE An injection volume of 0,1 µl has proven to be satisfactory.

8.4 Verification of the apparatus and test conditions

Run the reference solution (5.3) and check for correct instrument parameters, cutting times and grouping times. If they are not correct, adjust the apparatus to the manufacturer's recommendations and rerun the reference solution.

Attention should be paid to components, such as benzene, olefins and oxygenates, that are near the boundaries of separation on the group-selective columns. Care should be taken to accurately identify the oxygen-containing compounds. It is recommended to verify the identity of possible oxygenates using a reference material that contains the pure component of interest. Annex B shows several chromatograms specifically for oxygenate compounds, providing evidence of their elution times and possible interferences.

8.5 Validation

Reprocess the validation reference solution and compare the obtained results with the consensus values. The absolute deviation from the consensus values shall not be greater than the reproducibility for the parameters as given in Clause 11.

It is strongly recommended to run the validation reference solution weekly to check the proper function of the equipment.

The validation reference solution(s) should contain the components in amounts similar to those found in the test samples. Validation of the apparatus should be performed prior to the analysis of any new oxygenates.

8.6 Preparation of the test sample

Prepare the test sample as specified in 8.2.

8.7 Preparation of the apparatus and test conditions

Set up the apparatus in accordance with 8.1 and check it in accordance with 8.4.

9 Calculation

9.1 General

For Procedure A, this Clause shall be followed in full.

For Procedure B, in the final calculations the peak area of the dilutant (5.4) shall not be integrated so that the final report, after normalization to 100 %, will give the results for all groups and components for the undiluted sample.

NOTE Analysing high-ethanol samples using this application may require specific analysis and reporting procedures and competences (see manufacturer's instructions).

9.2 Calculation as % (m/m)

The integrated peak areas are employed for the calculations. The peaks are arranged according to their presence in the groups described in Clause 3. Tables 1 and 2 give the relative response factors of partial groups and for oxygenated compounds. After correcting with the response factors, the mass contributions for all partial groups are calculated and normalized to 100 % (m/m). The partial groups are then classified according to the hydrocarbon type and carbon number.

Table 1 — FID relative response factors of partial groups

Carbon number	Relative response factor				
	$F_{RR,PG}$				
	Paraffins, <i>n- plus iso-</i>	Naphthenes	Olefins, <i>n- plus iso-</i>	Olefins, cyclics	Aromatics
3	0,916	—	0,916	—	—
4	0,906	—	0,906	—	—
5	0,899	0,874	0,899	0,874	—
6	0,895	0,874	0,895	0,874	0,811
7	0,892	0,874	0,892	0,874	0,820
8	0,890	0,874	0,890	0,874	0,827
9	0,888	0,874	0,888	0,874	0,832
10	0,887	0,874	0,887	0,874	0,837
11+	0,887	—	—	—	0,840

Table 2 — FID relative response factors for oxygenated compounds

Oxygenate compound	Relative response factor $F_{RR,PG}^a$
MTBE	1,33
DIPE	1,32
ETBE	1,24
TAME	1,24
Methanol	3,80
Ethanol	1,87
<i>n</i> -propanol	1,87
<i>iso</i> -propanol	1,74
<i>n</i> -butanol	1,55
<i>iso</i> -butanol	1,39
<i>sec</i> -butanol	1,39
<i>tert</i> -butanol	1,23
2-methyl-2-butanol	1,40
^a The relative response factors for the oxygenate compounds have been determined experimentally.	

If single compounds, e.g. oxygenate compounds, are determined by a different but accepted method, e.g. EN 1601^[3], ASTM D4815^[4], EN 13132^[5] or ASTM D5599^[6], they shall be excluded from integration. The total area is then not normalized to 100 %, but to 100 % minus the excluded quantified component. The external quantification shall be noted in the report.

Calculate the theoretical relative response factors, $F_{RR,PG}$, of a particular carbon number for a hydrocarbon type group (response of methane set to unity) as given in Formula (1); (see Tables 1 and 2):

$$F_{RR,PG} = \frac{[(M_C \cdot n_C) + (M_H \cdot n_H)] \cdot 0,7487}{M_C \cdot n_C} \quad (1)$$

where

M_C is the atomic mass of carbon, equal to 12,011, in g/mol;

n_C is the number of carbon atoms in the group;

M_H is the atomic mass of hydrogen, equal to 1,008, in g/mol;

n_H is the number of hydrogen atoms in the group;

0,748 7 is the correction factor to set the response of methane to unity.

For each partial group (PG) the % (*m/m*), w_{PG} , is calculated as given in Formula (2):

$$w_{PG} = \frac{100 \cdot A_{PG} \cdot F_{RR,PG}}{\sum_i (A_{PG,i} \cdot F_{RR,PG,i})} \quad (2)$$

where A_{PG} is the total, corrected signal area for the partial group (PG).

9.3 Calculation as % (V/V)

The conversion from % (*m/m*) to % (V/V) is done using the density of the partial groups. The density values at 15 °C of partial groups, expressed in kilograms per cubic metre, are shown in Table 3 and of oxygenate compounds at 15 °C in Table 4.

Table 3 — Density at 15 °C of partial groups

Carbon number	Density ρ_{PG} kg/m ³				
	Paraffins, <i>n- plus iso-</i>	Naphthenes	Olefins, <i>n- plus iso-</i>	Olefins, cyclics	Aromatics
3	506,5	—	520,4	—	—
4	577,9	—	613,7	—	—
5	626,9	750,3	656,5	773,3	—
6	662,2	760,6	685,9	785,3	884,3
7	688,8	762,1	704,0	790,5	871,6
8	708,4	780,5	719,3	805,2	871,9
9	728,1	792,5	738,2	812,5	878,0
10	734,0	812,8	748,6	817,6	892,8
11+	759,0	—	—	—	894,4

Table 4 — Density at 15 °C of oxygenate compounds

Oxygenate compound	Density ρ_{PG} kg/m ³
MTBE	745,3
DIPE	729,2
ETBE	745,6
TAME	775,2
Methanol	795,8
Ethanol	794,8
<i>n</i> -propanol	813,3
<i>iso</i> -propanol	789,5
<i>n</i> -butanol	813,3
<i>iso</i> -butanol	805,8
<i>sec</i> -butanol	810,6
<i>tert</i> -butanol	791,0
2-methyl-2-butanol	813,5

The % (V/V), ϕ_{PG} , of the partial group (PG) is obtained from the % (m/m), w_{PG} , as given in Formula (3):

$$\phi_{PG} = \frac{100 \cdot \frac{w_{PG}}{\rho_{PG}}}{\sum_i \left(\frac{w_{PG,i}}{\rho_{PG,i}} \right)} \quad (3)$$

where

ρ_{PG} is the density of the partial group (PG) in kg/m³;

w_{PG} is the % (m/m) of the partial group (PG).

9.4 Calculation of total oxygen content in % (m/m)

Calculate the oxygen content, w_O , from all identified oxygenate compounds, i , according to Formula (4):

$$w_O = \sum_i \left(\frac{n_O \cdot M_O}{M_i} \cdot w_i \right) \quad (4)$$

where

n_O is the number of oxygen atoms in the molecule, generally 1;

M_O is the atomic mass of oxygen, in g/mol;

M_i is the molecular mass of the oxygenated compound, in g/mol;

w_i is the % (m/m) of the compound in the mixture.

EXAMPLE This example calculation uses MTBE (C₅H₁₂O) as the only oxygenate compound and the following atomic masses:

— C: 12,011

— H: 1,008

— O: 16,000

$$w_O = \sum_i \left(\frac{n_O \cdot M_O}{M_i} \cdot w_i \right) = \frac{1 \cdot 16,000}{5 \cdot 12,011 + 12 \cdot 1,008 + 1 \cdot 16,000} \cdot w_i = 0,1815 \cdot w_i$$

9.5 Data report according to automotive motor gasoline specification

For reporting of conformity to current automotive motor gasoline specifications, specific rounding or summation of results can be necessary. The following results are reported.

- The total content of saturates is determined by summation of (volume fraction) of the paraffins, naphthenes and high-boiling poly-naphthenes.
- The total olefin content is determined by summation of the (volume fraction) of the olefins and the cyclic olefins.
- The total aromatic content is reported unchanged.
- The benzene content is reported in % (V/V).
- The oxygenated compound contents are reported in % (V/V).
- The total oxygen content is calculated according to 9.4. It is reported in % (m/m).

10 Expression of results

10.1 Procedure A

The results are reported in a volume fraction of % or a mass fraction of % (see 9.5) according to the following requirements:

- saturates content, aromatics content and olefins content to the nearest 0,1 %;
- benzene content, oxygenate content and total oxygen content to the nearest 0,01 %.

10.2 Procedure B

The results for ethanol, ethers and higher alcohols are reported to the nearest 0,1 % (V/V).

11 Precision

11.1 General

The precision is given as determined by statistical examination of inter-laboratory test results in accordance with ISO 4259. Precision values calculated from the equations given in Table 5 or Table 6 shall be rounded to the appropriate number of decimal places as specified in Clause 10.

The values in Table 6 (Procedure B) are applicable for samples which have a content of ethers up to 11,0 % (V/V) and C3 – C5 alcohols up to 6,0 % (V/V).

11.2 Repeatability, r

The difference between two test results, obtained by the same operator with the same apparatus under constant operating conditions on identical test material, in the long run for the normal and correct operation of the test method, is expected to exceed the values given in Table 5 for Procedure A and Table 6 for Procedure B in only one case in twenty.

11.3 Reproducibility, R

The difference between two single and independent test results, obtained by different operators working in different laboratories on identical test material, in the long run for the normal and correct operation of the test method, is expected to exceed the values given in Table 5 for Procedure A and Table 6 for Procedure B in only one case in twenty.

NOTE 1 The reproducibility of *iso*-propanol can be higher than for the other components, particularly when it appears as a double peak; it is then necessary to identify both peaks properly (see warning notice in 4.3). The repeatability indicates that a better precision can be obtained when comparing the ratio of the reproducibility to the repeatability, R/r , with the ratio for *iso*-butanol. Reference can also be made to CEN/TR 15745^[8], which cites the research report on work done by CEN.

NOTE 2 The derived reproducibility data for methanol is much higher than can be expected from the repeatability. Due to the fact that methanol is an active component, it is necessary to take care during sampling and to ensure the proper operation of the pre-column. Reference can also be made to CEN/TR 15745^[8], which cites the research report on work done by CEN.

Table 5 — Repeatability and reproducibility for Procedure A

Component or group		Repeatability ^a r	Reproducibility ^a R
Saturates		0,5 % (V/V)	1,6 % (V/V)
Aromatics		$(0,009\ 5\ X + 0,195\ 2) \% (V/V)$	$(0,045\ 0\ X + 0,138\ 4) \% (V/V)$
Olefins		$(0,018\ 5\ X + 0,141\ 5) \% (V/V)$	$(0,117\ 6\ X + 0,511\ 8) \% (V/V)$
Benzene	for $w_{\text{benzene}} \geq 0,8$	$(0,014\ 7\ X + 0,003\ 1) \% (V/V)$	$(0,077\ 7\ X - 0,025\ 0) \% (V/V)$
	for $w_{\text{benzene}} < 0,8$	0,02 % (V/V)	0,04 % (V/V)
Oxygenated compounds (as individual component or group)		$(0,019\ 3\ X + 0,002\ 4) \% (V/V)$	$(0,025\ 1\ X + 0,351\ 5) \% (V/V)$
Total oxygen content		0,04 % (m/m)	0,31 % (m/m)

^a X is the mean of the two results being compared unless otherwise stated.

Table 6 — Repeatability and reproducibility for Procedure B (high ethanol gasolines)

Component or group	Repeatability ^a r % (V/V)	Reproducibility ^a R % (V/V)
Ethanol (>50 % and < 85 %)	1,24	4,85
Ethers (>0,5 % and < 1,6 %)	0,03	0,33
C3 – C5 alcohols (>1,4 % and < 2,5 %) ^b	$0,103 2 X + 0,001 1$	$0,696 3 X + 0,073 1$
^a X is the mean of the two results being compared in % (V/V) unless otherwise stated. ^b Limited data was obtained for the calculation of these precision data. The values should therefore be considered as an indication only.		

12 Test report

The test report shall contain at least the following information:

- a) a reference to this International Standard, i.e. ISO 22854;
- b) type and complete identification of the product tested;
- c) sampling method used (see Clause 7);
- d) result of the test (see Clause 10);
- e) if applicable, the external quantification (see 9.2);
- f) any deviation, by agreement or otherwise, from the procedure specified;
- g) date of the test.

Annex A (informative)

Instrument specifications

A specific column specification is given in Table A.1. Not all columns may be required, the actual columns used may vary depending on the instrument configuration. The test equipment should be set up to work according to the information in this Annex and should have all the necessary items installed according to the requirements of the supplier's specifications.


Table A.1 — Suggested column specification

Name	Length cm	I.D. mm	Phase	Description
Sulfate column I	30	2	50 % sulfate on Chromosorb 750 ^a , (80 to 100) mesh	Absorption of alcohols and higher-boiling aromatics
Polar column (4)	270	2	30 % OV 275 on Chromosorb ^a PAW, (60 to 80) mesh	Separation of aliphatic and aromatic compounds
Non-polar column (12)	1 500	0,53	5 µm methyl silicone	Elution of aromatics
Molecular sieve 13X (13)	170	1,7	3 % molecular sieve 13X on Chromosorb 750 ^a , (80 to 100) mesh	Separation of paraffins and naphthenes
Sulfate column II (6)	30	3	50 % sulfate on Chromosorb 750 ^a , (80 to 100) mesh	Adsorption of ethers
Olefine trap (7)	30	3	8 % silver salt on silica gel, (80 to 120) mesh	Adsorption of olefins
Porapak ^b column	90	2	Porapak P ^b , (80 to 100) mesh	Elution of aromatics, alcohols and ethers
Hydrogenation catalyst (9)	5,5	1,7	2 % Pt on alumina	Hydrogenation of unsaturated compounds

^a Chromosorb is the trade name of a product distributed by Johns-Manville Corp. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of the product named. Equivalent products may be used if they can be shown to lead to the same results.

^b Porapak is the trade name of a product distributed by Waters Associates, Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of the product named. Equivalent products may be used if they can be shown to lead to the same results.

A typical instrument configuration is shown in Figure A.1.

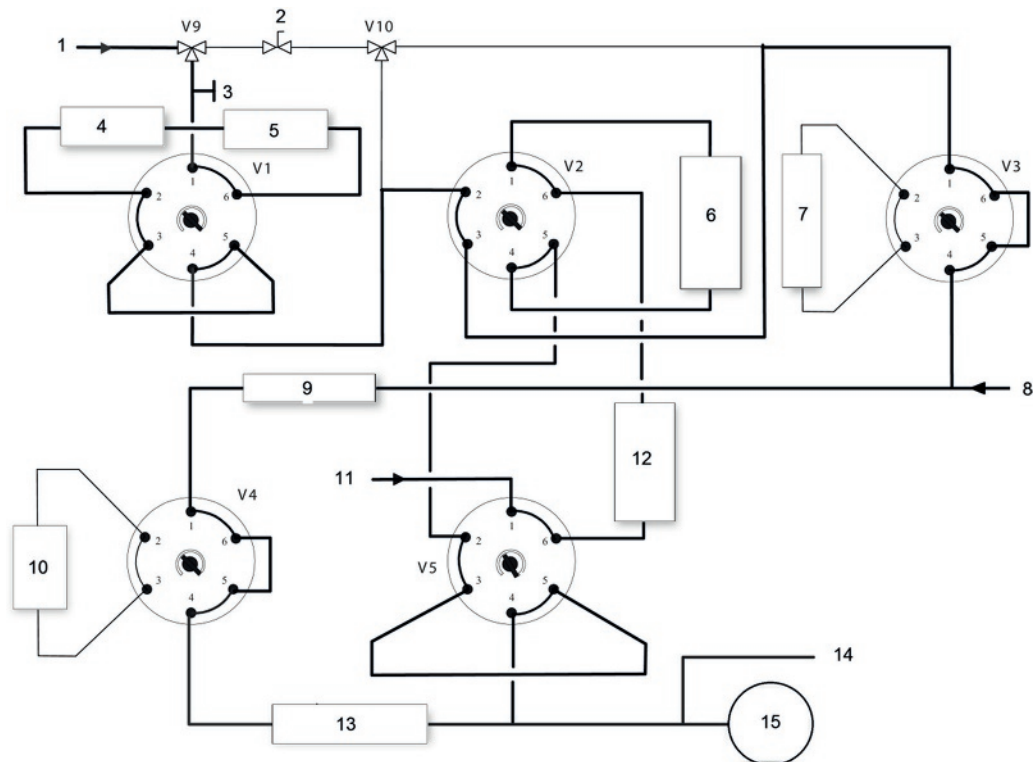

Key

V1 to V5	column switching/bypass valves	V9, V10	3-way valve
1	front inlet	9	Pt column
2	needle valve	10	molecular sieve 5A
3	injection port	11	back inlet
4	polar column	12	non-polar column
5	pre-column	13	molecular sieve 13X
6	alc/ether trap	14	back end split
7	olefine trap	15	flame ionization detector
8	Pt hydrogen		


Figure A.1 — Typical instrument configuration

Annex B **(informative)**

Examples of typical chromatograms

Figures B.1 and B.2 show example chromatograms with a typical elution order of the hydrocarbon fractions as mentioned in 6.3. Figure B.3 is a more detailed presentation of the elution of ethanol, showing that ethanol elutes just before the C9 aromatics (indicated as 2 in the chromatograms).


Reference is made to CEN/TR 15745^[8], which cites the research report on work done by CEN or the manufacturer's manual for additional detailed chromatograms.

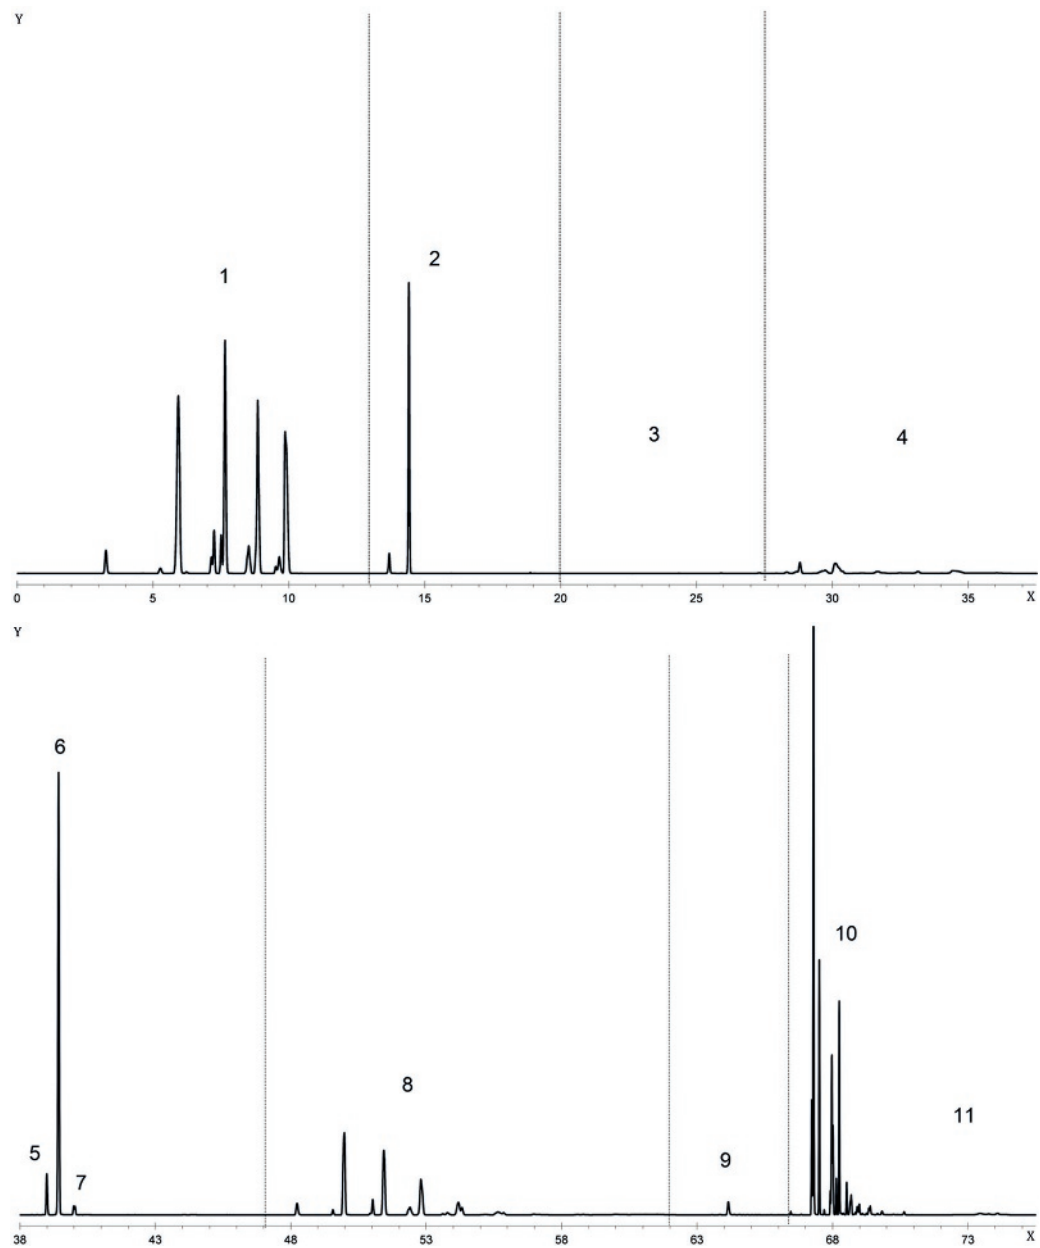

Key

X	time, in minutes (min)	6	toluene
Y	instrument response, in picoamperes (pA)	7	C8 aromatics
1	light saturates: C3 to C8	8	olefins
2	ETBE	9	ethanol
3	C4 to C6 olefins	10	C8 to C10 aromatics
4	heavy saturates: C7 to C10	11	high-boiling aromatics
5	benzene		


Figure B.1 — Typical chromatogram of an automotive motor gasoline containing ETBE

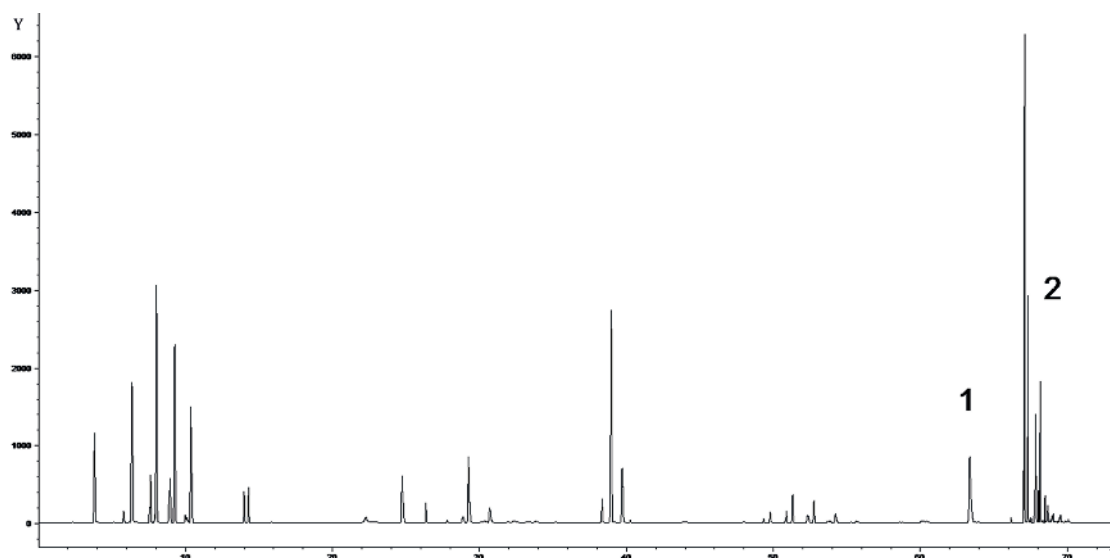

Key

X	time, in minutes (min)	1	ethanol, which elutes at 64,2 min
Y	instrument response, in picoamperes (pA)	2	C9 aromatics

Figure B.2 — Typical chromatogram of an automotive motor gasoline containing ethanol

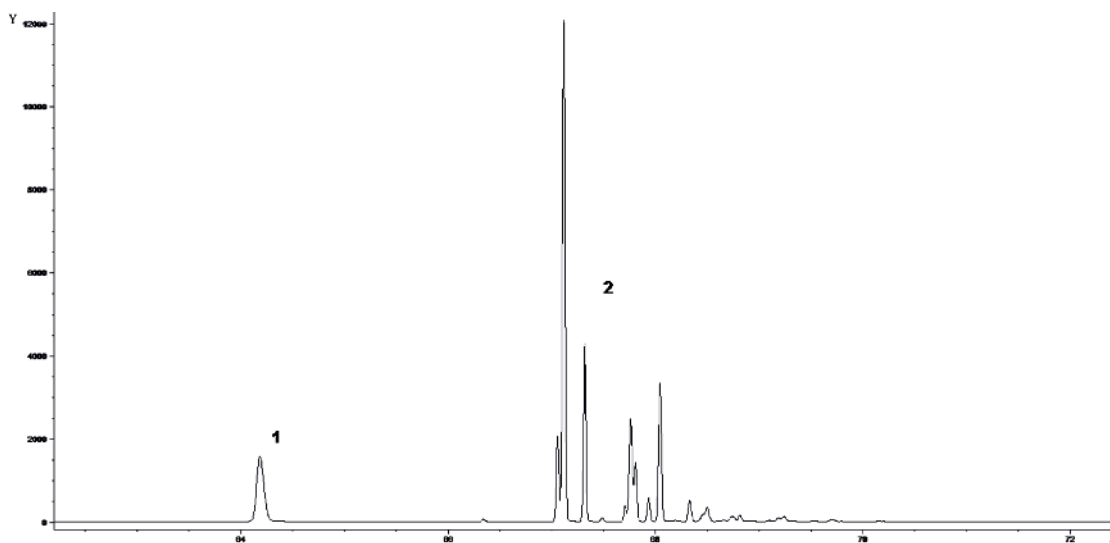


Key

X	time, in minutes (min)	1	ethanol, which elutes at 64,2 min
Y	instrument response, in picoamperes (pA)	2	C9 aromatics

Figure B.3 — Expanded segment of Figure B.2 that displays the elution of ethanol


If the sulfate column I has too high a separation temperature, part of the ethanol can elute from the column and enter the polar column. The ethanol then elutes in the first aromatic fraction. This is shown in Figures B.4 and B.5.

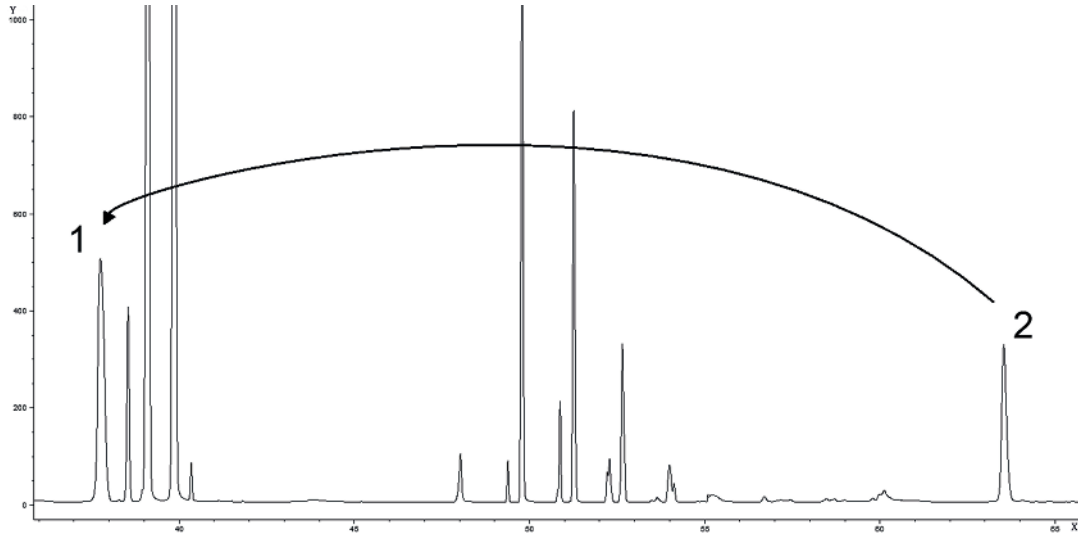

Key

X	time, in minutes (min)	1	ethanol, eluting at 37,8 min
Y	instrument response, in picoamperes (pA)	2	ethanol, which elutes at 64,2 min

Figure B.4 — Chromatogram of ethanol breakthrough from sulfate column I due to too high column temperature

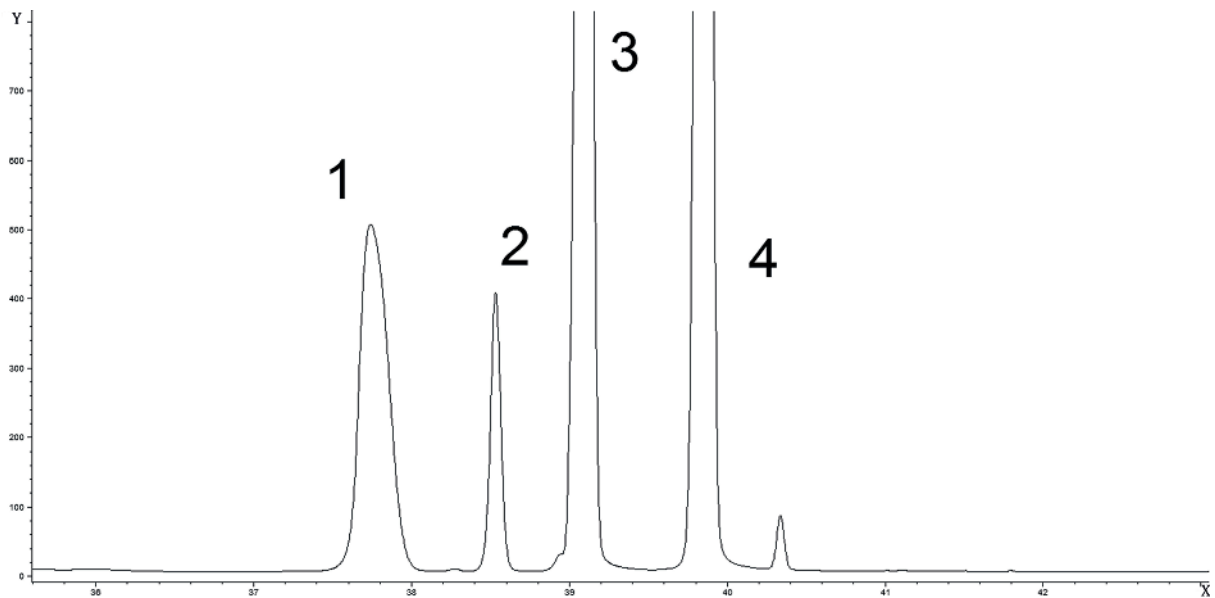


Key

X	time, in minutes (min)	2	benzene
Y	instrument response, in picoamperes (pA)	3	toluene
1	ethanol	4	C8 aromatics

Figure B.5 — Expanded chromatogram of ethanol elution after breakthrough from sulfate column I

For procedure B for gasoline samples containing higher amounts of ethanol, such as ethanol (E85) automotive fuel with ethanol content between 50 % (V/V) and 85 % (V/V), an example of a chromatogram is shown in Figure B.6.

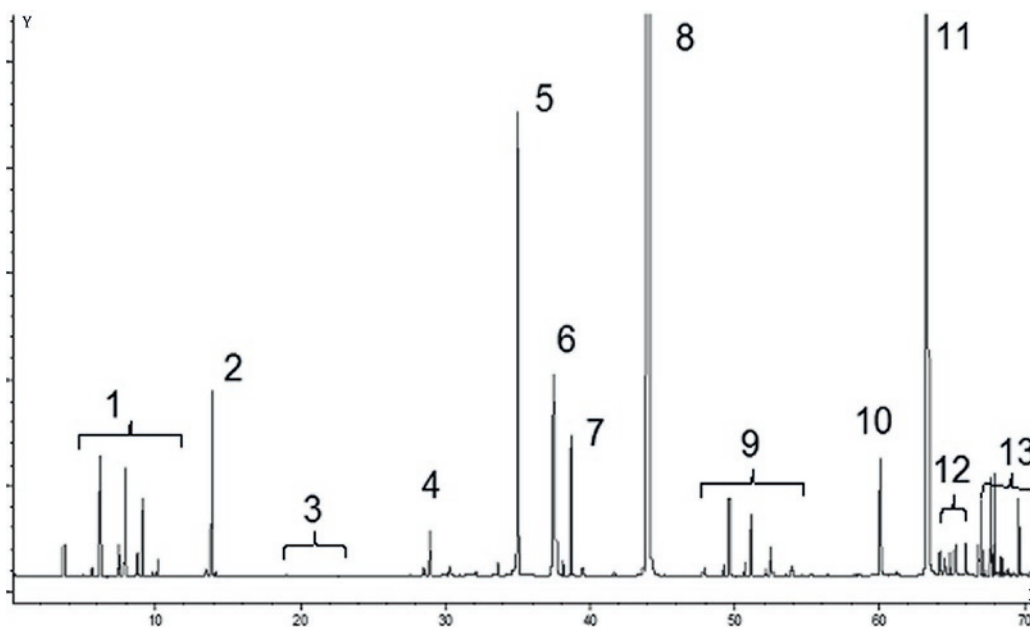

Key

X	time, in minutes (min)	6	ethanol
Y	instrument response, in picoamperes (pA)	7	benzene/toluene
1	light saturates: C3 to C8	8	dilutant
2	ETBE	9	olefins
3	C4 to C6 olefins	10	dilutant
4	heavy saturates: C7 to C10	11	ethanol
5	dilutant	12	oxygenates
		13	aromatics

Figure B.6 — Typical chromatogram of an E85 fuel

Bibliography

- [1] EN 228, *Automotive fuels — Unleaded petrol — Requirements and test methods*
- [2] ASTM D6839, *Standard Test Method for Hydrocarbon Types, Oxygenated Compounds and Benzene in Spark Ignition Engine Fuels by Gas Chromatography*
- [3] EN 1601, *Liquid petroleum products — Unleaded petrol — Determination of organic oxygenate compounds and total organically bound oxygen content by gas chromatography (O-FID)*
- [4] ASTM D4815, *Standard Test Method for Determination of MTBE, ETBE, TAME, DIPE, tertiary-Amyl Alcohol and C1 to C4 Alcohols in Gasoline by Gas Chromatography*
- [5] EN 13132, *Liquid petroleum products - Unleaded petrol - Determination of organic oxygenate compounds and total organically bound oxygen content by gas chromatography using column switching*
- [6] ASTM D5599, *Standard Test Method for Determination of Oxygenates in Gasoline by Gas Chromatography and Oxygen Selective Flame Ionization Detection*
- [7] *Zusammensetzung von Ottokraftstoffen aus Deutschen Raffinerien*, DGMK-Forschungsbericht 502
- [8] CEN/TR 15745, *Liquid petroleum products — Determination of hydrocarbon types and oxygenates via multidimensional gas chromatography method — Round robin research report*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK