

BS EN 926-1:2015



BSI Standards Publication

Paragliding equipment — Paragliders

Part 1: Requirements and test methods for
structural strength

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of EN 926-1:2015. It supersedes BS EN 926-1:2006 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee SW/136/-/6, Sports, Playground and other Recreational Equipment - Paragliding.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.
Published by BSI Standards Limited 2015

ISBN 978 0 580 84798 1

ICS 97.220.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2015.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN 926-1

NORME EUROPÉENNE

EUROPÄISCHE NORM

November 2015

ICS 97.220.40

Supersedes EN 926-1:2006

English Version

Paragliding equipment - Paragliders - Part 1: Requirements and test methods for structural strength

Équipement pour le parapente - Parapentes - Partie 1:
Exigences et méthodes d'essai concernant la résistance
de la structure

Ausrüstung für das Gleitschirmfliegen - Gleitschirme -
Teil 1: Anforderungen und Prüfverfahren an die
Baufestigkeit

This European Standard was approved by CEN on 26 September 2015.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents		Page
European foreword		3
Introduction		4
1	Scope	5
2	Terms and definitions	5
3	Requirements	5
3.1	Shock loading	5
3.2	Sustained loading	5
3.3	Breaking strength of the suspension lines	5
3.4	Breaking strength of the main control lines	6
4	Test methods	7
4.1	Apparatus	7
4.2	Test specimen	8
4.3	Test conditions	8
4.4	Shock loading test	8
4.5	Sustained loading test	9
4.6	Line bending test	9
5	Test files	10
5.1	Test file information	10
5.2	Items accompanying the test files	11
6	Manufacturing record	11
7	Marking	12
Annex A (informative) Suspension lines		13

European foreword

This document (EN 926-1:2015) has been prepared by Technical Committee CEN/TC 136 “Sports, playground and recreational equipment”, the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2016, and conflicting national standards shall be withdrawn at the latest by May 2016.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 926-1:2006.

In comparison with the previous edition, the following significant changes have been made:

- a) editorial revision;
- b) revision of line strength calculation method;
- c) revision of the definition of the same model and test specimen selection;
- d) deletion of Shock Loading Test Procedure B;
- e) clarification of measurement interval in the sustained loading test;
- f) addition of Manufacturing Record and Marking requirements.

This European Standard is one of a series of standards on equipment for paragliding as follows:

- EN 926-1, *Paragliding equipment — Paragliders — Part 1: Requirements and test methods for structural strength*
- EN 926-2, *Paragliding equipment — Paragliders — Part 2: Requirements and test methods for classifying flight safety characteristics*

Other relevant standards on equipment for paragliding are:

- EN 1651, *Paragliding equipment — Harnesses — Safety requirements and strength tests*
- EN 12491, *Paragliding equipment — Emergency parachutes — Safety requirements and test methods*

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

The EN 926 series consists of two parts: EN 926-1 details paraglider structural strength requirements and EN 926-2 details paraglider flight tests requirements. Paragliders that have been tested and found to be compliant with both EN 926-1 and EN 926-2 are therefore compliant with the EN 926 series.

The aim of these standards is to enhance safety thus eliminating paragliders which display unacceptable behaviour in given situations on the basis of recognized tests set in these two standards.

1 Scope

This European Standard is applicable to paragliders as defined in 2.1.

This part of EN 926 specifies requirements and test methods for the resistance of a paraglider to static and dynamic loads and sets the minimum strength threshold for its qualification.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

paraglider

ultra-light glider with no primary rigid structure, for which take-off and landing are on foot, with the pilot (and potentially one passenger) carried in a harness (or harnesses) connected to the wing

2.2

model of paraglider

paragliders of different sizes of a given design are considered to be the same model when fulfilling the following criteria:

- a) the different sizes have been obtained by using a uniform scale factor;
- b) for all sizes identical materials are used;
- c) the way materials are processed is identical for all sizes

2.3

identically constructed lines

lines where the only elements that differ are the finished line length and/or cosmetic colour

2.4

main control lines

entire line systems that terminate at the two primary control handles

2.5

significant damage

rupture of any of main load bearing component of the structure

3 Requirements

3.1 Shock loading

When tested according to 4.4, a visual inspection of the wing shall not show significant damage.

3.2 Sustained loading

When tested according to 4.5 the wing shall sustain 4.5.2. 1) or 4.5.2 2).

3.3 Breaking strength of the suspension lines

The lines shall be tested according to 4.6. If identically constructed lines have already been tested, then the result may be used.

The minimum breaking strength of any line shall be greater than 200 N. The first level is defined as the lines attached to the risers.

When a control handle is connected to a control line in the manner described in the user manual, the connection between the control handle and the first level of line shall have a minimum breaking strength of 750 N.

4 Test methods

4.1 Apparatus

4.1.1 Weak link

The weak link shall be chosen for instantaneous break at a load defined in Table 1 according to the total weight in flight:

Table 1 — Selection of weak link break loads

Total weight in flight (kg)	< 120	120 to 180	180 to 240	≥ 240
Break load of the weak link (N)	8 000	10 000	12 000	14 000

The use of weak links with a tolerance of $\pm 5\%$ is allowed. Weak links shall be protected against torsional load as recommended by the manufacturer.

For each additional 60 kg value above 240 kg total weight in flight, the break load of the weak link shall be increased by 2 000 N.

Where individual weak links of the specified values are not available, it is permissible to pair in parallel two identical weak links of half of the required value.

4.1.2 Cable

The shock test cable shall meet the following requirements:

- length: 125 m ($\pm 1\%$);
- minimum breaking strength: ≥ 50 kN;
- the elastic elongation at 5 kN shall be between 11,8 cm and 14,4 cm.

NOTE The elastic elongation is equal to 1,05 per thousand ($\pm 10\%$) at 5 kN.

4.1.3 Electronic sensor

An electronic sensor equipped with an electronic strain gauge for measuring the force (sampling a minimum of 10 times per second) is required for 4.5.

4.1.4 Measurement circuit

With a graph clearly showing the load (N) against time (s).

4.1.5 Video recording equipment

Video recording equipment shall be used to record the overall behaviour of the glider during the tests.

More than one camera may be used.

4.1.6 Test vehicle

For the shock load test, a vehicle with a verified means of indicating ground speed to within ± 1 km/h, shall be used.

4.2 Test specimen

Select one test specimen that conforms to the manufacturing record for that model. This specimen is used for both for test 4.4 and test 4.5, first 4.4 and then 4.5. No changes to the specimen shall be made between the two tests.

Either:

- a) every size of a particular paraglider design shall separately be tested or;
- b) where different sizes meet the criteria of being the same model, then the size with the largest maximum total weight in flight is tested. In this case, the maximum total weight in flight for all the smaller sizes shall not exceed:

$$W_{\max} = W_{\max \text{ tested glider}} \times 0,9$$

4.3 Test conditions

For the shock loading test in 4.4, the wind speed in the immediate vicinity of the glider shall be less than 4m/s.

4.4 Shock loading test

4.4.1 Principle

The paraglider is subjected to a shock load and the wing is then visually inspected for significant damage.

4.4.2 Procedure

Carry out the shock loading test using a weak link to limit the loads to a maximum force according to Table 1.

Place the paraglider vertically such that it is supported from close to the leading edge with the trailing edge in the centre touching the ground and the span fully extended. The number of supports shall be at least equal to the number of lines in the lowest section of the A lines.

The arrangement of the canopy shall be such as to minimize any slackness (looseness) in the material of the lower surface. The lines and risers shall be as straight as possible.

Connect the risers to the weak link and the latter to the cable defined in 4.1.2, whose other end is connected to the tow vehicle.

Fix the control handles to the normal position on the risers without pre-braking. .

Lay out the cable on the ground so that the test shock load can be applied almost instantaneously.

The tow vehicle shall attain a ground speed between 70 km/h and 75 km/h from the standing start before the cable becomes taut.

Continue until either:

- a) the weak link breaks; or
- b) 5 s has elapsed since the application of the shock load.

4.5 Sustained loading test

4.5.1 Principle

The paraglider is attached to a test vehicle and 'flown' whilst loads are measured.

4.5.2 Procedure

Attach the risers of the test specimen, $(0,42 \pm 0,02)$ m apart, to the electronic sensors on the tow vehicle.

A controller can be positioned on the tow vehicle in order to operate the paraglider control lines to stabilize the wing.

Record the test on video so as to show the behaviour of the paraglider under load.

Increase the speed of the vehicle as gradually as possible, enabling the controller to obtain satisfactory stabilisation of the flight path of the paraglider.

When the paraglider has stabilized, continue to increase the speed gradually until either:

- 1) the measured load exceeds a load factor of eight times the maximum total weight in flight recommended by the manufacturer, for a minimum cumulative duration of 3 s; or
- 2) five peaks separated by at least 0,3 s are obtained above ten times the maximum total weight in flight recommended by the manufacturer, in one run.

4.6 Line bending test

4.6.1 Principle

Three specimens of each line type (i. e. three specimens of each material and/or processing method), with the length between 0,5 m and 0,55 m with loops on each end, used in the suspension line system are conditioned and then their breaking strengths are measured.

4.6.2 Conditions

A line under a constant tension of $2 \text{ N} \pm 10\%$ is bent back and forward around a cylinder (see Figure 2) the same diameter as the nominal diameter of the line given by the manufacturer of the line ($\pm 0,1 \text{ mm}$) with a minimum of 0,7 mm. The centre point of the bend is to be aligned with the weakest point of the line. The minimum rotation required for a cycle is 350° .

A complete cycle shall take a maximum of 2 s (2 bendings).

After 5 000 complete bending cycles, the breaking strength of the test specimen is measured.

An example of the line bending process is shown in Figure 2.

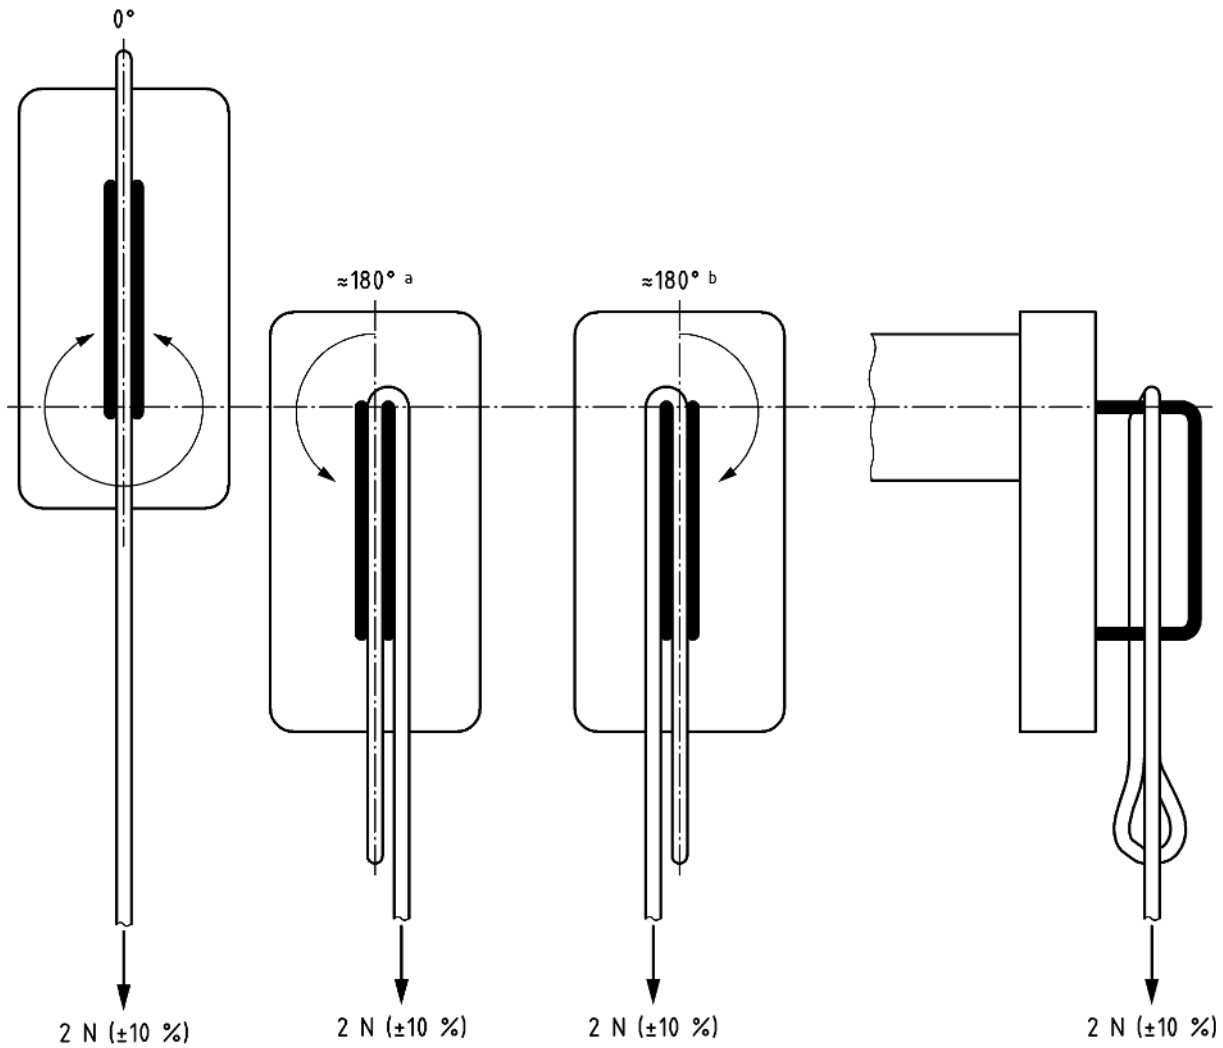


Figure 2 — Line bending test device

4.6.3 Procedure

Measure the breaking strength of the test specimen when loaded through the loops on each end, using metallic connectors between 3 mm and 4,5 mm diameter.

The speed rate of the test device for applying the load shall be between 0,7 m/min and 1 m/min. For the calculation in 4.2, F_{break} is the lowest value out of the three test specimens measured.

A calibrated electronic sensor equipped with an electronic strain gauge for measuring the force (sampling a minimum of 100 times per second) is required.

5 Test files

5.1 Test file information

The test files shall include the following minimum requirements:

- version of the current EN 926-1 standard;
- the name and the address of the manufacturer;

- c) the name and address of the person or company presenting the paraglider for testing (if different from manufacturer);
- d) model and reference of the paraglider tested;
- e) details of any significant damage after the test;
- f) name and address of the testing laboratory;
- g) results of the tests, i.e. values of loads in newtons and load times in seconds;
- h) unique identifying test reference number.

5.2 Items accompanying the test files

The following items shall accompany the test file and be archived by the testing laboratory:

- a) the video record of the tests;
- b) the manufacturing record except where the identical paraglider has also been submitted for flight test of EN 926-2, in which case only one manufacturer record shall be archived;
- c) the paraglider that has undergone testing except where the identical paraglider has also been submitted for flight test of EN 926-2, in which case only the flight tested sample shall be archived.

This documentation shall be archived for a minimum of 15 years and the tested paraglider for a minimum of 5 years.

6 Manufacturing record

The manufacturing record supplied by the manufacturer shall contain the following information:

- a) name and address of manufacturer;
- b) name and address of person or company presenting the paraglider for testing (if different from manufacturer);
- c) name of model;
- d) year (four digits) and month of manufacture of the sample tested;
- e) minimum and maximum total weight in flight;
- f) dimensioned and toleranced drawings;

The drawings shall be provided in an annex to the manufacturing record. They must clearly illustrate the suspension lines and also give a plan view of all the components of the paraglider.

It is possible to provide these drawings on binary media (as long as their format is readable with standard office software), but the suspension lines and plan view drawings shall be on paper.

- g) list of components and materials;

All the materials used shall be listed with:

- 1) name of the material;
- 2) name and references of the manufacturer;
- 3) its specific use in the paraglider;
- 4) characteristics and tests carried out on this material by the supplier or manufacturer.

7 Marking

Where a paraglider is submitted also to EN 926-2, this clause does not apply.

In the case of a paraglider tested to comply with EN 926-1 and not intended to be submitted for EN 926-2, the conformity of the paraglider to the requirements of this document shall be stated on a stamp or label permanently fixed to the canopy, which shall include the following information provided by the manufacturer:

- a) manufacturer's name;
- b) name of person or company having presented the paraglider for testing (if different from manufacturer);
- c) paraglider model name;
- d) class of the paraglider. This entry shall only state "LOAD TESTED ONLY";
- e) number and name of this document, i.e. EN 926-1, *Requirements and test methods for structural strength*, and issue date;
- f) references to any other standards the paraglider is in compliance with;
- g) year (four digits) and month of manufacture;
- h) serial number;
- i) minimum and maximum total weight in flight (kg);
- j) paraglider weight (wing, lines, risers) (kg);
- k) projected area (m²);
- l) number of risers;
- m) inspections (whichever is earlier);
 - 1) number of (months);
 - 2) number of (hours flying time);
- n) conformity tests carried out by (name and address of the testing laboratory);
- o) unique identifying test reference number;
- p) warning: Before use refer to the user's manual.

Annex A (informative)

Suspension lines

Table A.1 presents a table calculation to be used with Figure A.1.

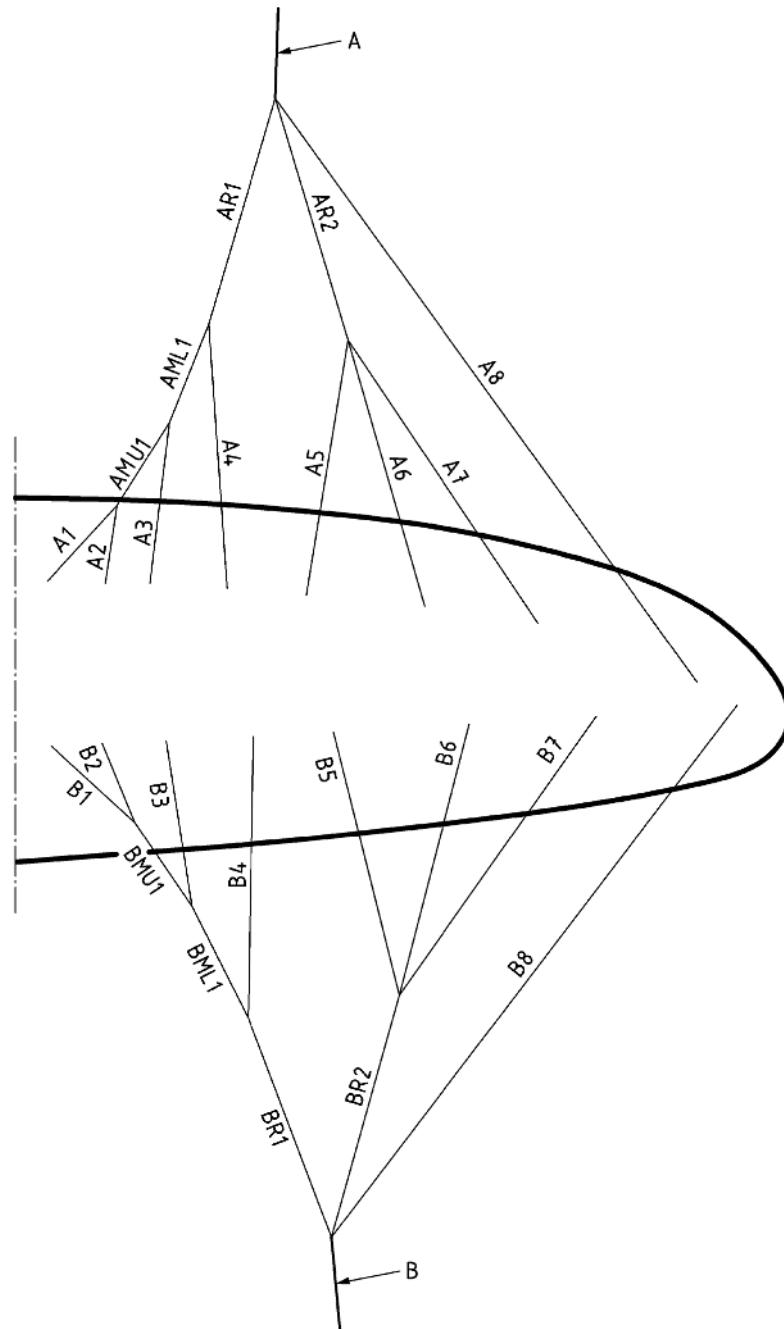


Figure A.1 — Example of calculation of rigging diagram

Table A.1 — Example of a calculation table of the suspension lines

Name	Reference	Break Value "New" (daN)	Break Value after bending test	Number of lines	Break value after bending use for level (DaN)			
					Level 1	Level 2	Level 3	Level 4
A1	9000U-090	90	48,6	2				97,3
A2	9000U-090	90	48,6	2				97,3
A3	9000U-090	90	48,6	2			97,3	97,3
A4	9000U-090	90	48,6	2		97,3	97,3	97,3
A5	9000U-150	150	81,1	2		162,2	162,2	162,2
A6	9000U-150	150	81,1	2		162,2	162,2	162,2
A7	9000U-150	150	81,1	2		162,2	162,2	162,2
A8	9000U-130	130	70,3	2	140,5	140,5	140,5	140,5
AMU1	TCT-130	130	56,5	2			113,0	
AML1	254UT-300	300	162,2	2		324,3		
AR1	7343-450	450	243,2	2	486,5			
AR2	7343-400	400	216,2	2	432,4			
B1	9000U-090	90	48,6	2				97,3
B2	9000U-070	70	37,8	2				75,7
B3	9000U-070	70	37,8	2			75,7	75,7
B4	9000U-090	90	48,6	2		97,3	97,3	97,3
B5	9000U-130	130	70,3	2		140,5	140,5	140,5
B6	9000U-130	130	70,3	2		140,5	140,5	140,5
B7	9000U-130	130	70,3	2		140,5	140,5	140,5
B8	9000U-090	90	48,6	2	97,3	97,3	97,3	97,3
BMU1	TCT-130	130	56,5	2			113,0	
BML1	254UT-300	300	162,2	2		324,3		
BR1	7343-400	400	216,2	2	432,4			
BR2	7343-400	400	216,2	2	432,4			
				Total of each level	2021,6	1989,2	1739,6	1881,1
				Weight in flight (daN)	125	125	125	125
				g factor	16,17	15,91	13,92	15,05

The g factor is calculated by dividing the total of each level by the weight in flight.

This example illustrates a failure as level 3 is too weak (less than 14 g). The dark cells are not applicable according to Figure A.1.

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™