

# Eurocode 1 — Actions on structures —

## Part 1-7: General actions — Accidental actions

ICS 91.010.30

## National foreword

This British Standard is the UK implementation of EN 1991-1-7:2006+A1:2014, incorporating corrigendum February 2010. It supersedes BS EN 1991-1-7:2006, which is withdrawn.

The start and finish of text introduced or altered by corrigendum is indicated in the text by tags. Text altered by CEN corrigendum February is indicated in the text by  $\langle \text{AC1} \rangle$   $\langle \text{AC1} \rangle$ .

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to CEN text carry the number of the CEN amendment. For example, text altered by CEN amendment A1 is indicated by  $\langle \text{A1} \rangle$   $\langle \text{A1} \rangle$ .

CEN amendment A1:2014 introduces a revised informative Annex, Annex D. The UK committee noted technical errors in subclause D.4 regarding explosions in ducts. Annex D of BS EN 1991-1-7:2006+A1:2014 can therefore be used only if it is complemented by further guidance available in the forthcoming PD 6688-1-7.

The structural Eurocodes are divided into packages by grouping Eurocodes for each of the main materials, concrete, steel, composite concrete and steel, timber, masonry and aluminium, this is to enable a common date of withdrawal (DOW) for all the relevant parts that are needed for a particular design. The conflicting national standards will be withdrawn at the end of the coexistence period, after all the EN Eurocodes of a package are available.

In the UK, the following national standards are superseded by the Eurocode 1 series. These standards will be withdrawn on a date to be announced.

Eurocode	Superseded British Standards
EN 1991-1-1	BS 6399-1:1996
EN 1991-1-2	none
EN 1991-1-3	BS 6399-3:1998
EN 1991-1-4	BS 6399-2:1997, BS 5400-2:2006
EN 1991-1-5	BS 5400-2:2006
EN 1991-1-6	none
EN 1991-1-7	BS 5400-2:2006
EN 1991-2	BS 5400-1:1998, BS 5400-2:2006
EN 1991-3	none
EN 1991-4	none

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 29 September 2006

© The British Standards Institution 2014.  
Published by BSI Standards Limited 2014

### Amendments/corrigenda issued since publication

Date	Comments
30 April 2010	Implementation of CEN corrigendum February 2010
31 July 2014	Implementation of CEN amendment A1:2014

The UK participation in its preparation was entrusted by Technical Committee B/525, Building and civil engineering structures, to Subcommittee B/525/1, Actions (loadings) and basis of design.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Where a normative part of this EN allows for a choice to be made at the national level, the range and possible choice will be given in the normative text, and a Note will qualify it as a Nationally Determined Parameter (NDP). NDPs can be a specific value for a factor, a specific level or class, a particular method or a particular application rule if several are proposed in the EN.

To enable BS EN 1991-1-7:2006+A1:2014 to be used in the UK, the latest version of the NA to this Standard containing these NDPs should also be used. At the time of publication, it is NA+A1:2014 to BS EN 1991-1-7:2006+A1:2014.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

**Compliance with a British Standard cannot confer immunity from legal obligations.**



ICS 91.010.30

English Version

## Eurocode 1 - Actions on structures - Part 1-7: General actions - Accidental actions

Eurocode 1 - Actions sur les structures Partie 1-7: Actions  
générales - Actions accidentelles

Eurocode 1 - Einwirkungen auf Tragwerke - Teil 1-7:  
Allgemeine Einwirkungen - Außergewöhnliche  
Einwirkungen

This European Standard was approved by CEN on 9 January 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

<b>Contents</b>	<b>Page</b>
<b>FOREWORD .....</b>	<b>4</b>
BACKGROUND OF THE EUROCODE PROGRAMME.....	4
STATUS AND FIELD OF APPLICATION OF EUROCODES.....	5
NATIONAL STANDARDS IMPLEMENTING EUROCODES.....	6
LINKS BETWEEN EUROCODES AND HARMONISED TECHNICAL SPECIFICATIONS (ENS AND ETAs) FOR PRODUCTS.....	6
ADDITIONAL INFORMATION SPECIFIC TO EN 1991-1-7.....	7
NATIONAL ANNEX.....	7
<b>SECTION 1    GENERAL.....</b>	<b>9</b>
1.1 SCOPE.....	9
1.2 NORMATIVE REFERENCES.....	9
1.3 ASSUMPTIONS.....	10
1.4 DISTINCTION BETWEEN PRINCIPLES AND APPLICATION RULES.....	10
1.5 TERMS AND DEFINITIONS.....	10
1.6 SYMBOLS.....	12
<b>SECTION 2    CLASSIFICATION OF ACTIONS.....</b>	<b>14</b>
<b>SECTION 3    DESIGN SITUATIONS.....</b>	<b>15</b>
3.1 GENERAL.....	15
3.2 ACCIDENTAL DESIGN SITUATIONS - STRATEGIES FOR IDENTIFIED ACCIDENTAL ACTIONS.....	16
3.3 ACCIDENTAL DESIGN SITUATIONS – STRATEGIES FOR LIMITING THE EXTENT OF LOCALISED FAILURE.....	17
3.4 ACCIDENTAL DESIGN SITUATIONS – USE OF CONSEQUENCE CLASSES.....	17
<b>SECTION 4    IMPACT.....</b>	<b>19</b>
4.1 FIELD OF APPLICATION.....	19
4.2 REPRESENTATION OF ACTIONS.....	19
4.3 ACCIDENTAL ACTIONS CAUSED BY ROAD VEHICLES.....	20
4.3.1 <i>Impact on supporting substructures</i> .....	20
4.3.2 <i>Impact on superstructures</i> .....	22
4.4 ACCIDENTAL ACTIONS CAUSED BY FORK LIFT TRUCKS.....	24
4.5 ACCIDENTAL ACTIONS CAUSED BY DERAILED RAIL TRAFFIC UNDER OR ADJACENT TO STRUCTURES.....	25
4.5.1 <i>Structures spanning across or alongside operational railway lines</i> .....	25
4.5.2 <i>Structures located in areas beyond track ends</i> .....	27
4.6 ACCIDENTAL ACTIONS CAUSED BY SHIP TRAFFIC.....	27
4.6.1 <i>General</i> .....	27
4.6.2 <i>Impact from river and canal traffic</i> .....	28
4.6.3 <i>Impact from seagoing vessels</i> .....	29
4.7 ACCIDENTAL ACTIONS CAUSED BY HELICOPTERS.....	30
<b>SECTION 5    INTERNAL EXPLOSIONS.....</b>	<b>31</b>
5.1 FIELD OF APPLICATION.....	31
5.2 REPRESENTATION OF ACTION.....	31
5.3 PRINCIPLES FOR DESIGN.....	32
<b>ANNEX A (INFORMATIVE) DESIGN FOR CONSEQUENCES OF LOCALISED FAILURE IN BUILDINGS FROM AN UNSPECIFIED CAUSE.....</b>	<b>33</b>
A.1 SCOPE AND FIELD OF APPLICATION.....	33
A.2 INTRODUCTION.....	33
A.3 CONSEQUENCES CLASSES OF BUILDINGS.....	33
A.4 RECOMMENDED STRATEGIES.....	34
A.5 EFFECTIVE HORIZONTAL TIES.....	36

A.5.1 Framed structures.....	36
A.5.2 Load-bearing wall construction.....	37
A.6 EFFECTIVE VERTICAL TIES .....	39
A.7 NOMINAL SECTION OF LOAD-BEARING WALL .....	39
A.8 KEY ELEMENTS .....	39
<b>ANNEX B (INFORMATIVE) INFORMATION ON RISK ASSESSMENT .....</b>	<b>40</b>
B.1 INTRODUCTION.....	40
B.2 DEFINITIONS .....	41
B.3 DESCRIPTION OF THE SCOPE OF A RISK ANALYSIS.....	41
B.4 METHODS OF RISK ANALYSIS .....	42
B.4.1 Qualitative risk analysis .....	42
B.4.2 Quantitative risk analysis .....	42
B.5 RISK ACCEPTANCE AND MITIGATING MEASURES .....	43
B.6 RISK MITIGATING MEASURES .....	45
B.7 MODIFICATION .....	45
B.8 COMMUNICATION OF RESULTS AND CONCLUSIONS.....	45
B.9 APPLICATIONS TO BUILDINGS AND CIVIL ENGINEERING STRUCTURES .....	46
B.9.1 General.....	46
B.9.2 Structural risk analysis.....	47
B.9.3 Modelling of risks from extreme load events .....	48
B.9.4 Guidance for application of risk analysis related to impact from rail traffic.....	51
<b>ANNEX C (INFORMATIVE) DYNAMIC DESIGN FOR IMPACT .....</b>	<b>53</b>
C.1 GENERAL .....	53
C.2 IMPACT DYNAMICS .....	53
C.2.1 Hard Impact .....	53
C.2.2 Soft Impact.....	54
C.3 IMPACT FROM ABERRANT ROAD VEHICLES .....	55
C.4 IMPACT BY SHIPS .....	58
C.4.1 Ship impact on inland waterways.....	58
C.4.2 Ship impact for sea waterways .....	59
C.4.3 Advanced ship impact analysis for inland waterways .....	58
C.4.4 Advanced ship impact analysis for sea waterways.....	62
<b>ANNEX D (INFORMATIVE) INTERNAL EXPLOSIONS.....</b>	<b>63</b>
D.1 NATURAL GAS EXPLOSIONS .....	63
D.2 DUST EXPLOSIONS IN ROOMS, VESSELS AND BUNKERS .....	63
D.3 EXPLOSIONS IN ROAD AND RAIL TUNNELS .....	65
D.4 DUST, GAS AND VAPOUR/AIR EXPLOSIONS IN ENERGY DUCTS .....	66
D.4.1 General.....	66
D.4.2 Vent area .....	67
D.4.3 Critical distances.....	67
D.4.4 Design pressure .....	68

## **Foreword**

This European Standard (EN 1991-1-7:2006) has been prepared on behalf of Technical Committee CEN/TC250 "Structural Eurocodes", the Secretariat of which is held by BSI.

CEN/TC 250 is responsible for all Structural Eurocodes.

This European Standard supersedes ENV 1991-2-7:1998.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by January 2007 and conflicting national standards shall be withdrawn at the latest by March 2010.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

## **Foreword to amendment A1**

This document (EN 1991-1-7:2006/A1:2014) has been prepared by Technical Committee CEN/TC 250 "Structural Eurocodes", the secretariat of which is held by BSI.

This Amendment to the European Standard EN 1991-1-7:2006 shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2015, and conflicting national standards shall be withdrawn at the latest by June 2015.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

## **Background of the Eurocode programme**

In 1975, the Commission of the European Community decided on an action programme in the field of construction, based on Article 95 of the Treaty. The objective of the programme was the elimination of technical obstacles to trade and the harmonisation of technical specifications.

Within this action programme, the Commission took the initiative to establish a set of harmonised technical rules for the design of construction works which, in a first stage, would serve as an alternative to the national rules in force in the Member States and, ultimately, would replace them.

For fifteen years, the Commission, with the help of a Steering Committee with Representatives of Member States, conducted the development of the Eurocodes programme, which led to the first generation of European codes in the 1980s.



In 1989, the Commission and the Member States of the EU and EFTA decided, on the basis of an agreement<sup>1</sup> between the Commission and CEN, to transfer the preparation and the publication of the Eurocodes to CEN through a series of Mandates, in order to provide them with a future status of European Standard (EN). This links de facto the Eurocodes with the provisions of all the Council's Directives and/or Commission's Decisions dealing with European standards (e.g. the Council Directive 89/106/EEC on construction products – CPD - and Council Directives 93/37/EEC, 92/50/EEC and 89/440/EEC on public works and services and equivalent EFTA Directives initiated in pursuit of setting up the internal market).

The Structural Eurocode programme comprises the following standards generally consisting of a number of parts:

EN 1990	Eurocode	Basis of structural design
EN 1991	Eurocode 1:	Actions on structures
EN 1992	Eurocode 2:	Design of concrete structures
EN 1993	Eurocode 3:	Design of steel structures
EN 1994	Eurocode 4:	Design of composite steel and concrete structures
EN 1995	Eurocode 5:	Design of timber structures
EN 1996	Eurocode 6:	Design of masonry structures
EN 1997	Eurocode 7:	Geotechnical design
EN 1998	Eurocode 8:	Design of structures for earthquake resistance
EN 1999	Eurocode 9:	Design of aluminium structures

Eurocode standards recognise the responsibility of regulatory authorities in each Member State and have safeguarded their right to determine values related to regulatory safety matters at a national level where these continue to vary from State to State.

### **Status and field of application of Eurocodes**

The Member States of the EU and EFTA recognise that Eurocodes serve as reference documents for the following purposes:

- as a means to prove compliance of building and civil engineering works with the essential requirements of Council Directive 89/106/EEC, particularly Essential Requirement N°1 – Mechanical resistance and stability – and Essential Requirement N°2 – Safety in case of fire;
- as a basis for specifying contracts for construction works and related engineering services;
- as a framework for drawing up harmonised technical specifications for construction products (ENs and ETAs).

---

<sup>1</sup> Agreement between the Commission of the European Communities and the European Committee for Standardisation (CEN) concerning the work on Eurocodes for the design of building and civil engineering works (BC/CEN/03/89).

The Eurocodes, as far as they concern the construction works themselves, have a direct relationship with the Interpretative Documents<sup>2</sup> referred to in Article 12 of the CPD, although they are of a different nature from harmonised product standards<sup>3</sup>. Therefore, technical aspects arising from the Eurocodes work need to be adequately considered by GEN Technical Committees and/or EOTA Working Groups working on product standards with a view to achieving a full compatibility of these technical specifications with the Eurocodes.

The Eurocode Standards provide common structural design rules for everyday use for the design of whole structures and component products of both a traditional and an innovative nature. Unusual forms of construction or design conditions are not specifically covered and additional expert consideration will be required by the designer in such cases.

### **National Standards implementing Eurocodes**

The National Standards implementing Eurocodes will comprise the full text of the Eurocode (including any annexes), as published by CEN, which may be preceded by a National title page and National foreword, and may be followed by a National Annex (informative).

The National Annex (informative) may only contain information on those parameters which are left open in the Eurocode for national choice, known as Nationally Determined Parameters, to be used for the design of buildings and civil engineering works to be constructed in the country concerned, i.e.:

- values and/or classes where alternatives are given in the Eurocode;
- values to be used where a symbol only is given in the Eurocode;
- country specific data (geographical, climatic, etc) e.g. snow map;
- procedure to be used where alternative procedures are given in the Eurocode.

It may also contain:

- decisions on the application of informative annexes;
- references to non contradictory complementary information to assist the user to apply the Eurocode.

### **Links between Eurocodes and harmonised technical specifications (ENs and ETAs) for products**

There is a need for consistency between the harmonised technical specifications for construction products and the technical rules for works<sup>4</sup>. Furthermore, all the information accompanying the CE marking of the construction products which refer to Eurocodes shall clearly mention which Nationally Determined Parameters have been taken into account.

---

<sup>2</sup> According to Article 3.3 of the CPD, the essential requirements (ERs) shall be given concrete form in interpretative documents for the creation of the necessary links between the essential requirements and the mandates for hENs and ETAGs/ETAs.

<sup>3</sup> According to Article 12 of the CPD the interpretative documents shall:

- a) give concrete form to the essential requirements by harmonising the terminology and the technical bases and indicating classes or levels for each requirement where necessary;
- b) indicate methods of correlating these classes or levels of requirement with the technical specifications, e.g. methods of calculation and of proof, technical rules for project design, etc.;
- c) serve as a reference for the establishment of harmonised standards and guidelines for European technical approvals.

The Eurocodes, de facto, play a similar role in the field of the ER 1 and a part of the ER 2.

<sup>4</sup> See Article 3.3 and Article 12 of the CPD, as well as clauses 4.2, 4.3.1, 4.3.2 and 5.2 of ID 1.

**Additional information specific to EN 1991-1-7**

EN 1991-1-7 describes Principles and Application rules for the assessment of accidental actions on buildings and bridges. The following actions are included:

- impact forces from vehicles, rail traffic, ships and helicopters,
- actions due to internal explosions,
- actions due to local failure from an unspecified cause.

EN 1991-1-7 is intended for use by:

- clients (e.g. for the formulation of their specific requirements on safety levels),
- designers,
- constructors, and
- relevant authorities.

EN 1991-1-7 is intended to be used with EN 1990, the other parts of EN 1991 and EN 1992 – 1999 for the design of structures.

**National Annex**

This standard gives alternative procedures, values and recommendations for classes with notes indicating where national choices may have to be made. Therefore the National Standard implementing EN 1991-1-7 should have a National Annex containing all Nationally Determined Parameters to be used for the design of buildings and civil engineering works to be constructed in the relevant country.

The National choice is allowed in EN 1991-1-7 through clauses<sup>5</sup>:

<b>Paragraph</b>	<b>Item</b>
2 (2)	Classification of accidental actions
3.1(2)	Strategies for accidental design situations
3.2(1)	Level of risk
AC1 3.3(2)	Notional accidental action
3.3(2)	Limit of local failure
3.3(2) AC1	Choice of strategies
3.4(1)	Consequences classes
3.4(2)	Design approaches
4.1(1)	Definition of lightweight structures
4.1(1)	Transmission of impact forces to foundations
4.3.1(1)	Values of vehicle impact forces
4.3.1(1)	Impact force as a function of the distance from traffic lanes

<sup>5</sup> It is proposed to add to each clause of the list what will be allowed for choice: value, procedures, classes.

4.3.1(1)	Types or elements of structure subject to vehicular collision
4.3.1(2)	Alternative impact rules
4.3.1(3)	Conditions of impact from road vehicles
4.3.2(1)	Clearances and protection measures and design values
4.3.2(1)	Reduction factor $r_F$
4.3.2(1)	Impact actions on underside of bridge decks
4.3.2(2)	Use of $F_{dy}$
4.3.2(3)	Dimension and position of impact areas
4.4(1)	Value of impact forces from forklift trucks
4.5(1)	Type of rail traffic
4.5.1.2(1)	Structures to be included in each exposure class
4.5.1.2(1)	Classification of temporary structures and auxiliary construction works
4.5.1.4(1)	Impact forces from derailed traffic
4.5.1.4(2)	Reduction of impact forces
4.5.1.4(3)	Point of application of impact forces
4.5.1.4(4)	Equivalent static forces
4.5.1.4(5)	Impact forces for speeds greater than 120 km/h
4.5.1.5(1)	Requirements for Class B structures
4.5.2(1)	Areas beyond track ends
4.5.2(4)	Impact forces on end walls
4.6.1(3)	Classification of ship impacts
4.6.2(1)	Values of frontal and lateral forces from ships
4.6.2(2)	Friction coefficients
4.6.2(3)	Application area of impact
4.6.2(4)	Impact forces on bridge decks from ships
4.6.3(1)	Dynamic impact forces from seagoing ships
4.6.3(3)	Friction coefficients
AC1 4.6.3(4)P AC1	Dimension and position of impact areas
4.6.3(5)	Forces on superstructure
5.3 (1)P	Procedures for internal explosion
A.4 (1)	Details of effective anchorage

## Section 1 General

### 1.1 Scope

(1) EN 1991-1-7 provides strategies and rules for safeguarding buildings and other civil engineering works against identifiable and unidentifiable accidental actions.

(2) EN 1991-1-7 defines:

- strategies based on identified accidental actions,
- strategies based on limiting the extent of localised failure.

(3) The following subjects are dealt with in this part of EN 1991:

- definitions and symbols (Section 1);
- classification of actions (Section 2);
- design situations (Section 3);
- impact (Section 4);
- explosions (Section 5);
- design for consequences of localised failure in buildings from an unspecified cause (informative Annex A);
- information on risk assessment (informative Annex B);
- dynamic design for impact (informative Annex C);
- internal explosions (informative Annex D).

(4) Rules on dust explosions in silos are given in EN 1991-4.

(5) Rules on impact from vehicles travelling on the bridge deck are given in EN 1991-2.

(6) EN 1991-1-7 does not specifically deal with accidental actions caused by external explosions, warfare and terrorist activities, or the residual stability of buildings or other civil engineering works damaged by seismic action or fire, etc.

NOTE See also 3.1.

### 1.2 Normative references

(1) This European Standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of, any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies (including amendments).

NOTE The Eurocodes were published as European Prestandards. The following European Standards which are published or in preparation are cited in normative clauses or in NOTES to normative clauses.

EN 1990	Eurocode: Basis of structural design
EN 1991-1-1	Eurocode 1: Actions on structures Part 1-1: Densities, self-weight, imposed loads for buildings.
EN 1991-1-6	Eurocode 1: Actions on structures Part 1-6: Actions during execution
EN 1991-2	Eurocode 1: Actions on structures Part 2: Traffic loads on bridges
EN 1991-4	Eurocode 1 : Actions on structures Part 4: Silos and tanks
EN 1992	Eurocode 2: Design of concrete structures
EN 1993	Eurocode 3: Design of steel structures
EN 1994	Eurocode 4: Design of composite steel and concrete structures
EN 1995	Eurocode 5: Design of timber structures
EN 1996	Eurocode 6: Design of masonry structures
EN 1997	Eurocode 7: Geotechnical design
EN 1998	Eurocode 8: Design of structures for earthquake resistance
EN 1999	Eurocode 9: Design of aluminium structures

### 1.3 Assumptions

(1)P The general assumptions given in EN 1990, 1.3 apply to this part of EN 1991.

### 1.4 Distinction between Principles and Application rules

(1) P The rules given in EN 1990, 1.4 apply to this part of EN 1991.

### 1.5 Terms and definitions

(1) For the purposes of this European Standard, general definitions are provided in EN 1990, 1.5. Additional definitions specific to this part are given below.

#### 1.5.1

##### **burning velocity**

rate of flame propagation relative to the velocity of the unburned dust, gas or vapour that is ahead of it.

#### 1.5.2

##### **consequence class**

classification of the consequences of failure of the structure or part of it.

#### 1.5.3

##### **deflagration**

propagation of a combustion zone at a velocity that is less than the speed of sound in the unreacted medium.


#### 1.5.4

##### **detonation**

propagation of a combustion zone at a velocity that is greater than the speed of sound in the unreacted medium.

**1.5.5  
dynamic force**

force that varies in time and which may cause significant dynamic effects on the structure; in the case of impact, the dynamic force represents the force with an associated contact area at the point of impact (see Figure 1.1).

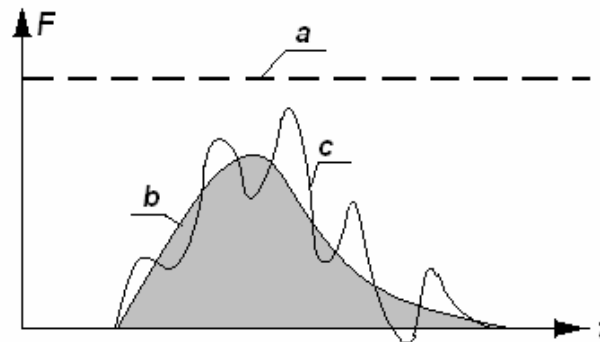

Key :  
a : equivalent static force  
b : dynamic force  
c : structural response

**Figure 1.1**

**1.5.6  
equivalent static force**

an alternative representation for a dynamic force including the dynamic response of the structure (see Figure 1.1).

**1.5.7  
flame speed**

speed of a flame front relative to a fixed reference point.

**1.5.8  
flammable limit**

minimum or maximum concentration of a combustible material, in a homogeneous mixture with a gaseous oxidiser that will propagate a flame.

**1.5.9  
impacting object**

the object impacting upon the structure (i.e. vehicle, ship, etc).

**1.5.10  
key element**

a structural member upon which the stability of the remainder of the structure depends.

**1.5.11  
load-bearing wall construction**

non-framed masonry cross-wall construction mainly supporting vertical loading. Also includes lightweight panel construction comprising timber or steel vertical studs at close centres with particle board, expanded metal or alternative sheathing.

**1.5.12  
localised failure**

that part of a structure that is assumed to have collapsed, or been severely disabled, by an accidental event.

### 1.5.13

#### **risk**

a measure of the combination (usually the product) of the probability or frequency of occurrence of a defined hazard and the magnitude of the consequences of the occurrence.

### 1.5.14

#### **robustness**

the ability of a structure to withstand events like fire, explosions, impact or the consequences of human error, without being damaged to an extent disproportionate to the original cause.

### 1.5.15

#### **substructure**

that part of a building structure that supports the superstructure. In the case of buildings this usually relates to the foundations and other construction work below ground level. In the case of bridges this usually relates to foundations, abutments, piers and columns etc.

### 1.5.16

#### **superstructure**

that part of a building structure that is supported by the substructure. In the case of buildings this usually relates to the above ground construction. In the case of bridges this usually relates to the bridge deck.

### 1.5.17

#### **venting panel**

non-structural part of the enclosure (wall, floor, ceiling) with limited resistance that is intended to relieve the developing pressure from deflagration in order to reduce pressure on structural parts of the building.

## 1.6 Symbols

(1) For the purpose of this European Standard, the following symbols apply (see also EN 1990).

#### *Latin upper case letters*

$F$	collision force
$F_{dx}$	horizontal static equivalent or dynamic design $\boxed{\text{AC}_1}$ force on the front side of the supporting structure (frontal force) $\langle \text{AC}_1 \rangle$
$F_{dy}$	horizontal static equivalent or dynamic design $\boxed{\text{AC}_1}$ force on the lateral side of the supporting structure (lateral force) $\langle \text{AC}_1 \rangle$
$F_R$	frictional impact force
$\boxed{\text{AC}_1}$	<del>text deleted</del> $\langle \text{AC}_1 \rangle$
$K_{St}$	deflagration index of a dust cloud
$P_{\max}$	maximum pressure developed in a contained deflagration of an optimum mixture
$P_{red}$	reduced pressure developed in vented enclosure during a vented deflagration
$P_{stat}$	static activation pressure that activates a vent opening when the pressure is increased slowly

#### *Latin lower case letters*

$a$	height of the application area of a collision force
$b$	width of an obstacle (e.g. bridge pier)
$\boxed{\text{AC}_1}$ d	distance from the structural element to the centre-line of the road or track $\langle \text{AC}_1 \rangle$



$h$	clearance height from roadway surfacing to underside of bridge element; height of a collision force above the level of a carriageway
$\ell$	ship length
$r_F$	reduction factor
$s$	$\boxed{\text{AC}_1}$ distance from the structural element to the point where the vehicle leaves the trafficked lane $\boxed{\text{AC}_1}$
$m$	Mass
$v_v$	Velocity

*Greek lower case letters*

$\mu$	friction coefficient
-------	----------------------

## **Section 2 Classification of actions**

(1)P Actions within the scope of this part of EN1991 shall be classified as accidental actions in accordance with EN 1990, 4.1.1.

NOTE Table 2.1 specifies the relevant clauses and sub-clauses in EN 1990, which apply to the design of a structure subjected to Accidental Actions..

**Table 2.1 - Clauses in EN 1990 specifically addressing accidental actions.**

<b>Section</b>	<b>Clause/Sub-clause</b>
Terms and definitions	1.5.2.5, 1.5.3.5, 1.5.3.15
Basic requirements	2.1(4), 2.1(5)
Design situations	3.2(2)P
Classifications of actions	4.1.1(1)P, 4.1.1(2), 4.1.2(8)
Other representative values of variable actions	4.1.3(1)P
Combination of actions for accidental design situations	6.4.3.3
Design values for actions in the accidental and seismic design situations	A1.3.2

(2) Accidental actions due to impact should be considered as free actions unless otherwise specified.

NOTE The National Annex or the individual project may specify the treatment of accidental actions which are not classified as free actions.

### Section 3 Design situations

#### 3.1 General

(1)P Structures shall be designed for the relevant accidental design situations in accordance with EN 1990, 3.2(2)P.

(2) The strategies to be considered for accidental design situations are illustrated in Figure 3.1.

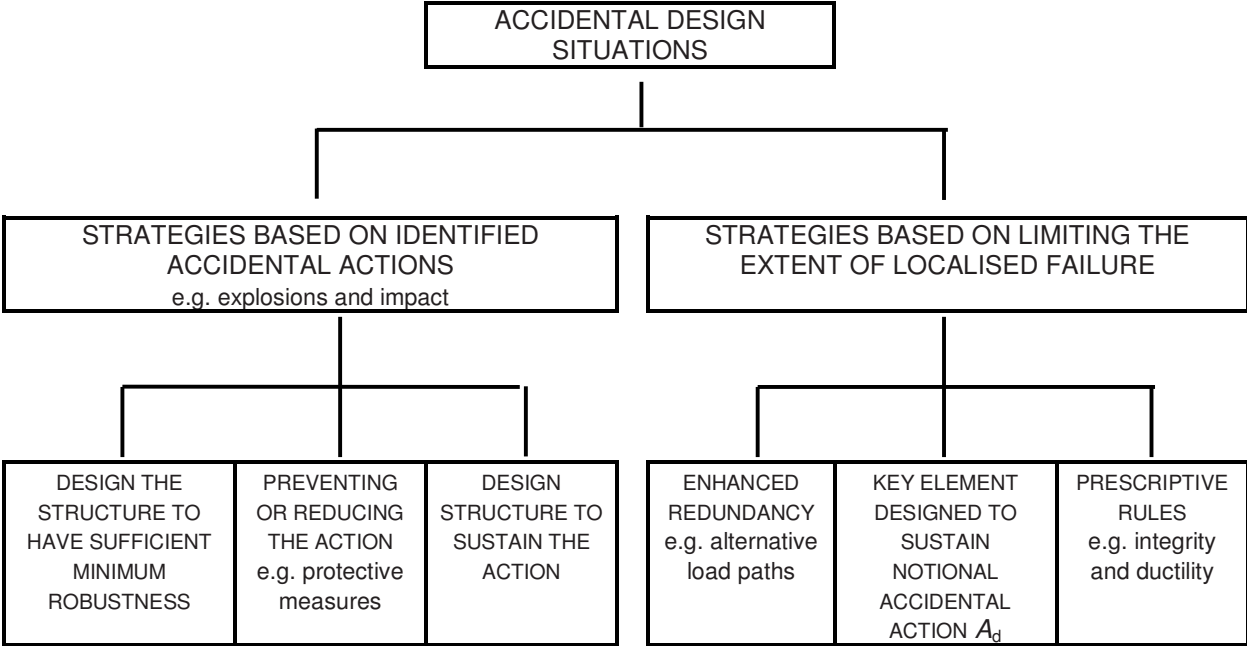


Figure 3.1 - Strategies for Accidental Design Situations

NOTE 1 The strategies and rules to be taken into account are those agreed for the individual project with the client and the relevant authority.

NOTE 2 Accidental actions can be identified or unidentified actions.

NOTE 3 Strategies based on unidentified accidental actions cover a wide range of possible events and are related to strategies based on limiting the extent of localised failure. The adoption of strategies for limiting the extent of localised failure may provide adequate robustness against those accidental actions identified in 1.1(6), or any other action resulting from an unspecified cause. Guidance for buildings is given in Annex A.

NOTE 4 Notional values for identified accidental actions (e.g. in the case of internal explosions and impact) are proposed in this part of EN 1991. These values may be altered in the National Annex or for an individual project and agreed for the design by the client and the relevant authority.

NOTE 5 For some structures (e.g. construction works where there is no risk to human life, and where economic, social or environmental consequences are negligible) subjected to accidental actions, the complete collapse of the structure caused by an extreme event may be acceptable. The circumstances when such a collapse is acceptable may be agreed for the individual project with the client and the relevant authority.

### **3.2 Accidental design situations - strategies for identified accidental actions**

(1) The accidental actions that should be taken into account depend upon:

- the measures taken for preventing or reducing the severity of an accidental action;
- the probability of occurrence of the identified accidental action;
- the consequences of failure due to the identified accidental action;
- public perception;
- the level of acceptable risk.

NOTE 1 See EN 1990, 2.1(4)P NOTE 1.

NOTE 2 In practice, the occurrence and consequences of accidental actions can be associated with a certain risk level. If this level cannot be accepted, additional measures are necessary. A zero risk level, however, is impracticable and in most cases it is necessary to accept a certain level of risk. Such a risk level can be determined by various factors, such as the potential number of casualties, the economic consequences and the cost of safety measures, etc.

NOTE 3 Levels of acceptable risks may be given in the National Annex as non contradictory, complementary information.

(2) A localised failure due to accidental actions may be acceptable, provided it will not endanger the stability of the whole structure, and that the overall load-bearing capacity of the structure is maintained and allows necessary emergency measures to be taken.

NOTE 1 For building structures such emergency measures may involve the safe evacuation of persons from the premises and its surroundings.

NOTE 2 For bridge structures such emergency measures may involve the closure of the road or rail service within a specific limited period.

(3) Measures should be taken to mitigate the risk of accidental actions and these measures should include, as appropriate, one or more of the following strategies:

- a) preventing the action from occurring (e.g. in the case of bridges, by providing adequate clearances between the trafficked lanes and the structure) or reducing the probability and/or magnitude of the action to an acceptable level through the structural design process (e.g. in the case of buildings providing sacrificial venting components with a low mass and strength to reduce the effect of explosions);
- b) protecting the structure against the effects of an accidental action by reducing the effects of the action on the structure (e.g. by protective bollards or safety barriers);
- c) ensuring that the structure has sufficient robustness by adopting one or more of the following approaches:
  - 1) by designing certain components of the structure upon which stability depends as key elements (see 1.5.10) to increase the likelihood of the structure's survival following an accidental event.
  - 2) designing structural members, and selecting materials, to have sufficient ductility capable of absorbing significant strain energy without rupture.
  - 3) incorporating sufficient redundancy in the structure to facilitate the transfer of actions to alternative load paths following an accidental event.

NOTE 1 It may not be possible to protect the structure by reducing the effects of an accidental action, or preventing an action from occurring. This is because an action is dependent upon factors which, over the design working life of the structure, may not necessarily be part of the design assumptions. Preventative measures may involve periodic inspection and maintenance during the design working life of the structure.

NOTE 2 For the design of structural members with sufficient ductility, see Annexes A and C, together with EN 1992 to EN 1999.

(4)P Accidental actions shall, where appropriate, be applied simultaneously in combination with permanent and other variable actions in accordance with EN 1990, 6.4.3.3.

NOTE For  $\psi$  values, see Annex A of EN 1990.

(5)P The safety of the structure immediately following the occurrence of the accidental action shall be taken into account.

NOTE This includes the consideration of progressive collapse for building structures. See Annex A.

### 3.3 Accidental design situations – strategies for limiting the extent of localised failure

(1)P In the design, the potential failure of the structure arising from an unspecified cause shall be mitigated.

(2) The mitigation should be reached by adopting one or more of the following approaches:

a) designing key elements, on which the stability of the structure depends, to sustain the effects of a model of accidental action  $A_d$ ;

NOTE 1 The National Annex may define the model which may be a concentrated or a distributed load with a design value of  $A_d$ . The recommended model for buildings is a uniformly distributed notional load applicable in any direction to the key element and any attached components (e.g. claddings, etc). The recommended value for the uniformly distributed load is 34 kN/m<sup>2</sup> for building structures. AC1 Reference is made in A.8. AC1

b) designing the structure so that in the event of a localised failure (e.g. failure of a single member) the stability of the whole structure or of a significant part of it would not be endangered;

NOTE 2 The National Annex may state the acceptable limit of "localised failure". The indicative limit for building structures is 100 m<sup>2</sup> or 15 % of the floor area, whichever is less, on two adjacent floors caused by the removal of any supporting column, pier or wall. This is likely to provide the structure with sufficient robustness regardless of whether an identified accidental action has been taken into account.

c) applying prescriptive design/detailing rules that provide acceptable robustness for the structure (e.g. three-dimensional tying for additional integrity, or a minimum level of ductility of structural members subject to impact).

NOTE 3 The National Annex may state which of the approaches given in 3.3 are to be considered for various structures. AC1 *Text deleted* AC1

### 3.4 Accidental design situations – use of consequence classes

(1) The strategies for accidental design situations may be based on the following consequence classes as set out in EN1990.

- CC1 Low consequences of failure
- CC2 Medium consequences of failure
- CC3 High consequences of failure

NOTE 1 EN 1990 Annex B provides further information.

NOTE 2 In some circumstances it may be appropriate to treat some parts of the structure as belonging to a different consequence class, e.g. a structurally separate low rise wing of a building that is serving a less critical function than the main building.

NOTE 3 Preventative and/or protective measures are intended to remove or to reduce the probability of damage to the structure. For design purposes this can sometimes be taken into consideration by assigning the structure to a lower consequence class. In other cases a reduction of forces on the structure may be more appropriate.

NOTE 4 The National Annex may provide a categorisation of structures according to the consequences classes in 3.4(1). A suggested classification of consequences classes relating to buildings is provided in Annex A.

(2) Accidental design situations for the different consequences classes given in 3.4(1) may be considered in the following manner:

- CC1: no specific consideration is necessary for accidental actions except to ensure that the robustness and stability rules given in EN 1990 to EN1999, as applicable, are met;
- CC2: depending upon the specific circumstances of the structure, a simplified analysis by static equivalent action models may be adopted or prescriptive design/detailing rules may be applied;
- CC3: an examination of the specific case should be carried out to determine the level of reliability and the depth of structural analyses required. This may require a risk analysis to be carried out and the use of refined methods such as dynamic analyses, non-linear models and interaction between the load and the structure.

NOTE The National Annex may give reference to, as non conflicting, complementary information, appropriate design approaches for higher and lower consequences classes..

## Section 4 Impact

### 4.1 Field of application

(1) This section defines accidental actions due to the following events:

- impact from road vehicles (excluding collisions on lightweight structures) (see 4.3);
- impact from forklift trucks (see 4.4);
- impact from trains (excluding collisions on lightweight structures) (see 4.5);
- impact from ships (see 4.6);
- the hard landing of helicopters on roofs (see 4.7).

NOTE 1 Accidental actions on lightweight structures which are excluded from the field of application above (e.g. gantries, lighting columns, footbridges) may be referred to in the National Annex, as non contradictory complementary information..

NOTE 2 For impact loads on kerbs and parapets, see EN 1991–2.

NOTE 3 The National Annex may give guidance on issues concerning the transmission of impact forces to the foundations as non contradictory complementary information. See EN 1990, 5.1.3 (4).

(2)P For buildings, actions due to impact shall be taken into account for:

- buildings used for car parking,
- buildings in which vehicles or forklift trucks are permitted, and
- buildings that are located adjacent to either road or railway traffic.

(3) For bridges, the actions due to impact and the mitigating measures provided should take into account, amongst other things, the type of traffic on and under the bridge and the consequences of the impact.

(4)P Actions due to impact from helicopters shall be taken into account for buildings where the roof contains a designated landing pad.

### 4.2 Representation of actions

(1) Actions due to impact should be determined by a dynamic analysis or represented by an equivalent static force.

NOTE 1 The forces at the interface of the impacting object and the structure depend on their interaction.

NOTE 2 The basic variables for impact analysis are the impact velocity of the impacting object and the mass distribution, deformation behaviour and damping characteristics of both the impacting object and the structure. Other factors such as the angle of impact, the construction of the impacting object and movement of the impacting object after collision may also be relevant.

NOTE 3 See Annex C for further guidance.

(2) It may be assumed that the impacting body absorbs all the energy.

NOTE In general, this assumption gives conservative results.

(3) For determining the material properties of the impacting object and of the structure, upper or lower characteristic values should be used, where relevant. Strain rate effects should also be taken into account, where appropriate.

(4) For structural design the actions due to impact may be represented by an equivalent static force giving the equivalent action effects in the structure. This simplified model may be used for the verification of static equilibrium, for strength verifications and for the determination of deformations of the impacted structure.

(5) For structures which are designed to absorb impact energy by elastic-plastic deformations of members (i.e. soft impact), the equivalent static loads may be determined by taking into account both plastic strength and the deformation capacity of such members.

NOTE For further information see Annex C.

(6) For structures for which the energy is mainly dissipated by the impacting body (i.e. hard impact), the dynamic or equivalent static forces may be determined from clauses 4.3 to 4.7.

NOTE Some information on design values for masses and velocities of colliding objects as a basis for a dynamic analysis may be found in Annex C.

### **4.3 Accidental actions caused by road vehicles**

#### **4.3.1 Impact on supporting substructures**

(1) Design values for actions due to impact on the supporting structures (e.g. columns and walls of bridges or buildings) adjacent to various types of roads should be defined.

NOTE 1 For hard impact (see 4.2.(6)) from road traffic the design values may be defined in the National Annex. The indicative equivalent static design force may be taken from Table 4.1. The choice of the values may take account of the consequences of the impact, the expected volume and type of traffic, and any mitigating measures provided. See EN 1991-2 and Annex C. Guidance on risk analysis may be found in Annex B if required.



**Table 4.1 - Indicative equivalent static design forces due to vehicular impact on members supporting structures over or adjacent to roadways.**

Category of traffic	Force $F_{dx}$ <sup>a</sup> [kN]	Force $F_{dy}$ <sup>a</sup> [kN]
Motorways and country national and main roads	1000	500
Country roads in rural area	750	375
Roads in urban area	500	250
Courtyards and parking garages with access to:		
- Cars	50	25
- Lorries <sup>b</sup>	150	75
<sup>a</sup> $x$ = direction of normal travel, $y$ = perpendicular to the direction of normal travel. <sup>b</sup> The term "lorry" refers to vehicles with maximum gross weight greater than 3,5 tonnes.		

**AC1** NOTE 2 The National Annex may prescribe the force as a function of distance  $s$  from the structural element to the point where the vehicle leaves the trafficked lane and  $d$  the distance from the structural element to the centre-line of the road or track. Information on the effect of the distance  $s$ , where applicable, can be found in Annex C. **AC1**

NOTE 3 The National Annex may define types or elements of the structure that may not need to be considered for vehicular collision.

NOTE 4 For impact from traffic on bridges, reference should be made to EN 1991-2.

NOTE 5 For guidance on accidental actions caused by road vehicles on bridges also carrying rail traffic, see UIC leaflet 777.1R.

(2) The application of the forces  $F_{dx}$  and  $F_{dy}$  should be defined.


NOTE Rules for the application of  $F_{dx}$  and  $F_{dy}$  may be defined in the National Annex or for the individual project. It is recommended that  $F_{dx}$  does not act simultaneously with  $F_{dy}$ .

(3) For impact on the supporting structures the applicable area of resulting collision force  $F$  should be specified.

NOTE The National Annex may define the conditions of impact from road vehicles. The recommended conditions are as follows (see Figure 4.1):

- for impact from lorries the collision force  $F$  may be applied at any height  $h$  between 0,5 m to 1,5 m above the level of the carriageway or higher where certain types of protective barriers are provided. The recommended application area is  $a = 0,5$  m (height) by 1,50 m (width) or the member width, whichever is the smaller.

- for impact from cars the collision force  $F$  may be applied at  $h = 0,50$  m above the level of the carriageway. The recommended application area is  $a = 0,25$  m (height) by 1,50 m (width) or the member width, whichever is the smaller.

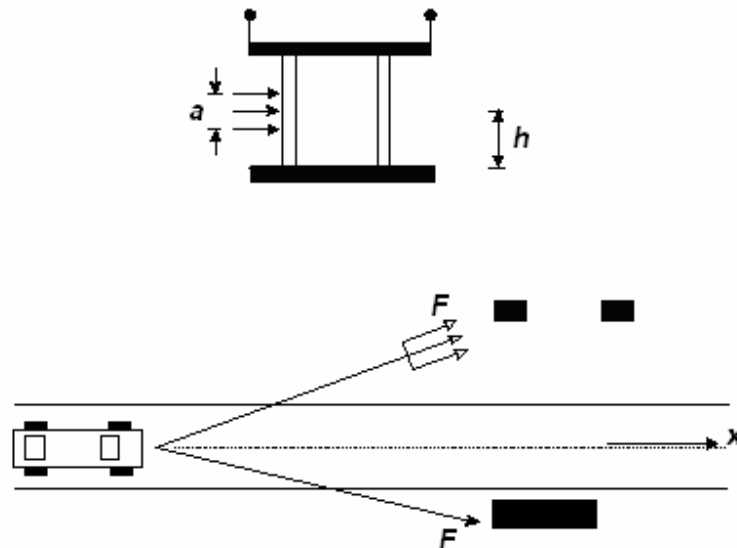

**Key**

- $a$  is the height of the recommended force application area. Ranges from 0,25 m (cars) to 0,50 m (lorries).
- $h$  is the location of the resulting collision force  $F$ , i.e. the height above the level of the carriageway. Ranges from 0,50 m (cars) to 1,50 m (lorries).
- $x$  is the centre of the lane.

**Figure 4.1 - Collision force on supporting substructures near traffic lanes for bridges and supporting structures for buildings.**

**4.3.2 Impact on superstructures**

(1) Design values for actions due to impact from lorries and/or loads carried by the lorries on members of the superstructure should be defined unless adequate clearances or suitable protection measures to avoid impact are provided.


NOTE 1 The design values for actions due to impact, together with the values for adequate clearances and suitable protection measures to avoid impact, may be defined in the National Annex. The recommended value for adequate clearance, excluding future re-surfacing of the roadway under the bridge, to avoid impact is in the range 5,0 m to 6,0 m. The indicative equivalent static design forces are given in Table 4.2.

Table 4.2 - Indicative equivalent static design forces due to impact on superstructures.

Category of traffic	Equivalent static design force $F_{dx}^a$ [kN]
Motorways and country national and main roads	500
Country roads in rural area	375
Roads in urban area	250
Courtyards and parking garages	75
<sup>a</sup> $x$ = direction of normal travel.	

NOTE 2 The choice of the values may take account of the consequences of the impact, the expected volume and type of traffic, and any mitigating (protective and preventative) measures provided.

NOTE 3 On vertical surfaces the design impact loads are equal to the equivalent static design forces due to impact given in Table 4.2. For  $h_0 \leq h \leq h_1$ , these values may be multiplied by a reduction factor  $r_F$ . The values of  $r_F$ ,  $h_0$  and  $h_1$  may be given in the National Annex. Recommended values of  $r_F$ ,  $h_0$  and  $h_1$  are given in Figure 4.2.

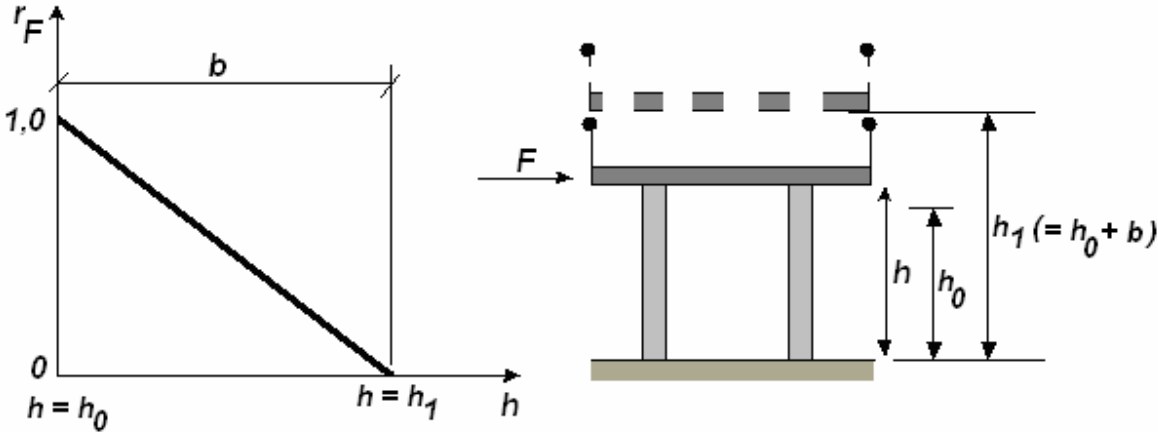

<sup>AC1</sup>  $h$  is the physical clearance between the road surface and the underside of the bridge deck at the impact point


$h_0$  is the clearance between the road surface and the underside of the bridge deck, below which an impact on the superstructure need to be taken into account without any reduction. The recommended value of  $h_0$  is 5,0 m (+ allowances for vertical sag curve and deflection of the bridge, and expected settlements)

$h_1$  is the clearance between the road surface and the underside of the bridge deck, above which no impact need to be considered. The recommended value of  $h_1$  is 6,0 m (+ allowances for future resurfacing, vertical sag curve and deflection of the bridge, and expected settlements). <sup>AC1</sup>

$b$  is the difference in height between  $h_1$  and  $h_0$ , i.e.  $b = h_1 - h_0$ . The recommended value for  $b$  is 1,0 m. A reduction factor for  $F$  is allowed for values of  $b$  between 0 and 1 m, i.e. between  $h_0$  and  $h_1$ .

Figure 4.2 - Recommended value of the factor  $r_F$  for vehicular collision forces on horizontal structural members above roadways, depending on the clearance height  $h$ .

NOTE 4 On the underside surfaces of bridge decks the same impact loads as above with an upward inclination may have to be taken into account: the conditions of impact may be given in the National Annex. The recommended value of upward inclination is  $10^\circ$ , see Figure 4.3.

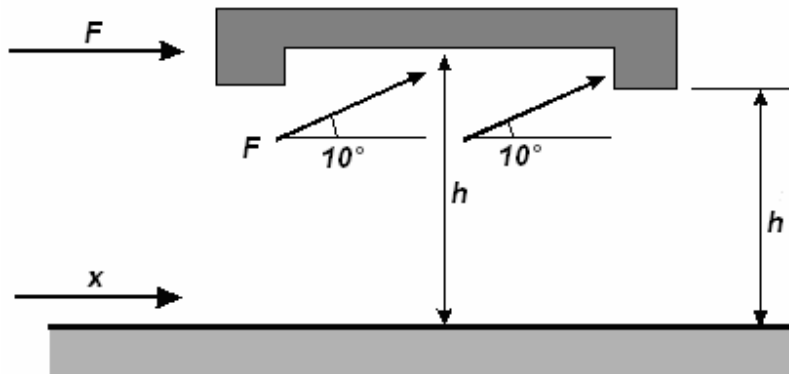

$x$ : direction of traffic

$h$ : height of the bridge from the road surface measured to either the soffit or the structural members

**Figure 4.3 - Impact force on members of the superstructure.**

NOTE 5 In determining the value of  $h$  allowance should be made for any possible future reduction caused by the resurfacing of the roadway under the bridge.

(2) Where appropriate, forces perpendicular to the direction of normal travel,  $F_{dy}$ , should also be taken into account.

NOTE The use of  $F_{dy}$  may be defined in the National Annex or for the individual project. It is recommended that  $F_{dy}$  does not act simultaneously with  $F_{dx}$ .

(3) The applicable area of the impact force  $F$  on the members of the superstructure should be specified.

NOTE The National Annex may define the dimensions and positions of the impact area. The recommended area of impact is a square with the sides of 0,25 m length.

#### 4.4 Accidental actions caused by forklift trucks

(1) Design values for accidental actions due to impact from forklift trucks should be determined taking into account the dynamic behaviour of the forklift truck and the structure. The structural response may allow for non linear deformation. As an alternative to a dynamic analysis an equivalent static design force  $F$  may be applied.

NOTE The National Annex may give the value of the equivalent static design force  $F$ . It is recommended that the value of  $F$  is determined according to advanced impact design for soft impact in accordance with C.2.2. Alternatively, it is recommended that  $F$  may be taken as  $5W$ , where  $W$  is the sum of the net weight and hoisting load of a loaded truck (see EN 1991-1,1, Table 6.5), applied at a height of 0,75 m above floor level. However, higher or lower values may be more appropriate in some cases.

#### 4.5 Accidental actions caused by derailed rail traffic under or adjacent to structures

(1) Accidental actions due to rail traffic should be defined.

NOTE The National Annex may give the types of rail traffic for which the rules in this clause are applicable.

##### 4.5.1 Structures spanning across or alongside operational railway lines

###### 4.5.1.1 General

(1) Design values for actions due to impact on supporting members (e.g. piers and columns) caused by derailed trains passing under or adjacent to structures should be determined. See 4.5.1.2. The strategy for design can also include other appropriate measures (both preventative and protective) to reduce, as far as is reasonably practicable, the effects of an accidental impact from a derailed train against supports of structures located above or adjacent to the tracks. The values chosen should be dependent on the classification of the structure.

NOTE 1 Derailment actions from rail traffic on bridges carrying rail traffic are specified in EN 1991-2.

NOTE 2 For more extensive guidance on accidental actions related to rail traffic, reference may be made to the UIC-code 777-2.

###### 4.5.1.2 Classification of structures

(1) Structures that may be subject to impact from derailed railway traffic should be classified according to Table 4.3.

**Table 4.3 - Classes of structures subject to impact from derailed railway traffic.**

<b>Class A</b>	Structures that span across or near to the operational railway that are either permanently occupied or serve as a temporary gathering place for people or consist of more than one storey.
<b>Class B</b>	Massive structures that span across or near the operational railway such as bridges carrying vehicular traffic or single storey buildings that are not permanently occupied or do not serve as a temporary gathering place for people.

NOTE 1 The structures to be included in either Classes A or B may be defined in the National Annex or for the individual project.

NOTE 2 The National Annex may give reference to the classification of temporary structures such as temporary footbridges or similar structures used by the public as well as auxiliary construction works as non contradictory, complementary information. See EN 1991-1-6.

NOTE 3 Further information and background on this classification system given in Table 4.3 is given in relevant UIC-documents.

###### 4.5.1.3 Accidental design situations in relation to the classes of structure

(1) Situations involving the derailment of rail traffic under or on the approach to a structure classified as Class A or B should be taken into account as an accidental design situation, in accordance with EN 1990, 3.2.

(2) Impact on the superstructure (deck structure) from derailed rail traffic under or on the approach to a structure need not generally be taken into account.

#### 4.5.1.4 Class A structures

(1) For class A structures, where the maximum speed of rail traffic at the location is less than or equal to 120 km/h, design values for the static equivalent forces due to impact on supporting structural members (e.g. columns, walls) should be specified.

NOTE The static equivalent forces and their identification may be given in the National Annex. Table 4.4 gives indicative values.

**Table 4.4 - Indicative horizontal static equivalent design forces due to impact for class A structures over or alongside railways.**

Distance “ <i>d</i> ” from structural elements to the centreline of the nearest track  (m)	Force $F_{dx}^a$  (kN)	Force $F_{dy}^a$  (kN)
Structural elements: $d < 3$ m	To be specified for the individual project.  Further information is set out in Annex B	To be specified for the individual project.  Further information is set out in Annex B
For continuous walls and wall type structures: $3 \text{ m} \leq d \leq 5 \text{ m}$	4 000	1 500
$d > 5 \text{ m}$	0	0
<sup>a</sup> $x$ = track direction; $y$ = perpendicular to track direction.		

(2) Where supporting structural members are protected by solid plinths or platforms, etc., the value of impact forces may be reduced.

NOTE Reductions may be given in the National Annex.

(3) The forces  $F_{dx}$  and  $F_{dy}$  (see Table 4.4) should be applied at a specified height above track level. The design should take into account  $F_{dx}$  and  $F_{dy}$  separately.

NOTE The height above track level of the point of application for  $F_{dx}$  and  $F_{dy}$  may be given in the National Annex. The recommended value is 1,8 m.

(4) If the maximum speed of rail traffic at the location is lower or equal to 50 km/h, the values of the forces in Table 4.4 may be reduced.

NOTE The amount of the reduction may be given in the National Annex. The recommended reduction is 50 %. Further information may be found in UIC 777-2.

(5) Where the maximum permitted speed of rail traffic at the location is greater than 120 km/h, the values of the horizontal static equivalent design forces  $F_{dx}$  and  $F_{dy}$ , which take into account additional preventative and/or protective measures should be determined assuming that consequence class CC3 applies. See 3.4(1).

NOTE The values for  $F_{dx}$  and  $F_{dy}$ , which may take into account additional preventative and/or protective measures, may be given in the National Annex or for the individual project.

#### **4.5.1.5 Class B structures**

(1) For class B structures, each requirement should be specified.

NOTE Information may be given in the National Annex or for the individual project. Each requirement may be based on a risk assessment. Information on the factors and measures to consider is given in Annex B.

#### **4.5.2 Structures located in areas beyond track ends**

(1) Overrunning of rail traffic beyond the end of a track or tracks (for example at a terminal station) should be taken into account as an accidental design situation in accordance with EN 1990 when the structure or its supports are located in the area immediately beyond the track ends.

NOTE The area immediately beyond the track ends may be specified either in the National Annex or for the individual project.

(2) The measures to manage the risk should be based on the utilisation of the area immediately beyond the track end and take into account any measures taken to reduce the likelihood of an overrun of rail traffic.

(3) Supporting structural members to structures should generally not be located in the area immediately beyond the track ends.

(4) Where supporting structural members are required to be located near to track ends, an end impact wall should be provided in the area immediately beyond the track ends in addition to any buffer stop. Values of static equivalent forces due to impact onto an end impact wall should be specified.

NOTE Particular measures and alternative design values for the static equivalent force due to impact may be specified in the National Annex or for the individual project. The recommended design values for the static equivalent force due to impact on the end impact wall is  $F_{dx} = 5\,000$  kN for passenger trains and  $F_{dx} = 10\,000$  kN for shunting and marshalling trains. It is recommended that these forces are applied horizontally and at a level of 1,0 m above track level.

### **4.6 Accidental actions caused by ship traffic**

#### **4.6.1 General**

(1) Accidental actions due to collisions from ships should be determined taking account of, amongst other things, the following:

- the type of waterway,
- the flood conditions,
- the type and draught of vessels and their impact behaviour, and
- the type of the structures and their energy dissipation characteristics.

(2) The types of ships on inland waterways to be taken into account in the case of ship impact on structures should be classified according to the CEMT classification system.

NOTE The CEMT classification is given in Table C.3 in Annex C.

(3) The characteristics of ships on sea waterways to be taken into account in the case of ship impact on structures should be defined.

NOTE 1 The National Annex may define a classification system for ships on sea waterways. Table C.4 in Annex C gives an indicative classification for such ships.

NOTE 2 For information on the probabilistic modelling of ship collision, see Annex B.

(4) Where the design values for actions due to ship impact are determined by advanced methods, the effects of hydrodynamic added mass should be taken into account.

(5) The action due to impact should be represented by two mutually exclusive forces:

- a frontal force  $F_{dx}$ ;  $\overline{AC1}$  (in the direction of the normal travel, usually perpendicular to the longitudinal axis of the superstructure (deck))  $\overline{AC1}$
- a lateral force with a component  $F_{dy}$  acting perpendicularly to the frontal impact force and a friction component  $F_R$  parallel to  $F_{dx}$ .

(6) Structures designed to accept ship impact in normal operating conditions (e.g. quay walls and breasting dolphins) are out of the scope of this part of EN 1991.

#### **4.6.2 Impact from river and canal traffic**

(1) Frontal and lateral dynamic design forces due to impact from river and canal traffic should be specified where relevant.

NOTE Values of frontal and lateral dynamic forces may be given either in the National Annex or for the individual project. Indicative values are given in Annex C (Table C.3) for a number of standard ship characteristics and standard design situations, including the effects of added hydraulic mass, and for ships of other masses.

(2) The impact force due to friction  $F_R$  acting simultaneously with the lateral impact force  $F_{dy}$  should be determined from expression (4.1):

$$F_R = \mu F_{dy} \quad (4.1)$$

where :

$\mu$  is the friction coefficient.

NOTE  $\mu$  may be given in the National Annex. The recommended value is  $\mu = 0,4$ .

(3) The forces due to impact should be applied at a height above the maximum navigable water level depending on the ship's draught (loaded or in ballast). The height of application of the impact force and the impact area  $b \times h$  should be defined.

NOTE 1 The height of application of the impact force and the impact area  $b \times h$  may be defined in the National Annex or for the individual project. In the absence of detailed information, the force may be applied at a height of 1,50 m above the relevant water level. An impact area  $b \times h$  where  $b = b_{\text{pier}}$  and  $h = 0,5$  m for frontal impact and an area  $b \times h$  where  $h = 1,0$  m and  $b = 0,5$  m for lateral impact may be assumed.  $b_{\text{pier}}$  is the width of the obstacle in the waterway, for example of the bridge pier.

NOTE 2 Under certain conditions it may be necessary to assume that the ship is lifted over an abutment or foundation block prior to colliding with columns.

(4) Where relevant, the deck of a bridge should be designed to sustain an equivalent static force due to impact from a ship acting in a transverse direction to the longitudinal (span) axis of the bridge.

NOTE A value for the equivalent static force may be defined in the National Annex or for the individual project. An indicative value is 1 MN.



### 4.6.3 Impact from seagoing vessels

(1) Frontal static equivalent design forces due to impact from seagoing vessels should be specified.

NOTE Values of frontal and lateral dynamic impact forces may be given in the National Annex or for the individual project. Indicative values are given in Table C.4 and interpolation of these values is permitted. The values hold for typical sailing channels and may be reduced for structures outside this region. For smaller vessels the forces may be calculated using C.4.

(2) Bow, stern and broad side impact should be considered where relevant. Bow impact should be considered for the main sailing direction with a maximum deviation of 30°.

(3) The frictional impact force acting simultaneously with the lateral impact should be determined from expression (4.2):

$$F_R = \mu F_{dy} \quad (4.2)$$

where:

$\mu$  is the friction coefficient.

NOTE  $\mu$  may be given in the National Annex. The recommended value is  $\mu = 0,4$ .

(4)P The position and area over which the impact force is applied depend upon the geometry of the structure and the size and geometry (e.g. with or without bulb) of the vessel, the vessel draught and trim, and tidal variations. The vertical range of the point of impact shall account for the most unfavourable conditions for the vessels travelling in the area.

NOTE The limits on the area and position of the force range may be given in the National Annex. Recommended limits on the area of impact are  $0,05\ell$  for the height and  $0,1\ell$  for the width ( $\ell$  = ship length). The limits on the position of the force in the vertical direction may be taken as being  $0,05\ell$  below to  $0,05\ell$  above the design water levels. See Figure 4.4.

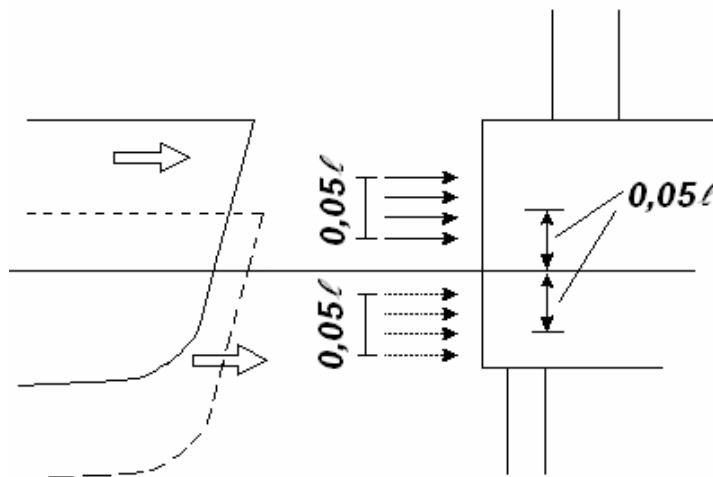


Figure 4.4 - Indicative impact areas for ship impact.

(5) The forces on a superstructure should be determined by taking account of the height of the structure and the type of ship to be expected. In general the force on the superstructure of the bridge will be limited by the yield strength of the ships' superstructure.

NOTE 1 The force may be given in the National Annex or for a particular project. A range of 5 to 10 % of the bow impact force may be considered as a guideline.

NOTE 2 In cases where only the mast is likely to impact on the superstructure the indicative design load is 1 MN.

#### **4.7 Accidental actions caused by helicopters**

(1) For buildings with roofs designated as a landing pad for helicopters, an emergency landing force should be taken into account. The vertical equivalent static design force  $F_d$  should be determined from expression (4.3):

$$F_d = C\sqrt{m} \quad (4.3)$$

where:

$C$  is 3 kN kg<sup>-0.5</sup>

$m$  is the mass of the helicopter [kg].

(2) The force due to impact should be considered as acting on any part of the landing pad as well as on the roof structure within a maximum distance of 7 m from the edge of the landing pad. The area of impact should be taken as 2 m × 2 m.

## Section 5 Internal explosions

### 5.1 Field of application

(1)P Explosions shall be taken into account in the design of all parts of the building and other civil engineering works where gas is burned or regulated, or where explosive material such as explosive gases, or liquids forming explosive vapour or gas is stored or transported (e.g. chemical facilities, vessels, bunkers, sewage constructions, dwellings with gas installations, energy ducts, road and rail tunnels).

(2) Effects due to explosives are outside the scope of this part.

(3) The influence on the magnitude of an explosion of cascade effects from several connected rooms filled with explosive dust, gas or vapour is also not covered in this part.

(4) This section defines actions due to internal explosions.

### 5.2 Representation of action

(1) Explosion pressures on structural members should be determined taking into account, as appropriate, reactions transmitted to the structural members by non structural members.

NOTE 1 For the purpose of this part an explosion is defined as a rapid chemical reaction of dust, gas or vapour in air. It results in high temperatures and high overpressures. Explosion pressures propagate as pressure waves.

NOTE 2 The pressure generated by an internal explosion depends primarily on the type of dust, gas or vapour, the percentage of dust, gas or vapour in the air and the uniformity of the dust, gas or vapour air mixture, the ignition source, the presence of obstacles in the enclosure, the size, the shape and the strength of the enclosure in which the explosion occurs, and the amount of venting or pressure release that may be available.

(2) Due allowance should be given for the probable presence of dust, gas or vapour in rooms or groups of rooms throughout the building, for venting effects, for the geometry of the room or group of rooms under consideration, etc.

(3) For construction works classified as CC1 (see Section 3) no specific consideration of the effects of an explosion should be necessary other than complying with the rules for connections and interaction between components provided in EN 1992 to EN 1999.

(4) For construction works classified as CC2 or CC3, key elements of the structure should be designed to resist actions by either using an analysis based upon equivalent static load models, or by applying prescriptive design/detailing rules. Additionally for structures classified as CC3 a dynamic analysis should be used.

NOTE 1 The methods given in Annexes A and D may be applied.

NOTE 2 Advanced design for explosions may include one or more of the following aspects:

- explosion pressure calculations, including the effects of confinements and venting panels;
- dynamic non linear structural calculations;
- probabilistic aspects and analysis of consequences;
- economic optimisation of mitigating measures.

### 5.3 Principles for design

(1)P Structures shall be designed to resist progressive collapse resulting from an internal explosion, in accordance with EN 1990, 2.1 (4)P.

**[A1]** NOTE The National Annex may give the procedures to be used for the types of internal explosions. Guidance on dealing with the following specific types of explosion is given in Annex D:

- gas and vapour/air explosions in rooms and closed sewage basins;
- dust explosions in rooms, vessels and bunkers;
- gas and vapour/air explosions in road and rail tunnels;
- dust, gas and vapour/air explosions in energy ducts.

The values presented in Annex D of this part may be considered as nominal values given that the explosion occurs.

When calculating the structural response, dynamic and nonlinear behaviour may be taken into account. A load duration of 0,2 s may be adopted and damage is acceptable provided it does not lead to disproportional collapse.

The load-time function may be assumed triangular. A sensitivity study on the load-time function should be performed to identify the peak load time within the 0,2 s duration. **[A1]**

(2) The design may permit failure of a limited part of the structure provided this does not include key elements upon which the stability of the whole structure depends.

(3) The consequences of explosions may be limited by applying one or more of the following measures:

- designing the structure to resist the explosion peak pressure;

NOTE Whilst the peak pressures may be higher than the values determined by the methods given in Annex D, such peak pressures have to be considered in the context of a maximum load duration of 0,2 s and assume plastic ductile material behaviour.

- using venting panels with defined venting pressures;
- separating adjacent sections of the structure that contain explosive materials;
- limiting the area of structures that are exposed to explosion risks;
- providing specific protective measures between adjacent structures exposed to explosion risks to avoid propagation of pressures.

(4) The explosive pressure should be assumed to act effectively simultaneously on all of the bounding surfaces of the enclosure in which the explosion occurs.

(5) Venting panels should be placed close to the possible ignition sources, if known, or where pressures are high. They should be discharged at a suitable location that will not endanger personnel or ignite other material. The venting panel should be restrained so that it does not become a missile in the event of an explosion. The design should limit the possibilities that the effects of the fire causes any impairment of the surroundings or initiates an explosion in an adjacent room.

(6) Venting panels should be opened at a low pressure and should be as light as possible.

NOTE If windows are used as venting panels it is recommended that the risk of injury to persons from glass fragments or other structural members be considered.

(7)P In determining the capacity of the venting panel, account shall be taken of the dimensioning and construction of the supporting frame of the panel.

(8) After the first positive phase of the explosion with an overpressure, a second phase follows with an under-pressure. This effect should be considered in the design where relevant.

NOTE Assistance by specialists is recommended.

## **Annex A (informative)**

### **Design for consequences of localised failure in buildings from an unspecified cause**

#### **A.1 Scope**

(1) This Annex A gives rules and methods for designing buildings to sustain an extent of localised failure from an unspecified cause without disproportionate collapse. Whilst other approaches may be equally valid, adoption of this strategy is likely to ensure that a building, depending upon the consequences class (see 3.4), is sufficiently robust to sustain a limited extent of damage or failure without collapse.

#### **A.2 Introduction**

(1) Designing a building such that neither the whole building nor a significant part of it will collapse if localised failure were sustained, is an acceptable strategy, in accordance with Section 3 of this part. Adopting this strategy should provide a building with sufficient robustness to survive a reasonable range of undefined accidental actions.

(2) The minimum period that a building needs to survive following an accident should be that period needed to facilitate the safe evacuation and rescue of personnel from the building and its surroundings. Longer periods of survival may be required for buildings used for handling hazardous materials, provision of essential services, or for national security reasons.

#### **A.3 Consequences classes of buildings**

(1) Table A.1 provides a categorisation of building types/occupancies to consequences classes. This categorisation relates to the low, medium and high consequences classes given in 3.4 (1).

**Table A.1 - Categorisation of consequences classes.**

Consequence class	Example of categorisation of building type and occupancy
1	Single occupancy houses not exceeding 4 storeys. Agricultural buildings. Buildings into which people rarely go, provided no part of the building is closer to another building, or area where people do go, than a distance of 1 <sup>1</sup> / <sub>2</sub> times the building height.
2a Lower Risk Group	5 storey single occupancy houses. Hotels not exceeding 4 storeys. Flats, apartments and other residential buildings not exceeding 4 storeys. Offices not exceeding 4 storeys. Industrial buildings not exceeding 3 storeys. Retailing premises not exceeding 3 storeys of less than 1 000 m <sup>2</sup> floor area in each storey. Single storey educational buildings All buildings not exceeding two storeys to which the public are admitted and which contain floor areas not exceeding 2000 m <sup>2</sup> at each storey.
2b Upper Risk Group	Hotels, flats, apartments and other residential buildings greater than 4 storeys but not exceeding 15 storeys. Educational buildings greater than single storey but not exceeding 15 storeys. Retailing premises greater than 3 storeys but not exceeding 15 storeys. Hospitals not exceeding 3 storeys. Offices greater than 4 storeys but not exceeding 15 storeys. All buildings to which the public are admitted and which contain floor areas exceeding 2000 m <sup>2</sup> but not exceeding 5000 m <sup>2</sup> at each storey. Car parking not exceeding 6 storeys.
3	All buildings defined above as Class 2 Lower and Upper Consequences Class that exceed the limits on area and number of storeys. All buildings to which members of the public are admitted in significant numbers. Stadia accommodating more than 5 000 spectators Buildings containing hazardous substances and /or processes

NOTE 1 For buildings intended for more than one type of use the “consequences class” should be that relating to the most onerous type.

NOTE 2 In determining the number of storeys basement storeys may be excluded provided such basement storeys fulfil the requirements of "Consequences Class 2b Upper Risk Group".

NOTE 3 Table A.1 is not exhaustive and can be adjusted

#### **A.4 Recommended strategies**

(1) Adoption of the following recommended strategies should provide a building with an acceptable level of robustness to sustain localised failure without a disproportionate level of collapse.

a) For buildings in Consequences Class 1:

Provided a building has been designed and constructed in accordance with the rules given in EN 1990 to EN 1999 for satisfying stability in normal use, no further specific consideration is necessary with regard to accidental actions from unidentified causes.

b) For buildings in Consequences Class 2a (Lower Group):

In addition to the recommended strategies for Consequences Class 1, the provision of effective horizontal ties, or effective anchorage of suspended floors to walls, as defined in A.5.1 and A.5.2 respectively for framed and load-bearing wall construction should be provided.

NOTE 1 Details of effective anchorage may be given in the National Annex.

c) For buildings in Consequences Class 2b (Upper Group):

In addition to the recommended strategies for Consequences Class 1, the provision of:

- horizontal ties, as defined in A.5.1 and A.5.2 respectively for framed and load-bearing wall construction (see 1.5.11), together with vertical ties, as defined in A.6, in all supporting columns and walls should be provided, or alternatively,
- the building should be checked to ensure that upon the notional removal of each supporting column and each beam supporting a column, or any nominal section of load-bearing wall as defined in A.7 (one at a time in each storey of the building) the building remains stable and that any local damage does not exceed a certain limit.

Where the notional removal of such columns and sections of walls would result in an extent of damage in excess of the agreed limit, or other such limit specified, then such elements should be designed as a "key element" (see A.8).


In the case of buildings of load-bearing wall construction, the notional removal of a section of wall, one at a time, is likely to be the most practical strategy to adopt.

For buildings in Consequences Class 3:

A systematic risk assessment of the building should be undertaken taking into account both foreseeable and unforeseeable hazards.

NOTE 2 Guidance on risk analysis is included in Annex B.

NOTE 3 The limit of admissible local failure may be different for each type of building. The recommended value is 15 % of the floor, or 100 m<sup>2</sup>, whichever is smaller, in each of two adjacent storeys  $\overline{AC_1}$ , in accordance with 3.3.(1)P  $\overline{AC_1}$ . See Figure A.1.

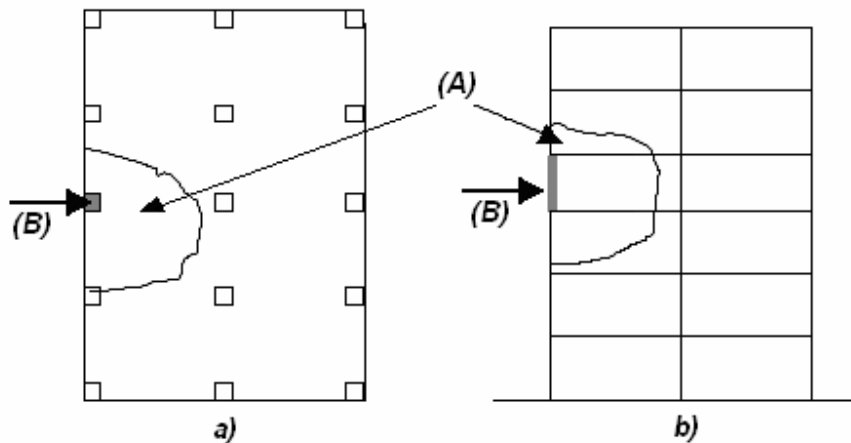

### Key

- (A) Local damage not exceeding 15 % of floor area in each of two adjacent storeys  
 (B) Notional column to be removed  
 a) Plan b) Section

Figure A.1 – Recommended limit of admissible damage.

## A.5 Horizontal ties

### A.5.1 Framed structures

(1) Horizontal ties should be provided around the perimeter of each floor and roof level and internally in two right angle directions to tie the column and wall elements securely to the structure of the building. The ties should be continuous and be arranged as closely as practicable to the edges of floors and lines of columns and walls. At least 30 % of the ties should be located within the close vicinity of the grid lines of the columns and the walls.

NOTE See the example in Figure A.2.

(2) Horizontal ties may comprise rolled steel sections, steel bar reinforcement in concrete slabs, or steel mesh reinforcement and profiled steel sheeting in composite steel/concrete floors (if directly connected to the steel beams with shear connectors). The ties may consist of a combination of the above types.

(3) Each continuous tie, including its end connections, should be capable of sustaining a design tensile load of “ $T_i$ ” for the accidental limit state in the case of internal ties, and “ $T_p$ ”, in the case of perimeter ties, equal to the following values:

$$\text{for internal ties } T_i = 0,8(g_k + \psi q_k)sL \text{ or } 75 \text{ kN, whichever is the greater.} \quad (\text{A.1})$$

$$\text{for perimeter ties } T_p = 0,4(g_k + \psi q_k)sL \text{ or } 75 \text{ kN, whichever is the greater.} \quad (\text{A.2})$$

where :


$s$  is the spacing of ties,

$L$  is the span of the tie,

$\psi$  is the relevant factor in the expression for combination of action effects for the accidental design situation (i.e.  $\psi_1$  or  $\psi_2$  in accordance with expression (6.11b) of EN 1990).



NOTE See the example in Figure A.2.

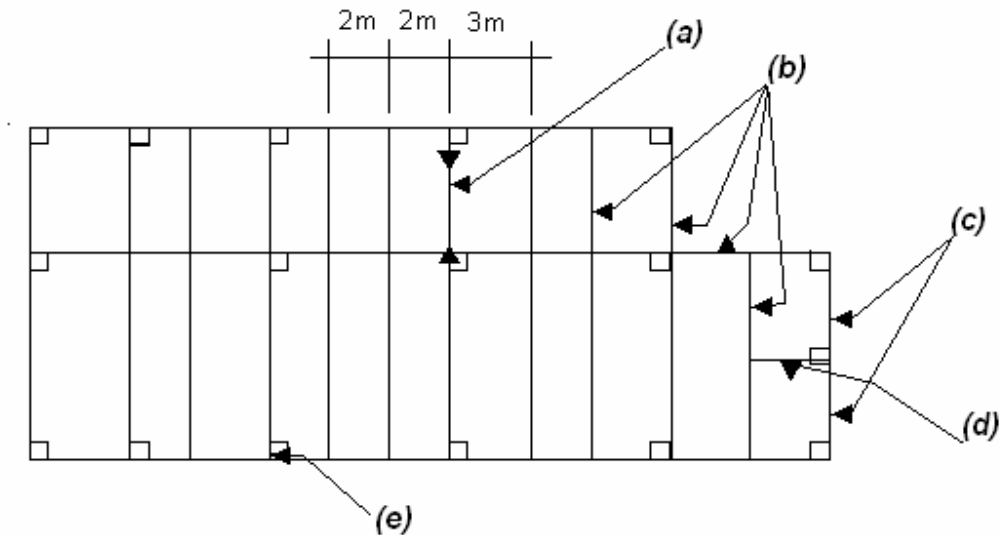

**Key**

- (a) 6 m span beam as internal tie
- (b) All beams designed to act as ties
- (c) Perimeter ties
- (d) Tie anchored to a column
- (e) Edge column

EXAMPLE The calculation of the accidental design tensile force  $T_i$  in the 6 m span beam shown in Figure A.2 assuming the following characteristic actions (e.g. for a steel frame building).

Characteristic loading :  $g_k = 3,0 \text{ kN/m}^2$  and  $q_k = 5,0 \text{ kN/m}^2$

And assuming the choice of combination coefficient  $\psi_1$  (i.e. = 0,5) in expression (6.11a)

$$T_i = 0,8(3,00 + 0,5 \times 5,00) \frac{3+2}{2} \times 6,0 = 66 \text{ kN} \text{ (being less than 75 kN)}$$

**Figure A.2 - Example of horizontal tying of a 6 storey department store.**

(4) Members used for sustaining actions other than accidental actions may be utilised for the above ties.

**A.5.2 Load-bearing wall construction**

(1) For Class 2 buildings (Lower Risk Group), see Table A.1:

Appropriate robustness should be provided by adopting a cellular form of construction designed to facilitate interaction of all components including an appropriate means of anchoring the floor to the walls.

(2) For Class 2 buildings (Upper Risk Group), see Table A.1:

Continuous horizontal ties should be provided in the floors. These should be internal ties distributed throughout the floors in both orthogonal directions and peripheral ties extending around the perimeter of

the floor slabs within a 1,2 m width of the slab. The design tensile load in the ties should be determined as follows:

For internal ties  $T_i$  = the greater of  $F_t$  kN/m or  $\frac{F_t (g_k + \psi q_k) z}{7,5 \cdot 5}$  kN/m (A.3)

For peripheral ties  $T_p = F_t$  (A.4)

where :


$F_t$  is 60 kN/m or  $20 + 4n_s$  kN/m, whichever is less

$n_s$  is the number of storeys

$z$  is the lesser of:

- 5 times the clear storey height  $H$ , or
- the greatest distance in metres in the direction of the tie, between the centres of the columns or other vertical load-bearing members whether this distance is spanned by:
  - a single slab or
  - by a system of beams and slabs.

NOTE Factors  $H$  (in metres) and  $z$  are illustrated in Figure A.3.

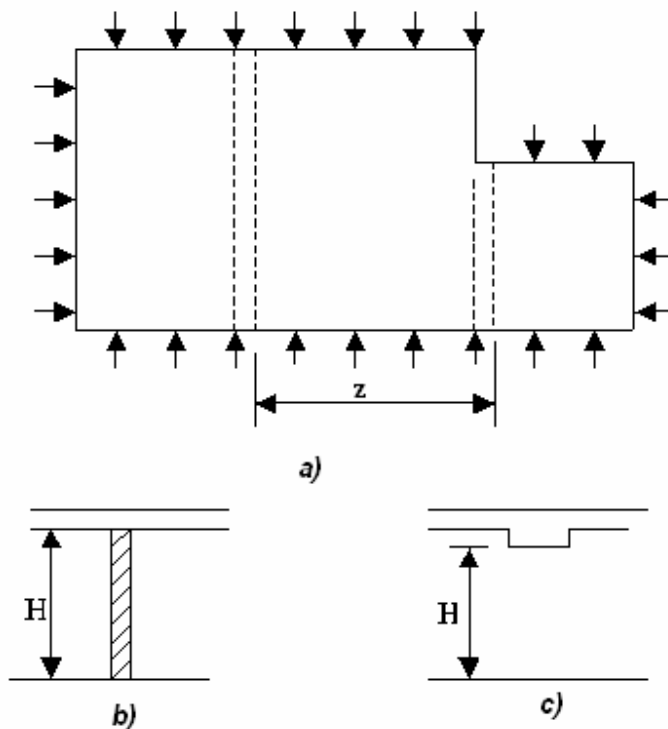

**Key**

a) Plan

b) Section: flat slab

c) Section : beam and slab

**Figure A.3 – illustration of factors  $H$  and  $z$ .**

### A.6 Vertical ties

- (1) Each column and wall should be tied continuously from the foundations to the roof level.
- (2) In the case of framed buildings (e.g. steel or reinforced concrete structures) the columns and walls carrying vertical actions should be capable of resisting an accidental design tensile force equal to the largest design vertical permanent and variable load reaction applied to the column from any one storey. Such accidental design loading should not be assumed to act simultaneously with permanent and variable actions that may be acting on the structure.
- (3) For load-bearing wall construction (see [AC1](#) 1.5.11 [AC1](#)) the vertical ties may be considered effective if:
- for masonry walls their thickness is at least 150 mm thick and if they have a minimum compressive strength of 5 N/mm<sup>2</sup> in accordance with EN 1996-1-1.
  - the clear height of the wall,  $H$ , measured in metres between faces of floors or roof does not exceed  $20t$ , where  $t$  is the thickness of the wall in metres.
  - if they are designed to sustain the following vertical tie force  $T$ :

$$T = \frac{34A}{8000} \left( \frac{H}{t} \right)^2 \text{ N, or 100 kN/m of wall, whichever is the greater,} \quad (\text{A.5})$$

where:

$A$  is the cross-sectional area in mm<sup>2</sup> of the wall measured on plan, excluding the non loadbearing leaf of a cavity wall.

- the vertical ties are grouped at 5 m maximum centres along the wall and occur no greater than 2,5 m from an unrestrained end of the wall.

### A.7 Nominal section of load-bearing wall

(1) The nominal length of load-bearing wall construction referred to in [AC1](#) A.4(1)c [AC1](#) should be taken as follows:

- for a reinforced concrete wall, a length not exceeding  $2,25H$ ,
- for an external masonry, or timber or steel stud wall, the length measured between lateral supports provided by other vertical building components (e.g. columns or transverse partition walls),
- for an internal masonry, or timber or steel stud wall, a length not exceeding  $2,25H$

where:

$H$  is the storey height in metres.

### A.8 Key elements

(1) In accordance with 3.3(1)P, for building structures a "key element", as referred to in A.4(1)c, should be capable of sustaining an accidental design action of  $A_d$  applied in horizontal and vertical directions (in one direction at a time) to the member and any attached components having regard to the ultimate strength of such components and their connections. Such accidental design loading should be applied in accordance with expression (6.11b) of EN 1990 and may be a concentrated or distributed load.

NOTE The recommended value of  $A_d$  for building structures is 34 kN/m<sup>2</sup>.

## Annex B (Informative) Information on risk assessment<sup>6</sup>

### B.1 Introduction

(1) This Annex B gives guidance for the planning and execution of risk assessment in the field of buildings and civil engineering structures. A general overview is presented in Figure B.1.

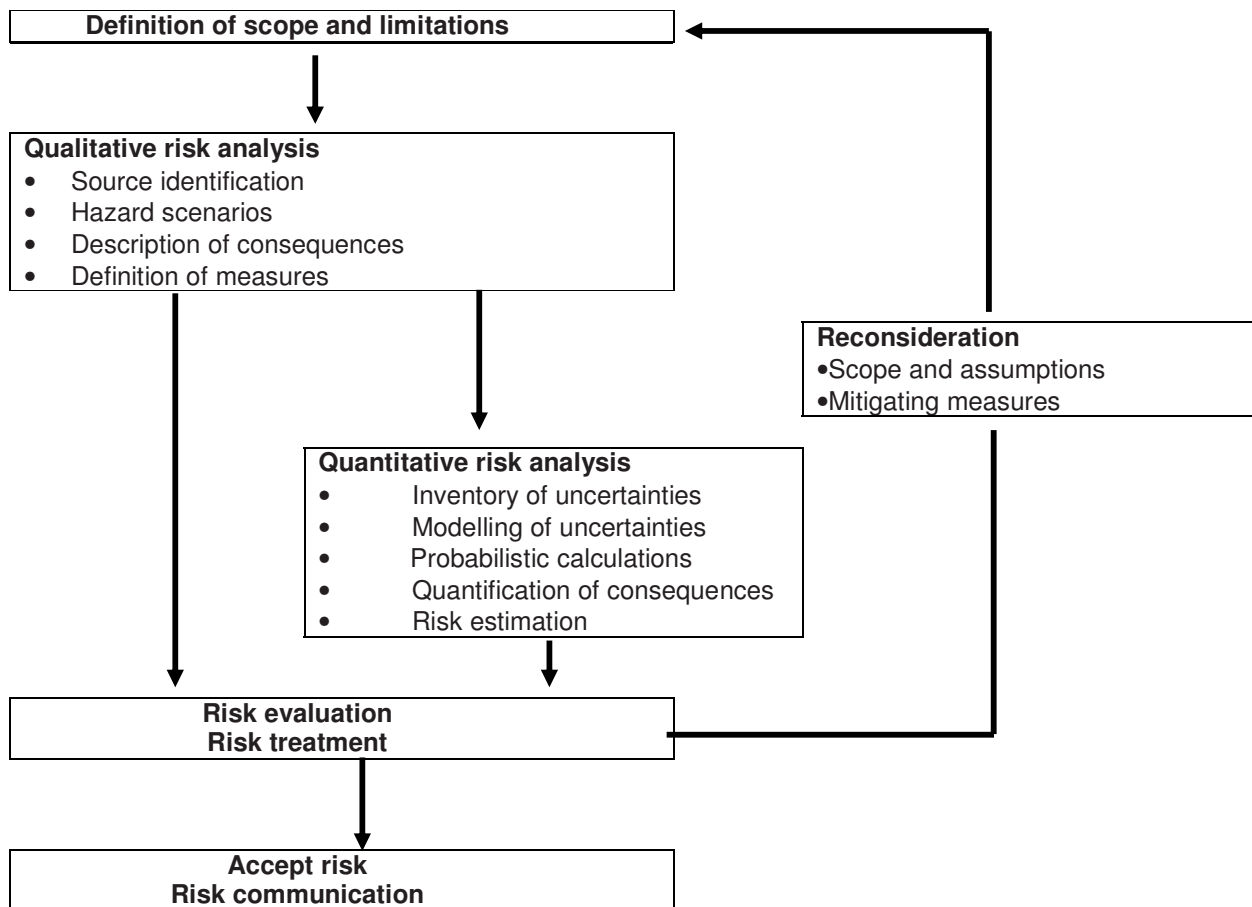


Figure B.1 - Overview of risk analysis

<sup>6</sup> Parts of the contents of this annex may be incorporated or developed in future editions of EN 1990, Eurocode: Basis of structural design after consideration.

## **B.2 Definitions**

### **B.2.1**

#### **consequence**

a possible result of an (in risk analysis usually unwanted) event. Consequences may verbally or numerically be expressed in terms of loss of life, injury, economic loss, environmental damage, disruption to users and the public, etc. Both immediate consequences and those that arise after a certain time has elapsed are to be included.

### **B.2.2**

#### **hazard scenario**

a critical situation at a particular time consisting of a leading hazard together with one or more accompanying conditions which leads to an unwanted event (e.g. complete collapse of the structure).

### **B.2.3**

#### **risk**

See 1.5.13.

### **B.2.4**

#### **risk acceptance criteria**

acceptable limits to probabilities of certain consequences of an undesired event and are expressed in terms of annual frequencies. These criteria are normally determined by the authorities to reflect the level of risk considered to be acceptable by people and society.

### **B.2.5**

#### **risk analysis**

a systematic approach for describing and/or calculating risk. Risk analysis involves the identification of undesired events, and the causes, likelihoods and consequences of these events (see Figure B.1).

### **B.2.6**

#### **risk evaluation**

a comparison of the results of a risk analysis with the acceptance criteria for risk and other decision criteria.

### **B.2.7**

#### **risk management**

systematic measures undertaken by an organisation in order to attain and maintain a level of safety that complies with defined objectives.

### **B.2.8**

#### **undesired event**

an event or condition that can cause human injury or environmental or material damage.

## **B.3 Description of the scope of a risk analysis**

- (1) The subject, background and objectives of the risk analysis need to be fully described.
- (2) All technical, environmental, organisational and human circumstances that are relevant to the activity and the problem being analysed, need to be stated in sufficient detail.
- (3) All presuppositions, assumptions, and simplifications made in connection with the risk analysis should be stated.

## **B.4 Methods of risk analysis**

(1) The risk analysis has a descriptive (qualitative) part and may, where relevant and practicable, also have a numerical (quantitative) part.

### **B.4.1 Qualitative risk analysis**

(1) In the *qualitative* part of the risk analysis all hazards and corresponding hazard scenarios should be identified. Identification of hazards and hazard scenarios is a crucial task to a risk analysis. It requires a detailed examination and understanding of the system. For this reason a variety of techniques have been developed to assist the engineer in performing this part of the analysis (e.g. PHA, HAZOP, fault tree, event tree, decision tree, causal networks, etc.).

In structural risk analysis the following conditions can, for example, present hazards to the structure:



- high values of ordinary actions,
- low values of resistances, possibly due to errors or unforeseen deterioration,
- ground and other environmental conditions different from those assumed in the design,
- accidental actions like fire, explosion, flood (including scour), impact or earthquake,
- unspecified accidental actions.

The following should be taken into account in defining the hazard scenarios:

- the anticipated or known variable actions on the structure;
- the environment surrounding the structure;
- the proposed or known inspection regime of the structure;
- the concept of the structure, its detailed design, materials of construction and possible points of vulnerability to damage or deterioration.
- the consequences of type and degree of damage due to the identified hazard scenario.

The main usage of the structure should be identified in order to ascertain the consequences for safety should the structure fail to withstand the leading hazard event with likely accompanying actions.

### **B.4.2 Quantitative risk analysis**

(1) In the *quantitative* part of the risk analysis probabilities should be estimated for all undesired events and their subsequent consequences. The probability estimations are usually at least partly based on judgement and may for that reason differ substantially from actual failure frequencies. If failure can be expressed numerically the risk may be presented as the mathematical expectation of the consequences of an undesired event. A possible way of presenting risks is indicated in  Figure B.2a .

Any uncertainty in calculations/figures of the data and models used should be fully discussed. The risk analysis will be terminated at an appropriate level, taking into account for example:

- the objective of the risk analysis and the decisions to be made,
- the limitations made at an earlier stage in the analysis,
- the availability of relevant or accurate data,
- the consequences of the undesired events.

The assumptions upon which the analysis is based should be reconsidered when the results of the analysis are available. Sensitivities of factors used in the analysis should be quantified.

Severe	X				
High	X				
Medium		X			
Low			X		
Very low				X	
consequence					
probability	0,00001	0,0001	0,001	0,01	> 0,1
X represents examples of maximum acceptable risk levels					

**AC1** Classification: **AC1** The severity of potential failure is identified for each hazard scenario and classified as Severe, High, Medium, Low or Very Low. They may be defined as follows:

Severe	Sudden collapse of structure occurs with high potential for loss of life and injury.
High	Failure of part(s) of the structure with high potential for partial collapse and some potential for injury and disruption to users and public.
Medium	Failure of part of the structure. Total or partial collapse of structure unlikely. Small potential for injury and disruption to users and public.
Low	Local damage
Very Low	Local damage of small importance

**AC1** Figure B.2a **AC1** - Possible presentation diagram for the outcome of a quantitative risk analysis.

### B.5 Risk acceptance and mitigating measures

(1) Following the identification of the level of risk, it should be decided whether mitigating (structural or non structural) measures should be specified.

(2) In risk acceptance usually the ALARP (as low as reasonably practicable) principle is used. According to this principle two risk levels are specified: if the risk is below the lower bound of the broadly tolerable (i.e. ALARP) region no measures need to be taken; if it is above the upper bound of the broadly tolerable region the risk is considered as unacceptable. If the risk is between the upper and lower bound an economical optimal solution should be sought.

(3) When evaluating the risk of a certain period of time related to the failure event on the basis of the consequences, a discount rate should be taken into account.

(4) Risk acceptance levels should be specified. They will usually be formulated on the basis of the following two acceptance criteria:

- the individual acceptable level of risk: individual risks are usually expressed as fatal accident rates. They can be expressed as an annual fatality probability or as the probability per time unit of a single fatality when actually being involved in a specific activity.
- the socially acceptable level of risk: the social acceptance of risk to human life, which may vary with time, is often presented as an F-N curve, indicating a maximum yearly probability F of having an accident with more than N casualties.


Alternatively, concepts like value for prevented fatality (VPF) or  $\overline{AC_1}$  life quality index (LQI)  $\overline{AC_1}$  may be used.

NOTE Risk acceptance levels may be specified for the individual project.

Acceptance criteria may be determined from certain national regulations and requirements, certain codes and standards, or from experience and/or theoretical knowledge that may be used as a basis for decisions on acceptable risk. Acceptance criteria may be expressed qualitatively or numerically.

(5) In the case of qualitative risk analysis the following criteria may be used:

- a) the general aim should be to minimise the risk without incurring a substantial cost penalty.
- b) for the consequences within the vertically hatched area of  $\overline{AC_1}$  Figure B.2b, the risks associated with the scenario can normally be accepted.
- c) for the consequences within the diagonally hatched area of Figure B.2b, a decision on whether the risk of the scenario can be accepted and whether risk mitigation measures can be adopted at an acceptable cost should be made.
- d) for the consequences considered to be unacceptable (those falling in the horizontally hatched area of Figure B.2b  $\overline{AC_1}$  are likely to be unacceptable) appropriate risk mitigation measures (see B.6) should be taken.

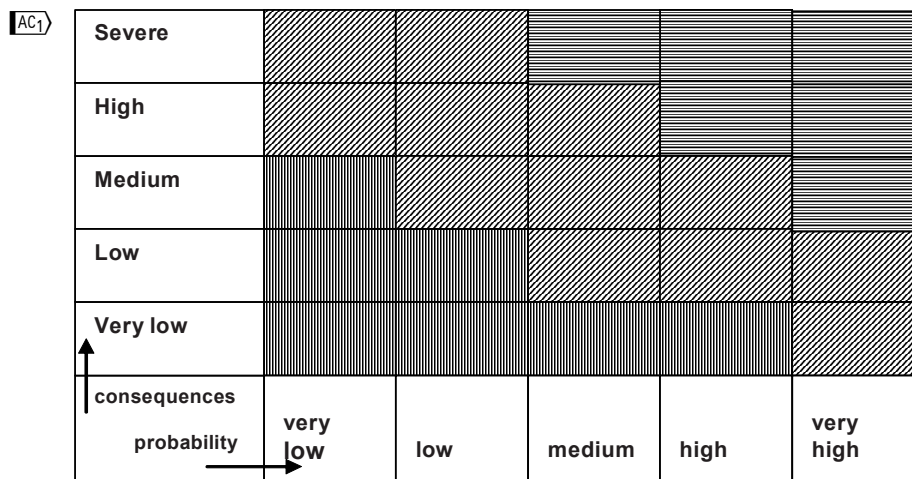

**Figure B.2b – Possible presentation diagram for the outcome of a qualitative risk analysis  $\overline{AC_1}$**



### **B.6 Risk mitigating measures**

(1) Risk mitigation measures may be selected from one or more of the following:

- a) elimination or reduction of the hazard by, for example making an adequate design, modifying the design concept, and providing the countermeasures to combat the hazard, etc..
- b) by-passing the hazard by changing the design concepts or occupancy, for example through the protection of the structure, provision of sprinkler system, etc.
- c) controlling the hazard, for example, by controlled checks, warning systems or monitoring.
- d) overcome the hazard by providing, for example, increased reserves of strength or robustness, availability of alternative load paths through structural redundancy, or resistance to degradation, etc.
- e) permitting controlled collapse of a structure where the probability of injury or fatality may be reduced, for example for impact on lighting columns or signal posts.

### **B.7 Reconsideration**

(1) The revision of the scope, design and assumptions (see Figure B1) should be re-evaluated against the scenarios until it is possible to accept the structure with the selected mitigation measures.

### **B.8 Communication of results and conclusions**

(1) The results of the qualitative and (if available) the quantitative analysis should be presented as a list of consequences and probabilities and their degree of acceptance should be communicated with all stakeholders.

(2) All data and its sources that have been used to carry out a risk analysis should be specified.

(3) All the essential assumptions, pre-suppositions and simplifications that have been made should be summarised so that the validity and limitations of the risk analysis are made clear.

(4) Recommendations for measures to mitigate risk should be stated and be based on conclusions from the risk analysis.

## **B.9 Applications to buildings and civil engineering structures**

### **B.9.1 General**

(1) In order to mitigate the risk in relation to extreme events in buildings and civil engineering structures one or more of the following measures should be considered:

- structural measures, where the structure and the structural members have been designed to have reserves of strength or alternative load paths in case of local failures.
- non structural measures, which include the reduction of
  - the probability of the event occurring,
  - the action intensity or
  - the consequences of failure.

(2) The probabilities and effects of all accidental and extreme actions (e.g. actions due to fire, earthquake, impact, explosion, extreme climatic actions) should be considered for a suitable set of possible hazard scenarios. The consequences should then be estimated in terms of the number of casualties and economic losses. Detailed information is presented in B.9.2 and B.9.3.


(3) The approach mentioned in B.9.1(2) may be less suitable for unforeseeable hazards (design or construction errors, unexpected deterioration, etc). As a result more global damage tolerance design strategies (see Annex A) have been developed, e.g. the classical requirements on sufficient ductility and tying of elements. A specific approach, in this respect, is the consideration of the situation that a structural member (beam, column) has been damaged, by whatever event, to such an extent that the member has lost its normal load bearing capacity. For the remaining part of the structure it is then required that, for a relatively short period of time (defined as the repair period  $T$ ) the structure can withstand the "normal" loads with some prescribed reliability:

$$P(R < E \text{ in } T \mid \text{one element removed}) < p_{\text{target}} \quad (\text{B.1})$$

The target reliability depends on the normal safety target for the building, the period under consideration (hours, days or months) and the probability that the element under consideration is removed (by causes other than those already considered in design).

(4) For conventional structures all relevant collapse possibilities should be included in the design. Where this can be justified, failure causes that have only a remote likelihood of occurring may be disregarded. The approach given in B.9.1(2) should be taken into account. In many cases, and in order to avoid complicated analyses, the strategy given in B.9.1(3) may be investigated.

(5) For unconventional structures (e.g. very large structures, those with new design concepts, those using new materials) the probability of having some unspecified cause of failure should be considered as substantial. A combined approach of the methods described in B.9.1(2) and B.9.1(3) should be taken into account.

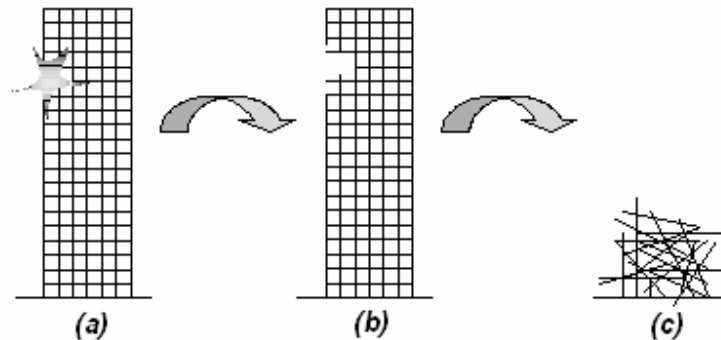

**Key**

Step 1: Identification and modelling of relevant accidental hazards. Assessment of the probability of occurrence of different hazards with different intensities.

Step 2: Assessment of damage states to structure from different hazards. Assessment of the probability of different states of damage and corresponding consequences for given hazards.

Step 3: Assessment of the performance of the damaged structure. Assessment of the probability of inadequate performance(s) of the damaged structure together with the corresponding consequence(s).

**Figure B.3 - Illustration of steps in risk analysis of structures subject to accidental actions.**

**B.9.2 Structural risk analysis**

(1) Risk analysis of structures subject to accidental actions may be approached by the following three steps, see Figure B.3:

Step 1: assessment of the probability of occurrence of different hazards with their intensities.

Step 2: assessment of the probability of different states of damage and corresponding consequences for given hazards.

Step 3: assessment of the probability of inadequate performance(s) of the damaged structure together with the corresponding consequence(s).

(2) The total risk  $R$  can be assessed by

$$\boxed{\text{AC}_1} R = \sum_{i=1}^{N_H} P(H_i) \sum_j^{N_D} \sum_{k=1}^{N_S} P(D_j | H_i) P(S_k | D_j) C(S_k) \boxed{\text{AC}_1} \quad (\text{B.2})$$

where it is assumed that the structure is subjected to  $N_H$  different hazards, that the hazards may damage the structure in  $N_D$  different ways (can be dependent on the considered hazards) and that the performance of the damaged structure can be discretised into  $N_S$  adverse states  $S_k$  with corresponding consequences  $C(S_k)$ .  $P(H_i)$  is the probability of occurrence (within a reference time interval) of the  $i^{\text{th}}$  hazard,  $P(D_j | H_i)$  is the conditional probability  $\boxed{\text{AC}_1}$  of the  $j^{\text{th}}$  damage state of the structure given the  $i^{\text{th}}$  hazard and  $P(S_k | D_j) \boxed{\text{AC}_1}$  is the conditional probability of the  $k^{\text{th}}$  adverse overall structural performance  $S$  given the  $i^{\text{th}}$  damage state.


NOTE 1  $P(S_k|D_i)$  and  $C(S_k)$  can be highly dependent on time (e.g. in case of fire and evacuation, respectively) and the overall risk should be assessed and compared to acceptable risks accordingly.

NOTE 2 Expression (B.2) can form the basis for risk assessment of structures not only for structures subject to rare and accidental loads but also for structures subject to ordinary loads.

(3) Within risk assessment possible different strategies for risk control, and risk reduction need to be investigated for economical feasibility:

- risk may be reduced by reduction of the probability that the hazards occur, i.e. by reducing  $P(H)$ . For example for ship impacts on bridge pier structures the hazard (the event of a ship impact) can be mitigated by construction of artificial islands in front of the bridge piers. Similarly, the risk of explosions in buildings might be reduced by removing explosive materials from the building.
- risk may be reduced by reducing the probability of significant damages for given hazards, i.e.  $P(D|H)$ . For example, damage which might follow as a consequence of the initiation of fires can be mitigated by passive and active fire control measures (e.g. foam protection of steel members and sprinkler systems).
- risk may be reduced by reducing the probability of adverse structural performance given structural damage, i.e.  $P(S|D)$ . This might be undertaken by designing the structures with a sufficient degree of redundancy thus allowing for alternative load transfer should the static system change due to damage.

### B.9.3 Modelling of risks from extreme events

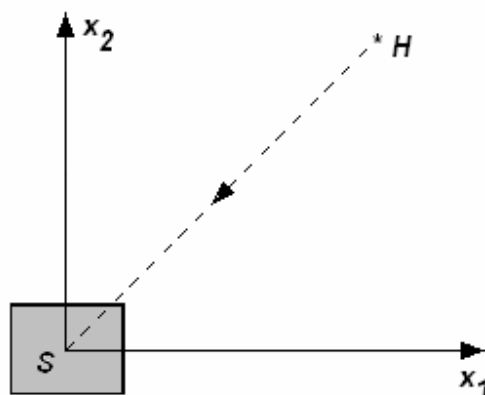

**Key**

S: Structure

H: Hazard event with magnitude  $M$  at time  $t$

**Figure B.4 - Components for the extreme event modelling.**

#### B.9.3.1 General format

(1) As part of a risk analysis extreme hazards like earthquakes, explosions, collisions, etc should be investigated. The general model for such an event may consist of the following components (Figure B.4):

- a triggering event at some place and at some point in time

- the magnitude  $M$  of the energy involved in the event and possibly some other parameters.
- the physical interactions between the event, the environment and the structure, leading to the exceedance of some limit state in the structure.

(2) The occurrence of the triggering event for hazard  $H$  in B.9.3.1(1) may often be modelled as events in a Poisson process of intensity  $\lambda(t,x)$  per unit volume and time unit,  $t$  representing the point in time and  $x$  the location in space  $(x_1, x_2, x_3)$ . The probability of occurrence of failure during the time period up to time  $T$  is then (for constant  $\lambda$  and small probabilities) given by expression (B.3):

$$P_f(T) \approx N \int_0^{\infty} P(F|M = m) f_M(m) dm \quad (B.3)$$

where:


$N = \lambda T$  is the total number of relevant initiating events in the considered period of time,

$f_M(m)$  is the probability density function of the random magnitude  $M$  of the hazard

Note that the probability of failure may depend on the distance between the structure and the location of the event. In that case an explicit integration over the area or volume of interest is necessary.

### B.9.3.2 Application to impact from vehicles

(1) For the situation shown in Figure B.5 impact will occur if a vehicle, travelling along the roadway leaves its intended course at a critical place with sufficient speed. The required speed for impact depends on the distance from the structure or a structural member or element to the road, the angle of the collision course, the initial velocity and the topographical properties of the terrain between road and structure. In some cases there may be obstacles or height differences in terrain.

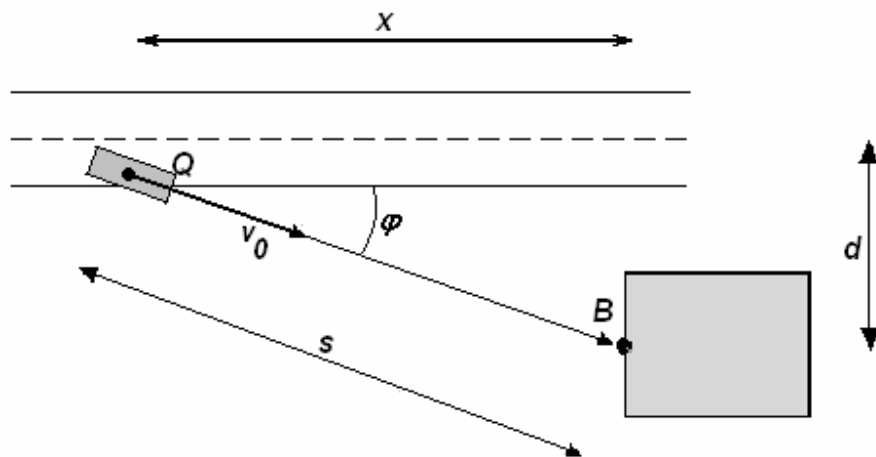

A vehicle leaves the intended course at point Q with velocity  $v_0$  and angle  $\varphi$ . A structure or structural member in the vicinity of the roadway at distance  $s$  is hit with velocity  $v_f$ .

Figure B.5 - Impact from vehicles.

(2) Based on the general expression (B.3) the failure probability for this case is given in expression (B.4):

$$\boxed{AC1} P_f = N \int [P(F > R)] \frac{b}{\sin \varphi} f(\varphi) d\varphi \boxed{AC1} \quad (B.4)$$

where :

$N = nT\lambda$  is the total number of initiating events in the period under consideration,  
 $n$  is the traffic intensity,  
 $\lambda$  is the vehicle failure intensity (number of incidents per vehicle km),  
 $T$  is the period of time,  
 $b$  is the width of the structural element or two times the width of the colliding vehicle, whichever is the less.  
 $\varphi$  is the direction angle,  
 $f(\varphi)$  is its probability density function.,  
 $R$  represents the resistance of the structure and  
 $F$  is the impact force.

Using a simple impact model (see Annex C), the impact force  $F$  can be written as:

$$\boxed{\text{AC1}} F = \sqrt{mkv_r^2} = \sqrt{mk(v_0^2 - 2as)} \quad \boxed{\text{AC1}} \quad (\text{B.5})$$

where:

$m$  is the vehicle mass,  
 $k$  is the  $\boxed{\text{AC1}}$  spring  $\boxed{\text{AC1}}$  stiffness,  
 $v_0$  is the velocity of the vehicle when leaving the track at point Q and  $a$  the constant deceleration of the vehicle after it has left the road (see Figure B.5) and  $s = d/\sin \varphi$  the distance from point Q to the structure).

### **B.9.3.3 Application to impact from ships**


(1) For the application illustrated in Figure B.6, expression (B.3) may be further developed as given in expression (B.6).

$$P_f(T) = N \int P\{F_{dyn}(x) > R\} dx \quad (\text{B.6})$$

where :

$N = n \lambda T (1 - p_a)$  is the total number of incidents in the period of consideration,  
 $n$  is the number of ships per time unit (traffic intensity),  
 $\lambda$  is the probability of a failure per unit travelling distance,  
 $T$  is the reference period (usually 1 year),  
 $p_a$  is the probability that a collision is avoided by human intervention,  
 $x$  is the coordinate of the point of the fatal error or mechanical failure,  
 $F_{dyn}$  is the impact force on the structure following from impact analysis (see Annex C) and  
 $R$  is the resistance of the structure.

Where relevant, the distribution of the initial ship position in the  $y$ -direction may be taken into account, see Figure B.6.

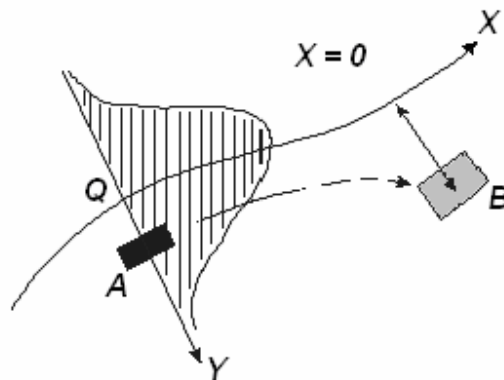

**Key**

A: Object

B: Structure

**Figure B.6 - Ship collision scenario.**

**B.9.4 Guidance for application of risk analysis related to impact from rail traffic**

(1) The following factors should be taken into account when assessing the risk to people from derailed trains on the approach to class A structures where the maximum permitted line speed is over 120 km/h and class B structures:

- the likelihood of derailed trains on the approach to the structure.
- the permissible speed of trains using the line.
- the predicted deceleration of derailed trains on the approach to the structure.
- the lateral distance a derailed train is predicted to travel.
- whether the line is single or not in the vicinity of the structure.
- the type of traffic (passenger/freight) passing under the structure.
- the predicted number of passengers in the train passing under the structure.
- the frequency of trains passing under the structure.
- the presence of switches and crossings on the approach to the structure.
- the static system (structural configuration) of the structure and the robustness of the supports.
- the location of the supports to the structure relative to the tracks.
- the predicted number of people, outside the train, who are at risk from harm from a derailed train.

The following factors also affect the risk from derailed trains, but to a lesser extent:

- the curvature of the track in the vicinity of the structure.
- the number of tracks, where there are more than two.

The effect that any preventative and protective measures proposed have on other parts or other users of the adjacent infrastructure should also be taken into account. This includes for example the effect on signal sighting distances, authorised access, and other safety considerations relating to the layout of the track.

NOTE Further recommendations and guidance for class A and class B structures (see AC1 4.5.1.2 AC1) are set out in UIC Code 777-2R (2002) "Structures Built Over Railway Lines (Construction requirements in the track zone). UIC Code 777-2R includes specific recommendations and guidance on the following:

- carrying out a risk assessment for class B structures,
- measures (including construction details) to be considered for class A structures, including situations where the maximum line speed at the site is less than 50 km/h,
- measures to be considered for class A structures where the distance from the nearest structural support and the centre line of the nearest track is 3 m or less.

(2) The following should be considered for Class B structures either singly or in combination in determining the appropriate measures to reduce the risk to people from a derailed train on the approach to a structure:

- provision of robustness to the supports of the structure to withstand the glancing impact from a derailed train to reduce the likelihood of collapse of the structure.
- provision of continuity to the spans of the superstructure to reduce the likelihood of collapse following impact with the supports of the structure from a derailed train.
- provision of measures to limit the lateral deviation of the derailed train on the approach to the structure to reduce the likelihood of impact from a derailed train.
- provision of increased lateral clearance to the supports of the structure to reduce the likelihood of impact from a derailed train.
- avoidance of supports located on a line that is crossed by a line extended in the direction of the turn out of a switch to reduce the likelihood of a derailed train being directed towards the supports of the structure.
- provision of continuous walls or wall type supports (in effect the avoidance of supports consisting of separate columns) to reduce the likelihood of collapse following impact with the supports of the structure from a derailed train.
- where it is not reasonably practicable to avoid supports consisting of separate columns provision of supports with sufficient continuity so that the superstructure remains standing if one of the columns is removed.
- provision of deflecting devices and absorbing devices to reduce the likelihood of impact from a derailed train.



## Annex C (Informative) Dynamic design for impact

### C.1 General

(1) Impact is an interaction phenomenon between a moving object and a structure, in which the kinetic energy of the object is suddenly transformed into energy of deformation. To find the dynamic interaction forces, the mechanical properties of both the object and the structure should be determined. Static equivalent forces are commonly used in design.

(2) Advanced design of structures to sustain actions due to impact may include explicitly one or several of the following aspects:

- dynamic effects;
- non linear material behaviour.

Only dynamic effects are dealt with in this annex.

NOTE For probabilistic aspects and analysis of consequences see Annex B.

(3) This annex provides guidance for the approximate dynamic design of structures subject to accidental impact by road vehicles, rail vehicles and ships, on the basis of simplified or empirical models.

NOTE 1 The models given in Annex C, in general, better approximate the design than the models presented in Annex B which in special cases might be too simplified.

NOTE 2 Analogous actions can be the consequence of impact in tunnels, on road barriers, etc. (see EN 1317). Similar phenomena may also arise as consequences of explosions (see Annex D) and other dynamic actions.

### C.2 Impact dynamics

(1) Impact is characterised as either *hard impact*, where the energy is mainly dissipated by the impacting body, or *soft impact*, where the structure is designed to deform in order to absorb the impact energy.

#### C.2.1 Hard Impact

(1) For hard impact, the equivalent static forces may be obtained from 4.3 to 4.7. Alternatively, an approximate dynamic analysis may be performed following the simplified approximations in C.2.1(2) and (3).

(2) For hard impact it is assumed that the structure is rigid and immovable and that the colliding object deforms linearly during the impact phase. The maximum resulting dynamic interaction force is given by expression (C.1):

$$F = v_r \sqrt{k m} \quad (\text{C.1})$$

where:

$v_r$  is the object velocity at impact;

$k$  is the equivalent elastic stiffness of the object (i.e. the ratio between force  $F$  and total deformation);

$m$  is the mass of the colliding object.

The force due to impact may be considered as a rectangular pulse on the surface of the structure. In that case the duration of the pulse follows from:

$$F \Delta t = mv \quad \text{or} \quad \Delta t = \sqrt{m/k} \quad (\text{C.2})$$

If relevant, a non zero rise time can be applied (see Figure C.1).

When the colliding object is modelled as an equivalent impacting object of uniform cross-section (see Figure C.1) expressions (C.3) and (C.4) should be used:

$$k = EA/L \quad (\text{C.3})$$

$$m = \rho AL \quad (\text{C.4})$$


where :

$L$  is the length of the impacting object;

$A$  is the cross sectional area;

$E$  is the modulus of elasticity;

$\rho$  is the mass density of the impacting object.

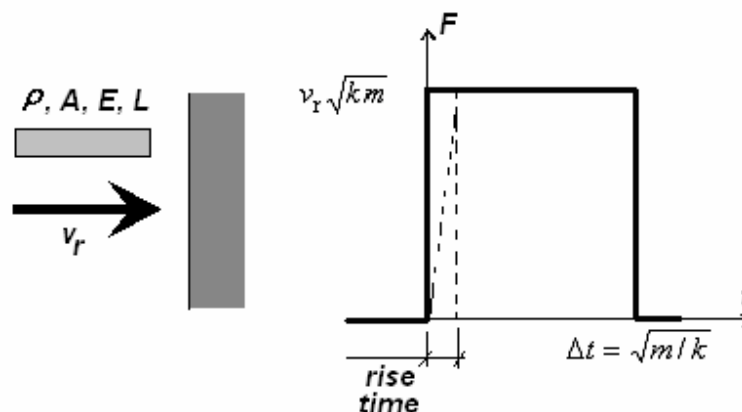

**Figure C.1 - Impact model,  $F$  = dynamic interaction force.**

(3) Expression (C.1) gives the maximum dynamic force value on the outer surface of the structure. Within the structure these forces may give rise to dynamic effects. An upper bound for these effects can be determined if the structure is assumed to respond elastically and the load is realised as a step function (i.e. a function that rises immediately to its final value and then stays constant at that value). In that case the dynamic amplification factor (i.e. the ratio between dynamic and static response)  $\phi_{dyn}$  is 2,0. If the pulse nature of the load (i.e. its limited time of application according to expression (C.2)) needs to be taken into account, calculations will lead to amplification factors  $\phi_{dyn}$  ranging from below 1,0 up to 1,8 depending on the dynamic characteristics of the structure and the object. In general, it is recommended to use a direct dynamic analysis to determine  $\phi_{dyn}$  with the loads specified in this annex.

### **C.2.2 Soft Impact**

(1) If the structure is assumed elastic and the colliding object rigid, the expressions given in C.2.1 apply and should be used with  $k$  being the stiffness of the structure.

(2) If the structure is designed to absorb the impact energy by plastic deformations, provision should be made so that its ductility is sufficient to absorb the total kinetic energy  $\frac{1}{2} m v_r^2$  of the colliding object.

(3) In the limit case of rigid-plastic response of the structure, the above requirement is satisfied by the condition of expression (C.5):

$$\frac{1}{2} m v_r^2 \leq F_o y_o \quad (\text{C.5})$$

where:

$F_o$  is the plastic strength of the structure, i.e. the limit value of the static force  $F$ ;

$y_o$  is its deformation capacity, i.e. the displacement of the point of impact that the structure can undergo.

NOTE Analogous considerations apply to structures or other barriers specifically designed to protect a structure from impacts (see e.g. EN 1317 "Road restraint systems").

### C.3 Impact from aberrant road vehicles

(1) In case of a lorry impacting a structural member, the velocity of impact  $v_r$  in expression (C.1) should be determined using expression (C.6):

$$\boxed{\text{AC1}} \quad v_r = \sqrt{v_o^2 - 2as} = v_o \sqrt{1 - d/d_b} \quad (\text{for } d < d_b) \quad \boxed{\text{AC1}} \quad (\text{C.6})$$

where (see also Figure C.2):

$v_o$  is the velocity of the lorry leaving the trafficked lane,

$a$  is the average deceleration of the lorry after leaving the trafficked lane;

$s$  is the distance from the point where the lorry leaves the trafficked lane to the structural member (see Figure C.2);

$d$  is the distance from the centre of the trafficked lane to the structural member;

$d_b$  is the braking distance =  $d_b = (v_o^2 / 2a) \sin \varphi$ , where  $\varphi$  is the angle between the trafficked lane and the course of the impacting vehicle.

(2) Indicative probabilistic information for the basic variables partly based on statistical data and partly on engineering judgement is given in Table C.1.

NOTE See also Annex B.

Table C.1 - Indicative data for probabilistic collision force calculation.

Variable	Designation	Probability distribution	Mean value	Standard deviation
$v_0$	vehicle velocity			
	- highway	Lognormal	80 km/h	10 km/h
	- urban area	Lognormal	40 km/h	8 km/h
	- courtyard	Lognormal	15 km/h	5 km/h
	- parking garage	Lognormal	5 km/h	5 km/h
$a$	Deceleration	Lognormal	4,0 m/s <sup>2</sup>	1,3 m/s <sup>2</sup>
$m$	Vehicle mass – lorry	Normal	20 000 kg	12 000 kg
$m$	Vehicle mass – car	----	1 500 kg	--
$k$	Vehicle stiffness	Deterministic	300 kN/m	--
$\varphi$	Angle	AC1 Rayleigh AC1	10°	10°

(3) On the basis of Table C.1, the following approximate design value for the dynamic interaction force due to impact can be determined using expression (C.7):

$$F_d = F_0 \sqrt{1 - d / d_b} \quad (C.7)$$

where:

$F_0$  is the collision force

$d$  and  $d_b$  are as before.

Indicative values for  $F_0$  and  $d_b$  are presented in Table C.2, together with design values for  $m$  and  $v$ . All these values correspond approximately to the averages given in Table C.1 plus or minus one standard deviation.

In particular cases, when specific information is available, different design values may be chosen, depending on the target safety, the traffic intensity and the accident frequency.

NOTE 1 The presented model is a rough schematisation and neglects at least in detail many influences that may play an important role like the presence of kerbs, bushes, fences and the cause of the incident. To some extent the scatter in the deceleration is supposed to compensate for those factors.

NOTE 2 Calculation of the dynamic impact force ( $F_d$ ) using expression (C.7) may be modified on the basis of a risk analysis taking into account the potential consequences of an impact, the rate of deceleration, the tendency of the vehicle to deviate away from the carriageway, the likelihood of the vehicle leaving the carriageway and the likelihood of the vehicle hitting the structure.

(4) In the absence of a dynamic analysis, the dynamic amplification factor for the elastic response may be assumed to be equal to 1,4.

NOTE The derived forces in this annex are intended to be used with an elasto-plastic dynamic structural analysis.

Table C.2 - Design values for vehicle mass, velocity and dynamic impact force  $F_0$ .

Type of road	Mass $m$ [kg]	Velocity $v_0$ [km/h]	Deceleration $A$ [m/s <sup>2</sup> ]	Impact force based on (C.1) with $v_r = v_0$ $F_0$ [kN]	Distance $d_b^a$ [m]
Motorways	30 000	90	3	2 400	20
Urban areas <sup>b</sup>	30 000	50	3	1 300	10
Courtyards					
– cars only	1 500	20	3	120	2
– all vehicles	30 000	15	3	500	2
Parking garages					
– cars only	1 500	10	3	60	1

<sup>a</sup> Road in areas where the speed limit is 50 km/h.

<sup>b</sup> The value of  $d_b$  may be multiplied by 0,6 for uphill slopes and by 1,6 for downhill slopes (see Figure C.2).

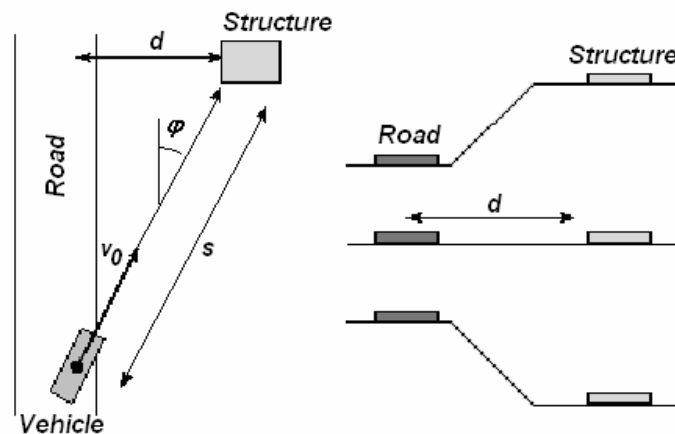


Figure C.2 - Situation sketch for impact by vehicles (top view and cross sections for upward slope, flat terrain and downward slope).

## C.4 Impact by ships

### C.4.1 Ship impact on inland waterways

(1) Impact by ships against solid structures on inland waterways should normally be considered as *hard impact*, with the kinetic energy being dissipated by elastic or plastic deformation of the ship itself.

(2) In the absence of a dynamic analysis, Table C.3 gives indicative values of the forces due to ship impact on inland waterways.

**Table C.3 – Indicative values for the dynamic forces due to ship impact on inland waterways.**

CEMT <sup>a</sup> Class	Reference type of ship	Length $\ell$ (m)	Mass $m$ (ton) <sup>b</sup>	Force $F_{dx}$ <sup>c</sup> (kN)	Force $F_{dy}$ <sup>c</sup> (kN)
I		30-50	200-400	2 000	1 000
II		50-60	400-650	3 000	1 500
III	“Gustav König”	60-80	650-1 000	4 000	2 000
IV	Class „Europe“	80-90	1 000-1 500	5 000	2 500
Va	Big ship	90-110	1 500-3 000	8 000	3 500
Vb	Tow + 2 barges	110-180	3 000-6 000	10 000	4 000
VIa	Tow + 2 barges	110-180	3 000-6 000	10 000	4 000
VIb	Tow + 4 barges	110-190	6 000-12 000	14 000	5 000
VIc	Tow + 6 barges	190-280	10 000-18 000	17 000	8 000
VII	Tow + 9 barges	300	14 000-27 000	20 000	10 000

<sup>a</sup> CEMT: European Conference of Ministers of Transport, classification proposed 19 June 1992, approved by the Council of European Union 29 October 1993.

<sup>b</sup> The mass  $m$  in tons (1 ton = 1 000 kg) includes the total mass of the vessel, including the ship structure, the cargo and the fuel. It is often referred to as the displacement tonnage.

<sup>c</sup> The forces  $F_{dx}$  and  $F_{dy}$  include the effect of hydrodynamic mass and are based on background calculations, using expected conditions for every waterway class.

(3) The indicative dynamic values given in Table C.3 may be adjusted depending upon the consequences of failure of the ship impact. It is recommended to increase these dynamic values for high consequences of failure and to reduce them in the case of low consequences of failure. See also 3.4.

(4) In the absence of a dynamic analysis for the impacted structure, it is recommended to multiply the indicative dynamic values given in Table C.3 by an appropriate dynamic amplification factor. Indeed, these values include the dynamic effects in the colliding object, but not in the structure. For information on dynamic analysis, see C.4.3. Indicative values of the dynamic amplification factor are 1,3 for frontal impact and 1,7 for lateral impact.

(5) In harbour areas the forces given in Table C.3 may be reduced by a factor of 0,5.

#### C.4.2 Ship impact for sea waterways

(1) In the absence of a dynamic analysis, Table C.4 gives indicative values of the forces due to ship impact for sea waterways.

**Table C.4 - Indicative values for the dynamic interaction forces due to ship impact for sea waterways.**

Class of ship	Length $\ell$ (m)	Mass $m^a$ (ton)	Force $F_{dx}^{b,c}$ (kN)	Force $F_{dy}^{b,c}$ (kN)
Small	50	3 000	30 000	15 000
Medium	100	10 000	80 000	40 000
Large	200	40 000	240 000	120 000
Very large	300	100 000	460 000	230 000

<sup>a</sup> The mass  $m$  in tons (1 ton = 1 000 kg) includes the total mass of the vessel, including the ship structure, the cargo and the fuel. It is often referred to as the displacement tonnage. It does not include the added hydraulic mass.

<sup>b</sup> The forces given correspond to a velocity of about 5,0 m/s. They include the effects of added hydraulic mass.

<sup>c</sup> Where relevant the effect of bulbs should be accounted for.

(2) In the absence of a dynamic analysis for the impacted structure, it is recommended to multiply the indicative dynamic values given in Table C.4 by an appropriate dynamic amplification factor. Indeed, these values include the dynamic effects in the colliding object, but not in the structure. For information on dynamic analysis, see C.4.3. Indicative values of the dynamic amplification factor are 1,3 for frontal impact and 1,7 for lateral impact.

(3) In harbour areas the forces given in Table C.4 may be reduced by a factor of 0,5.

(4) For side and stern impact it is recommended to multiply the forces given in Table C.4 by a factor of 0,3, mainly because of reduced velocities. Side impact may govern the design in narrow waters where head-on impact is not feasible.

#### C.4.3 Advanced ship impact analysis for inland waterways

(1) The dynamic impact force  $F_d$  may be derived from expressions (C.8) to (C.13). In this case, it is recommended to use the average mass value for the relevant ship class defined in Table C.3 and a design velocity  $v_{rd}$  equal to 3 m/s increased by the water velocity.

(2) Where a hydrodynamic mass has to be taken into account values of 10 % of the mass of displaced water for bow and 40 % for side impact are recommended.

(3) For elastic deformations (when  $E_{def} \leq 0,21$  MNm) the dynamic design impact force may be calculated from expression (C.8):

$$F_{dyn,el} = 10,95 \cdot \sqrt{E_{def}} \quad [\text{MN}] \quad (\text{C.8})$$

(4) For plastic deformations (when  $E_{def} > 0,21 \text{ MNm}$ ), the dynamic design impact force may be calculated from expression (C.9):

$$F_{dyn,pl} = 5,0 \cdot \sqrt{1 + 0,128 \cdot E_{def}} \quad [\text{MN}] \quad (\text{C.9})$$

The deformation energy  $E_{def}$  [MNm] is equal to the available total kinetic energy  $E_a$  in case of frontal impact, while in case of lateral impact with angle  $\alpha < 45^\circ$ , a sliding impact may be assumed and the deformation energy taken equal to

$$E_{def} = E_a (1 - \cos \alpha) \quad (\text{C.10})$$


(5) Information on probabilistic models of the basic variables determining the deformation energy or the ship's impact behaviour may be used for the design impact force based on probabilistic methods.

(6) If a dynamic structural analysis is used, the impact forces should be modelled as a half-sine-wave pulse for  $F_{dyn} < 5 \text{ MN}$  (elastic impact) and a trapezoidal pulse for  $F_{dyn} > 5 \text{ MN}$  (plastic impact); load durations and other details are presented in Figure C.3.




AC1

elastic impact ( $F_{dyn} \leq 5 \text{ MN}$ )



$$t_a = 2 \cdot \sqrt{m^*/c} = 2 \cdot t_r$$

plastic impact ( $F_{dyn} > 5 \text{ MN}$ )

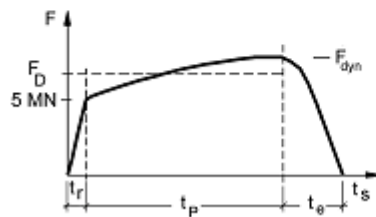

$$F_D \approx (F_0 + F_{dyn}) / 2$$

$$t_r \approx x_e / v_n$$

$$t_p \approx m^* \cdot v_n / F_D$$

$$t_e \approx \pi / 2 \cdot \sqrt{m^*/c}$$

**Key:**

$t_r$  elastic elapsing time [s];

$t_p$  plastic impact time [s];

$t_e$  elastic response time [s];

$t_a$  equivalent impact time [s];

$t_s$  total impact time [s] for plastic impact  $t_s = t_r + t_p + t_e$ ;

$c$  elastic stiffness of the ship (= 60 MN/m);

$F_0$  elastic-plastic limit force = 5 MN;

$x_e$  elastic deformation ( $\approx 0,1 \text{ m}$ );

$v_n$  a) the sailing speed  $v_r$ , for frontal impact;

b) velocity of the colliding ship normal to the impact point  $v_n = v_r \sin \alpha$ , for lateral impact;

For frontal impact the mass  $m^*$  to be taken into account is the total mass of the colliding ship/barge; for lateral impact:  $m^* = (m_1 + m_{hyd})/3$ , where  $m_1$  is the mass of the directly colliding ship or barge and  $m_{hyd}$  is the hydraulic added mass.

**Figure C.3 - Load-time function for ship collision, respectively for elastic and plastic ship response** AC1

(7) When a design value for the impact force is given, e.g. taken from Table C.3, and the load duration has to be calculated, the mass  $m^*$  may be determined as follows:

- if  $F_{dyn} > 5$  MN: by setting  $E_{def}$  expression (C.9), equal to the kinetic energy  $E_a = 0,5 \dot{m}^* v_n^2$ ,
- if  $F_{dyn} \leq 5$  MN :directly by  $\dot{m}^* = (F_{dyn}/v_n)^2 * (1/c)$  [MN s<sup>2</sup>/m].

(8) When not specified by the project, a design velocity  $v_{rd}$  equal to 3 m/s increased by the water velocity is recommended; in harbours the velocity may be assumed as 1,5 m/s. The angle  $\alpha$  may be taken as 20°.

#### C.4.4 Advanced ship impact analysis for sea waterways

**AC1** Text deleted **AC1**

(1) The dynamic design impact force for sea-going merchant vessels between 500 Dead Weight Tons (DWT) and 300 000 DWT may be determined from expression (C.11):

$$F_{bow} = \begin{cases} F_o \cdot \bar{L} \left[ \bar{E}_{imp} + (5.0 - \bar{L}) \bar{L}^{1.6} \right]^{0.5} & \text{for } \bar{E}_{imp} \geq \bar{L}^{2.6} \\ 2.24 \cdot F_o \left[ \bar{E}_{imp} \bar{L} \right]^{0.5} & \text{for } \bar{E}_{imp} < \bar{L}^{2.6} \end{cases} \quad (C.11)$$

where:

$$\bar{L} = L_{pp} / 275 \text{ m}$$

$$\bar{E}_{imp} = E_{imp} / 1425 \text{ MNm}$$

$$\text{AC1 } E_{imp} = \frac{1}{2} m_x v_r^2 \text{ AC1}$$

and

$F_{bow}$  is the maximum bow collision force in [MN];

$F_o$  is the reference collision force = 210 MN;

$E_{imp}$  is the energy to be absorbed by plastic deformations;

$L_{pp}$  is the length of vessel in [m];

$m_x$  is the mass plus added mass with respect to longitudinal motion in [ $10^6$  kg];

**AC1**  $v_r$  is the sailing speed (impact velocity) of the vessel,  $v_r = 5$  m/s (in harbours: 2,5 m/s) **AC1**

(2) Probabilistic models for basic variables determining the deformation energy or the ship's impact behaviour may be used where the determination of the design impact force is based on probabilistic methods.

(3) From the energy balance the maximum indentation  $s_{max}$  is determined using expression (C.12):

$$\text{AC1 } s_{max} = \frac{\pi E_{imp}}{2 F_{bow}} \text{ AC1} \quad (C.12)$$

(4) The associated impact duration,  $T_0$ , is represented by expression (C.13):

$$\text{AC1 } T_0 \approx 1.67 s_{max} / v_r \text{ AC1} \quad (C.13)$$

(5) When not specified by the project a **AC1** sailing speed (impact velocity)  $v_r$  **AC1** equal to 5 m/s increased by the water velocity is recommended; in harbours the velocity may be assumed as 2,5 m/s.

## A1 Annex D (informative)

### Internal explosions

#### D.1 Natural gas explosions

(1) For buildings which might have piped natural gas installed, or where gas canisters can be present, the structure may be designed to withstand the effects of an internal natural gas explosion using a nominal equivalent static pressure given by Formulae (D.1) and (D.2):

$$p_d = 3 + p_{stat} \quad (D.1)$$

or

$$p_d = 3 + p_{stat} / 2 + 0,04 / (A_v / V)^2 \quad (D.2)$$

whichever is the greater;

where

$p_d$  is the nominal equivalent static pressure to design the structure in [kN/m<sup>2</sup>];

$p_{stat}$  is the uniformly distributed static pressure at which venting components will fail in [kN/m<sup>2</sup>];

$A_v$  is the area of venting components in [m<sup>2</sup>];

$V$  is the volume of rectangular enclosure in [m<sup>3</sup>].

Formulae (D.1) and (D.2) are valid for a single room up to 1 000 m<sup>3</sup> total volume.

NOTE 1 The pressure due to deflagration acts effectively simultaneously on all of the bounding surfaces of the room.

NOTE 2 Multi-room explosions may give much higher pressures. The pressures are difficult to calculate as they are not simply limited by the strength of the vent panels; therefore, for this type of explosion, the strategy based on limiting the extend of localized failure (see Figure 3.1) should be adopted.

(2) Where building components with different  $p_{stat}$  values contribute to the venting area, the largest value of  $p_{stat}$  should be used. No value of  $p_d$  greater than 50 kN/m<sup>2</sup> need be taken into account.

(3) The ratio of the area of venting components and the volume should comply with Formula (D.3):

$$0,05 \text{ m}^{-1} \leq A_v / V \leq 0,15 \text{ m}^{-1} \quad (D.3)$$

NOTE Natural gas is a gaseous fossil fuel consisting primarily of methane but including significant quantities of ethane, butane, propane, carbon dioxide, nitrogen, helium and hydrogen sulfide. Before natural gas can be used as a fuel, it undergoes extensive processing to remove almost all materials other than methane.

#### D.2 Dust explosions in rooms, vessels and bunkers

(1) The design value  $p_d$  for the maximum pressure developed in vented cubic and elongated rooms, vessels and bunkers for dust explosions within a single room may be determined from the empirical Formula (D.4):

$$A_v = [4,485 \times 10^{-8} p_{max} K_{st} p_d^{-0,569} + 0,027(p_{stat} - 10)p_d^{-0,5}] V^{0,753} \quad (D.4) \quad A1$$

**A1** where

- $A_v$  is the venting area [ $\text{m}^2$ ];
- $V$  is the volume of room, vessel, bunker [ $\text{m}^3$ ];
- $K_{St}$  is the deflagration index of a dust cloud [ $\text{kN/m}^2$ ] (see Clause (2));
- $p_{max}$  is the maximum pressure of an explosion of the dust [ $\text{kN/m}^2$ ] (see Clause (2));
- $p_{stat}$  is the static activation pressure of the vent areas [ $\text{kN/m}^2$ ];
- $p_d$  is the design value of the pressure in the vented vessel [ $\text{kN/m}^2$ ].

(2) Values for  $p_{max}$  and  $K_{St}$  may be experimentally determined by standard methods for each type of dust.

NOTE 1 The value of  $K_{St}$  depends on factors such as the chemical composition, particle size and moisture content. Indicative values for  $p_{max}$  and  $K_{St}$  are given in Table D.1.

NOTE 2 For standard methods, see for instance EN 14034–1:2004 and EN 14034–2:2006.

(3) Formula (D.4) is valid with the following restrictions:

- $0,1 \text{ m}^3 \leq V \leq 10\,000 \text{ m}^3$ ;
- $L_3 / D_E \leq 2$ , where  $L_3$  is the largest dimension and  $D_E = 2(L_1 \times L_2 / \pi)^{0,5}$ , where  $L_1$  and  $L_2$  are the other two dimensions of the room;
- $10 \text{ kN/m}^2 \leq p_{stat} \leq 100 \text{ kN/m}^2$ , rupture disks and panels with low mass which respond almost without inertia;
- $10 \text{ kN/m}^2 \leq p_d \leq 200 \text{ kN/m}^2$ ;
- $500 \text{ kN/m}^2 \leq p_{max} \leq 1\,000 \text{ kN/m}^2$  for  $1\,000 \text{ kN/m}^2(\text{m/s}) \leq K_{St} \leq 30\,000 \text{ kN/m}^2$ ;  
 $500 \text{ kN/m}^2 \leq p_{max} \leq 1\,200 \text{ kN/m}^2$  for  $30\,000 \text{ kN/m}^2(\text{m/s}) \leq K_{St} \leq 80\,000 \text{ kN/m}^2$ .

(4) For elongated rooms with  $L_3/D_E \geq 2$  the following increase for the venting area should be considered:

$$\Delta A_v = A_v (-4,305 \log p_d + 9,368) \log L_3/D_E \quad (\text{D.5})$$

where

$\Delta A_v$  is the increase for venting area in [ $\text{m}^2$ ].

NOTE In dust explosions, pressures reach their maximum value within a time span in the order of 20 ms to 50 ms. The decline to normal values strongly depends on the venting device and the geometry of the enclosure. **A1**

**A1** Table D.1 –  $p_{max}$  and  $K_{St}$  values for dust explosions

Type of dust	$p_{max}$ kN/m <sup>2</sup>	$K_{St}$ kN/m <sup>2</sup>
Brown coal	810 to 1 000	18 000
Cellulose	800 to 980	27 000
Coffee		9 000
Corn, corn crush		12 000
Corn starch		21 000
Grain		13 000
Milk powder	810 to 970	16 000
Mineral coal		13 000
Mixed provender		4 000
Paper		6 000
Pea flour		14 000
Pigment	650 to 1 070	29 000
Rubber	740	14 000
Rye flour, wheat flour		10 000
Soya meal		12 000
Sugar	820 to 940	15 000
Washing powder		27 000
Wood, wood flour	770 to 1 050	22 000

### D.3 Explosions in road and rail tunnels

(1) In case of a detonation in road and rail tunnels, the pressure time function may be determined using Formulae (D.6) to (D.8), see Figure D.1(a):

$$p(x,t) = p_0 \exp \left\{ - \left( t - \frac{|x|}{c_1} \right) / t_0 \right\} \text{ for } \frac{|x|}{c_1} \leq t \leq \frac{|x|}{c_2} - \frac{|x|}{c_1} \quad (\text{D.6})$$

$$p(x,t) = p_0 \exp \left\{ - \left( \frac{|x|}{c_2} - 2 \frac{|x|}{c_1} \right) / t_0 \right\} \text{ for } \frac{|x|}{c_2} - \frac{|x|}{c_1} \leq t \leq \frac{|x|}{c_2} \quad (\text{D.7})$$

$$p(x,t) = 0 \text{ for all other conditions} \quad (\text{D.8})$$

where

- $p_0$  is the peak pressure (= 2 000 kN/m<sup>2</sup> for a typical liquefied natural gas);
- $c_1$  is the propagation velocity of the shock wave (approximately 1 800 m/s);
- $c_2$  is the acoustic propagation velocity in hot gasses (approximately 800 m/s);
- $t_0$  is the time constant (= 0,01 s);
- $|x|$  is the distance between the pressure sampling point and the centre of the explosion; **A1**

$t$  is the time.

(2) In case of a deflagration in road and rail tunnels, the following pressure time characteristic may be taken into account, see Figure D.1(b):


$$p(t) = 4p_0 \frac{t}{t_0} \left(1 - \frac{t}{t_0}\right) \text{ for } 0 \leq t \leq t_0 \quad (\text{D.9})$$

where

$p_0$  is the peak pressure (= 100 kN/m<sup>2</sup> for a typical liquefied natural gas);

$t_0$  is the time constant (= 0,1 s);

$t$  is the time.

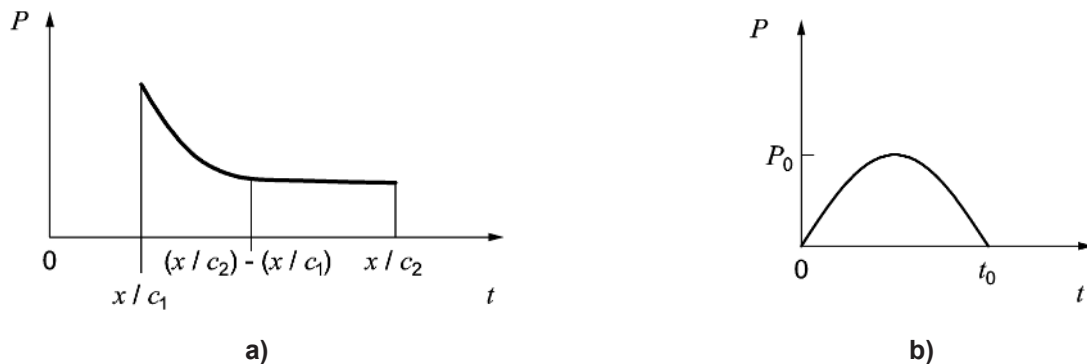

**Figure D.1 — Pressure as time function for (a) detonation and (b) deflagration**

## D.4 Dust, Gas and vapour/air explosions in energy ducts

### D.4.1 General

(1) Ducts including pipelines, cables, etc. for transport and distribution of gases, water, compressed air or electricity for the supply of industry, traffic and/or population which are normally accessible for maintenance should normally be designed to resist the anticipated overpressure of a possible explosion.

(2) Pipes and ducts for transport and distribution of dusts for the supply of industry, which normally are accessible for maintenance, should normally be designed to resist the anticipated overpressure of a possible dust explosion.

NOTE 1 Dust explosions and gas explosions in energy ducts have a similar behaviour concerning the pressure. In general, gas explosions result in higher maximum pressures. Turbulence-producing devices have a greater influence on the increase of the pressure for gas than for dust explosions.

NOTE 2 Ducts (and elongated vessels) are characterized with length-to-diameter ratios equal or greater than 5.

NOTE 3 The measurements of the duct (cross-section, length) as well as the layout of the duct (closed at both sides, open at both sides, open at one side, closed at the other) and whether obstacles are built in the duct influence the combustion and the resulting pressures.

NOTE 4 Especially high pressure is reached when the pressure wave of a detonation is moving directly against walls or other fixed structures (for example the end wall of a duct). The pressure wave will be reflected. The pressure at the flange will be up to three times as high as the pressure at the side wall of a straight duct.  $\overline{A_1}$


### **A1** D.4.2 Vent area

- (1) The venting area should be taken as equal to the cross-sectional area of the duct at each venting location at distances less than the critical distance  $L$  (see D.4.3). Multiple venting locations within the critical distance  $L$  are possible. The area of several openings may be added.
- (2) The effective diameter  $D$  of non-circular venting areas in D.4.3 may be determined as  $D = 4 A/U$ , where  $A$  is the venting area and  $U$  the venting perimeter.
- (3) The mass per unit area of the deflagration venting closure should not exceed  $12,2 \text{ kg/m}^2$ .
- (4) Vent areas should be placed close to possible leakage or ignition sources.
- (5) Vent areas should not be placed in regions where people can be endangered.

### D.4.3 Critical distances

- (1) For propane and dust explosions the critical distance  $L$  for a smooth straight pipe or duct may be determined from Figure D.2.

NOTE By providing sufficient vent areas at a distance less than the critical length  $L$ , deflagration can be prevented from transitioning into a detonation.

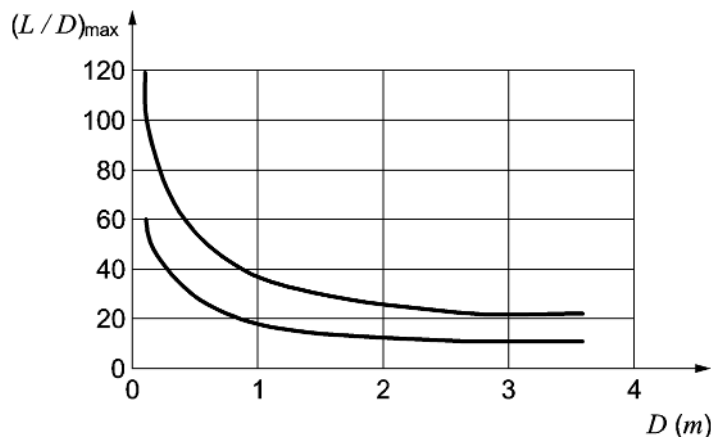


#### Key

- $L$ : distance between deflagration vents or length of pipe or duct having one end open  
dusts with  $K_{St} \leq 20\,000 \text{ kN/m}^2$   
propane, dusts with  $K_{St} > 20\,000 \text{ kN/m}^2$

**Figure D.2 — Critical distance  $L$  for a smooth straight pipe or duct (for  $D$  see D.4.2(2))**

- (2) In order to keep the pressure during deflagration less than  $17 \text{ kN/m}^2$  for an explosion of propane, the maximum distance between vents is given in Figure D.3. **A1**

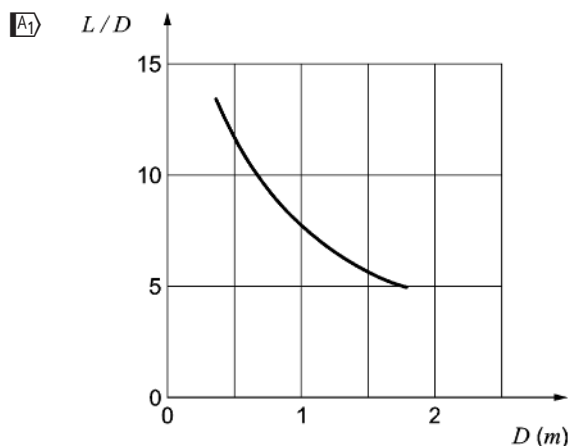

Propane and Dusts with  $K_{St} \leq 30\,000\text{ kN/m}^2$  initial velocity between 2 m/s and 20 m/s

**Figure D.3 —  $L/D$ -values during a deflagration to comply with a maximum pressure of propane explosion of  $17\text{ kN/m}^2$  (see D.4.2(2) for  $D$ ; to apply only when the initial flow velocity is between 2 m/s and 20 m/s)**

(3) For gases other than propane, the critical distance between vents may be calculated using Formula (D.10):

$$L_x = L_P (S_{u,P} / S_{u,x})^2 \quad (\text{D.10})$$

where


$L_x$  is the critical distance between vents for gas X in [m];

$L_P$  is the critical distance between vents for propane in [m].

#### D.4.4 Design pressure

(1) The design pressure  $p_d$  in the vented pipe for dust may be determined from Figure D.4.


NOTE Values of  $p_d$  are given for three different  $K_{St}$  values, For dusts with other values of  $K_{St}$ , interpolation is allowed.

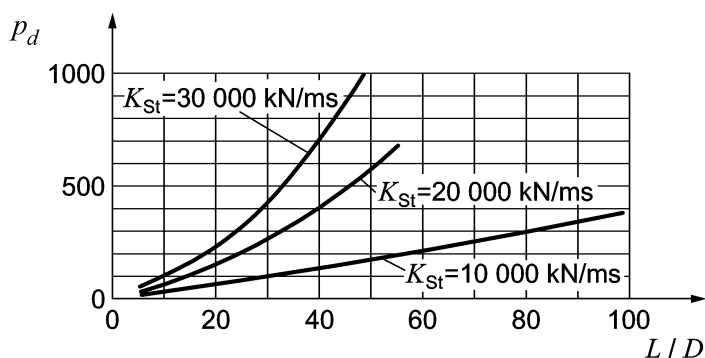

**Figure D.4 — Design pressure  $p_d$  for vented pipe containing dust**

(2) The design overpressure  $p_d$  for the pipe for a gas having a fundamental burning velocity of less than 0,60 m/s may be determined from Figure D.5.  $\square$



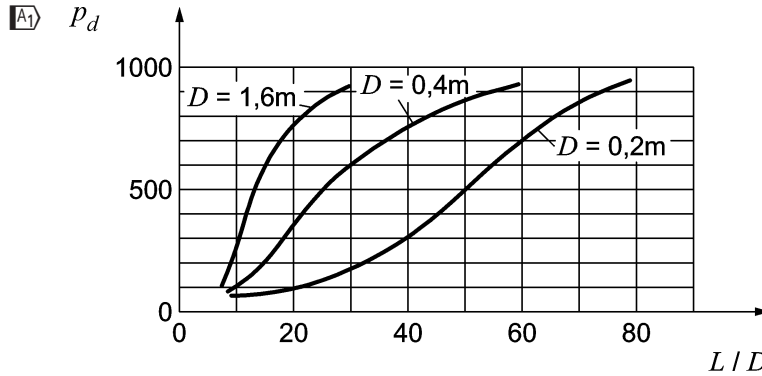

**Figure D.5 — Design value of the overpressure  $p_d$  for gases with fundamental burning velocity of less than 0,60 m/s**

(3) For gases other than propane, the maximum pressure and the distance between vents may be calculated using Formula (D.11):

$$p_{d,X} = p_{d,P} (S_{u,X} / S_{u,P})^2 \quad (D.11)$$

where

$p_{d,X}$  is the maximum explosion overpressure of the gas X in [kN/m<sup>2</sup>];

$p_{d,P}$  is the maximum explosion overpressure of propane in [kN/m<sup>2</sup>];

$S_{u,X}$  is the fundamental burning velocity for gas X in [m/s], see Table D.2;

$S_{u,P}$  is the fundamental burning velocity for propane in [m/s].

(4) For gases with fundamental burning velocities greater than 0,60 m/s (see Table D.2) additional vent area is required by using multiple vent locations to decrease the spacing between the vents determined for propane.

**Table D.2 — Fundamental burning velocity  $S_u$**

Type of gas	$S_u$ m/s
Acetone	0,54
Acetylene	1,66
Benzene	0,48
Butane	0,45
Ethane	0,47
Ethylene	0,80
Gasoline	0,40
Heptane	0,46
Hydrogen	3,12
Jet fuel, grade JP-1	0,40
Methane	0,40
Pentane	0,46
<b>Propane</b>	<b>0,46</b>
Toluene	0,41

Ⓐ





---

## **BSI - British Standards Institution**

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

### **Revisions**

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### **Buying standards**

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: [orders@bsigroup.com](mailto:orders@bsigroup.com) You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

### **Information on standards**

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: [info@bsigroup.com](mailto:info@bsigroup.com)

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: [membership@bsigroup.com](mailto:membership@bsigroup.com)

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>

### **Copyright**

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: [copyright@bsigroup.com](mailto:copyright@bsigroup.com)