

Aerospace series — Electrical contacts used in elements of connection —

**Part 029: Contacts, electrical, coaxial,
shielded, size 16, female, type D, crimp,
class R — Product standard**

The European Standard EN 3155-029:2007 has the status of a
British Standard

ICS 49.060

National foreword

This British Standard was published by BSI. It is the UK implementation of EN 3155-029:2007.

The UK participation in its preparation was entrusted by Technical Committee ACE/6, Aerospace avionic electrical and fibre optic technology, to Panel ACE/6/-/3, Aerospace — Connectors.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2007

© BSI 2007

ISBN 978 0 580 50625 3

Amendments issued since publication

Amd. No.	Date	Comments

ICS 49.060

English Version

Aerospace series - Electrical contacts used in elements of connection - Part 029: Contacts, electrical, coaxial, shielded, size 16, female, type D, crimp, class R - Product standard

Série aérospatiale - Contacts électriques utilisés dans les organes de connexion - Partie 029 : Contacts électriques coaxiaux, blindés, taille 16, femelles, type D, à sertir, classe R - Norme de produit

Luft- und Raumfahrt - Elektrische Kontakte zur Verwendung in Verbindungselementen - Teil 029: Elektrische koaxiale Buchsenkontakte, geschirmt, Größe 16, Typ D, crimpbar, Klasse R - Produktnorm

This European Standard was approved by CEN on 6 January 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	5
4 Required characteristics	5
4.1 Specific characteristics.....	5
4.2 Dimensions and mass	5
4.3 Marking by colour code	6
4.4 Material, surface treatment	6
4.5 Permissible cables.....	6
4.6 Tooling	7
4.6.1 Crimping tools.....	7
4.6.2 The contact insertion/extraction tools	7
4.7 Stripping	7
4.8 Tests.....	9
4.9 Gauge.....	11
5 Designation	12
6 Marking	12
7 Delivery conditions.....	12
8 Technical specification	12

Foreword

This document (EN 3155-029:2007) has been prepared by the European Association of Aerospace Manufacturers - Standardization (AECMA-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of AECMA, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2007, and conflicting national standards shall be withdrawn at the latest by October 2007.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

1 Scope

This standard specifies the required characteristics, tests and tooling applicable to female electrical coaxial contacts, shielded, size 16, type D, crimp, class R, used in elements of connection according to EN 3155-002.

It shall be used together with EN 3155-001.

The associated male contacts are defined in EN 3155-028 and EN 3155-038.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2083, *Aerospace series — Copper or copper alloy conductors for electrical cables — Product standard.*

EN 2591*, *Aerospace series — Elements of electrical and optical connection — Test methods.*

EN 3155-001, *Aerospace series — Electrical contacts used in elements of connection — Part 001: Technical specification.* ¹⁾

EN 3155-002, *Aerospace series — Electrical contacts used in elements of connection — Part 002: List and utilization of contacts.*

EN 3155-028, *Aerospace series — Electrical contacts used in elements of connection — Part 028: Contacts, electrical, coaxial, shielded, size 16, male, type D, crimp, class R — Product standard.*

EN 3155-038, *Aerospace series — Electrical contacts used in elements of connection — Part 038: Contacts, electrical, coaxial, size 16, male, type D, solder, class R — Product standard.* ²⁾

EN 3682-001, *Aerospace series — Connectors, plug and receptacle, electrical, rectangular, interchangeable insert type, rack to panel, operating temperature 150 °C continuous — Part 001: Technical specification.*

EN 4008-015, *Aerospace series — Elements of electrical and optical connection — Crimping tools and associated accessories — Part 015: Positioner for crimping tool M22520/2-01 — Product standard.* ¹⁾

EN 4008-017, *Aerospace series — Elements of electrical and optical connection — Crimping tools and associated accessories — Part 017: Positioner for crimping tool M22520/4-01 — Product standard.* ¹⁾

MIL-DTL-22520, *Crimping tools, wire termination, general specification for.* ³⁾

MIL-I-81969, *Installing and removal tools, connector electrical contact, general specification for.* ³⁾

TR 6058, *Aerospace series — Cable code identification list.* ⁴⁾

* All parts quoted in this standard.

1) Published as AECMA Prestandard at the date of publication of this standard.

2) In preparation at the date of publication of this standard.

3) Published by: Department of Defense (DOD), The Pentagon, Washington D.C. 20301, USA.

4) Published as AECMA Technical Report at the date of publication of this standard.

3 Terms and definitions

For the purposes of this standard, the terms and definitions given in EN 3155-001 apply.

4 Required characteristics


4.1 Specific characteristics


Type D contacts are contacts with screening feature, class R corresponds to an operating temperature range from - 65°C to 150 °C.

4.2 Dimensions and mass

See Figure 1.

Dimensions and tolerances are given in millimetres and apply after surface treatment.

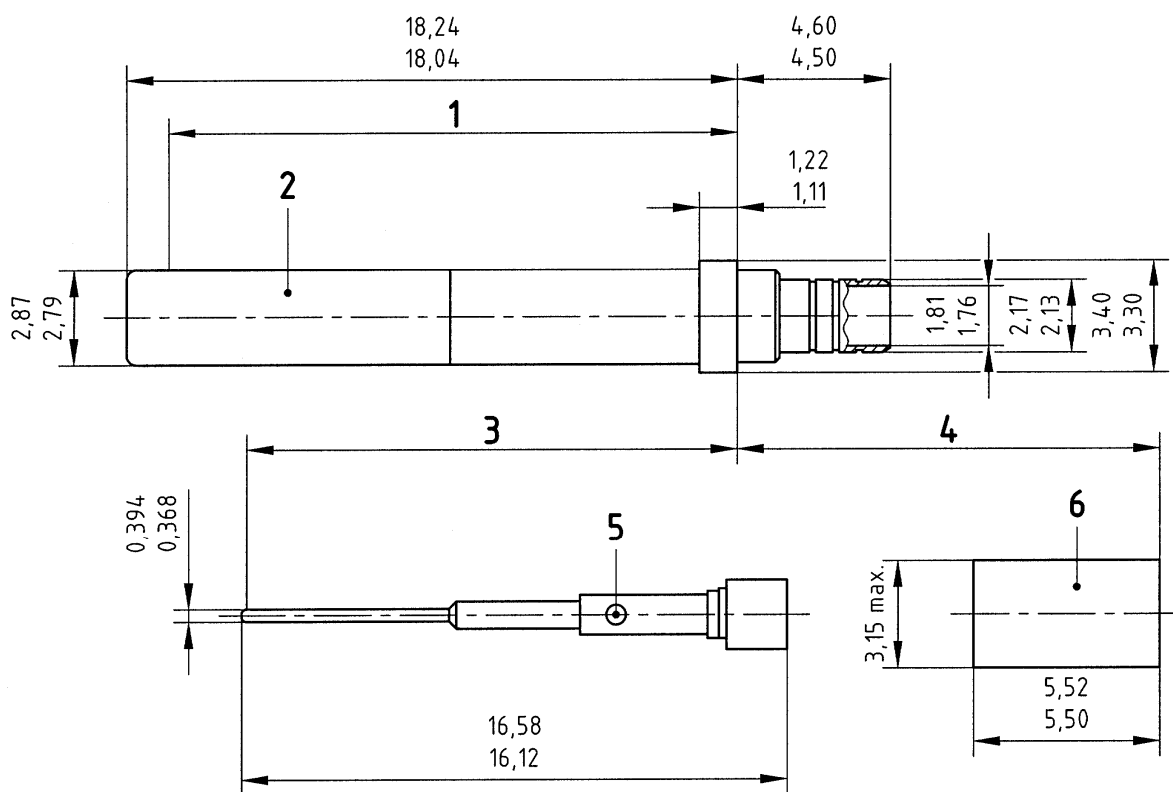

 $\varnothing 0,05$ General concentricity

Key

- | | | | |
|---|----------------------------------------|---|----------------------|
| 1 | Electrical point of contact = 16,8 min | 4 | 8 max after crimping |
| 2 | Outer contact | 5 | Central contact |
| 3 | Electrical point of contact 14,50 min | 6 | Crimping ferrule |

Figure 1

4.3 Marking by colour code

Not applicable

4.4 Material, surface treatment

- Outer body material (female) : copper alloy
- Centre contact (male) : copper alloy
- Crimp ferrule : copper alloy
- Surface treatment : gold on appropriate undercoat, thickness of protection not specified, selective protection permitted
- Hood : stainless steel
- Dielectric : PTFE or equivalent

4.5 Permissible cables

See Figure 2 and Table 1.

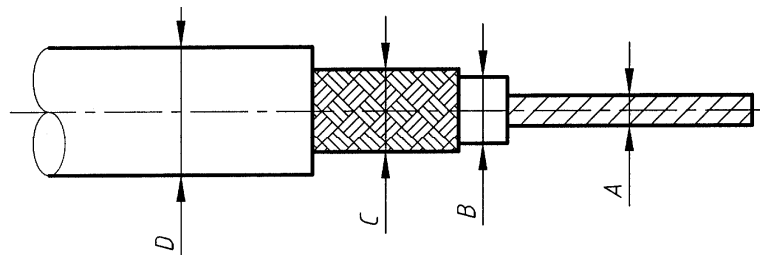


Figure 2

Table 1

Cable group	Cable code according to TR 6058	Dimensions of cable							
		A		B		C		D	
		min.	max.	min.	max.	min.	max.	min.	max.
A	WK and WS	0,48	0,53	1,44	1,60	2,17	2,45	2,33	2,66
B	XY	0,28	0,33	1,52	1,68	–	2,14	2,41	2,67
C	WL	0,28	0,33	1,20	1,30	–	2,00	2,10	2,35
D	WG	0,28	0,33	0,79	0,89	–	1,37	1,70	1,90

NOTE Cables in this table are not a definitive range, but the cable group(s) used for qualification must be stated in the qualification test report.

4.6 Tooling

4.6.1 Crimping tools

Conform to MIL-DTL-22520G, see Table 2.

The qualification selector numbers used for crimping copper or copper alloy conductors in electrical cables EN 2083 cables are indicated in Table 2.

It is the responsibility of the user if the parameters in Tables 1 and 2 are changed for service use.

Table 2

Cable code	Tooling for crimping of centre contact			Tooling for crimping of contact outer body		
	Crimping tool	Positioner	Selector	Crimping tool	Positioner	Selector
WK, WL and WS	M22520/2C-01	EN 4008-015	2	M22520/4A-01	EN 4008-017	–
XY, WG and WS	M22520/2C-01		1	M22520/4A-01		–

4.6.2 The contact insertion/extraction tools

Conform to MIL-I-81969: insertion/extraction tool: M81969/1A-03

4.7 Stripping

Cable group codes WK, WS, XY and WL

a) Strip the cable as shown on Figure 3 with:

$$X = 5 \text{ mm to } 5,50 \text{ mm}$$

$$Y = 3,75 \text{ mm to } 4,25 \text{ mm}$$

$$Z = 3 \text{ mm max.}$$

b) Slide ferrule over cable sheath.

Fold back the inner braid on cable sheath.

Cut high immunity ribbon on 3 mm strip off length.

Slide centre contact over the centre conductor until it butts against the dielectric.

Crimp centre contact using tools described in Table 2.

c) Push centre contact assembly into contact outer body.

Fold braid over barrel.

Slide ferrule to 0,50 mm min. of crimp barrel shoulder.

Crimp the ferrule once by using the tools described in Table 2.

Rotate the contact of about 45°.

Crimp the ferrule a second time by using the tools described in Table 2.

Cable group WG

a) Strip the cable as shown on Figure 3 with:

$$X = 5 \text{ mm to } 5,50 \text{ mm}$$

$$Y = Z = 3,75 \text{ mm to } 4,25 \text{ mm}$$

b) Slide ferrule over cable sheath.

Flare the braid.

Slide centre contact over centre conductor until it butts against the dielectric.

Crimp centre contact using tools described in Table 2.

c) Push centre contact assembly into the contact outer body.

Fold back braid over barrel.

Slide ferrule to 0,50 mm min. of crimp barrel shoulder.

Crimp the ferrule once by using the tools described in Table 2.

Rotate the contact of about 45°.

Crimp the ferrule a second time by using the tools described in Table 2.

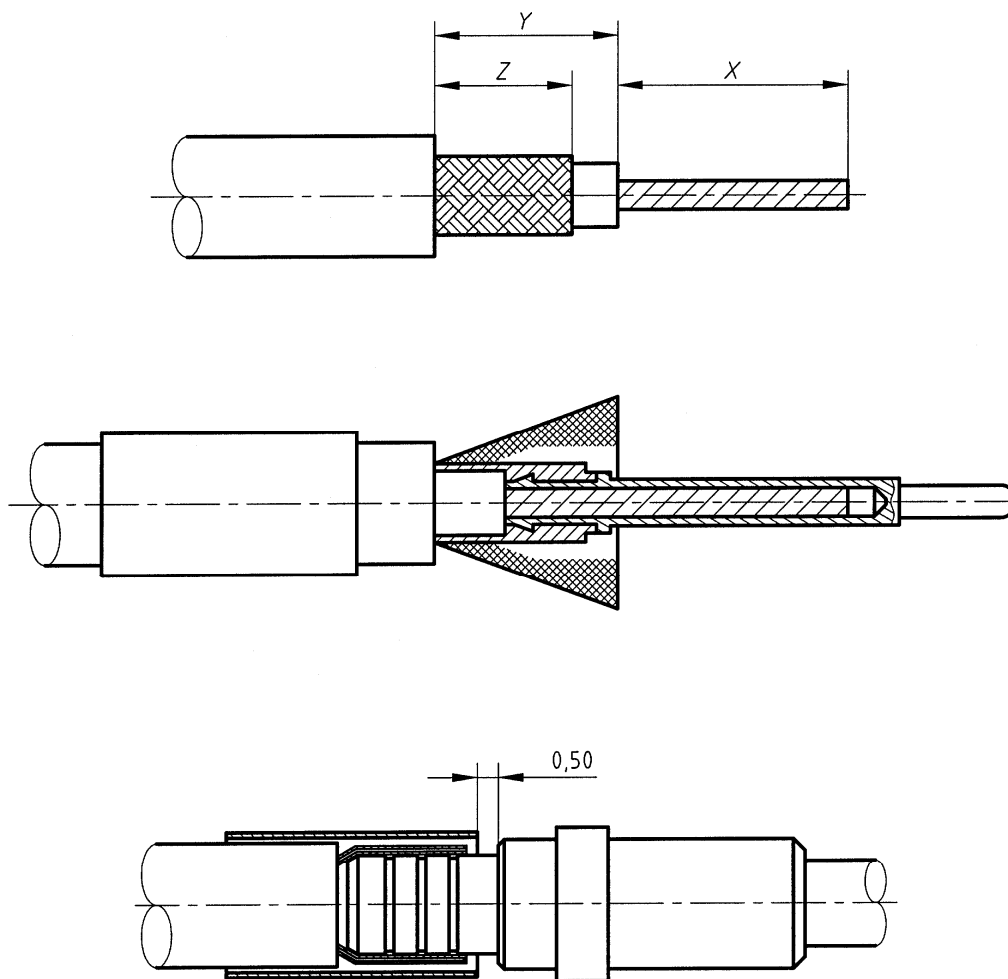


Figure 3

4.8 Tests

See Table 3.

Table 3

EN 2591-	Test	Not applicable	According to EN 3155-001	Applicable Remarks																		
101	Visual examination		X																			
102	Examination of dimensions and mass		X	See 4.2.																		
201	Contact resistance - low level		X	<p>Test temperature: ambient. Contact resistance whatever the cable code is:</p> <table border="1"> <tr> <td></td> <td>Initial</td> <td>After test</td> </tr> <tr> <td>Centre</td> <td>10 mΩ</td> <td>15 mΩ</td> </tr> <tr> <td>Outer</td> <td colspan="2">Not applicable</td> </tr> </table>		Initial	After test	Centre	10 mΩ	15 mΩ	Outer	Not applicable										
	Initial	After test																				
Centre	10 mΩ	15 mΩ																				
Outer	Not applicable																					
202	Contact resistance at rated current		X	<p>Test current: Central contact: 1 A Outer contact: 12 A</p> <p>Contact resistance at ambient temperature whatever the cable code is:</p> <table border="1"> <tr> <td></td> <td>Initial</td> <td>After test</td> </tr> <tr> <td>Centre</td> <td>10 mΩ</td> <td>15 mΩ</td> </tr> <tr> <td>Outer</td> <td>1,5 mΩ</td> <td>2 mΩ</td> </tr> </table> <p>Contact resistance at $(150 + \frac{5}{0})$ °C whatever the cable code is:</p> <table border="1"> <tr> <td></td> <td>Initial</td> <td>After test</td> </tr> <tr> <td>Centre</td> <td>10 mΩ</td> <td>20 mΩ</td> </tr> <tr> <td>Outer</td> <td>1,5 mΩ</td> <td>3 mΩ</td> </tr> </table>		Initial	After test	Centre	10 mΩ	15 mΩ	Outer	1,5 mΩ	2 mΩ		Initial	After test	Centre	10 mΩ	20 mΩ	Outer	1,5 mΩ	3 mΩ
	Initial	After test																				
Centre	10 mΩ	15 mΩ																				
Outer	1,5 mΩ	2 mΩ																				
	Initial	After test																				
Centre	10 mΩ	20 mΩ																				
Outer	1,5 mΩ	3 mΩ																				
203	Electrical continuity at microvolt level	X																				
204	Discontinuity of contacts in the microsecond range		X	Duration of discontinuity $\leq 0,1 \mu\text{s}$ – Refer to tests EN 2591-402 and EN 2591-403																		
206	Measurement of insulation resistance		X	<p>Method C – Contacts mated</p> <ul style="list-style-type: none"> – 5 000 MΩ at ambient temperature – 2 000 MΩ at $(150 + \frac{5}{0})$ °C 																		
207	Voltage proof test		X	<p>Method C – Contacts mated 750 V a.c. at sea level.</p> <p>Maximum leakage current: 5 mA maximum</p>																		

continued

Table 3 (continued)

EN 2591-	Test	Not applicable	According to EN 3155-001	Applicable Remarks
210	Electrical overload	X		
211	Capacitance	X		
212	Surface transfer impedance	X		
220	Contact/conductor joint ageing by current and temperature cycling	X		
301	Endurance at temperature		X	$T = (150 \pm 5) ^\circ\text{C}$ Duration: 1 000 h
305	Rapid change of temperature		X	$T_A = (150 \pm 5) ^\circ\text{C}$ $T_B = (-65 \pm 5) ^\circ\text{C}$
306	Mould growth	X		
307	Salt mist		X	
315	Fluid resistance		X	According to EN 3682-001
316	Ozone resistance	X		
402	Shock		X	Method A, severity 30, see EN 3682-001.
403	Sinusoidal and random vibration		X	According to EN 3682-001.
406	Mechanical endurance		X	
417	Tensile strength (crimped connection)		X	Cable code XY and WL: centre: > 15 N outer: > 65 N Cable code WG: centre: > 15 N outer: > 45 N Cable code WS and WK: centre: > 35 N outer: > 80 N
418	Gauge insertion/extraction forces (female contacts)		X	Gauge as described in Figure 4 and Table 4 Insertion Initial = 8,34 N max. After test = 10 N max. Extraction Initial = 0,56 N max. After test = 0,42 N max.
501	Soft solderability	X		

continued

Table 3 (concluded)

EN 2591-	Test	Not applicable	Applicable	
			According to EN 3155-001	Remarks
503	Contact deformation after crimping		X	Cable size in accordance with Table 2 – Centre contact concentricity tolerance shall not exceed 0,28 mm. Centre contact and outer body crimping zone shall not exceed 0,15 mm expansion.
507	Plating porosity	X		
508	Measurement of thickness of coating on contacts		X	The measured thickness shall be recorded.
509	Adhesion of coating on contacts		X	
513	Magnetic permeability		X	
514	Solderability of contacts with self-contained solder and flux	X		

NOTE Tests EN 2591-201, EN 2591-202, EN 2591-417 and EN 2591-503 must be performed for each cable group; other tests are performed for the worst case.

4.9 Gauge

See Figure 4 and Table 4.

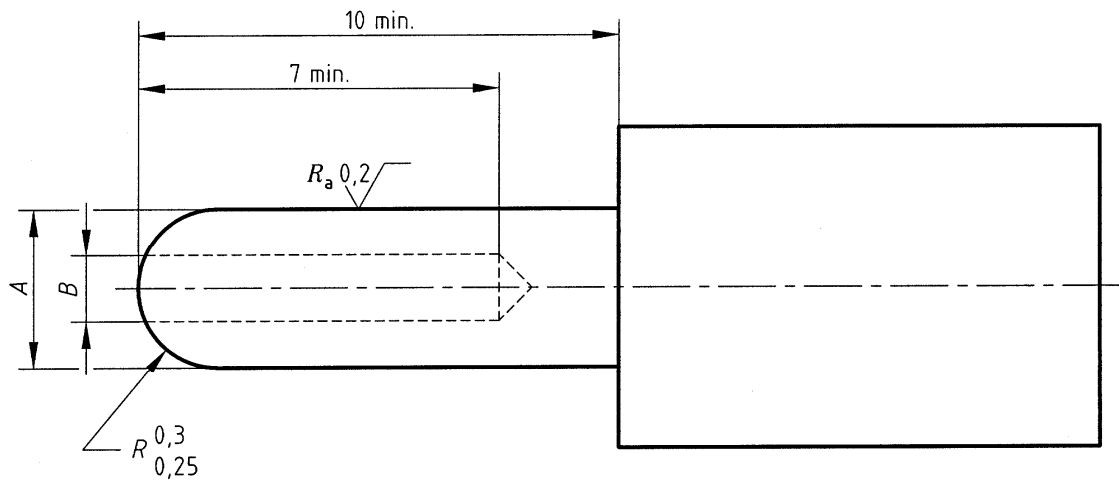



Figure 4

Table 4

Gauge	A	B
max.	1,905 1,9	0,5
min.	1,85 1,845	

5 Designation

EXAMPLE

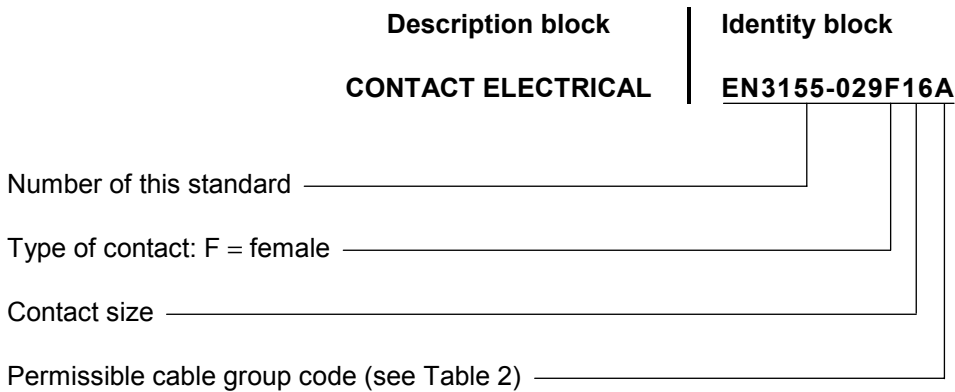

NOTE If necessary, the code I9005 shall be placed between the description block and the identity block.

6 Marking

See EN 3155-001.

7 Delivery conditions

The contacts are packaged and identified individually. Conditioning shall provide protection of the contacts against any eventual damage.

Packaging shall include:

- the manufacturer's name;
- the designation defined in Clause 5;
- the manufacturer's reference;
- the manufacturing date code (year-week).

8 Technical specification

See EN 3155-001.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.