

**Aerospace series —  
Bolts, double hexagon  
head, close tolerance,  
medium thread length,  
in heat resisting steel  
FE-PM38 (FV535),  
uncoated —  
Classification:  
1 000 MPa/550 °C**

ICS 49.030.20

## National foreword

This British Standard is the UK implementation of EN 3328:2008.

The UK participation in its preparation was entrusted to Technical Committee ACE/12, Aerospace fasteners and fastening systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2008

© BSI 2008

ISBN 978 0 580 60326 6

### Amendments/corrigenda issued since publication

Date	Comments

---

ICS 49.030.20

English Version

**Aerospace series - Bolts, double hexagon head, close tolerance,  
medium thread length, in heat resisting steel FE-PM38 (FV535),  
uncoated - Classification: 1 000 MPa/550 °C**

Série aéronautique - Vis de précision à tête bihexagonale, à  
filetage moyen, en acier résistant à chaud FE-PM38  
(FV535), non revêtu - Classification: 1 000 MPa/550 °C

Luft- und Raumfahrt - Zwölftkant-Passschrauben, mittlere  
Gewindelänge, aus hochwarmfestem Stahl FE-PM38  
(FV535), blank - Klasse: 1 000 MPa/550 °C

This European Standard was approved by CEN on 3 November 2007.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**Management Centre: rue de Stassart, 36 B-1050 Brussels**

**Contents**

Page

Foreword.....3

1 Scope .....4

2 Normative references .....4

3 Required characteristics.....4

3.1 Configuration, dimensions, tolerances, masses.....4

3.2 Material .....4

3.3 Surface treatment .....4

3.4 Thread surface .....4

4 Designation .....8

5 Marking .....8

6 Technical specification .....8

**Figures**

Figure 1 — Configuration..... 5

**Tables**

Table 1 — Dimensions..... 6

Table 2 — Lengths and masses ..... 6

## **Foreword**

This document (EN 3328:2008) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2008, and conflicting national standards shall be withdrawn at the latest by November 2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

## 1 Scope

This standard specifies the dimensions of the uncoated double hexagon head bolts, close tolerance, with MJ-thread, medium thread length, in heat resisting steel FE-PM38 for aerospace applications.

Maximum test temperature of the parts is 550 °C.

These bolts are to be used in aerospace fastening systems mainly stressed in shearing force.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2424, *Aerospace series — Marking of aerospace products*<sup>1)</sup>

EN 2493, *Aerospace series — Heat resisting steel FE-PM38 —  $1\ 000\ \text{MPa} \leq R_m \leq 1\ 140\ \text{MPa}$  — Bars*

EN 3302, *Aerospace series — Bolts in heat resisting steel FE-PM38 (FV535) — Classification:  $1\ 000\ \text{MPa}/550\ \text{°C}$  — Technical specification*<sup>1)</sup>

ISO 3353-1, *Aerospace — Lead and runout threads — Part 1: Rolled external threads*

ISO 4095, *Aerospace — Bihexagonal drives — Wrenching configuration — Metric series*

ISO 5855-1, *Aerospace — MJ threads — Part 1: General requirements*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts*

## 3 Required characteristics

### 3.1 Configuration, dimensions, tolerances, masses

Configuration shall be in accordance with Figure 1. Dimensions, tolerances and masses shall conform to Figure 1 and Tables 1 and 2. Details of form, not stated are at the manufacturer's option.

### 3.2 Material

Heat resisting steel FE-PM38 according to EN 2493.

### 3.3 Surface treatment

None.


### 3.4 Thread surface

See Figure 1.

---

<sup>1)</sup> Published as AECMA prestandard at the date of publication of this standard.

Dimensions in millimetres

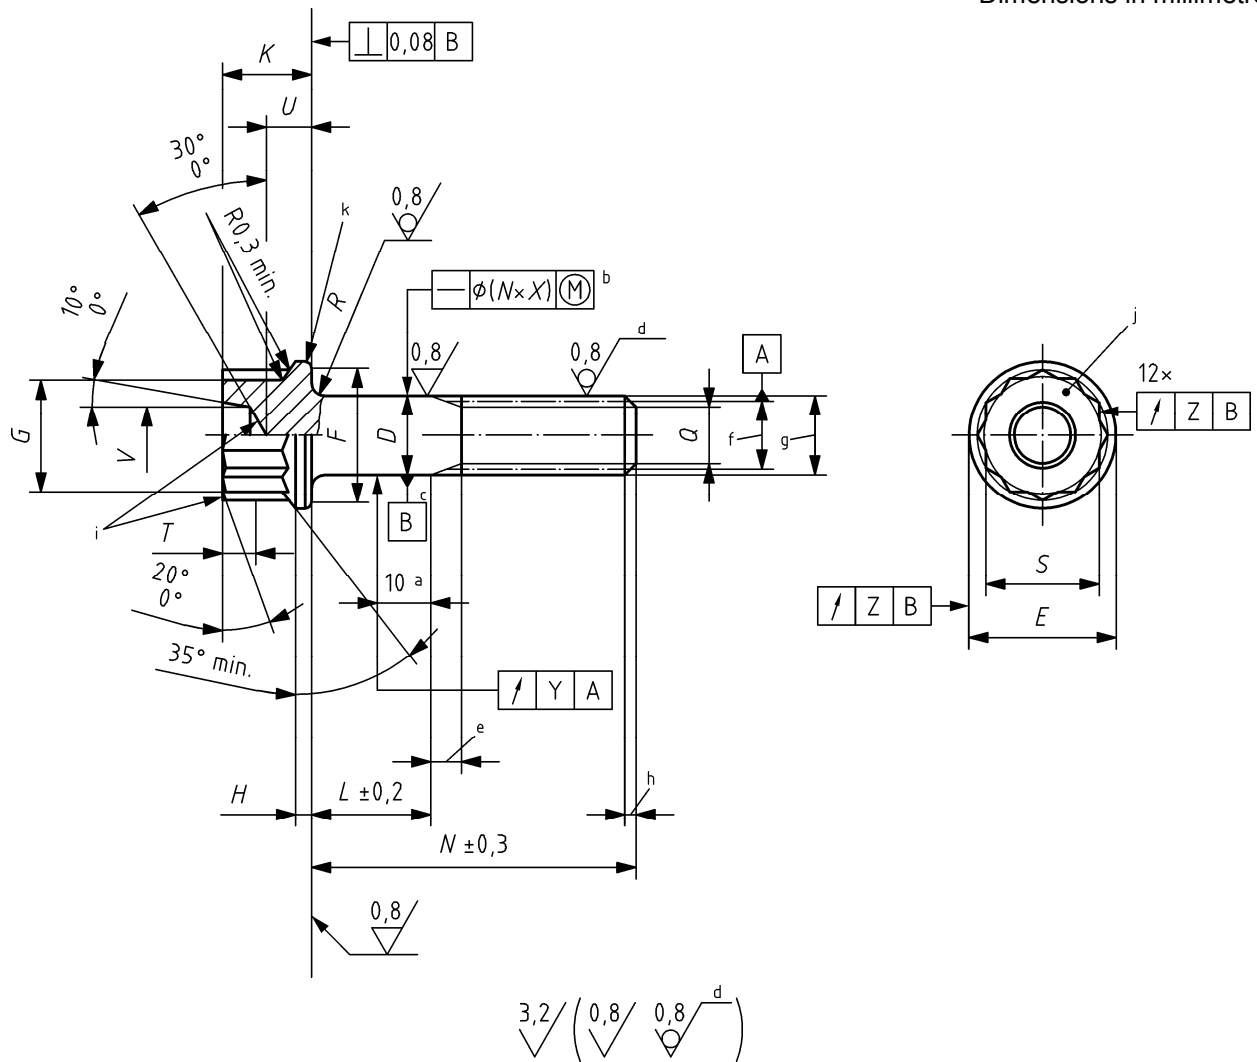

Break sharp edges 0,1 mm to 0,4 mm

- a When the length of the shank is less than one time the nominal value of the shank diameter,  $D$ , the run-out is measured at a distance equal to half the actual shank length
- b Total straightness with reference to nominal length  $N$
- c For bolts having a shank length less than one time the nominal value of the shank diameter,  $D$ , the pitch diameter axis shall be used as datum
- d Rolled
- e Thread runout ISO 3353-1
- f Thread pitch diameter
- g Thread major diameter – max.: actual shank diameter minus 0,025 mm; min.: defined by 6h tolerance
- h Lead thread ISO 3353-1
- i Shape in this area at manufacturer's option
- j Identity marking
- k Shape in this area at manufacturer's option

Figure 1 — Configuration

Table 1 — Dimensions

Dimensions in millimetres

Code	Designation <sup>a</sup>	<i>D</i>	<i>E</i>	<i>F</i>	<i>G</i>	<i>H</i>	<i>K</i>	<i>Q</i>	<i>R</i>		<i>S</i> <sup>b</sup>		<i>T</i>		<i>U</i>		<i>V</i>		<i>X</i>	<i>Y</i>	<i>Z</i>
		f7	max.	min.	min.	min.	h15	± 0,5	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.			
050	MJ5 × 0,8–4H6H <sup>c</sup>	∅ 5	∅ 9,1	∅ 8,3	∅ 6,8	1,0	5,5	∅ 3,5	0,5	0,3	7	2	2,9	2,5	∅ 3,7	∅ 3,2	0,002	0,12	0,13		
060	MJ6 × 1–4H6H <sup>c</sup>	∅ 6	∅ 10,6	∅ 9,8	∅ 7,8	1,2	6	∅ 4,2	0,7	0,5	8	2,3	3,2	2,8	∅ 4,6	∅ 4,1			0,15		
070	MJ7 × 1–4H6H <sup>c</sup>	∅ 7	∅ 12,1	∅ 11,3	∅ 8,8	1,4	6,5	∅ 5,2	0,7	0,5	9	2,6	3,7	3,3	∅ 5,4	∅ 4,9			0,18		
080	MJ8 × 1–4H6H <sup>c</sup>	∅ 8	∅ 13,6	∅ 12,8	∅ 9,8	1,6	7	∅ 6,2	0,7	0,5	10	2,8	4,1	3,7	∅ 5,7	∅ 5,2		0,001 5	0,15	0,20	
100	MJ10 × 1,25–4H6H <sup>c</sup>	∅ 10	∅ 16,7	∅ 15,7	∅ 11,8	2,0	8	∅ 7,9	0,8	0,6	12	3,1	5,1	4,7	∅ 7,2	∅ 6,7			0,25		
120	MJ12 × 1,25–4H6H <sup>c</sup>	∅ 12	∅ 19,9	∅ 18,8	∅ 13,7	2,4	9,2	∅ 9,9	0,9	0,6	14	3,5	6,0	5,6	∅ 8,5	∅ 8,0			0,18	0,30	

<sup>a</sup> According to ISO 5855-1 and ISO 5855-2.  
<sup>b</sup> Bihexagonal configuration in conformity with ISO 4095 over length *T* min.  
<sup>c</sup> The tolerance on the thread major diameter shall be modified as indicated in Figure 1.

Table 2 — Lengths and masses

Masses (7,8 kg/dm<sup>3</sup>): kg/1 000 pieces

Length code	<i>L</i> ±0,2 mm	Nominal diameter code											
		050		060		070		080		100		120	
		<i>N</i> mm	Mass kg	<i>N</i> mm	Mass kg	<i>N</i> mm	Mass kg	<i>N</i> mm	Mass kg	<i>N</i> mm	Mass kg	<i>N</i> mm	Mass kg
003	3	16,5	4,04	18,5	6,14	—	—	—	—	—	—	—	—
004	4	17,5	4,19	19,5	6,35	20,5	9,01	22	12,78	—	—	—	—
005	5	18,5	4,35	20,5	6,58	21,5	9,31	23	13,17	26,5	23,12	—	—
006	6	19,5	4,50	21,5	6,80	22,5	9,60	24	13,56	27,5	23,73	29,5	37,85
007	7	20,5	4,66	22,5	7,01	23,5	9,90	25	13,96	28,5	24,35	30,5	38,72
008	8	21,5	4,81	23,5	7,23	24,5	10,21	26	14,34	29,5	24,95	31,5	39,60
009	9	22,5	4,96	24,5	7,46	25,5	10,51	27	14,74	30,5	25,57	32,5	40,49
010	10	23,5	5,11	25,5	7,68	26,5	10,81	28	15,13	31,5	26,16	33,5	41,37
011	11	24,5	5,27	26,5	7,89	27,5	11,10	29	15,53	32,5	26,80	34,5	42,25
012	12	25,5	5,42	27,5	8,12	28,5	11,41	30	15,91	33,5	27,40	35,5	43,19
013	13	26,5	5,57	28,5	8,34	29,5	11,71	31	16,31	34,5	28,02	36,5	44,02
014	14	27,5	5,72	29,5	8,56	30,5	12,00	32	16,72	35,5	28,62	37,5	44,90
015	15	28,5	5,89	30,5	8,78	31,5	12,31	33	17,09	36,5	29,25	38,5	45,78
016	16	29,5	6,04	31,5	9,00	32,5	12,61	34	17,48	37,5	29,85	39,5	46,66
017	17	30,5	6,19	32,5	9,22	33,5	12,91	35	17,87	38,5	30,47	40,5	47,55
018	18	31,5	6,34	33,5	9,44	34,5	13,20	36	18,27	39,5	31,08	41,5	48,42
019	19	32,5	6,49	34,5	9,66	35,5	13,51	37	18,66	40,5	31,70	42,5	49,30
020	20	33,5	6,65	35,5	9,88	36,5	13,81	38	19,05	41,5	32,30	43,5	50,18
021	21	34,5	6,80	36,5	10,11	37,5	14,10	39	19,44	42,5	32,91	44,5	51,07
022	22	35,5	6,95	37,5	10,32	38,5	14,41	40	19,84	43,5	33,53	45,5	51,95
023	23	36,5	7,10	38,5	10,54	39,5	14,71	41	20,23	44,5	34,14	46,5	52,83
024	24	37,5	7,26	39,5	10,77	40,5	15,01	42	20,61	45,5	34,75	47,5	53,91
025	25	38,5	7,42	40,5	10,99	41,5	15,30	43	21,01	46,5	35,36	48,5	54,60
026	26	39,5	7,57	41,5	11,20	42,5	15,61	44	21,40	47,5	35,98	49,5	55,48
027	27	40,5	7,72	42,5	11,42	43,5	15,91	45	21,80	48,5	36,59	50,5	56,36
028	28	41,5	7,87	43,5	11,65	44,5	16,21	46	22,18	49,5	37,20	51,5	57,24




Table 2 (continued)

Masses (7,8 kg/dm<sup>3</sup>): kg/1 000 pieces

Length code	L ±0,2 mm	Nominal diameter code											
		050		060		070		080		100		120	
		N mm	Mass kg	N mm	Mass kg	N mm	Mass kg	N mm	Mass kg	N mm	Mass kg	N mm	Mass kg
029	29	42,5	8,02	44,5	11,86	45,5	16,50	47	22,58	50,5	37,81	52,5	58,12
030	30	43,5	8,18	45,5	12,08	46,5	16,81	48	22,97	51,5	38,43	53,5	59,00
032	32	46,5	8,60	48,5	12,70	49,5	17,65	51	24,05	54,5	40,18	56,5	61,52
034	34	48,5	8,91	50,5	13,14	51,5	18,25	53	24,87	56,5	41,40	58,5	63,29
036	36	50,5	9,22	52,5	13,58	53,5	18,85	55	25,65	58,5	42,63	60,5	65,05
038	38	52,5	9,52	54,5	14,02	55,5	19,45	57	26,44	60,5	43,84	62,5	66,82
040	40	54,5	9,82	56,5	14,47	57,5	20,04	59	27,22	62,5	45,07	64,5	68,59
042	42	56,5	10,14	58,5	14,90	59,5	20,65	61	28,01	64,5	46,29	66,5	70,34
044	44	58,5	10,44	60,5	15,34	61,5	21,24	63	28,78	66,5	47,52	68,5	72,11
046	46	60,5	10,75	62,5	15,79	63,5	21,85	65	29,57	68,5	48,74	70,5	73,87
048	48	62,5	11,05	64,5	16,22	65,5	22,44	67	30,35	70,5	49,97	72,5	75,64
050	50	64,5	11,36	66,5	16,67	67,5	23,05	69	31,14	72,5	51,19	74,5	77,40
052	52	—	—	68,5	17,10	69,5	23,65	71	31,92	74,5	52,42	76,5	79,16
054	54	—	—	70,5	17,55	71,5	24,24	73	32,71	76,5	53,64	78,5	80,92
056	56	—	—	72,5	17,99	73,5	24,85	75	33,49	78,5	54,87	80,5	82,69
058	58	—	—	74,5	18,43	75,5	25,45	77	34,27	80,5	56,09	82,5	84,45
060	60	—	—	76,5	18,87	77,5	26,05	79	35,06	82,5	57,32	84,5	86,22
062	62	—	—	—	—	79,5	26,65	81	35,84	84,5	58,54	86,5	87,98
064	64	—	—	—	—	81,5	27,25	83	36,62	86,5	59,77	88,5	89,74
066	66	—	—	—	—	83,5	27,84	85	37,40	88,5	60,99	90,5	91,50
068	68	—	—	—	—	85,5	28,45	87	38,19	90,5	62,22	92,5	93,27
070	70	—	—	—	—	87,5	29,04	89	38,97	92,5	63,43	94,5	95,03
072	72	—	—	—	—	—	—	91	39,76	94,5	64,67	96,5	96,79
074	74	—	—	—	—	—	—	93	40,54	96,5	65,88	98,5	98,56
076	76	—	—	—	—	—	—	95	41,33	98,5	67,11	100,5	100,32
078	78	—	—	—	—	—	—	97	42,11	100,5	68,33	102,5	102,08
080	80	—	—	—	—	—	—	99	42,89	102,5	69,56	104,5	103,85
082	82	—	—	—	—	—	—	—	—	104,5	70,78	106,5	105,61
084	84	—	—	—	—	—	—	—	—	106,5	72,01	108,5	107,36
086	86	—	—	—	—	—	—	—	—	108,5	73,23	110,5	109,14
088	88	—	—	—	—	—	—	—	—	110,5	74,46	112,5	110,90
090	90	—	—	—	—	—	—	—	—	112,5	75,68	114,5	112,66
092	92	—	—	—	—	—	—	—	—	114,5	76,91	116,5	114,43
094	94	—	—	—	—	—	—	—	—	116,5	78,13	118,5	116,19
096	96	—	—	—	—	—	—	—	—	118,5	79,36	120,5	117,96
098	98	—	—	—	—	—	—	—	—	120,5	80,58	122,5	119,72
100	100	—	—	—	—	—	—	—	—	122,5	81,80	124,5	121,48
104	104	—	—	—	—	—	—	—	—	—	—	130,5	126,53
108	108	—	—	—	—	—	—	—	—	—	—	134,5	130,06
112	112	—	—	—	—	—	—	—	—	—	—	138,5	133,58
116	116	—	—	—	—	—	—	—	—	—	—	142,5	137,11
120	120	—	—	—	—	—	—	—	—	—	—	146,5	140,64

## 4 Designation

Each double hexagon head bolt, close tolerance, shall only be designated as in the following example:

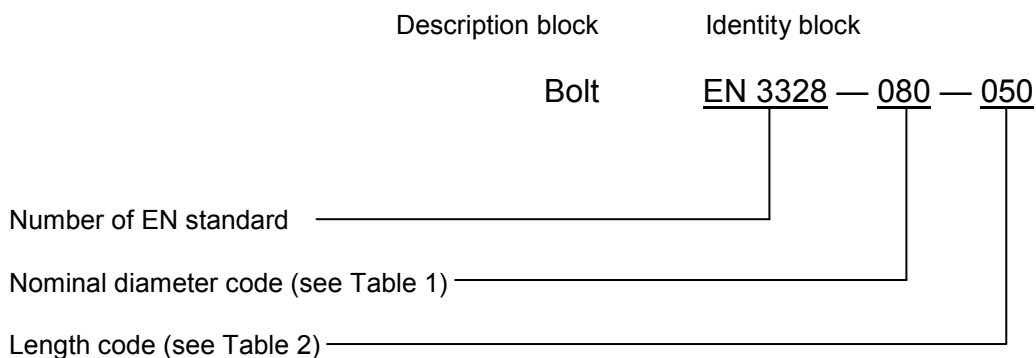

If necessary the originator code I9005 shall be placed between the description block and the identity block.

## 5 Marking

Each double hexagon head bolt, close tolerance, shall be marked in accordance with EN 2424, Style A.

## 6 Technical specification

The double hexagon head bolts, close tolerance, shall conform to the requirements of EN 3302.



---

---

## British Standards Institute (BSI)

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

### Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.  
Tel: +44 (0)20 8996 9000 Fax: +44 (0)20 8996 7400

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

Email: [orders@bsigroup.com](mailto:orders@bsigroup.com)

You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

### Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.

Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048

Email: [info@bsigroup.com](mailto:info@bsigroup.com)

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: [membership@bsigroup.com](mailto:membership@bsigroup.com)

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>.

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>.

### Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.

Tel: +44 (0)20 8996 7070 Email: [copyright@bsigroup.com](mailto:copyright@bsigroup.com)