

Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors

**Part 008: Cable outlet, self-locking,
style C, 45°, shielded (cone grounding),
unsealed with clamp strain relief —
Product standard**

ICS 49.060

National foreword

This British Standard is the UK implementation of EN 3660-008:2010.

The UK participation in its preparation was entrusted to Technical Committee ACE/6, Aerospace avionic electrical and fibre optic technology.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2010.

© BSI 2010

ISBN 978 0 580 53186 6

Amendments/corrigenda issued since publication

Date	Comments

EUROPEAN STANDARD

EN 3660-008

NORME EUROPÉENNE

EUROPÄISCHE NORM

April 2010

ICS 49.060

English Version

Aerospace series - Cable outlet accessories for circular and rectangular electrical and optical connectors - Part 008: Cable outlet, self-locking, style C, 45°, shielded (cone grounding), unsealed with clamp strain relief - Product standard

Série aérospatiale - Accessoires arrière pour connecteurs circulaires et rectangulaires électriques et optiques - Partie 008: Raccord type C, coudé à 45°, non étanche, auto-freinant avec reprise de blindage (par cône) et brides serre-câble - Norme de produit

Luft- und Raumfahrt - Endgehäuse für elektrische und optische Rund- und Rechtecksteckverbinder - Teil 008: Endgehäuse, selbstsichernd, Bauform C, 45° Ausführung, Schirmanschluß (Konusring), nicht abgedichtet, mit Zugentlastungsklemme - Produktnorm

This European Standard was approved by CEN on 11 April 2007.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

© 2010 CEN All rights of exploitation in any form and by any means reserved worldwide for CEN national Members.

Ref. No. EN 3660-008:2010: E

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 Characteristics	4
5 Designation	11
6 Marking	11
7 Technical specification	11

Foreword

This document (EN 3660-008:2010) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2010, and conflicting national standards shall be withdrawn at the latest by October 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

1 Scope

This product standard defines a range of cable outlets, style C, anti-decoupling, 45°, shielded (cone grounding), unsealed with clamp strain relief for use under the following conditions:

The cable outlet permits the termination of individual and/or overall screens for thickness from 0,8 mm to 4,8 mm.

Associated electrical connector(s) : EN 3660-002

Temperature Range, Class N : – 65 °C to 200 °C;

Class W : – 65 °C to 175 °C;

Class K : – 65 °C to 260 °C.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2591-100¹⁾, *Aerospace series — Elements of electrical and optical connection — Test methods — Part 100: General*

EN 3660-001:2006, *Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors — Part 001: Technical specification*

EN 3660-002, *Aerospace series — Cable outlet accessories for circular and rectangular electrical and optical connectors — Part 002: Index of product standards*

AS85049B, *Connector Accessories, Electrical General Specification for-* 2)

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 3660-001:2006 apply.

4 Characteristics

4.1 Dimensions and mass


For dimensions and mass see Figure 1 and Table 1.

For interface dimensions see 4.2.


All dimensions in millimetres.

1) As well as all its parts quoted in this standard.

2) Published by: Society of Automotive Engineers, Inc. (SAE), 400 Commonwealth Drive, Warrendale, PA 15096-0001.

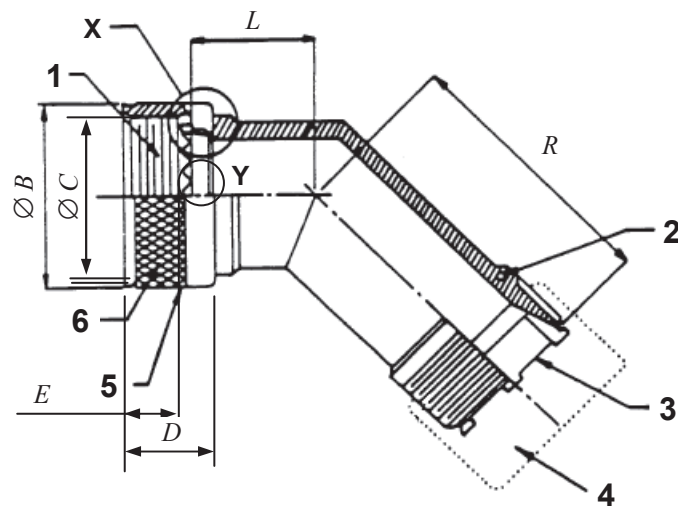

a) Cable outlet

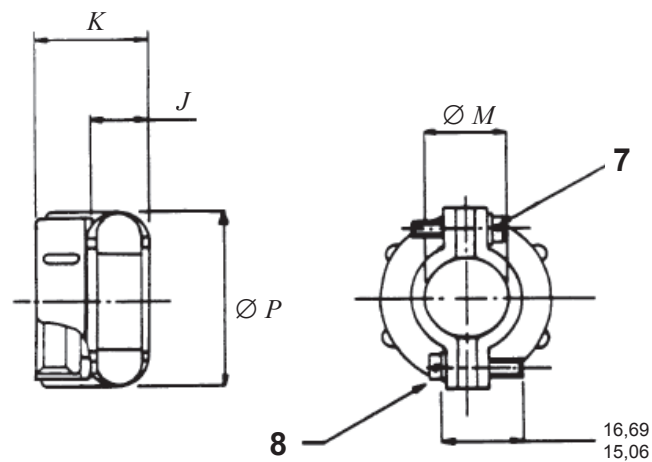

b) Clamp forms integral part of the cable outlet assembly

Key

- 1 Thread *A*
- 2 Three equally spaced holes for max. 0,80 mm lockwire (optional)
- 3 Cone grounding
- 4 Clamp
- 5 Anti-decoupling device
- 6 Knurl
- 7 Hole to accommodate max. 0,80 mm lockwire
- 8 Screw and lockwasher

NOTE 1 For details X and Y see 4.2.2.

NOTE 2 Coupling nut to be captive on cable outlet body but free to rotate and shall have an anti-decoupling device.

Figure 1

Table 1

Shell size	<i>A</i>	$\varnothing B$	$\varnothing C$	<i>D</i>	<i>E</i> ^a	<i>J</i>	<i>K</i> ^b	<i>L</i>	$\varnothing M$	$\varnothing P$	<i>R</i>	Screw size Class A	Mass
	Thread Class 2B	max.	+ 0,64 0	0 - 1,57	0 - 0,56	± 0,25	max.	+ 1,02 0	± 0,76	max.	+ 1,02 0		
	inches	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		
08	0.500-20UNF	19,05	12,74	13,72	7,75	6,35	22,38	19,41	6,35	21,41	24,13	6-32UNC	c
10	0.625-24UNEF	22,35	15,88	13,72	7,75	6,35	23,98	20,04	11,12	27,76	24,89	6-32UNC	
12	0.750-20UNEF	25,40	19,05	13,72	7,75	6,35	25,58	20,65	14,28	30,94	25,40	6-32UNC	
14	0.875-20UNEF	28,70	22,23	13,72	7,75	6,35	25,58	21,08	15,88	32,54	26,16	6-32UNC	
16	1.000-20UNEF	31,75	25,40	13,72	7,75	9,52	25,58	21,77	19,05	38,10	26,67	6-32UNC	
18	1.063-18UNEF	33,53	27,00	13,72	7,75	9,52	25,58	22,17	19,05	38,10	26,92	8-32UNC	
20	1.188-18UNEF	36,58	30,18	13,72	7,75	9,52	27,94	22,81	23,83	43,66	27,43	8-32UNC	
22	1.313-18UNEF	39,88	33,35	13,72	7,75	9,52	27,94	23,50	23,83	43,66	28,45	8-32UNC	
24	1.438-18UNEF	42,93	36,53	13,72	7,75	9,52	29,59	24,08	31,75	52,38	29,21	8-32UNC	
28	1.750-18UNS	50,80	44,45	17,83	7,75	9,52	29,59	29,62	34,93	58,72	33,53	8-32UNC	

^a *E* dimension is taken when the coupling nut is pulled in forward position.

^b An allowance must be made for the thickness of the screen used.

^c To be confirmed by manufacturers.

4.2 Interface dimensions


4.2.1 Associated connection

See EN 3660-002.

4.2.2 Modified AS85049 interface

See Figure 2, Figure 3 and Table 2.

All dimensions in millimetres.

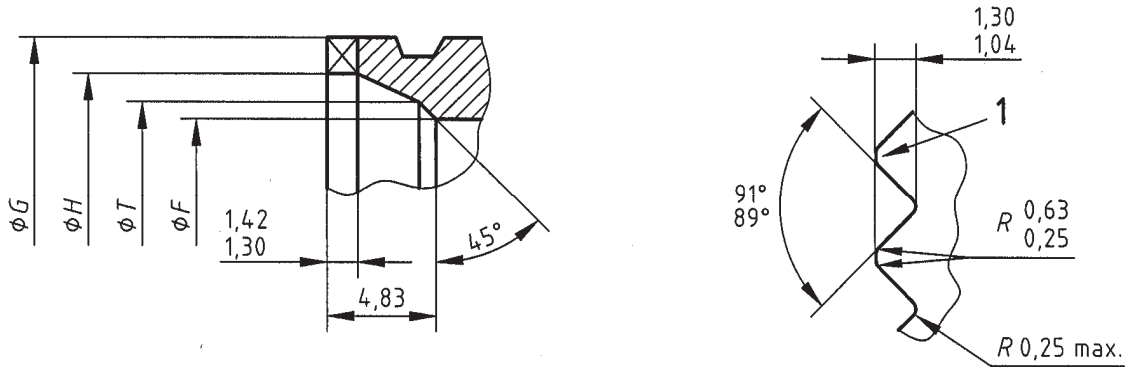

Key

1 Number of teeth (see Table 2)

NOTE Valley of start tooth to be at vertical centre line of accessory at position shown:

Within $\pm 3^\circ$ for shell sizes 08-12;

Within $\pm 2^\circ$ for shell sizes 14-18;

Within $\pm 1^\circ$ for shell sizes 20 and larger.

Figure 2 — Detail X

Figure 3 — Detail Y

Table 2

Dimensions in millimetres

Shell size	$\varnothing F$	$\varnothing G$	$\varnothing H$	$\varnothing T$	N
	0 - 0,25	Ref.	+ 0,13 0	+ 0,18 0	Number of teeth
08	6,86	11,10	9,17	6,68	12
10	9,53	14,53	11,10	9,35	15
12	12,80	17,45	14,83	12,62	21
14	14,86	20,62	17,22	15,98	24
16	17,93	23,80	20,55	17,73	30
18	20,02	25,20	22,48	21,46	33
20	23,22	28,37	25,53	25,02	36
22	26,39	31,55	29,01	27,61	39
24	29,31	34,72	32,46	31,62	42
28	35,28	42,75	38,91	37,97	54

4.3 Material and finish

Material/Finish	Class N	:	Aluminium/Electroless nickel
Material/Finish	Class W	:	Aluminium/Olive drab cadmium plate
Material/Finish	Class K	:	Stainless steel/Passivated

4.4 Assembly torque

These torque values are intended for installation use only, see Table 3.

Table 3

Shell size	Torque Nm \pm 0,5
08	4,5
10	4,5
12	4,5
14	4,5
16	4,5
18	4,5
20	9,0
22	9,0
24	9,0
28	10,0

4.5 Coupling thread strength torques

These torque values are for test purposes, see EN 2591-420 and Tables 4 and 5.

Table 4

Shell size	Torque Nm \pm 0,5
08	5,5
10	5,5
12	5,5
14	5,5
16	5,5
18	5,5
20	11,0
22	11,0
24	11,0
28	12,0

4.6 Tests

Test details to be in accordance with Table 5, EN 3660-001 and EN 2591-100.

Qualification to be in accordance with EN 3660-001.

Table 5

EN 2591-	Designation of the test	Not applicable	Applicable see EN 3660-001	Details																
101	Visual inspection		X	—																
102	Examination of dimensions and mass		X	See 4.1.																
205	Housing (shell) electrical continuity		X	Max. resistance 5 mΩ																
212	Surface transfer impedance (from 100 MHz to 1 GHz) ^a		X	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Minimum attenuation</th> </tr> <tr> <th>MHz</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>100</td> <td>80</td> </tr> <tr> <td>200</td> <td>75</td> </tr> <tr> <td>300</td> <td>73</td> </tr> <tr> <td>400</td> <td>71</td> </tr> <tr> <td>800</td> <td>66</td> </tr> <tr> <td>1 000</td> <td>65</td> </tr> </tbody> </table> <p>Method 2</p>	Frequency	Minimum attenuation	MHz	dB	100	80	200	75	300	73	400	71	800	66	1 000	65
Frequency	Minimum attenuation																			
MHz	dB																			
100	80																			
200	75																			
300	73																			
400	71																			
800	66																			
1 000	65																			
301	Endurance at temperature		X	Class N and W only Class K ^b																
305	Rapid change of temperature	X		—																
306	Mould growth		X	See EN 3660-001.																
307	Salt mist		X	Cable outlet not fitted to a connector and suspended with non-metallic cord. Duration: Class N and K 48 h Class W 500 h																
308	Sand and dust		X	Air speed 3,5 m/s No. of cycles: 1																
314	Immersion at low air pressure	X		—																
315	Fluid resistance		X	—																
316	Ozone resistance	X		—																
317	Flammability	X		—																
318	Fire-resistance		X	Class K only																

continued

Table 5 (concluded)

EN 2591-	Designation of the test	Not applicable	Applicable see EN 3660-001	Details																						
402	Shock		X	Method A. Severity: 100 g No. of shocks: One in each direction in three perpendicular axes, i.e. six shocks																						
403	Sinusoidal and random vibration		X	Method B. Figure 3. Level J Duration: 8 h in each of two axes Test performed: on one group – 50 % of time at – 65 °C; – 50 % of time at ambient temperature; on a 2 nd group – 100 % of time at max. temperature of class under test																						
406	Mechanical endurance		X	60 cycles total																						
408	Mating and unmating forces		X	Method A. Use dummy receptacle. See Table 6.																						
420	Mechanical strength of rear accessories		X	Phase A <table border="1" data-bbox="1015 1196 1367 1597"> <thead> <tr> <th data-bbox="1015 1196 1193 1294">Shell size</th> <th data-bbox="1193 1196 1367 1294">Bending moment Nm</th> </tr> </thead> <tbody> <tr><td data-bbox="1015 1294 1193 1330">08</td><td data-bbox="1193 1294 1367 1330">06,2</td></tr> <tr><td data-bbox="1015 1330 1193 1366">10</td><td data-bbox="1193 1330 1367 1366">10,2</td></tr> <tr><td data-bbox="1015 1366 1193 1402">12</td><td data-bbox="1193 1366 1367 1402">20,3</td></tr> <tr><td data-bbox="1015 1402 1193 1438">14</td><td data-bbox="1193 1402 1367 1438">22,6</td></tr> <tr><td data-bbox="1015 1438 1193 1473">16</td><td data-bbox="1193 1438 1367 1473">28,2</td></tr> <tr><td data-bbox="1015 1473 1193 1509">18</td><td data-bbox="1193 1473 1367 1509">31,6</td></tr> <tr><td data-bbox="1015 1509 1193 1545">20</td><td data-bbox="1193 1509 1367 1545">33,9</td></tr> <tr><td data-bbox="1015 1545 1193 1581">22</td><td data-bbox="1193 1545 1367 1581">39,5</td></tr> <tr><td data-bbox="1015 1581 1193 1617">24</td><td data-bbox="1193 1581 1367 1617">42,9</td></tr> <tr><td data-bbox="1015 1617 1193 1653">28</td><td data-bbox="1193 1617 1367 1653">47,5</td></tr> </tbody> </table> See Tables 4 and 6.	Shell size	Bending moment Nm	08	06,2	10	10,2	12	20,3	14	22,6	16	28,2	18	31,6	20	33,9	22	39,5	24	42,9	28	47,5
Shell size	Bending moment Nm																									
08	06,2																									
10	10,2																									
12	20,3																									
14	22,6																									
16	28,2																									
18	31,6																									
20	33,9																									
22	39,5																									
24	42,9																									
28	47,5																									
422	Locking wire hole strength		X	Where applicable																						
513	Magnetic permeability		X	Not fitted to a connector. Max. values: Class N and W 2,0 Class K 5,0																						

^a 1 GHz to 10 GHz under consideration.


^b Class K to be subjected to Test EN 2591-301, only where non-metallic components are used.

Table 6

Shell size	Rotation torque coupling direction	Rotation torque uncoupling direction	
	Nm	Nm	
	max.	max.	min.
08	0,12	0,25	0,10
10	0,18	0,40	0,15
12	0,25	0,60	0,20
14	0,38	0,85	0,25
16	0,46	1,05	0,30
18	0,56	1,25	0,35
20	0,65	1,50	0,40
22	0,73	1,65	0,45
24	0,82	1,85	0,50
28	1,06	2,40	0,60

5 Designation

EXAMPLE 1

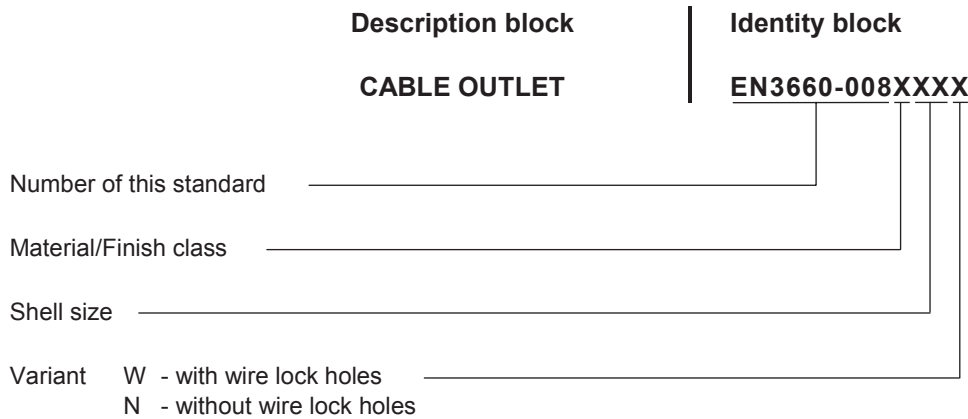

EXAMPLE 2

EN3660-008N08W Cable outlet style C, 45°, shielded (cone grounding), aluminium, electroless nickel, shell size 08, with wire lock holes.

NOTE 1 No gaps are required between sections in the part number when printed.

NOTE 2 If necessary, the code I9005 shall be placed between the description block and the identity block.

6 Marking

Refer to EN 3660-001 and Figure 1.

7 Technical specification

Refer to EN 3660-001.

BSI - British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: orders@bsigroup.com You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com

BSI Group
Headquarters 389
Chiswick High Road,
London, W4 4AL, UK
Tel +44 (0)20 8996 9001
Fax +44 (0)20 8996 7001
[www.bsigroup.com/
standards](http://www.bsigroup.com/standards)