



BSI Standards Publication

Aerospace series — Cables, optical 125 μm diameter cladding

Part 103: Semi-loose, ruggedized simplex
construction 62,5/125 μm GI fibre
nominal 2,74 mm, outside diameter —
Product standard

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

raising standards worldwide[™]

Copyright British Standards Institution
Provided by IHS under license with BSI - Uncontrolled Copy
No reproduction or networking permitted without license from IHS

Not for Resale

National foreword

This British Standard is the UK implementation of EN 4641-103:2010.

The UK participation in its preparation was entrusted to Technical Committee ACE/6, Aerospace avionic electrical and fibre optic technology.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2010

ISBN 978 0 580 57826 7

ICS 49.060

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 December 2010.

Amendments issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN 4641-103

NORME EUROPÉENNE

EUROPÄISCHE NORM

November 2010

ICS 49.090

English Version

**Aerospace series - Cables, optical 125 μm diameter cladding -
Part 103: Semi-loose, ruggedized simplex construction 62,5/125
 μm GI fibre nominal 2,74 mm, outside diameter - Product
standard**

Série aérospatiale - Câble, optique, diamètre extérieur de la gaine optique 125 μm - Partie 103 : Câble à structure semi libre, renforcée, monovoie fibre à gradient d'indice 62,5/125 μm , diamètre extérieur 2,74 mm - Norme de produit

Luft- und Raumfahrt - Lichtwellenleiterkabel, Claddingdurchmesser 125 μm - Teil 103: Halbfester Leiteraufbau GI 62,5/125 μm , Faser Kabelaußendurchmesser 2,74 mm - Produktnorm

This European Standard was approved by CEN on 2 July 2010.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

© 2010 CEN All rights of exploitation in any form and by any means reserved worldwide for CEN national Members.

Ref. No. EN 4641-103:2010: E

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 Required characteristics	4
5 Cable construction	5
6 Materials	5
7 Test methods and performances in accordance with EN 3745-100	6
7.1 Optical fibre tests.....	6
7.2 Fibre optic component cable tests	6
7.3 Ruggedized fibre optic cable.....	6
8 Tooling	10
9 Quality assurance	10
10 Designation, marking and colours.....	10
10.1 Designation	10
10.2 Marking	11
10.3 Colours	11
11 Delivery conditions.....	11
11.1 Packaging	11
11.2 Labelling	11
11.3 Delivery lengths	11
12 Storage.....	11

Foreword

This document (EN 4641-103:2010) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2011, and conflicting national standards shall be withdrawn at the latest by May 2011.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

1 Scope

This product standard specifies the general characteristics, conditions for qualification, acceptance and quality assurance for a fibre optic cable with a 62,5/125 µm single mode fibre core, 2,74 mm outside cable diameter and of semi-loose construction. The basic construction is the cable defined in EN 4641-102 with added sheaths for ruggedized usages.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2812, *Aerospace series — Stripping of electrical cables* ¹⁾

EN 3475-601, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 601: Smoke density*

EN 3475-602, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 602: Toxicity*

EN 3745-100, *Aerospace series — Fibres and cables, optical, aircraft use — Test methods — Part 100: General*

EN 3838, *Aerospace series — Requirements and tests on user-applied markings on aircraft electrical cables* ¹⁾

EN 3909, *Aerospace series — Test fluids for electric components and sub-assemblies*

EN 4641-102, *Aerospace series — Cables, optical 125 µm outside diameter cladding — Part 102: Semi-loose 62,5/125 µm GI fibre nominal 1,8 mm outside diameter — Product standard*

EN 9133, *Aerospace series — Quality management systems — Qualification procedure for aerospace standard parts*

TR 4647, *Aerospace series — Termination procedure for EN 4639 optical contact* ²⁾

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 3745-100 apply.

4 Required characteristics


The characteristics of the cables, tested according to the methods described hereafter shall comply with the values defined in this product standard.

1) Published as ASD-STAN Prestandard at the date of publication of this standard by Aerospace and Defence Industries Association of Europe-Standardization (ASD-STAN), (www.asd-stan.org).

2) Published as ASD-STAN Technical Report at the date of publication of this standard by Aerospace and Defence Industries Association of Europe-Standardization (ASD-STAN), (www.asd-stan.org).

5 Cable construction

See Figure 1 and Table 1.

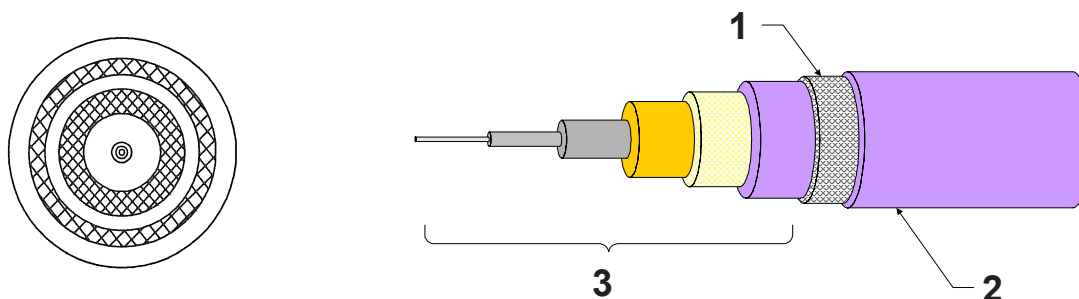

Key

- 1 Glass braid
- 2 Jacket – Extruded fluoropolymer
- 3 EN 4641-102 fibre cable

Figure 1

Table 1

Property	Value
EN 4641-102 — Fibre optic cable	(1,80 ± 0,12) mm
Finished cable diameter	(2,74 ± 0,25) mm
Cable mass	10,7 g/m
Operating temperature	– 65 °C to 150 °C
Attenuation at 850 nm (20 °C)	≤ 4,0 dB/km
Attenuation at 1 300 nm (20 °C)	≤ 2,0 dB/km
Numerical aperture	0,275 ± 0,015
Minimum bend radius (20 °C)	Installation: 27 mm (10 × outside diameter) Long term: 27 mm (10 × outside diameter) Storage: 54 mm (20 × cable outside diameter)

6 Materials

See Table 2.

Table 2

Element	Material
Fibre cable component	EN 4641-102 — Fibre optic cable
Overall braid	Fibre glass woven braid
Outer jacket	Extruded fluoropolymer

7 Test methods and performances in accordance with EN 3745-100

7.1 Optical fibre tests

In accordance with EN 4641-102.

7.2 Fibre optic component cable tests

In accordance with EN 4641-102.

7.3 Ruggedized fibre optic cable

Tests in accordance with Table 3.

Table 3 — Ruggedized fibre optic cable test methods

Test	Test method EN 3745-	Test conditions and results
Visual examination	201	The outer jacket shall have the correct identification as specified in this standard. The coating shall be continuous and free of visible defects such as lumps, abrasions, cracks, splits or blisters. Sample length : 3 m
Outer jacket outside diameter	203	(2,74 ± 0,25) mm
Outer jacket wall thickness	203	Minimum wall ≥ 0,20 mm
Longitudinal stability	205	The change in longitudinal dimensions between A and B shall not exceed the maximum value of ≤ 5 mm. Number of samples: 3 – Sample Length: (3,5 ± 0,03) m Test Method EN 3745-402 – 25 cycles
Fibre attenuation	301 Method D	Maximum attenuation ≤ 4 dB/km at 850 nm, ≤ 2 dB/km at 1 300 nm at 20 °C Minimum sample length: ≥ 100 m
Cable immunity to ambient light	305	Not applicable. This is a EN 4641-102 component test.
Cable accelerated aging	401	Not applicable if jacket materials are the same. This is a EN 4641-102 component test.
Attenuation during temperature cycling	306	Visual examination in accordance with EN 3745-201 Maximum variation of attenuation: $\alpha \leq 0,25$ dB at 850 nm and 1 300 nm Test Method EN 3745-402 – 10 cycles High temperature : 150 °C – Low temperature: – 65 °C Duration at extreme temperatures: 30 minutes Rate of change: 5 °C per minute Number of samples: 3 – Sample Length: ≥ 20 m

continued

Table 3 — Ruggedized fibre optic cable test methods (continued)

Test	Test method EN 3745-	Test conditions and results
Thermal shock	404	Visual examination in accordance with EN 3745-201 Maximum permissible variation in attenuation during test sequence and after 24 h: $\Delta\alpha \leq 0,25$ dB at 850 nm and 1 300 nm. High temperature: 150 °C – Low temperature: – 65 °C Duration at extreme temperatures: 30 minutes Number of samples: 3 – Sample Length: ≥ 20 m Number of temperature cycles: 10
Cold bend	406	Maximum permissible variation in attenuation: $\Delta\alpha \leq 0,25$ dB at 850 nm and 1 300 nm. Visual examination in accordance with EN 3745-201. 1 hour soak at: – 65 °C – Mandrel size: (50 \pm 1) mm Mandrel wraps: 10 Number of samples: 1 – Sample Length: ≥ 10 m
Flammability	407	No flaming particles shall fall from the sample during the test and the tissue paper shall not be ignited. Period of flame application: 30 seconds Maximum burn length: 75 mm – Self extinguish after 5 seconds Number of samples: 3 – Sample length: (1 \pm 0,05) m
Thermal life	410	Not applicable if jacket materials are the same. This is a EN 4641-102 component test.
Resistance to fluids	411 Method 2	Not applicable if jacket materials are the same. This is a EN 4641-102 component test.
Humidity resistance	412	Not applicable if jacket materials are the same. This is a EN 4641-102 component test.
Scrape abrasion	503	Maximum variation in attenuation: $\Delta\alpha \leq 0,25$ dB at 850 nm and 1 300 nm. Visual examination in accordance with EN 3745-201 Number of samples: 3 – Sample length: $\geq 3,0$ m Test at ambient temperature: 20 °C Load: 7 N – Number of cycles: 500 Test at high temperature: 150 °C Load: 2,2 N – Number of cycles: 500
Tensile strength	505	Maximum variation in attenuation: $\Delta\alpha \leq 0,25$ dB at 850 nm and 1 300 nm. Tensile Strength: 50 N Mandrel diameter: 28 mm Pulling speed: (50 \pm 10) mm/min Number of samples: 3 – Sample length: ≥ 5 m

continued

Table 3 — Ruggedized fibre optic cable test methods (continued)

Test	Test method EN 3745-	Test conditions and results
Impact resistance	506	<p>Maximum variation in attenuation: $\Delta\alpha \leq 0,25$ dB at 850 nm and 1 300 nm.</p> <p>No Jacket cracks/splits</p> <p>Test temperature: 20 °C</p> <p>Load to be applied: 15 N – Radius intermediate piece: 12 mm</p> <p>Drop height: 150 mm – Number of impacts: 2</p> <p>Number of samples: 3 – Sample length: ≥ 700 mm</p>
Cut-through	507	<p>Visual examination in accordance with EN 3745-201</p> <p>Monitor attenuation to determine fibre breakage of the sample during testing at 20 °C and 150 °C.</p> <p>Loads to be applied:</p> <p>Ambient (20 °C): 330 N – High temperature (150 °C): 85 N</p> <p>Duration of load application: 1 min</p> <p>Number of samples: 3 – Sample length: ≥ 3 m</p>
Torsion	508	<p>Added to test criterion: No cracking or splitting of cable jacket</p> <p>Maximum variation of attenuation at 850 nm and 1 300 nm.</p> <p>For one cycle: $\leq 0,10$ dB – For 1 000 cycles: $\leq 0,10$ dB</p> <p>Number of samples: 3 – Sample length: $\geq 3,0$ m</p> <p>Load to be applied: 150 N – Number of cycles: 1 000</p> <p>Distance between the rotating grip and the fixed grip: $(0,25 \pm 0,05)$ m</p>
Kink	509	<p>No kink shall occur at a diameter greater than minimum loop diameter.</p> <p>Maximum permissible variation of attenuation: $\leq 0,10$ dB at 1,310 nm</p> <p>Minimum loop diameter: 20 mm</p> <p>Number of samples: 3 – Sample length: ≥ 10 times bend radius</p>
Bend	510 Method B	<p>Maximum variation of attenuation: $\leq 0,25$ dB at 850 nm and 1 300 nm.</p> <p>Residual attenuation after removing the specimen from the test equipment: $\leq 0,10$ dB at 850 nm and 1 300 nm.</p> <p>Visual examination in accordance with EN 3745-201</p> <p>Mandrel diameter: 25 mm – Number of turns: 10</p> <p>Number of samples: 1 – Sample length: $(10 \pm 0,05)$ m</p>
Cable to cable abrasion	511	<p>Not applicable if jacket materials are the same. This is a EN 4641-102 component test.</p>

continued

Table 3 — Ruggedized fibre optic cable test methods (continued)

Test	Test method EN 3745-	Test conditions and results
Flexure endurance	512	<p>Examination of test specimen for damage in accordance with EN 3745-201 (visual examination).</p> <p>Maximum permissible variation of attenuation: ≤ 0,25 dB at 850 nm and 1 300 nm.</p> <p>Number of samples: 3 – Length of the sample: ≥ 5 m</p> <p>Load to be applied: 11,5 N – Diameter of mandrel: 28 mm</p> <p>Number of cycles: 100 000</p>
Crush resistance	513	<p>Maximum variation of attenuation: ≤ 0,05 dB at 850 nm and 1 300 nm.</p> <p>No cracking or splitting of cable jacket</p> <p>Load: 445 N – Area of load: 100 mm²</p> <p>Number of samples: 3 – Sample length: ≥ 3 m</p>
Severe cable bend	516	<p>Examination of test specimen for damage in accordance with EN 3745-201 (visual examination). No fibre breakage.</p> <p>Load to be applied : 45 N</p> <p>Maximum edge radius: 127 µm</p> <p>Number of cycles: One bend in each direction</p> <p>Number of samples: 3 – Length of the sample: ≥ 3 m</p>
Cable clamping	517	<p>Typical requirements:</p> <p>Maximum transmittance change: ≤ 0,05 dB at 850 nm.</p> <p>Mandrel diameter: (13 ± 1) mm</p> <p>Number of cable ties applied: 6 – Cable tie tension setting: #1</p> <p>Cable tie spacing: ≥ 90 mm</p> <p>Number of samples: 3 – Sample length: ≥ 4 m</p>
Smoke	601	<p>Test method: EN 3475-601</p> <p>Specific optical smoke density (average) Ds ≤ 200 within 4 minutes test duration under both the flaming and non-flaming conditions.</p> <p>Value must be measured at the end of the test.</p>
Toxicity	602	<p>EN 3475-602</p> <p>HF < 300 ppm</p> <p>HCL < 150 ppm</p> <p>HCN < 150 ppm</p> <p>SO2 < 100 ppm</p> <p>H2S < 100 ppm</p> <p>NO < 100 ppm</p> <p>NO2 < 100 ppm</p> <p>CO < 1 000 ppm</p>

continued

Table 3 — Ruggedized fibre optic cable test methods (concluded)

Test	Test method EN 3745-	Test conditions and results
Nuclear radiation	603	Not applicable
Cable stripping	701	Jacket: < 5 N per 30 mm Blade design (see EN 2812) Pulling speed 25 mm/min to 50 mm/min
Durability of manufacturers identity markings	703	Examine marking in accordance with EN 3745-201 visual examination. Number of samples: 3 – Sample length: (2 ± 0,05) m Load: 1,5 N – Number of cycles: 125 Not applicable if marker tape used under outer jacket.
Contrast measurement	705	≥ 40 % for UV laser marked cable. Not applicable if marker tape used under outer jacket.
Durability of user identification markings	706 EN 3838 Except 6.8	Not applicable
General test conditions: — The tests shall be performed with the following launch condition: 70/70 %		

8 Tooling

See TR 4647 termination processes.


9 Quality assurance

See EN 9133.

10 Designation, marking and colours

10.1 Designation

EXAMPLE

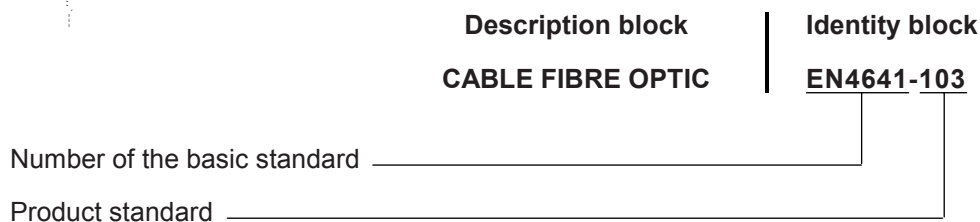

10.2 Marking

The marking shall comprise of the cable reference, the manufacturer code and the last two digits of the year of manufacture shall conform to EN 2424.

The marking may be done wholly or partially in code by agreement with the user.

The cable shall use marker tape under the outer jacket or the outer jacket shall be marked with a UV laser. **Hot stamping is forbidden.**

10.3 Colours

The colour of the outer jacket will be light purple or as specified by customer.

11 Delivery conditions

11.1 Packaging

See EN 4641-001.

11.2 Labelling

See EN 4641-001.

11.3 Delivery lengths

The minimum delivery length of a fibre or cable is by agreement between customer and supplier.

12 Storage

Fibre optic cables shall be stored as described hereunder:

- Humidity: < 90 %
- Temperatures: – 65 °C to 85 °C

CAUTION — Let cable warm up prior to handling if fibre optic cable has been stored for prolonged periods of time below 0 °C

- Tensile strength on cable < 30 N.

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services.

It presents the UK view on standards in Europe and at the international level.

It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001

Email: plus@bsigroup.com

Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website www.bsigroup.com/shop. In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

Email: orders@bsigroup.com

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.

Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005

Email: knowledgecentre@bsigroup.com

Various BSI electronic information services are also available which give details on all its products and services.

Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048

Email: info@bsigroup.com

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at www.bsigroup.com/BSOL

Further information about BSI is available on the BSI website at www.bsigroup.com/standards

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Manager.

Tel: +44 (0)20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001

Fax +44 (0)20 8996 7001

www.bsigroup.com/standards

raising standards worldwide™

Copyright British Standards Institution
Provided by IHS under license with BSI - Uncontrolled Copy
No reproduction or networking permitted without license from IHS

Not for Resale

