

BS EN 4673-006:2010



BSI Standards Publication

Aerospace series — Inserts, UNJ threads, self-locking, with self-broaching keys

Part 006: In heat resisting steel FE-PA2601 (A286), MoS₂ coated

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

raising standards worldwide[™]

Copyright British Standards Institution
Provided by IHS under license with BSI - Uncontrolled Copy
No reproduction or networking permitted without license from IHS

Not for Resale



National foreword

This British Standard is the UK implementation of EN 4673-006:2010.

The UK participation in its preparation was entrusted to Technical Committee ACE/12, Aerospace fasteners and fastening systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2010

ISBN 978 0 580 63731 5

ICS 49.030.30

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2010.

Amendments issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN 4673-006

NORME EUROPÉENNE

EUROPÄISCHE NORM

August 2010

ICS 49.030.30

English Version

Aerospace series - Inserts, UNJ threads, self-locking, with self-broaching keys - Part 006: In heat resisting steel FE-PA2601 (A286), MoS² coated

Série aérospatiale - Douilles filetées, à filetage UNJ, à freinage interne, à clavettes auto-brochantes - Partie 006: En acier résistant à chaud FE-PA2601 (A286), revêtues MoS²

Luft- und Raumfahrt - Gewindeeinsätze, UNJ-Gewinden, selbstsichernd, mit selbstbräumenden Stiften - Teil 006: Mit selbstbräumenden Stiften, aus hochwarmfestem Stahl FE-PA2601 (A286), MoS² beschichtet

This European Standard was approved by CEN on 12 June 2010.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

© 2010 CEN All rights of exploitation in any form and by any means reserved worldwide for CEN national Members.

Ref. No. EN 4673-006:2010: E

Contents

Page

Foreword.....	3
Introduction	4
1 Scope	4
2 Normative references	4
3 Required characteristics	4
3.1 Configuration – Dimensions – Tolerances – Masses.....	4
3.2 Material	5
3.3 Surface treatment	5
4 Insert definition	5
4.1 Normal size insert	6
4.2 First repair size insert	6
4.3 Second repair size insert	7
4.4 External thread dimension.....	7
5 Designation	8
6 Marking	8
7 Technical specification	8

Foreword

This document (EN 4673-006:2010) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2011, and conflicting national standards shall be withdrawn at the latest by February 2011.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Introduction

For design and installation procedures, see EN 4673-002 and EN 4673-001.

1 Scope

This European Standard specifies the characteristics of self-locking, inserts for Inch series, self-broaching keys, in FE-PA2601, MoS₂ coated, for aerospace applications.

Classification: 900 MPa¹⁾ / 315 °C²⁾

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2399, *Aerospace series — Heat resisting steel FE-PA2601 (X4NiCrTiMoV26-15) — $R_m \geq 900$ MPa — Bars for forged bolts — $D \leq 25$ mm*

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2491, *Aerospace series — Molybdenum disulphide dry lubricants — Coating methods*

EN 3639, *Aerospace series — Heat resisting alloy FE-PA2601 — Softened and cold worked — Wire for forged fasteners — $D \leq 15$ mm — $900 \text{ MPa} \leq R_m \leq 1100 \text{ MPa}$ ³⁾*

EN 4673-001, *Aerospace series — Inserts, UNJ threads, self-locking, with self-broaching keys — Part 001: Installation and removal procedure*

EN 4673-002, *Aerospace series — Inserts, UNJ threads, self-locking, with self-broaching keys — Part 002: Design standard*

EN 4673-003, *Aerospace series — Inserts, UNJ threads, self-locking, with self-broaching keys — Part 003: Technical specification*

ISO 3161, *UNJ threads — general requirements and limit dimensions*

TR 3198, *Aerospace series — Manufacturers' identification monograms and marks for EN aerospace products*⁴⁾

3 Required characteristics

3.1 Configuration – Dimensions – Tolerances – Masses

See Figure 1 and Tables 1, 2, 3 and 4.

-
- 1) Corresponds to the minimum tensile stress which the material is able to withstand at ambient temperature.
 - 2) Maximum temperature that the insert is able to withstand, without permanent alteration to its original characteristics, after ambient temperature has been restored. The maximum temperature is conditioned by the MoS₂ lubricant.
 - 3) Published as ASD-STAN Prestandard at the date of publication of this standard by Aerospace and Defence Industries Association of Europe-Standardization (ASD-STAN), (www.asd-stan.org).
 - 4) Published as ASD-STAN Technical Report at the date of publication of this standard by Aerospace and Defence Industries Association of Europe-Standardization (ASD-STAN), (www.asd-stan.org).

Dimensions and tolerances are in millimetres. They apply before MoS₂ coating.

3.2 Material

Insert: EN 3639 and EN 2399 treated for 370 HV to 435 HV.

Keys: Stainless steel or nickel alloy treated for HV > 600.

3.3 Surface treatment

See EN 2491.


4 Insert definition

See Figure 1.

$R_a 3,2$ $\left[R_a 1,6 \text{ only for key grooves and keys} \right]$

Values apply before MoS₂ coating.

Remove sharp edges 0,1 mm to 0,4 mm.

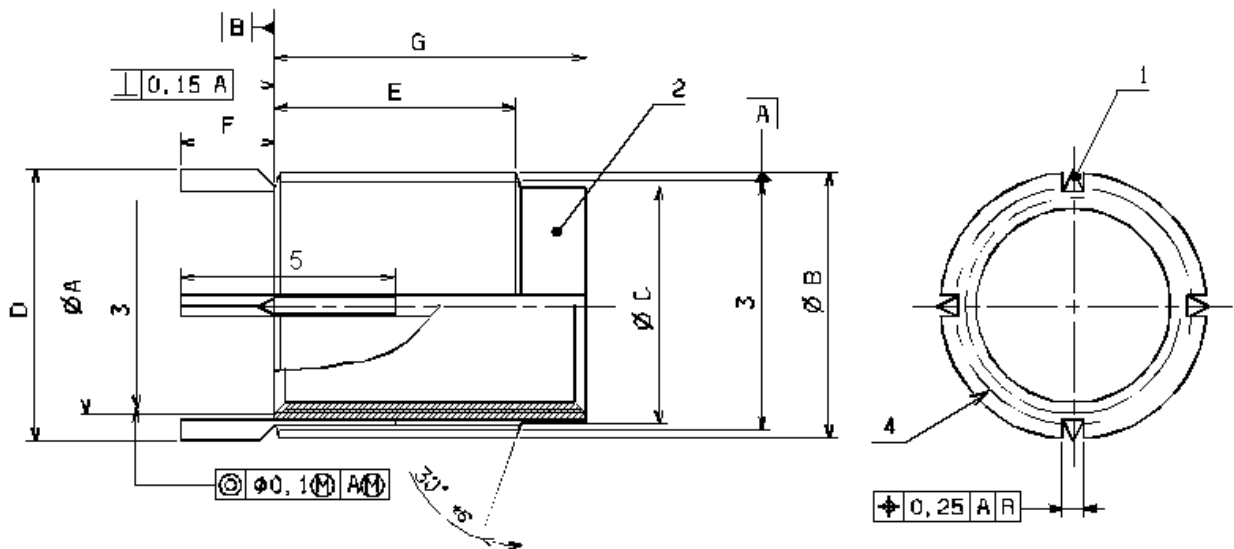

Key

- 1 *N* keys equally spaced.
- 2 Form out-of-round in this area to achieve the self-locking requirement. Mark of tools allowed.
- 3 Pitch diameters.
- 4 Marking area or on keys left to producer's option.
- 5 Total length of the key shall not exceed *E* min. Dimensions and location of keys shall meet EN 4673-003 requirements.

Details of form not stated are left to the producer's discretion.

Figure 1

4.1 Normal size insert

See Table 1.

Table 1

<i>A</i> Internal thread ^a		<i>B</i> External thread ^b	<i>C</i> ^c max.	<i>D</i> 0 - 0,2	<i>E</i> max.	<i>F</i> 0 - 0,2	<i>G</i> max.	<i>N</i>	Mass kg/1 000 ≈
Code	Designation	Designation							
3-0	.190 0-32UNJF-3B	.312 5-18UNS-2A	6,30	7,9	6,0	4,35	7,7	2	1,4
4-0	.250 0-28UNJF-3B	.375 0-16UNS-2A	7,90	9,5	8,0		10,0	2	2,3
5-0	.312 5-24UNJF-3B	.437 5-16UNS-2A	9,50	11,1	9,5		12,3	2	3,6
6-0	.375 0-24UNJF-3B	.500 0-16UNS-2A	11,05	12,7	11,5		14,5	4	5,0
7-0	.437 5-20UNJF-3B	.562 5-16UNS-2A	12,65	14,2	13,5		17,1	4	7,1
8-0	.500 0-20UNJF-3B	.625 0-16UNS-2A	14,25	15,8	15,5		19,4	4	9,2
^a In accordance with ISO 3161. ^b See Table 4. ^c After deformation.									

4.2 First repair size insert

See Table 2.

Table 2

<i>A</i> Internal thread ^a		<i>B</i> External thread ^b	<i>C</i> ^c max.	<i>D</i> 0 - 0,2	<i>E</i> max.	<i>F</i> 0 - 0,2	<i>G</i> max.	<i>N</i>	Mass kg/1 000 ≈
Code	Designation	Designation							
3-1	.190 0-32UNJF-3B	.375 0-16UNS-2A	7,90	9,5	6,0	4,35	7,7	2	2,5
4-1	.250 0-28UNJF-3B	.437 5-16UNS-2A	9,50	11,1	8,0		10,0	2	4,1
5-1	.312 5-24UNJF-3B	.500 0-16UNS-2A	11,05	12,7	9,5		12,3	2	6,2
6-1	.375 0-24UNJF-3B	.562 5-16UNS-2A	12,65	14,2	11,5		14,5	4	8,5
7-1	.437 5-20UNJF-3B	.625 0-16UNS-2A	14,25	15,8	13,5		17,1	4	11,8
8-1	.500 0-20UNJF-3B	.687 5-16UNS-2A	15,80	17,4	15,5		19,4	4	15,1
^a In accordance with ISO 3161. ^b See Table 4. ^c After deformation.									

4.3 Second repair size insert

See Table 3.

Table 3

<i>A</i> Internal thread^a		<i>B</i> External thread^b	<i>C</i> ^c max.	<i>D</i> 0 - 0,2	<i>E</i> max.	<i>F</i> 0 - 0,2	<i>G</i> max.	<i>N</i>	Mass kg/1 000 ≈
Code	Designation	Designation							
3-2	.190 0-32UNJF-3B	.437 5-16UNS-2A	9,50	11,1	6,0	4,35	7,7	2	3,9
4-2	.250 0-28UNJF-3B	.500 0-16UNS-2A	11,05	12,7	8,0		10,0	2	6,3
5-2	.312 5-24UNJF-3B	.562 5-16UNS-2A	12,65	14,2	9,5		12,3	2	9,2
6-2	.375 0-24UNJF-3B	.625 0-16UNS-2A	14,25	15,8	11,5		14,5	4	12,6
7-2	.437 5-20UNJF-3B	.687 5-16UNS-2A	15,80	17,4	13,5		17,1	4	17,1
8-2	.500 0-20UNJF-3B	.750 0-16UNS-2A	17,40	19,0	15,5		19,4	4	21,7

^a In accordance with ISO 3161.
^b See Table 4.
^c After deformation.

4.4 External thread dimension


See Table 4.

Table 4

External thread Designation	Major diameter		Pitch diameter		Minor diameter	
	min.	max.	min.	max.	min.	max.
.312 5-18UNS-2A	7,69	7,91	6,89	6,99	6,32	6,50
.375 0-16UNS-2A	9,25	9,49	8,35	8,46	7,92	8,13
.437 5-16UNS-2A	10,84	11,08	9,93	10,05	9,50	9,72
.500 0-16UNS-2A	12,43	12,67	11,51	11,63	11,09	11,30
.562 5-16UNS-2A	14,01	14,25	13,10	13,22	12,67	12,89
.625 0-16UNS-2A	15,60	15,84	14,69	14,81	14,26	14,48
.687 5-16UNS-2A	17,19	17,43	16,27	16,39	15,84	16,07
.750 0-16UNS-2A	18,77	19,01	17,85	17,98	17,42	17,65

5 Designation

EXAMPLE

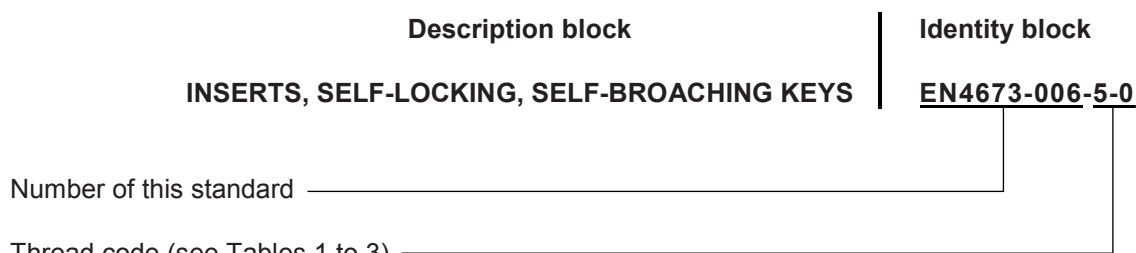

NOTE 1 The last digit corresponds to:
Oversize code:
0 = Normal size
1 = First repair size
2 = Second repair size

NOTE 2 If necessary, the code I9005 shall be placed between the description block and the identity block.

6 Marking

EN 2424, style F

Manufacturers' identification marks in accordance with the list for special identification marks in TR 3198.

7 Technical specification

EN 4673-003

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services.

It presents the UK view on standards in Europe and at the international level.

It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001

Email: plus@bsigroup.com

Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website www.bsigroup.com/shop. In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

Email: orders@bsigroup.com

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.

Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005

Email: knowledgecentre@bsigroup.com

Various BSI electronic information services are also available which give details on all its products and services.

Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048

Email: info@bsigroup.com

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at www.bsigroup.com/BSOL

Further information about BSI is available on the BSI website at www.bsigroup.com/standards

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Manager.

Tel: +44 (0)20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001

Fax +44 (0)20 8996 7001

www.bsigroup.com/standards

raising standards worldwide™

Copyright British Standards Institution
Provided by IHS under license with BSI - Uncontrolled Copy
No reproduction or networking permitted without license from IHS

Not for Resale

