

BS EN 12020-2:2016



BSI Standards Publication

Aluminium and aluminium alloys — Extruded precision profiles in alloys EN AW-6060 and EN AW-6063

Part 2: Tolerances on dimensions and form

National foreword

This British Standard is the UK implementation of EN 12020-2:2016. It supersedes BS EN 12020-2:2008 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee NFE/35, Light metals and their alloys.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 91008 1

ICS 77.150.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 December 2016.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN 12020-2

NORME EUROPÉENNE

EUROPÄISCHE NORM

December 2016

ICS 77.150.10

Supersedes EN 12020-2:2008

English Version

Aluminium and aluminium alloys - Extruded precision profiles in alloys EN AW-6060 and EN AW-6063 - Part 2: Tolerances on dimensions and form

Aluminium et alliages d'aluminium - Profilés de précision filés en alliages EN AW-6060 et EN AW-6063
- Partie 2 : Tolérances sur dimensions et forme

Aluminium und Aluminiumlegierungen - Stranggepresste Präzisionsprofile aus Legierungen EN AW-6060 und EN AW-6063 - Teil 2: Grenzabmaße und Formtoleranzen

This European Standard was approved by CEN on 4 March 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents	Page
European foreword	3
1 Scope	4
2 Normative references	5
3 Tolerances on dimensions	5
3.1 General	5
3.2 Cross-sectional dimensions	5
3.3 Length	7
3.4 Squareness of cut ends	8
3.5 Length offset for profiles with a thermal barrier	8
4 Tolerances on form	8
4.1 Parallelism	8
4.2 Straightness	9
4.3 Convexity-Concavity	10
4.4 Contour	12
4.5 Twist	13
4.6 Angularity	15
4.7 Corner and fillet radii	16
Bibliography	18

European foreword

This document (EN 12020-2:2016) has been prepared by Technical Committee CEN/TC 132 “Aluminium and aluminium alloys”, the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2017, and conflicting national standards shall be withdrawn at the latest by June 2017.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 12020-2:2008.

The following technical modifications have been introduced during the revision:

- subclause 4.1, Parallelism;
- subclause 4.2, Straightness;
- subclause 4.5, Twist.

EN 12020 comprises the following parts under the general title “*Aluminium and aluminium alloys — Extruded precision profiles in alloys EN AW-6060 and EN AW-6063*”:

- *Part 1: Technical conditions for inspection and delivery*
- *Part 2: Tolerances on dimensions and form*

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.


1 Scope

This European Standard specifies tolerances on dimensions and form of extruded precision profiles, in alloys EN AW-6060 and EN AW-6063 manufactured with and without a thermal barrier (see Figures 1 and 2). It applies to extruded products supplied without further surface treatment. Precision profiles covered in this standard are distinguished from extruded profiles for general applications covered in EN 755-9 by the following characteristics:

- they are mainly for architectural applications;
- they meet more stringent requirements regarding the surface condition of visible surfaces;
- the maximum diameter of the circumscribing circle CD is 350 mm;
- they are made to closer tolerances on dimensions and form.

In the case of profiles which, due to the complexity of their design, are difficult to manufacture and specify, then special agreements between supplier and purchaser may need to be reached.


NOTE The effect of the thermal barrier material on the dimensional tolerances is covered by this document although the actual thermal barrier material itself is not (see EN 14024).

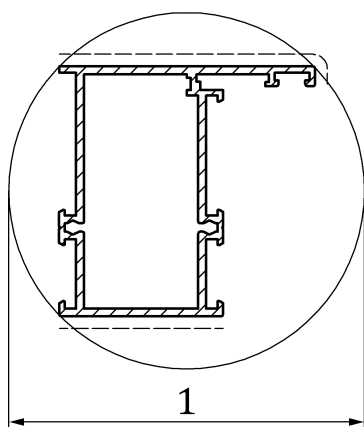

Key

1 CD maximum 350 mm

Figure 1 — Profile without thermal barrier

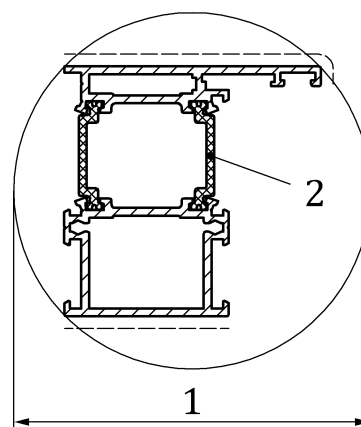

Key

1 CD maximum 350 mm
2 thermal barriers

Figure 2 — Profile containing thermal barrier

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN ISO 1101, *Geometrical product specifications (GPS) - Geometrical tolerancing - Tolerances of form, orientation, location and run-out (ISO 1101)*

3 Tolerances on dimensions

3.1 General

If, for compelling reasons, tolerances closer than those specified in 3.2.2 are required, these shall only be specified for dimensions that are critical to the function, subject to specific agreement between supplier and purchaser. Any such reduction shall not exceed two-thirds of the values specified in this standard and is subject to a minimum tolerance band of 0,3 mm.

3.2 Cross-sectional dimensions

3.2.1 General

The tolerances of the following dimensions (see Figure 3) are specified in Tables 1 and 2.

- *A*: wall thicknesses except those enclosing the hollow spaces in hollow profiles;
- *B*: wall thicknesses enclosing the hollow spaces in hollow profiles, except those between two hollow spaces;
- *C*: wall thicknesses between two hollow spaces in hollow profiles;
- *E*: the length of the shorter leg of profiles with open ends;
- *H*: all dimensions (except wall thickness) between points on the cross section of the profile or the centres of open screw holes, including open ends.

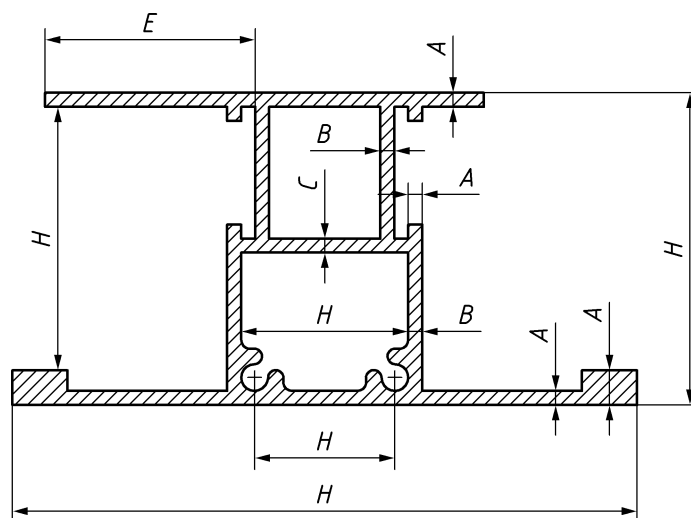


Figure 3 — Definition of dimensions *A*, *B*, *C*, *E*, *H*

3.2.2 Tolerances on dimensions other than wall thickness

The tolerances for dimension H shall be as specified in Table 1.

Table 1 — Tolerances on cross-sectional dimensions

Dimensions in millimetres

Dimension H		Tolerances on H (except open ends)	Tolerances on H (open ends)	
Over	Up to and including		$E \leq 60$	$60 < E \leq 120$ ^a
-	10	$\pm 0,15$	$\pm 0,15$	b
10	15	$\pm 0,20$	$\pm 0,20$	b
15	30	$\pm 0,25$	$\pm 0,25$	b
30	45	$\pm 0,30$	$\pm 0,30$	$\pm 0,45$
45	60	$\pm 0,40$	$\pm 0,40$	$\pm 0,55$
60	90	$\pm 0,45$	$\pm 0,45$	$\pm 0,65$
90	120	$\pm 0,60$	$\pm 0,60$	$\pm 0,80$
120	150	$\pm 0,80$	$\pm 0,80$	$\pm 1,0$
150	180	$\pm 1,0$	$\pm 1,0$	$\pm 1,3$
180	240	$\pm 1,2$	$\pm 1,2$	$\pm 1,5$
240	300	$\pm 1,5$	$\pm 1,5$	$\pm 1,8$
300	350	$\pm 1,8$	$\pm 1,8$	$\pm 2,1$

NOTE Tolerances given in Table 1 do not cover dimensions from a given point inside a closed hollow chamber to any other point outside the chamber.

^a Tolerances for values of dimension E over 120 mm shall be subject to agreement between supplier and purchaser.

^b Shall be subject to agreement between purchaser and supplier.

3.2.3 Tolerances on wall thickness of solid and hollow profiles

The tolerances on wall thickness (see Figure 3) of solid and hollow profiles shall be as specified in Table 2.

Table 2 — Tolerances on wall thickness of solid and hollow profiles

Dimensions in millimetres

Nominal wall thickness <i>A</i> , <i>B</i> or <i>C</i>		Tolerances on:			
		Wall thickness <i>A</i>		Wall thickness <i>B</i> and <i>C</i>	
Over	Up to and including	Circumscribing circle $CD \leq 100$	Circumscribing circle $100 < CD \leq 350$	Circumscribing circle $CD \leq 100$	Circumscribing circle $100 < CD \leq 350$
-	2	±0,15	±0,20	±0,20	±0,30
2	3	±0,15	±0,25	±0,25	±0,40
3	6	±0,20	±0,30	±0,40	±0,60
6	10	±0,25	±0,35	±0,60	±0,80
10	15	±0,30	±0,40	±0,80	±1,0
15	20	±0,35	±0,45	±1,2	±1,5
20	30	±0,40	±0,50	a	a
30	40	±0,45	±0,60	a	a

^a Shall be subject to agreement between supplier and purchaser.

When, for functional reasons, tolerances are specified for both the outside and inside dimensions of hollow sections, then the deviations given in Table 2 shall not apply as a wall thickness tolerance, but as a tolerance on the difference in wall thickness. This difference shall be determined by measuring the maximum and minimum wall thickness in the same plane.

3.3 Length

If fixed lengths are to be supplied, this shall be stated on the order. The fixed length tolerances shall be as specified in Table 3.

Table 3 — Tolerances on fixed length

Dimensions in millimetres

Circumscribing circle <i>CD</i>		Tolerances on fixed length <i>L</i>			
Over	Up to and including	$L \leq 2\,000$	$2\,000 < L \leq 5\,000$	$5\,000 < L \leq 10\,000$	$L > 10\,000$
-	100	+5 0	+7 0	+10 0	Subject to agreement between supplier and purchaser
100	200	+7 0	+9 0	+12 0	
200	350	+8 0	+11 0	+14 0	


If no fixed or minimum length is specified in the order, profiles may be delivered in random lengths. The length range and the tolerances on the random lengths shall be subject to agreement between supplier and purchaser.

3.4 Squareness of cut ends

The squareness of cut ends shall be within half of the fixed length tolerance range specified in Table 3 for both fixed and random lengths, e.g. for a fixed length tolerance of $+_{0}^{10}$ mm the deviation from squareness of cut ends shall be within 5 mm measured over all the complete cross sectional width of the profile.

3.5 Length offset for profiles with a thermal barrier

Length offset K , see Figure 4, for profiles with a thermal barrier shall be within the tolerance range for the fixed length specified in Table 3, e.g. for a fixed length tolerance of $+_{0}^{10}$ mm the length offset shall be within 10 mm.

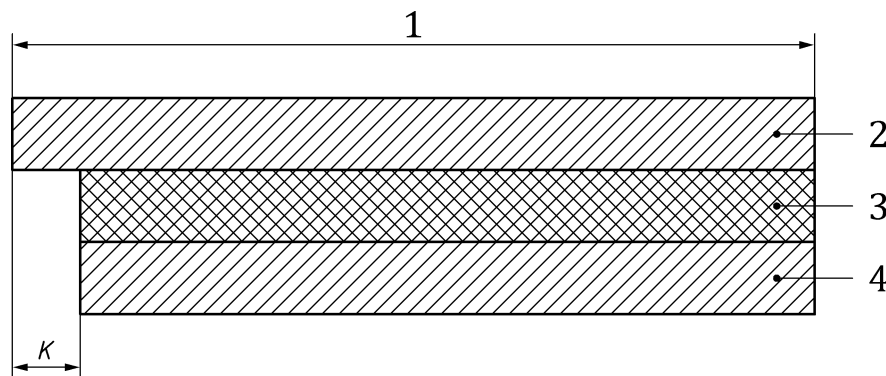

Key

- 1 length of profile
- 2 profile 1
- 3 thermal barrier
- 4 profile 2

Figure 4 — Length offset K

4 Tolerances on form

4.1 Parallelism

Requirements on parallelism // of opposite outer planes shall be subject of agreement between supplier and purchaser and shall be specified on the drawing.

Parallelism shall be marked on the drawing as specified in Figure 5, using the // symbol as in EN ISO 1101.

Tolerances on parallelism shall not increase tolerances on dimensions, i.e. shall always lie within dimensional tolerances or tolerance ranges.

Where outer planes are of unequal length, the longer one shall be taken as contact reference.

Two clearly defined reference points shall specify the width of the parallelism measurement.

The tolerance on parallelism // for outer parallel dimension H apply for cross sectional measurements in a single plane. The value for parallelism may be selected in accordance with the tolerance range given in Table 1 (including those for open ends).

Example Dimension $H = 50 \pm 0,4$, i.e. possible parallelism $//0,8$.

Requirements in Figure 5 ($//, 0,4$) is an example only. Tolerances to be according to Table 1:

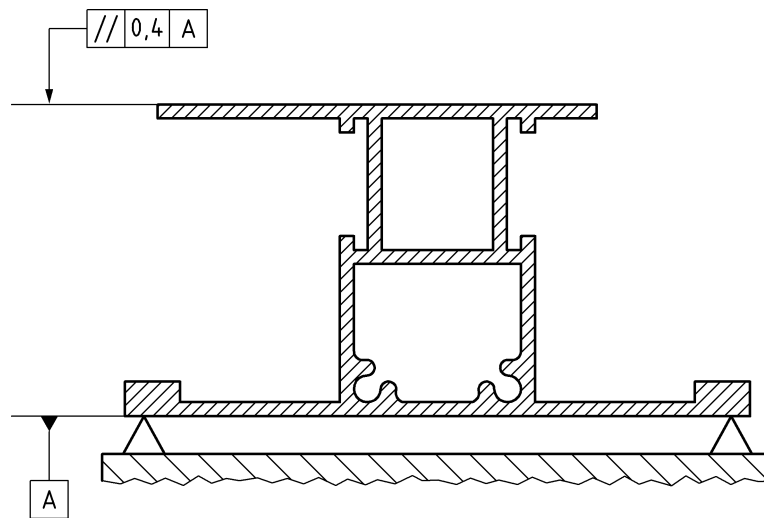



Figure 5 — Marking parallelism for convex and concave surfaces

4.2 Straightness

Deviations from straightness, h_s and h_t , shall be measured as shown in Figure 6, with the profile placed on a horizontal base plate so that its mass decreases the deviation.

The straightness tolerance h_t shall be as specified in Table 4.

The local deviation from straightness h_s shall not exceed 0,3 mm per 300 mm length.

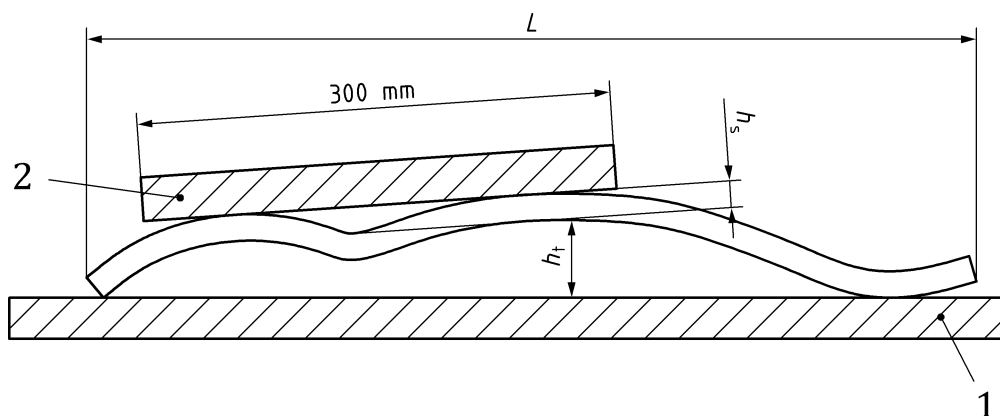

Key

- 1 base plate
- 2 straight edge

Figure 6 — Measurement of deviation from straightness

In addition to the straightness issues shown in Figure 6, other possibilities may be encountered and measured as shown in Figure 7.

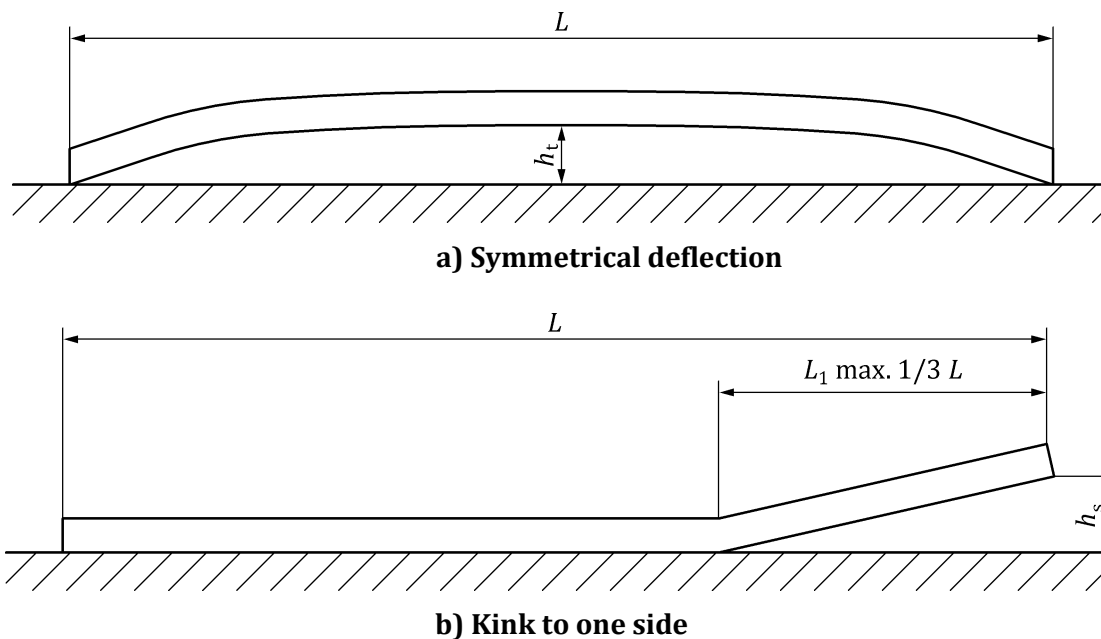


Figure 7 — Possible other measurements

Should other cases of interpretation and measurement be encountered then the specific requirements and method of measurement shall be subject to agreement between supplier and purchaser.


Table 4 — Straightness tolerances

Dimensions in millimetres

Straightness tolerance h_t for specified length L						
$L \leq 1\,000$	$1\,000 < L \leq 2\,000$	$2\,000 < L \leq 3\,000$	$3\,000 < L \leq 4\,000$	$4\,000 < L \leq 5\,000$	$5\,000 < L \leq 6\,000$	$L > 6\,000$
0,7	1,3	1,8	2,2	2,6	3,0	3,5

4.3 Convexity-Concavity


The convexity-concavity f shall be measured as shown in Figures 8 and 9. The tolerances shall be as specified in Table 5.

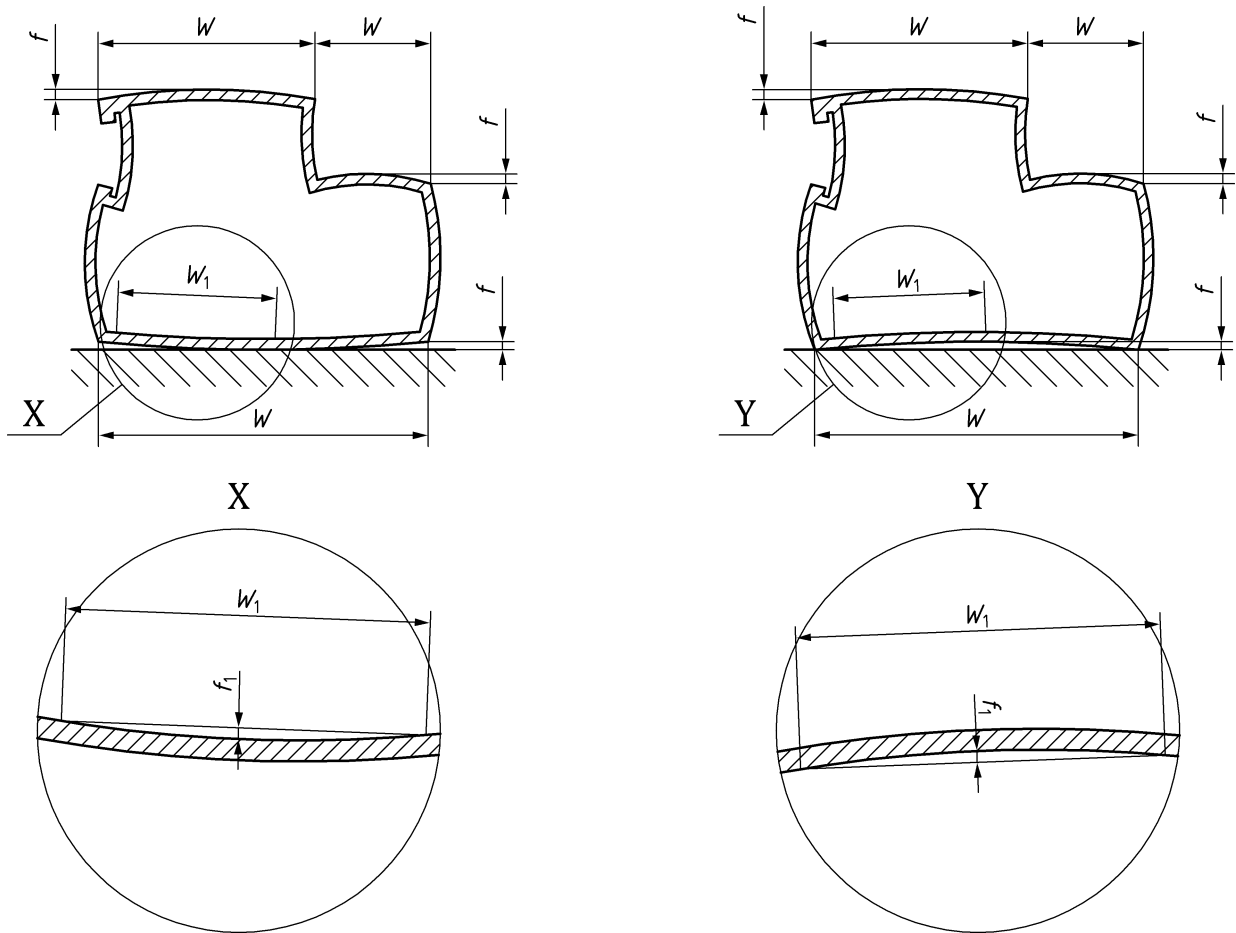

Key

- W width
- f deviation
- W_1 100 mm
- f_1 local deviation per any 100 mm

Figure 8 — Measurement of convexity - concavity for hollow section

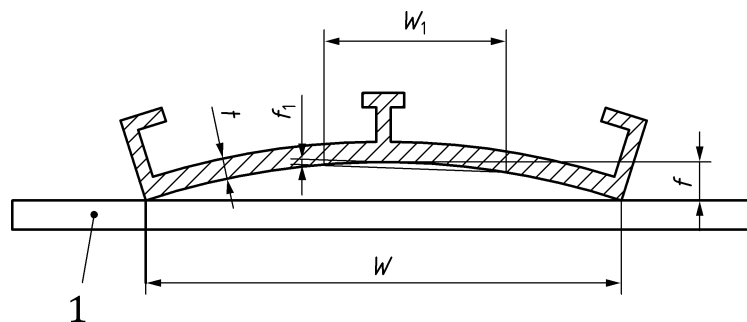

Key

- 1 base plate
- W width
- f deviation
- W_1 100 mm
- f_1 local deviation per any 100 mm

Figure 9 — Measurement of convexity-concavity for open section

Table 5 — Convexity-concavity tolerances

Dimensions in millimetres

Width W		Maximum allowable deviation f
Over	Up to and including	
-	30	0,20
30	60	0,30
60	100	0,40
100	150	0,50
150	200	0,70
200	250	0,85
250	300	1,0
300	350	1,2

In the case of profiles with a width W of over 150 mm, the local deviation f_1 shall not exceed 0,50 mm for any width W_1 of 100 mm.

4.4 Contour

For profiles with curved cross sections, the deviation at any point of the curve, from the theoretically exact line as defined by the drawing shall not be greater than the appropriate tolerance C specified in Table 6.

Considering all points on the curve, a tolerance zone shall be defined as the zone between two envelopes running tangentially to all circles of diameter C which can be drawn with their centres lying along the theoretically exact line; this is shown in Figure 10.

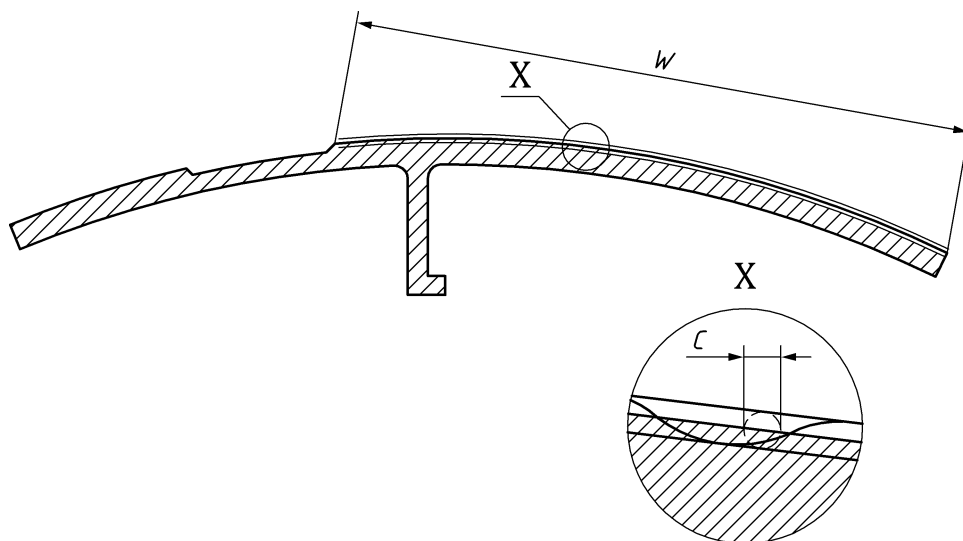


Figure 10 — Definition of contour tolerances

Table 6 — Contour tolerances

Dimensions in millimetres


Width W of the contour		Contour tolerance = Diameter C of the tolerance circle
Over	Up to and including	
-	30	0,30
30	60	0,50
60	90	0,70
90	120	1,00
120	150	1,20
150	200	1,50
200	250	2,00
250	300	2,50
300	350	3,00

NOTE Contour tolerances can be checked by placing a section of the profile on a scale projection of the drawing with the contour tolerance indicated on the drawing. Another possible method is the use of suitable gauge (min./max.).

4.5 Twist

Twist T shall be measured as shown in Figure 11 by placing the profile on a flat base plate, the profile resting under its own mass. As shown in Figure 11, twist is determined by measuring the maximum distance between the bottom surface of the profile and the surface of the base plate.

Tolerances shall be specified in Table 7 as a function of the width W and the length L of the profile.

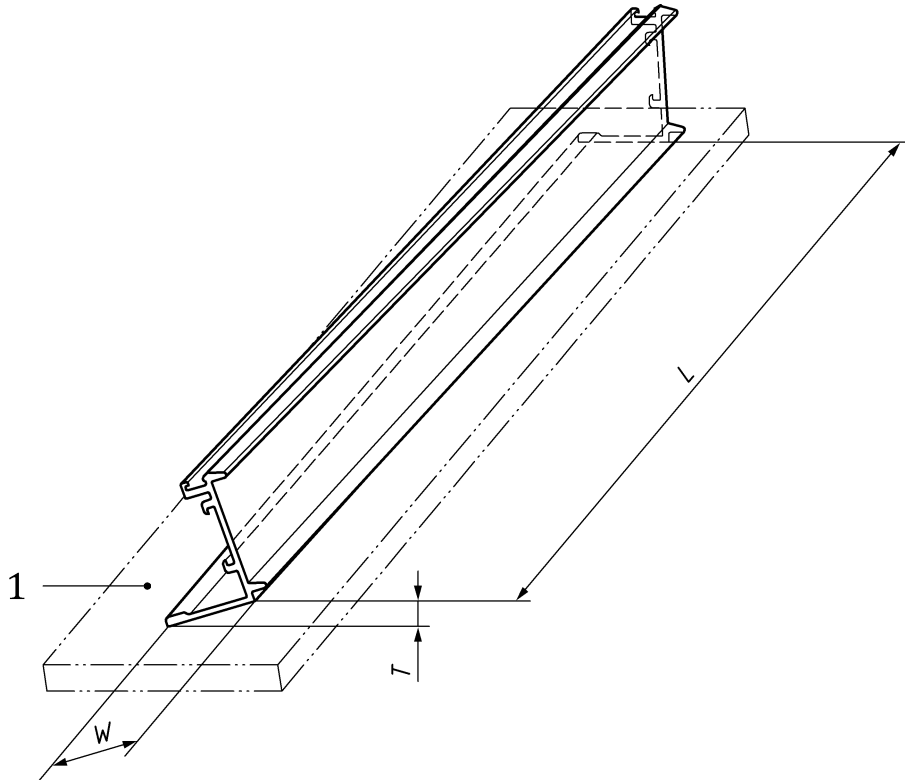

Key

1 base plate

Figure 11 — Measurement of twist

Figure 11 shows an example of a simple case of twist. There are other possibilities where the twist has to be identified differently. Some examples are given below:

- Differing positioning of the profile on the base plate such that the maximum twist has to be calculated as the sum of two separate measurements on the diagonal end positions.
- Discontinuous twist over the profile length such that the maximum twist is the difference between specific points along the length. The maximum twist in this case is not necessarily equal to the maximum distance to the base plate and should not be confused with flatness of the surfaces (combination of twist and straightness).

In case of such difficult interpretation of twist, the specific requirements and methods of measurement shall be subject to agreement between supplier and purchaser.

Table 7 — Twist tolerances

Dimensions in millimetres

Width W		Twist tolerances T for specified length L						
Over	Up to and including	$L \leq 1\,000$	$1\,000 < L \leq 2\,000$	$2\,000 < L \leq 3\,000$	$3\,000 < L \leq 4\,000$	$4\,000 < L \leq 5\,000$	$5\,000 < L \leq 6\,000$	$L > 6\,000$
-	75	1,0	1,2	1,5	1,8	2,0	2,0	Subject to agreement between supplier and purchaser
75	100	1,0	1,2	1,5	2,0	2,2	2,5	
100	125	1,0	1,5	1,8	2,2	2,5	3,0	
125	150	1,2	1,5	1,8	2,2	2,5	3,0	
150	200	1,5	1,8	2,2	2,6	3,0	3,5	
200	350	1,8	2,5	3,0	3,5	4,0	4,5	

4.6 Angularity

The deviation from a specified angle shall be measured as shown in Figures 12 and 13.

The angularity tolerances for right angles shall be as specified in Table 8 as a function of profile width W .

The maximum allowable deviation (α) for angles other than a right angle shall be $\pm 1^\circ$ (see Figure 13).

In the case of unequal side lengths the tolerances on angularity shall apply to the shorter side of the angle, i.e. the measurement should start with the longer side.

Table 8 — Tolerances for right angles

Dimensions in millimetres

Width W		Maximum allowable deviation Z from a right angle
Over	Up to and including	
-	30	0,30
30	50	0,40
50	80	0,50
80	100	0,60
100	120	0,70
120	140	0,80
140	160	0,90
160	180	1,0
180	200	1,2
200	250	1,5

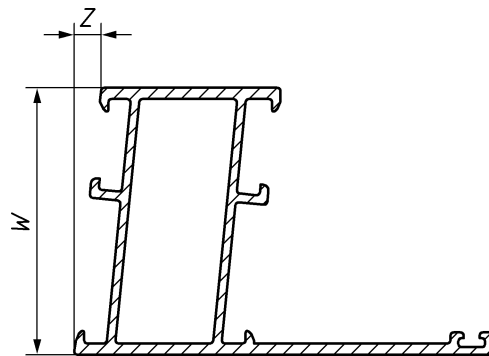


Figure 12 — Measurement of angularity of a right angle

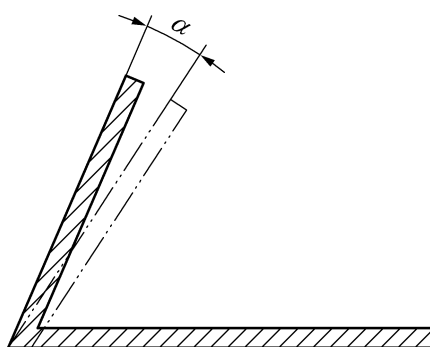


Figure 13 — Measurement of angularity of other than right angles

4.7 Corner and fillet radii

Sharp corners and fillets may be slightly rounded, unless otherwise indicated on the drawing. The maximum allowable corner and fillet radii shall be as specified in Table 9.

When a corner or fillet radius is specified, the maximum allowable deviation from this specified radius shall be as given in Table 10.

Table 9 — Maximum allowable corner and fillet radii

Dimensions in millimetres

Wall thickness A , B^a or C^a		Maximum allowable corner and fillet radii
Over	Up to and including	
-	3	0,5
3	6	0,6
6	10	0,8
10	20	1,0
20	40	1,5

^a When varying wall thicknesses are involved, the maximum allowable radius in the transition zone is a function of the greater wall thickness.

Table 10 — Maximum allowable deviations from specified corner and fillet radii

Specified radius mm	Maximum allowable deviations from specified radius
$\leq 1,0$	$\pm 0,30$ mm
$> 1,0$ to $\leq 5,0$	$\pm 0,50$ mm
$> 5,0$	± 10 %

Bibliography

- [1] EN 755-9, *Aluminium and aluminium alloys - Extruded rod/bar, tube and profiles - Part 9: Profiles, tolerances on dimensions and form*
- [2] EN 14024, *Metal profiles with thermal barrier - Mechanical performance - Requirements, proof and tests for assessment*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK