

Materials and articles in contact with foodstuffs — Insulated containers for domestic use —

Part 2: Specification for insulated bags and boxes

The European Standard EN 12546-2:2000 has the status of a
British Standard

ICS 67.250

National foreword

This British Standard is the official English language version of EN 12546-2:2000. It supersedes BS 6672-2:1986 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee CW/9, Cooking and catering containers, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled 'International Standards Correspondence Index', or using the 'Find' facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 8, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard, having been prepared under the direction of the Consumer Products and Services Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 July 2000

© BSI 07-2000

ISBN 0 580 34644 7

EUROPEAN STANDARD

EN 12546-2

NORME EUROPÉENNE

EUROPÄISCHE NORM

April 2000

ICS 67.250

English version

Materials and articles in contact with foodstuffs – Insulated containers for domestic use – Part 2: Specification for insulated bags and boxes

Matériaux et objets en contact avec les denrées alimentaires – Récipients isolants à usage domestique – Partie 2: Spécification pour les sacs et boîtes isolants

Materialien und Gegenstände in Kontakt mit Lebensmitteln – Isolierbehälter zum Gebrauch im Haushalt – Teil 2: Beschreibung für Isoliertaschen und Isolierbehälter

This European Standard was approved by CEN on 4 March 2000.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Contents

	Page
1 Scope	2
2 Definitions	2
3 Requirements	3
Figure 1 — Pictogram for insulation performance	3
4 Test methods	4
5 Marking and labelling	8

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 194, Utensils in contact with food, the Secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2000, and conflicting national standards shall be withdrawn at the latest by October 2000.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

This standard has been prepared as a series of three parts which have the following titles:

- Part 1: Specification for vacuum ware, insulated flasks and jugs
- Part 2: Specification for bags and boxes
- Part 3: Specification for thermal packs.

1 Scope

This part of EN 12546 specifies requirements for portable domestic food and/or drink insulated containers such as boxes, chests and bags, intended to contain generally wrapped or packaged foods and/or drinks in their own containers.

It does not apply to insulated bags designed specifically for short term storage and transportation of frozen foods, containers fitted with a device for production or removal of heat, containers for industrial or catering uses, or insulated flasks and jugs.

It does not deal with the requirements for materials in contact with food which are defined by legislation already in existence.

2 Definitions

For the purposes of this standard the following definitions apply

2.1 Insulated container

container, consisting of an inner container and an outer protective case with an insulant between them in order to reduce to a minimum the transfer of heat to or from the contents of the inner container.

NOTE: Insulated bags and boxes intended primarily for use with cold food and/or drinks are often referred to as cool bags or cool boxes and those intended primarily for hot food and/or drinks as hot bags or hot boxes.

2.2 Nominal capacity

declared inner usable volume in litres.

3 Requirements

3.1 Capacity

The capacity measured according to 4.1 shall not differ from the nominal capacity by more than $\pm 5\%$ for rigid containers and $\pm 10\%$ for flexible containers.

3.2 Insulation performance

The insulation performance measured according to 4.2 shall be declared to the user by means of the pictogram shown in figure 1 where the declared time in hours is stated according to the following rules:

[X hours + Y minutes] is the time measured in 4.2

for $(0 < Y \leq 30)$ min declared time (hours): X

for $(30 < Y < 60)$ min declared time (hours): X + 1

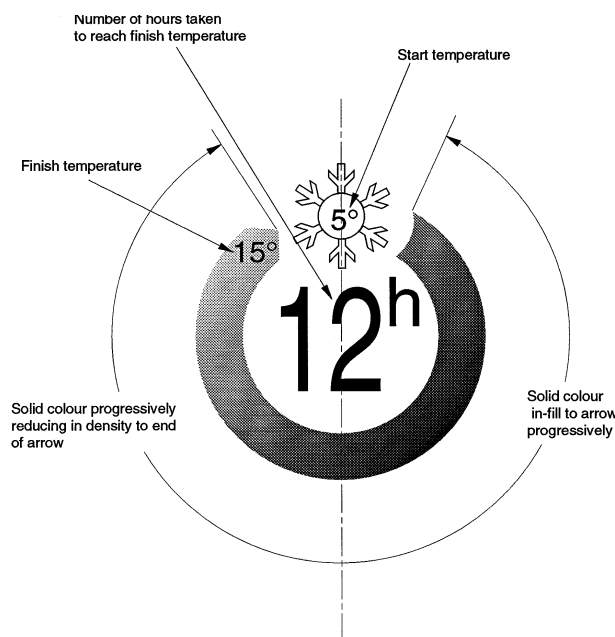


Figure 1 — Pictogram for insulation performance

3.3 Impact resistance

The impact resistance shall be such that when tested in accordance with 4.3 the insulated container shall suffer not more than superficial damage which does not impair its function.

3.4 Handle strength

The handle and its attachment when tested in accordance with 4.4 shall remain effective.

3.5 Cleaning

The inner container of the insulated container shall be designed in such a way that it shall be possible to clean it easily and completely.

Insulated containers in which the inner lining is not continuous or may allow seepage between the inner container, the insulant and the outer protective case (for example through stitched seams) shall be tested in accordance with 4.5 and shall show no traces of the coloured water used.

4 Test methods

4.1 Capacity

4.1.1 Rigid containers

4.1.1.1 Principle

The empty container is weighed, filled with water, and weighed again. The mass of water is calculated and used to estimate the actual volume.

4.1.1.2 Apparatus and test materials

4.1.1.2.1 Domestic tap water

4.1.1.2.2 **Weighing machine** capable of weighing the filled insulated container to an accuracy of $\pm 0,1$ g.

4.1.1.2.3 Level surface

4.1.1.3 Procedure

4.1.1.3.1 Ensure the container is completely empty. Remove the lid and all removable accessories and weigh the container.

4.1.1.3.2 Stand the container on the level surface, fill with water and weigh the container.

4.1.1.3.3 If the lid has a usable storage volume, invert the lid and repeat the procedure for that volume.

4.1.1.4 Expression of results

Calculate the mass of water in the insulated container, M_W , in kilograms using the equation

$$M_W = (M - M_e) + (L - L_e)$$

Where

M_e is the mass of the empty container in kilograms

M is the mass of the filled container in kilograms

L_e is the mass of the empty lid in kilograms

L is the mass of the filled lid in kilograms

Express the volume of the insulated container as M_w litres.

NOTE: This assumes one litre of water has a mass of 1 kilogram.

4.1.2 Flexible containers

4.1.2.1 Principle

The empty container under test is weighed, filled with spherical balls of polystyrene or other suitable material, and weighed again. The apparent density of the balls is measured. The mass of balls is calculated and used to estimate the actual volume.

4.1.2.2 Apparatus and test materials

4.1.2.2.1 Spherical balls of polystyrene, or other suitable material, having a diameter of between 4 mm and 8 mm.

4.1.2.2.2 Receptacles with defined inner volumes of 1 l, 5 l and 20 l.

4.1.2.2.3 Weighing machine capable of weighing the filled insulated container to an accuracy of $\pm 0,1$ g.

4.1.2.3 Procedure

4.1.2.3.1 Fill the 1 l receptacle with the balls. Lightly compress the balls, remove the balls from the container and weigh the balls. Repeat using the 5 l receptacle, and then using the 20 l receptacle.

4.1.2.3.2 Ensure the container under test is completely empty. Remove all removable accessories and weigh the container.

4.1.2.3.3 Fill the container under test with the balls, compress the balls lightly and close the container. Weigh the filled container.

4.1.2.4 Expression of results

Calculate the average density of the balls, D_a , in grams per litre using the equation

$$D_a = \frac{(B_1/1) + (B_2/5) + (B_3/20)}{3}$$

Where

B_1 is the mass of 1 l of balls in grams

B_2 is the mass of 5 l of balls in grams

B_3 is the mass of 20 l of balls in grams

Calculate the capacity of the flexible container, F_c , in litres, using the equation

$$F_c = \frac{(F - F_e)}{D_a}$$

Where

F is the mass in grams of the filled container
F_e is the mass in grams of the empty container

4.2 Insulation performance

4.2.1 Principle

An insulated container is pre-cooled with water and then half filled with cool water and the time taken for the water to rise to a given temperature is measured.

4.2.2 Apparatus and test materials

4.2.2.1 Domestic tap water at $(5 \pm 1) ^\circ\text{C}$

4.2.2.2 Thermocouple capable of measuring to an accuracy of $\pm 0,5 ^\circ\text{C}$

4.2.2.3 Clock accurate to 1 minute

4.2.3 Procedure

4.2.3.1 Ensure the container under test is completely empty.

4.2.3.2 Condition the container to be tested for 24 h at an ambient temperature of $(32 \pm 1) ^\circ\text{C}$.

4.2.3.3 Fill the empty container to half its nominal capacity by pouring the water (4.2.2.1) into it. Leave for 5 min then empty. Immediately refill the container to half its nominal capacity by pouring the water (4.2.2.1) into it. Insert the thermocouple (4.2.2.2) to approximately half the depth of the water. Close the lid and start the clock (4.2.2.3).

4.2.3.4 Maintain the container in the ambient temperature of $(32 \pm 1) ^\circ\text{C}$ and measure and record the temperature of the water in the container every 15 min until it rises to $15 ^\circ\text{C}$.

4.2.4 Expression of results

Record the time taken for the temperature to rise to $15 ^\circ\text{C}$.

4.3 Impact test

4.3.1 Principle

The container under test is loaded with sand, dropped on its base and corners and assessed for damage.

4.3.2 Apparatus and test materials

4.3.2.1 Concrete floor

4.3.2.2 Sand at $(-5 \pm 1 ^\circ\text{C})$

NOTE: The sand can be wrapped in polyethylene bags and muslin to prevent displacement of the centre of gravity.

4.3.2.3 Lifting and dropping device

4.3.3 Procedure

4.3.3.1 Fill the container with 0,25 kg of sand for every litre of nominal capacity. Close the container and leave for 1 h.

4.3.3.2 Raise the container so the point of impact is (500 ± 50) mm above the concrete floor and allow it to fall freely so that the base impacts on the concrete floor.

4.3.3.3 Repeat the test but realign the test specimen such that one corner of the base impacts the floor.

4.3.3.4 Repeat the test for the other corners of the base.

4.4 Handle strength test

4.4.1 Principle

The handle of the container is attached by means of a canvas strap to a fixed support. The container is raised and allowed to fall such that the canvas strap causes the fall to be suddenly arrested.

4.4.2 Apparatus and test materials

4.4.2.1 Sand at (-5 ± 1) °C

NOTE: The sand can be wrapped in polyethylene bags and muslin to prevent displacement of the centre of gravity.

4.4.2.2 **Canvas strap** of the same width as the handle of the container and of sufficient length to allow slack of 100 mm once attached at both ends.

4.4.2.3 **Inelastic support** fixed at a height such that container when suspended from it using the canvas strap, hangs freely.

4.4.2.4 Lifting and dropping device

4.4.3 Procedure

4.4.3.1 Fill the container with 0,5 kg of sand for every litre of capacity. Close and leave for 1 h.

4.4.3.2 Attach one end of the canvas strap to the handle of the container. Attach the other end of the canvas strap to the inelastic support. Allow the container to fall freely before being instantly arrested by means of a positive stop incorporated into the inelastic support.

4.4.3.3 Raise the container vertically through 100 mm causing the canvas strap to become slack. Release the container and allow it to fall freely such that its fall is instantly arrested by the canvas strap acting on the handles.

4.4.3.4 Repeat the procedure for a total of 10 falls.

4.5 Seepage test

4.5.1 Principle

Coloured water containing a wetting agent is introduced into the container under test which is shaken in order to wet all the internal surfaces. The container is dismantled to assess seepage of the coloured water from the inner container to the insulant.

4.5.2 Apparatus

4.5.2.1 Coloured water containing 1,0 gram per litre wetting agent and a small quantity of intensely coloured non-colour fast water soluble dye.

NOTE 1: Domestic washing up liquid is suitable for the wetting agent.

NOTE 2: Fluorescein is suitable for the dye. For ease of determination of results, a colour which contrasts with that of the construction of the container under test should be chosen.

4.5.3 Procedure

4.5.3.1 Place into the container under test a quantity of coloured water approximately equal to 25 % of its nominal capacity. Close the container.

4.5.3.2 Shake the container up and down through a distance of (200 ± 50) mm, 25 times in (15 ± 1) s.

4.5.3.3 Empty the container. Dry all exposed surfaces. If the container under test is a bag which is claimed to be washable follow the washing instructions to wash the bag and allow to dry thoroughly.

4.5.3.4 Dismantle or cut apart the container to reveal the insulant and examine the insulant between the inner container and the outer protective case to assess any seepage into the insulant.

5 Marking and labelling

5.1 The insulated container shall be legibly labelled or marked with the following:

- a) the name or identification mark of the manufacturer, distributor or vendor;
- b) the insulation performance pictogram (see 3.2);
- c) the number of this EN 12546-2;
- d) the nominal capacity (see 3.1).

5.2 Additional information shall be provided giving advice on cleaning, care, and the availability and fitting of spare and replacement parts.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.