

BS EN 13924-2:2014



BSI Standards Publication

Bitumen and bituminous binders — Specification framework for special paving grade bitumen

Part 2: Multigrade paving grade bitumens

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of EN 13924-2:2014.

The UK participation in its preparation was entrusted to Technical Committee B/510/19, Bitumen and related products.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014. Published by BSI Standards Limited 2014

ISBN 978 0 580 75655 9

ICS 75.140; 91.100.50

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2014.

Amendments issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN 13924-2

NORME EUROPÉENNE

EUROPÄISCHE NORM

March 2014

ICS 75.140; 91.100.50

English Version

Bitumen and bituminous binders - Specification framework for special paving grade bitumen - Part 2: Multigrade paving grade bitumens

Bitumes et liants bitumineux - Cadre de spécifications pour les bitumes routiers spéciaux - Partie 2: Bitumes routiers multigrades

Bitumen und bitumenhaltige Bindemittel - Anforderungsrahmenwerk für spezielle Straßenbaubitumen - Teil 2: Multigrade Straßenbaubitumen

This European Standard was approved by CEN on 4 February 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents	Page
Foreword.....	3
Introduction.....	4
1 Scope.....	5
2 Normative references.....	5
3 Terms and definitions.....	5
4 Sampling.....	6
5 Requirements and test methods.....	6
5.1 General.....	6
5.2 Properties and related test methods.....	6
5.2.1 General.....	6
5.2.2 Consistency at intermediate service temperature.....	6
5.2.3 Consistency at elevated service temperature.....	6
5.2.4 Temperature dependence of consistency.....	6
5.2.5 Brittleness at low service temperature.....	6
5.2.6 Durability – Resistance to hardening.....	7
5.2.7 Temperature dependency of mixing.....	7
5.2.8 Other properties.....	7
5.2.9 Informative properties.....	7
5.3 Release of regulated dangerous substances.....	7
5.4 Precision.....	7
6 Assessment and verification of constancy of performance - AVCP.....	9
6.1 General.....	9
6.2 Type testing.....	9
6.2.1 General.....	9
6.2.2 Test samples, testing and compliance criteria.....	10
6.2.3 Test reports.....	10
6.2.4 Shared other party results.....	10
6.3 Factory production control (FPC).....	11
6.3.1 General.....	11
6.3.2 Requirements.....	11
6.3.3 Initial inspection of factory and of FPC.....	14
6.3.4 Continuous surveillance of FPC.....	14
6.3.5 Procedure for modifications.....	15
6.3.6 One-off products, pre-production products (e.g. prototypes) and products produced in very low quantity.....	15
Annex A (normative) Calculation of the penetration index, I_p	17
Annex B (normative) Informative properties.....	19
Annex ZA (informative) Clauses of this European Standard addressing the provisions of the EC Construction Products Regulation.....	20
ZA.1 Scope and relevant characteristics.....	20
ZA.2 Procedure for AVCP of multigrade paving grade bitumens.....	21
ZA.2.1 System of attestation of conformity.....	21
ZA.2.2 Declaration of performance (DoP).....	22
ZA.2.2.1 General.....	22
ZA.2.2.2 Content.....	23
ZA.2.2.3 Example of DoP.....	24
ZA.3 CE marking and labelling.....	25
Bibliography.....	29

Foreword

This document (EN 13924-2:2014) has been prepared by Technical Committee CEN/TC 336 "Bituminous binders", the secretariat of which is held by AFNOR.


This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by September 2014 and conflicting national standards shall be withdrawn at the latest by December 2015.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA which is an integral part of this document.

This European Standard is part of a family of European Standards for bitumen as follows:

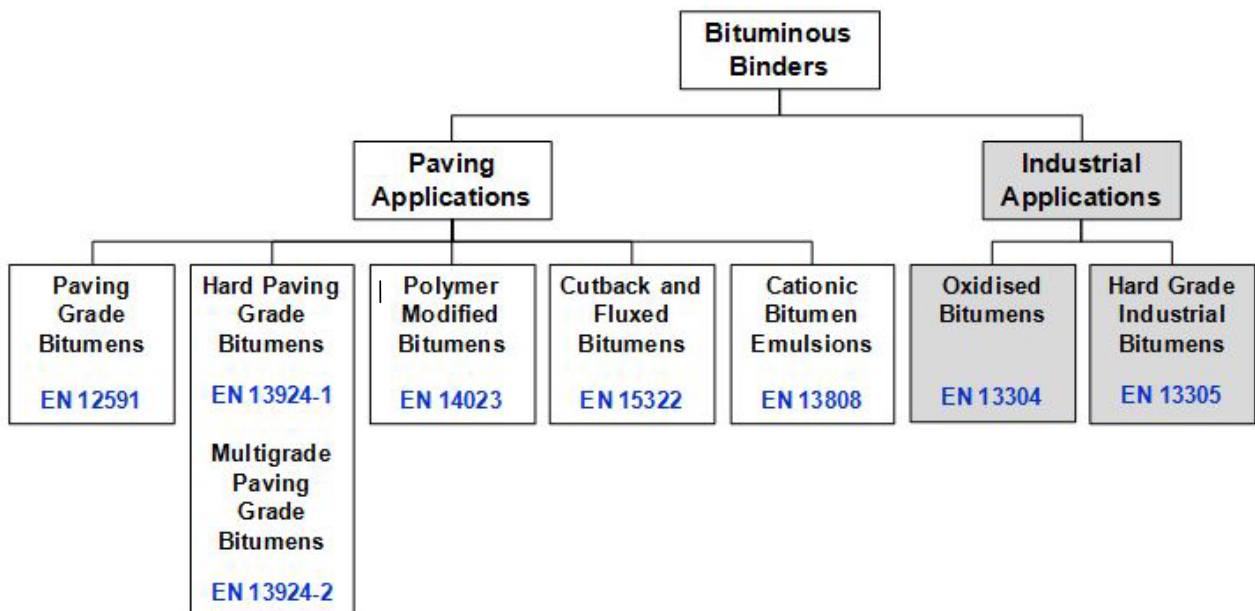

NOTE Industrial applications are not covered by mandate M/124.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

This document is closely related to EN 12591. This introduction gives information on the basis for selection of the grades defined in this document, the status of certain of the properties and test methods, and proposed development of this document.

The general principle adopted in the development of EN 12591 was to provide a range of grades suitable for the manufacture of the materials for road construction and maintenance used, and the climatic and traffic conditions encountered, in all the Member States. This document extends the range of grades specified in EN 12591, following the wider use of materials for road construction and maintenance.

This document has been based on the regional requirements identified when the process started. It is a first step in harmonising the so-called "empirical" specifications and it is intended to evaluate alternative properties and test methods to develop new specifications that are more directly performance-related. To this end, work programmes are being undertaken and the results will be considered for a future revision of this document. The progress of those work programmes are reported in CEN/TR 15352 [1], and the results will be considered for future revisions of this European Standard.

For multigrade paving grade bitumens (MG), the testing of the five essential characteristics, according to the mandate M/124, also gives an indication that its intrinsic cohesive properties are adequate for its normal use. The properties of "adhesion" and "setting ability" are indicated by tests used on the finished asphalt mixtures, EN 12697-1, EN 12697-11, EN 12697-12, EN 12697-26 (respectively [2] to [5]), rather than tests on the bitumen itself.

In certain acid modified binders the structure may change when mixed with aggregate.

Table B.1 lists informative properties which suppliers of multigrade bitumens are encouraged to produce as "Supplier Declared Values". It is hoped that the data so provided will form the basis for developing performance-related specifications in the future.

1 Scope

This document provides a framework for specifying the properties and relevant test methods for multigrade paving grade bitumens which are suitable for use in the construction and maintenance of roads, airfields and other paved areas, together with information for attestation and verification of constancy of performance. Multigrade paving grade bitumens are designated in EN 12597:2000 as special bitumens for road applications having a positive penetration index (I_p).

This document does not directly address cohesion, adhesion and settling ability, (see Clause Introduction).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 58, *Bitumen and bituminous binders - Sampling bituminous binders*

EN 1426, *Bitumen and bituminous binders - Determination of needle penetration*

EN 1427, *Bitumen and bituminous binders - Determination of the softening point - Ring and Ball method*

EN 12592, *Bitumen and bituminous binders - Determination of solubility*

EN 12593, *Bitumen and bituminous binders - Determination of the Fraass breaking point*

EN 12594, *Bitumen and bituminous binders - Preparation of test samples*

EN 12595, *Bitumen and bituminous binders - Determination of kinematic viscosity*

EN 12596, *Bitumen and bituminous binders - Determination of dynamic viscosity by vacuum capillary*

EN 12597:2000, *Bitumen and bituminous binders - Terminology*

EN 12607-1, *Bitumen and bituminous binders - Determination of the resistance to hardening under the influence of heat and air - Part 1: RTFOT method*

EN 15326 *Bitumen and bituminous binders – Measurement of density and specific gravity – Capillary-stoppered pycnometer method*

EN ISO 2592, *Determination of flash and fire points - Cleveland open cup method (ISO 2592:2000)*

EN ISO 4259, *Petroleum products - Determination and application of precision data in relation to methods of test (ISO 4259)*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 12597:2000 apply.

3.1

multigrade paving grade bitumens

multigrade paving grade bitumens are designated by stating MG and the nominal penetration range at 25 °C, followed by the softening point range (see Table 1), e.g. "MG 20/30-64/74"

4 Sampling

Samples of bulk products shall be taken as described in EN 58. Test samples shall be taken from the laboratory samples, and prepared for testing, as described in EN 12594.

5 Requirements and test methods

5.1 General

The requirements for the properties for a specific grade shall be selected from the classes given in Tables 1 and 2. The properties in Table 1 shall be specified for all multigrade paving grade bitumens. They are associated with regulatory or Health Safety and Environmental requirements. The properties in Table 2 are required to meet specific regional conditions. They are associated with regulatory or other regional requirements.

When tested by the methods given in the tables, the various multigrade paving grade bitumens shall conform to the limits specified by classes in these tables.

NOTE The TBR class has been included to facilitate selection in countries which merely wish to record a supplier's range for a particular requirement. It should not be considered as a "Class" for the purpose of regulatory marking. These values can be used as a basis for the development of future technical specifications.

The selection of classes should be made from past experience to avoid unworkable combinations.

5.2 Properties and related test methods

5.2.1 General

For specifying multigrade paving grade bitumens the appropriate class for each technical requirement is selected in turn. Different classes may be selected for different properties.

5.2.2 Consistency at intermediate service temperature

Consistency at intermediate service temperature for these multigrade paving grade bitumens shall comply with the requirements for penetration at 25 °C in Table 1.

5.2.3 Consistency at elevated service temperature

Consistency at elevated service temperature for these multigrade paving grade bitumens shall comply with the requirements for softening point Ring and Ball in Table 1.

5.2.4 Temperature dependence of consistency

Temperature dependence of consistency shall comply with the requirements for penetration index (I_p) in Table 1. Where required, multigrade paving grade bitumens shall comply also with the requirement for dynamic viscosity in Table 2.

The penetration index shall be calculated in accordance with Annex A.

5.2.5 Brittleness at low service temperature

Brittleness at low service temperature may be required to meet specific regional conditions. Where required, multigrade paving grade bitumens shall conform to the requirements for Fraass breaking point in Table 2.

5.2.6 Durability – Resistance to hardening

Durability shall be demonstrated by compliance with the required surrogate characteristics “Resistance to hardening“ of Table 1.

Resistance to hardening shall be tested after running the Rolling Thin Film Oven Test (RTFOT), EN 12607-1.

NOTE Appropriate tests and classes, for measurements on material after the hardening procedure, are given in Table 1. The choice of class may depend upon the intended use of the product.

5.2.7 Temperature dependency of mixing

Where required, multigrade paving grade bitumens shall comply also with the requirement for kinematic viscosity in Table 2.

5.2.8 Other properties

5.2.8.1 Flash point

Flash point shall be determined by the Cleveland open cup method in EN ISO 2592.

NOTE The Pensky-Martens closed cup method (see EN ISO 2719 [8]) can be used to investigate possible contamination, but is likely to give lower values.

5.2.8.2 Density

If the supplier wishes to declare the density of multigrade paving grade bitumens, it shall be determined in accordance with EN 15326.

5.2.8.3 Solubility

Solubility shall be determined on the fresh multigrade paving grade bitumens in accordance with EN 12592.

5.2.9 Informative properties

The specifications include a table of informative properties (Annex B) based on new test methods. Suppliers of multigrade paving grade bitumens are invited to supply data from these measurements to the client on a voluntary basis. It is hoped that the data so gathered will be of assistance in developing performance-related specifications in the future.

5.3 Release of regulated dangerous substances

When required, products covered by this standard shall comply with relevant regulations on dangerous substances in force in the intended place of use. In the absence of International or European test methods, manufacturers shall verify and declare the release of dangerous substances in accordance with provisions applicable in the intended place of use of the product.

NOTE An informative database covering European and national provisions on dangerous substances is available at the Construction web site on Europa accessed through <http://ec.europa.eu/enterprise/construction/cpd-ds/> .

5.4 Precision

The test methods referred to in this document include a precision statement where available. In cases of uncertainty, the procedures described in EN ISO 4259 for interpretation of the results based on test method precision shall be used.

Table 1 — Specifications for multigrade paving grade bitumens: properties applying to all multigrade paving grade bitumens^a

Property	Test method	Unit	Class			
			1	2	3	4
Penetration at 25 °C	EN 1426	0,1 mm	DV ^b	20 to 30	35 to 50	50 to 70
Softening point	EN 1427	°C	DV ^b	54 to 64	59 to 69	64 to 74
Resistance to hardening at 163 °C	EN 12607-1					
Retained penetration	EN 1426	%	DV ^b	≥ 50	≥ 60	
Increase in softening point	EN 1427	°C	DV ^b	≤ 8	≤ 10	≤ 12
Change in mass		%	≤ 0,5			
Penetration Index I_p	Annex A	°C	DV ^b	+0,1 to +1,5	+0,3 to +2,0	
Flash point	EN ISO 2592	°C		≥ 220	≥ 235	≥ 250
Solubility	EN 12592	%	TBR ^c	≥ 99,0		

^a Grades are designated by MG with the nominal penetration range followed by softening point range, e.g. MG 20/30-64/74.

^b DV: Declared Value shall mean that the manufacturer is required to provide a range of values, or limiting value(s) as part of a regulatory declaration and subsequent regulatory requirement.

^c TBR: To Be Reported may be used when there are no regulations or other regional requirements for the property in the territory of intended use, but the property has been found useful to describe multigrade paving grade bitumens.

Table 2 — Specifications for multigrade paving grade bitumens: properties associated with specific regional requirements

Property	Test method	Unit	Class					
			0	1	2	3	4	5
Fraass breaking point	EN 12593	°C	NR ^a	TBR ^b	≤ - 8	≤ - 12	≤ - 15	≤ - 17
Dynamic viscosity at 60 °C	EN 12596 ^c	Pa.s	NR ^a	TBR ^b	≥ 300	≥ 600	≥ 900	≥ 1 500
Kinematic viscosity at 135 °C	EN 12595	mm ² /s	NR ^a	TBR ^b	≥ 200	≥ 300	≥ 700	≥ 1 200

^a NR, No Requirement may be used when there are no regulations or other regional requirements for the property in the territory of intended use.

^b TBR, To Be Reported may be used when there are no regulations or other regional requirements for the property in the territory of intended use, but the property has been found useful to describe multigrade bitumens.

^c EN 13302 using a rotating spindle apparatus is an alternative test method. The reference method is EN 12596.

6 Assessment and verification of constancy of performance - AVCP

6.1 General

The compliance of multigrade paving grade bitumens with the requirements of this standard and with the performance declared by the manufacturer in the declaration of performance (DoP) shall be demonstrated by:

- Determination of the product type;
- Factory Production Control (FPC) by the manufacturer, including product assessment.

The manufacturer shall always retain the overall control and shall have the necessary means to take responsibility for the conformity of the product with its declared performance(s)

NOTE The information from AVCP can be available for audit as detailed in a manufacturer's quality plan.

6.2 Type testing

6.2.1 General

All performances related to characteristics included in this standard shall be determined when the manufacturer intends to declare the respective performances unless the standard gives provisions for declaring them without performing tests. (e.g. use of previously existing data, classified without further testing (CWFT) and conventionally accepted performance).

Assessment previously performed in accordance with the provisions of this standard, may be taken into account provided that they were made to the same or a more rigorous test method, under the same AVCP system on the same product or products of similar design, construction and functionality, such that the results are applicable to the product in question.

For the purposes of assessment, the manufacturer's products may be grouped into families, where it is considered that the results for one or more characteristics from any one product within the family are representative for the same characteristics for all products within that same family

Products may be grouped in different families for different characteristics.

With reference to the assessment method, standards should be made to allow the selection of a suitable representative sample.

In addition, the determination of the product type shall be performed for all characteristics included in the standard for which the manufacturer declares the performance:

- at the beginning of the production of a new or modified multigrade paving grade bitumen (unless a member of the same product range), or
- at the beginning of a new or modified method of production (where this may affect the stated properties); or they shall be repeated for the appropriate characteristic(s), whenever a change occurs in the multigrade paving grade bitumen design, in the raw material or in the supplier of the components, or in the method of production (subject to the definition of a family), which would affect significantly one or more of the characteristics.

Where components are used whose characteristics have already been determined, by the component manufacturer, on the basis of assessment methods of other product standards, these characteristics need not be re-assessed. The specifications of these components shall be documented.

Products bearing regulatory marking in accordance with appropriate harmonized European specifications may be presumed to have the performances declared in the declaration of performance (DoP), although this does not replace the responsibility on the multigrade paving grade bitumen manufacturer to ensure that the multigrade paving grade bitumen as a whole is correctly manufactured and its component products have the declared performance values.

6.2.2 Test samples, testing and compliance criteria

Sampling shall be carried out in accordance with Clause 4.

The results of all type tests shall be recorded, held by the manufacturer at least ten years from the date of the test or until the type test is no longer valid (whichever is the longer) and be available for inspection.

6.2.3 Test reports

The results of the determination of the product type shall be documented in test reports. All test reports shall be retained by the manufacturer for at least 10 years after the last date of production of the multigrade paving grade bitumen to which they relate.

6.2.4 Shared other party results

A manufacturer may use the results of the product type determination obtained by someone else (e.g. by another manufacturer, as a common service to manufacturers, or by a product developer), to justify his own declaration of performance regarding a product that is manufactured according to the same design (e.g. dimensions) and with raw materials, constituents and manufacturing methods of the same kind, provided that:

- the results are known to be valid for products with the same essential characteristics relevant for the product performance;
- in addition to any information essential for confirming that the product has such same performances related to specific essential characteristics, the other party who has carried out the determination of the product type concerned or has had it carried out, has expressly accepted to transmit to the manufacturer the results and the test report to be used for the latter's product type determination, as well as information regarding production facilities and the production control process that can be taken into account for FPC;

- the manufacturer using other party results accepts to remain responsible for the product having the declared performances and he also:
- ensures that the product has the same characteristics relevant for performance as the one that has been subjected to the determination of the product type, and that there are no significant differences with regard to production facilities and the production control process compared to that used for the product that was subjected to the determination of the product type, and
- keeps available a copy of the determination of the product type report that also contains the information needed for verifying that the product is manufactured according to the same design and with raw materials, constituents and manufacturing methods of the same kind.

6.3 Factory production control (FPC)

6.3.1 General

The manufacturer shall establish, document and maintain an FPC system to ensure that the products placed on the market comply with the declared performance of the essential characteristics.

The FPC system shall consist of procedures, regular inspections and tests and/or assessments and the use of the results to control raw and other incoming materials or components, equipment, the production process and the product.

All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures.

This factory production control system documentation shall ensure a common understanding of the evaluation of the constancy of performance and enable the achievement of the required product performances and the effective operation of the production control system to be checked. Factory production control therefore brings together operational techniques and all measures allowing maintenance and control of the compliance of the product with the declared performances of the essential characteristics.

In case the manufacturer has used shared product type results, the FPC shall also include the appropriate documentation as foreseen in 6.2.4.

6.3.2 Requirements

6.3.2.1 General

The manufacturer is responsible for organizing the effective implementation of the FPC system in line with the content of this product standard. Tasks and responsibilities in the production control organization shall be documented and this documentation shall be kept up-to-date.

The responsibility, authority and the relationship between personnel that manages, performs or verifies work affecting product constancy, shall be defined. This applies in particular to personnel that need to initiate actions preventing product non-constancies from occurring, actions in case of non-constancies and to identify and register product constancy problems.

Personnel performing work affecting the constancy of performance of the product shall be competent on the basis of appropriate education, training, skills and experience for which records shall be maintained.

In each factory the manufacturer may delegate the action to a person having the necessary authority to:

- identify procedures to demonstrate constancy of performance of the product at appropriate stages;
- identify and record any instance of non-constancy;

- identify procedures to correct instances of non-constancy.

The manufacturer shall draw up and keep up-to-date documents defining the factory production control. The manufacturer's documentation and procedures should be appropriate to the product and manufacturing process. The FPC system should achieve an appropriate level of confidence in the constancy of performance of the product. This involves:

- the preparation of documented procedures and instructions relating to factory production control operations, in accordance with the requirements of the technical specification to which reference is made;
- the effective implementation of these procedures and instructions;
- the recording of these operations and their results;
- the use of these results to correct any deviations, repair the effects of such deviations, treat any resulting instances of non-conformity and, if necessary, the FPC to rectify the cause of non-constancy of performance.

Where subcontracting takes place, the manufacturer shall retain the overall control of the product and ensure that he receives all the information that is necessary to fulfil his responsibilities according to this European Standard.

If the manufacturer has part of the product designed, manufactured, assembled, packed, processed and/or labelled by subcontracting, the FPC of the subcontractor may be taken into account, where appropriate for the product in question.

The manufacturer who subcontracts all of his activities may in no circumstances pass the above responsibilities on to a subcontractor.

Manufacturers having an FPC system, which complies with EN ISO 9001 and which addresses the provisions of the present European Standard are considered as satisfying the FPC requirements of the EC Regulation 305/2011.

6.3.2.2 Equipment

6.3.2.2.1 Testing

All weighing, measuring and testing equipment shall be calibrated and regularly inspected according to documented procedures, frequencies and criteria.

6.3.2.2.2 Manufacturing

All equipment used in the manufacturing process shall be regularly inspected and maintained to ensure use, wear or failure does not cause inconsistency in the manufacturing process. Inspections and maintenance shall be carried out and recorded in accordance with the manufacturer's written procedures and the records retained for the period defined in the manufacturer's FPC procedures.

6.3.2.2.3 Raw materials and components

The specifications of all incoming raw materials and components shall be documented, as shall the inspection scheme for ensuring their compliance.

6.3.2.2.4 Traceability and marking

Individual product batches shall be identifiable and traceable with regard to their production origin. The manufacturer shall have written procedures ensuring that processes related to affixing traceability information

and/or markings are inspected regularly. Compliance with 7.5.3 of EN ISO 9001:2008 should be deemed to satisfy the requirements of this sub-clause.

- The information to be provided with the delivery note shall, as a minimum, include the last two digits of the year in which it was first affixed, the name and the registered address of the manufacturer, or the identifying mark allowing identification of the name and address of the manufacturer easily and without any ambiguity, the unique identification code of the product type, the reference number of the declaration of performance, the dated reference to the harmonized technical specification applied, the identification number of the notified body, and the intended use as laid down in the harmonized technical specification applied.

6.3.2.2.5 Controls during manufacturing process

The manufacturer shall plan carry out production under controlled conditions.

6.3.2.2.6 Product testing and evaluation

The manufacturer shall establish procedures to ensure that the stated values of all the characteristics are maintained. The characteristics and the means of control are:

- all characteristics shall be subject to type testing a minimum of once per year;
- routine control of product quality shall be on a basis of checks, of a type and a frequency to be defined and documented, to ensure that properties do not change significantly from those subject to type testing.

The tests for consistency at intermediate and elevated service temperatures, and for durability, shall be carried out on a representative sample of product for supply to customers.

Where batch production is carried out, the sample should be taken from the batch, which is considered as the quantity of bitumen produced and stored in one tank once the production run into tank has been completed. The batch is considered to remain the same as long as no new production has been added.

In case of loading through an in-line blender, the routine quality control may be carried out on the feeder tanks and a procedure for checking the performance of the blender shall be in place.

The appropriate testing frequencies vary with individual supply facilities, throughput and processes. Minimum frequencies shall be:

- consistency at intermediate temperature: daily; if product is supplied directly from a tank that has not received new production then the minimum test frequency may be extended to a batch;
- consistency at elevated service temperatures: monthly;
- durability, brittleness at low service temperature and dynamic viscosity: annually.

6.3.2.2.7 Non-complying products

The manufacturer shall have written procedures which specify how non-complying products shall be dealt with. Any such events shall be recorded as they occur and these records shall be kept for the period defined in the manufacturer's written procedures.

Where the product fails to satisfy the acceptance criteria, the provisions for non-complying products shall apply, the necessary corrective action(s) shall immediately be taken and the products or batches not complying shall be isolated and properly identified.

Once the fault has been corrected, the test or verification in question shall be repeated.

The results of controls and tests shall be properly recorded. The product description, date of manufacture, test method adopted, test results and acceptance criteria shall be entered in the records under the signature of the person responsible for the control/test.

With regard to any control result not meeting the requirements of this European Standard, the corrective measures taken to rectify the situation (e.g. a further test carried out, modification of manufacturing process, throwing away or putting right of product) shall be indicated in the records.

6.3.2.2.8 Corrective actions

The manufacturer shall have documented procedures that instigate action to eliminate the cause of non-conformities in order to prevent recurrence. Compliance with 8.3 of EN ISO 9001:2008 should be deemed to satisfy the requirements of this sub-clause.

6.3.2.2.9 Handling, storage and packaging

The manufacturer shall have procedures providing methods of product handling and shall provide suitable storage areas preventing damage or deterioration. Compliance with 8.5.3 of EN ISO 9001:2008 should be deemed to satisfy the requirements of this sub-clause.

6.3.3 Initial inspection of factory and of FPC

Initial inspection of factory and of FPC shall be carried out when the production process has been finalised and in operation. The factory and FPC documentation shall be assessed to verify that the requirements of 6.3.2 are fulfilled.

During the inspection it shall be verified:

- a) that all resources necessary for the achievement of the product characteristics included in this European Standard are in place and correctly implemented, and
- b) that the FPC-procedures in accordance with the FPC documentation are followed in practice, and
- c) that the product complies with the product type samples, for which compliance of the product performance to the DoP has been verified.

All locations where final assembly or at least final testing of the relevant product is performed shall be assessed to verify that the above conditions a) to c) are in place and implemented. If the FPC system covers more than one product, production line or production process, and it is verified that the general requirements are fulfilled when assessing one product, production line or production process, then the assessment of the general requirements does not need to be repeated when assessing the FPC for another product, production line or production process.

All assessments and their results shall be documented in the initial inspection report.

6.3.4 Continuous surveillance of FPC

Surveillance of the FPC shall be undertaken once per year. The surveillance of the FPC shall include a review of the FPC test plan(s) and production processes(s) for each product to determine if any changes have been made since the last assessment or surveillance. The significance of any changes shall be assessed.

In the case of a manufacturer operating more than one production site under the same FPC, then sampling of the sites should be applied using the IAF rules (IAF guidance on application of ISO/IEC guide 62, annex 3, Multisite Certification).

The sample of the sites to be visited during each surveillance audit could be determined before and/or during the surveillance visit based on information gathered during the visit. Minor sites doing only mixing of CE marked products may be audited from the main site controlling the minor site. All the production sites shall be visited within a period of 3 years.

Checks shall be made to ensure that the test plans are still correctly implemented and that the production equipment is still correctly maintained and calibrated at appropriate time intervals.

The records of tests and measurement made during the production process and to finished products shall be reviewed to ensure that the values obtained still correspond with those values for the samples submitted to the determination of the product type and that the correct actions have been taken for non-compliant products.

6.3.5 Procedure for modifications

If modifications are made to the product, production process or FPC system that could affect any of the product characteristics declared according to this standard, then all the characteristics for which the manufacturer declares performance, which may be affected by the modification, shall be subject to the determination of the product type, as described in 6.2.1.

Where relevant, a re-assessment of the factory and of the FPC system shall be performed for those aspects, which may be affected by the modification.

All assessments and their results shall be documented in a report.

6.3.6 One-off products, pre-production products (e.g. prototypes) and products produced in very low quantity

The multigrade paving grade bitumens produced as a one-off, prototypes assessed before full production is established, and products produced in quantities of less than 100 tonnes per year shall be assessed as follows.

For type assessment, the provisions of 6.2.1, 3rd paragraph apply, together with the following additional provisions:

- in case of prototypes, the test samples shall be representative of the intended future production and shall be selected by the manufacturer;
- on request of the manufacturer, the results of the assessment of prototype samples may be included in a certificate or in test reports issued by the involved third party.

The FPC system of one-off products and products produced in very low quantities shall ensure that raw materials and/or components are sufficient for production of the product. The provisions on raw materials and/or components shall apply only where appropriate. The manufacturer shall maintain records allowing traceability of the product.

For prototypes, where the intention is to move to series production, the initial inspection of the factory and FPC shall be carried out before the production is already running and/or before the FPC is already in practice. The FPC documentation and the factory shall be assessed

In the initial assessment of the factory and FPC it shall be verified:

- that all resources necessary for the achievement of the product characteristics included in this European Standard will be available, and
- that the FPC-procedures in accordance with the FPC-documentation will be implemented and followed in practice, and

- that procedures are in place to demonstrate that the factory production processes can produce a product complying with the requirements of this European Standard and that the product will be the same as the samples used for the determination of the product type, for which compliance with this European Standard has been verified.

Once series production is fully established, the provisions of 6.3 shall apply.

Annex A (normative)

Calculation of the penetration index, I_p

A.1 Scope

This annex specifies the procedure to be used for calculating the penetration index, I_p , of multigrade paving grade bitumens when required, e.g. in relation to the specification for resistance to hardening given in Table 1.

A.2 Term and definition

For the purposes of this annex, the following definition applies:

A.2.1

penetration index, I_p

indication of the thermal susceptibility of a bituminous binder

A.3 Principle

The penetration index, I_p is calculated from the values of penetration at 25 °C, 100 g, 5 s, determined in accordance with EN 1426, and the softening point, determined in accordance with EN 1427.

NOTE 1 It is based on the following hypothesis of Pfeiffer and Van Doormael:

- a) At the temperature of the softening point, the penetration of a bitumen is $(800 \times 0,1)$ mm.
- b) When the logarithm (base 10) of penetration is plotted against temperature, a straight line is obtained, the slope A of which is defined by:

$$A = \frac{(20 - I_p)}{(10 + I_p)} \times \frac{1}{50} \quad (\text{A.1})$$

NOTE 2 A penetration index of zero is attributed to a bitumen with a penetration at 25 °C of $(200 \times 0,1)$ mm and a softening point of 40 °C.

A.4 Determination

Calculate the I_p from the following formula:

$$I_p = \frac{20 \times t_{RaB} + 500 \times \lg P - 1952}{t_{RaB} - 50 \times \lg P + 120} \quad (\text{A.2})$$

where:

- t_{RaB} is the softening point, in degrees Celsius;
 $\lg P$ is the logarithm (base 10) of the penetration at 25 °C (in 0,1 mm)

A.5 Expression of results

Report the penetration index as the value, calculated according to A.4, rounded to the nearest 0,1.

A.6 Precision

A.6.1 Repeatability

The difference between two successive test results, obtained by the same operator with the same apparatus under constant operating conditions on identical test material would exceed 0,3 in only one case in twenty.

A.6.2 Reproducibility

The difference between two single and independent results obtained by different operators working in different laboratories on identical test material would exceed 0,5 in only one case in twenty.

Annex B (normative)

Informative properties

Table B.1 lists informative properties which suppliers of multigrade paving grade bitumens are encouraged to produce as “To Be Reported”. It is hoped that the data so provided will be of assistance in developing performance-related specifications in the future.

Table B.1 — Informative properties

Property	Unit	Test Method	Data
$T_{S=300 \text{ MPa}}$, by Bending Beam Rheometer (BBR)	°C	EN 14771 [7]	TBR
$T_{m=0,3}$, by Bending Beam Rheometer (BBR)	°C	EN 14771 [7]	TBR
G^* at 15 °C and 10 Hz, by Dynamic Shear Rheometer (DSR) ^a	MPa	EN 14770 [6]	TBR
$T_{G^*/\sin \delta = 1 \text{ kPa}}$ at 1,6 Hz, by Dynamic Shear Rheometer (DSR) ^a	°C	EN 14770 [6]	TBR
Resistance to hardening after PAV or RCAT			
Retained Penetration	%	EN 14769 [9] or	TBR
Increase in Softening Point	°C	EN 15323 [10]	TBR
Change in mass (absolute value)	%		TBR
^a or any other rheometer able to measure a complex modulus.			

Annex ZA (informative)

Clauses of this European Standard addressing the provisions of the EC Construction Products Regulation

ZA.1 Scope and relevant characteristics

This European Standard has been prepared under Mandate M/124 "Road Construction Products" given to CEN by the European Commission and the European Free Trade Association.

If this European Standard is cited in the Official Journal of the European Union (OJEU), the clauses of this standard, shown in this annex, are considered to meet the provisions of the relevant mandate, under Regulation (EU) 305/2011.

This annex deals with the CE marking of multigrade paving grade bitumens intended for the uses indicated in Table ZA.1 and shows the relevant clauses applicable.

This annex has the same scope as Clause 1 of this standard related to the aspects covered by the mandate and is defined by Table ZA.1.

Table ZA.1 — Relevant clauses for multigrade paving grade bitumens from Table 1 and Table 2

Product(s): Multigrade paving grade bitumens			
Intended use(s): For construction and maintenance of roads, airfields and other paved areas			
Essential Characteristic	Clause(s) in this and other European Standard(s) related to essential characteristics	Regulatory classes	Notes
Consistency at intermediate service temperature	5.2.2	None	Class
Consistency at elevated service temperature	5.2.3	None	Class (declared range)
Temperature dependence of consistency	5.2.4	None	Class
Brittleness at low service temperature	5.2.5	None	Class
Durability of the consistency at intermediate and elevated service temperatures	5.2.6	None	Class
Dangerous regulated substances	5.3	None	

The declaration of the product performance related to certain essential characteristics is not required in those Member States (MS) where there are no regulatory requirements on these essential characteristics for the intended use of the product.

In this case, manufacturers placing their products on the market of these MS are not obliged to determine nor declare the performance of their products with regard to these characteristics and the option "No Performance Determined" (NPD) in the information accompanying the CE marking and in the declaration of performance (see ZA.3) may be used for those essential characteristics.

ZA.2 Procedure for AVCP of multigrade paving grade bitumens

ZA.2.1 System of attestation of conformity

The AVCP systems of multigrade paving grade bitumens indicated in Table ZA.1 established by EC Decision 98/601/EC of 13 October 1998 under OJ L287 and amended by decision 2001/596/EC of 8 January 2001 published 2 August 2001 under OJ L209 are shown in Table ZA.2 for the indicated intended use and relevant levels or classes of performance.

Table ZA.2 — System of AVCP

Product	Intended use	Level(s) or class(es) of performance	AVCP system
Bitumen	For road construction and surface treatment of roads	None	2+
System 2+: See EC Regulation 305/2011 (CPR) Annex V, 1.3 including certification of the factory production control by a notified production control certification body on the basis of initial inspection of the manufacturing plant and of factory production control as well as of continuous surveillance, assessment and evaluation of factory production control.			

NOTE The product and intended use defined in Table ZA.2 are as cited in the Commission Decision. The Multigrade paving grade bitumen are considered as part of the general product family 'Bitumen'.

The AVCP of the multigrade paving grade bitumens in Table ZA.1 shall be according to the AVCP procedures indicated in Table ZA.3 resulting from application of the clauses of this or other European Standard indicated therein. The content of tasks of the notified body shall be limited to those essential characteristics as provided for, if any, in Annex III of the relevant mandate and to those that the manufacturer intends to declare.

Table ZA.3 — Assignment of AVCP tasks for multigrade paving grade bitumens under system 2+

Tasks		Content of the task	AVCP clauses to apply
Tasks for the manufacturer	Factory Production Control (FPC)	Parameters related to essential characteristics of Table ZA.1 relevant for the intended use which are declared	6.3
	Determination of product type on the basis of type testing (including sampling), type calculation, tabulated values or descriptive documentation of the product	All the relevant characteristics of Table ZA.1	6.2
	Further testing of samples taken at factory according to the prescribed test plan	Essential characteristics of Table ZA.1 relevant for the intended use which are declared	6.2
Tasks for the notified production control certification body	Initial inspection of factory and of FPC	Parameters related to all essential characteristics of Table ZA.1 relevant for the intended use which are declared, namely: <ul style="list-style-type: none"> - <i>Consistency at intermediate service temperature,</i> - <i>Consistency at elevated service temperature,</i> - <i>Temperature dependence of consistency</i> - <i>Brittleness at low service temperature</i> - <i>Durability of the consistency at intermediate and elevated service temperatures</i> Documentation of the FPC	6.3
	Continuous surveillance, assessment and evaluation of FPC	Parameters related to all essential characteristics of Table ZA.1 relevant for the intended use which are declared, namely: <ul style="list-style-type: none"> - <i>Consistency at intermediate service temperature,</i> - <i>Consistency at elevated service temperature,</i> - <i>Temperature dependence of consistency</i> - <i>Brittleness at low service temperature</i> - <i>Durability of the consistency at intermediate and elevated service temperatures</i> Documentation of the FPC	6.3

ZA.2.2 Declaration of performance (DoP)

ZA.2.2.1 General

The manufacturer draws up the DoP and affixes the CE marking on the basis of the different AVCP systems set out in Annex V of the EC Regulation 305/2011:

In case of products under system 2+:

- the determination of the product-type on the basis of type testing (including sampling), type calculation, tabulated values or descriptive documentation of the product; the factory production control and the testing of samples taken at the factory according to the prescribed test plan, carried out by the manufacturer, and
- the certificate of conformity of the factory production control, issued by the notified production control certification body on the basis of:
 - initial inspection of the manufacturing plant and of factory production control, and
 - continuous surveillance, assessment and evaluation of factory production control.

ZA.2.2.2 Content

The model of the DoP is provided in Annex III of the EC Regulation 305/2011.

According to this Regulation, the DoP shall contain, in particular, the following information:

- the reference of the product-type for which the declaration of performance has been drawn up;
- the AVCP system or systems of the construction product, as set out in Annex V of the CPR;
- the reference number of the harmonized standard which has been used for the assessment of each essential characteristic;
- where applicable, the reference number of the Specific Technical Documentation used and the requirements with which the manufacturer claims the product complies.

The DoP shall in addition contain:

- the intended use or uses for the construction product, in accordance with the applicable harmonized technical specification;
- the list of essential characteristics, as determined in the harmonized technical specification for the declared intended use or uses;
- the performance of at least one of the essential characteristics of the construction product, relevant for the declared intended use or uses;
- where applicable, the performance of the construction product, by levels or classes, or in a description, if necessary based on a calculation in relation to its essential characteristics determined in accordance with the Commission determination regarding those essential characteristics for which the manufacturer shall declare the performance of the product when it is placed on the market or the Commission determination regarding threshold levels for the performance in relation to the essential characteristics to be declared;
- the performance of those essential characteristics of the construction product which are related to the intended use or uses, taking into consideration the provisions in relation to the intended use or uses where the manufacturer intends the product to be made available on the market;
- for the listed essential characteristics for which no performance is declared, the letters "NPD" (No Performance Determined);

Regarding the supply of the DoP, Article 7 of the EC Regulation 305/2011 applies.

The information referred to in Article 31 or, as the case may be, in Article 33 of EC Regulation 1907/2006, (REACH) shall be provided together with the DoP.

ZA.2.2.3 Example of DoP

The following gives an example of a filled-in DoP for a multigrade paving grade bitumen.

DECLARATION OF PERFORMANCE

No. 001CPR2013-07-14

- 1) Unique identification code of the product-type:

Multigrade paving grade bitumen MG 20/30 – 64/74

- 2) Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4):

Multigrade paving grade bitumen MG 20/30 – 64/74

- 3) Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:

Construction and maintenance of roads, airfields and other paved areas

- 4) Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5):

AnyCo SA,

PO Box 21

B-1050 Brussels, Belgium

Tel. +32 987 654 321

Fax: +32 123 456 789

Email: anyco.sa@provider.be

- 5) Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):

Anyone Ltd

Flower Str. 24

West Hamfordshire

UK-589645 United Kingdom

Tel. +44 987 654 321

Fax: +44 123 456 789

e-mail: anyone.ltd@provider.uk

- 6) System of assessment and verification of constancy of performance of the construction product as set out in CPR, Annex V:

System 2+

- 7) In case of the declaration of performance concerning a construction product covered by a harmonized standard:

Notified factory production control certification body No. 5678 performed the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of conformity of the factory production control.

- 8) Declared performance

Essential characteristics	Performance	Harmonized technical specification
Consistency at intermediate service temperature	20 to 30 0,1 mm (Class 3)	EN 13924-2: 2014
Consistency at elevated service temperature	64 °C to 74 °C (Class 4)	
Durability of the consistency at intermediate and elevated service temperatures	≥ 50 % (Class 2) ≤ 8 °C (Class 2) < 0,5 % (Class 1)	
Brittleness at low service temperature	NPD	
Temperature dependency of consistency	0,1 to 1,5 (Class 2)	
<i>l_p</i> Dynamic viscosity	NPD	
Regulated dangerous substances	NPD	

- 9) The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8). This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4).

Signed for and on behalf of the manufacturer by: name and function).....(place and date of issue) (signature)

ZA.3 CE marking and labelling

The CE marking symbol shall be in accordance with the general principles set out in Article 30 of EC Regulation 765/2008 and shall be affixed visibly, legibly and indelibly to the packaging or with the delivery note or to the accompanying commercial documents.

The CE marking shall be followed by:

- the last two digits of the year in which it was first affixed,
- the name and the registered address of the manufacturer, or the identifying mark allowing identification of the name and address of the manufacturer easily and without any ambiguity,

- the unique identification code of the product-type,
- the reference number of the declaration of performance,
- the level or class of the performance declared,
- the dated reference to the harmonized technical specification applied,
- the identification number of the notified body,
- the intended use as laid down in the harmonized technical specification applied.

The CE marking shall be affixed before the construction product is placed on the market. It may be followed by a pictogram or any other mark notably indicating a special risk or use.

The "No Performance Determined" (NPD) option may be used when and where the characteristic, for a given intended use, is not subject to regulatory requirements in the Member State of destination.

Figures ZA.1, ZA.2 and ZA.3 give examples of the information related to products subject to AVCP under system 2+.

Figure ZA.1 gives an example of CE marking information to be affixed to the packaging or to be given on a Delivery Note

Figures ZA.2 and ZA.3 give examples of the information to be given on the commercial documents.



 5678	CE marking, consisting of the "CE" symbol
AnyCo Ltd , P.O. Box 21, B – 1050 13	Identification number of the notified production control certification body
 001CPR2013-07-14	Name and registered address of the manufacturer or identifying mark Last two digits of year in which the CE marking was affixed
 EN 13924-2:2014	Reference number of the DoP Dated reference of European Standard applied, as referenced in OJEU
<i>Multigrade bitumen for paving MG 20/30 - 64/74 (2-2-2)</i>	Unique identification code of the product type, intended use as laid down in the European Standard applied and level or class of the performance declared

Figure ZA.1 — Example of CE marking information of products under AVCP system 2+ to be affixed to the packaging or to be given on a Delivery Note


NOTE 1 It is essential that product designation allows an unambiguous tracing to the corresponding CE marking information given on commercial documents

NOTE 2 If Class 1 (DV) is chosen, the limiting value or range needs to be declared.

 5678
AnyCo Ltd, P.O. Box 21, B – 1050 13 001CPR2013-07-14
EN 13924-2:2014 <i>Multigrade bitumen for paving: MG 35/50-54/64</i> Intended to be used for Paving Penetration at 25 °C Class 3 ((35 - 50) x 0,1 mm) Softening point Class 2 ((54 - 64) °C) Penetration index..... Class 2 (+0,1 - +1,5) Resistance to hardening at 163 °C (EN 12607-1) Retained penetration at 25 °C.....Class 2 Increase in softening point Class 2

- CE marking, consisting of the "CE" symbol
- Identification number of the notified production control certification body
- Name and registered address of the manufacturer or identifying mark
- Last two digits of year in which the CE marking was affixed
- Reference number of the DoP
- Dated reference of European Standard applied, as referenced in OJEU
- Unique identification code of the product type
- Intended use of the product as laid down in the European Standard applied.
- Level or class of the performance declared

Figure ZA.2— Example of CE marking information and values of products under AVCP system 2+

 5678
AnyCo Ltd , P.O. Box 21, B – 1050 13 001CPR2013-07-14
EN 13924-2:2014 <i>Multigrade bitumen for paving: MG 35/50-54/64</i> Intended to be used for Paving Penetration at 25 °C (35 to 50) x 0,1 mm Softening point (54 to 64) °C Penetration index+0,1 to +1,5 Resistance to hardening at 163 °C (EN 12607-1) Retained penetration at 25 °C ≥ 50 % Increase in softening point ≤ 8 °C Fraass Breaking Point ≤ - 8 °C Dynamic Viscosity at 60 °C ≥ 600 Pa.s

CE marking, consisting of the "CE" symbol

Identification number of the notified production control certification body

Name and registered address of the manufacturer or identifying mark

Last two digits of year in which the CE marking was affixed

Reference number of the DoP

Dated reference of European Standard applied, as referenced in OJEU

Unique identification code of the product type

Intended use of the product as laid down in the European Standard applied.

Level or class of the performance declared

Figure ZA.3— Example of CE marking information with associated specific regional requirements of products under AVCP system 2+

Bibliography

- [1] CEN/TR 15352, *Bitumen and bituminous binders - Development of performance-related specifications: status report 2005*
- [2] EN 12697-1, *Bituminous mixtures - Test methods for hot mix asphalt - Part 1: Soluble binder content*
- [3] EN 12697-11, *Bituminous mixtures - Test methods for hot mix asphalt - Part 11: Determination of the affinity between aggregate and bitumen*
- [4] EN 12697-12, *Bituminous mixtures - Test methods for hot mix asphalt - Part 12: Determination of the water sensitivity of bituminous specimens*
- [5] EN 12697-26, *Bituminous mixtures - Test methods for hot mix asphalt - Part 26: Stiffness*
- [6] EN 14770, *Bitumen and bituminous binders - Determination of complex shear modulus and phase angle - Dynamic Shear Rheometer (DSR)*
- [7] EN 14771, *Bitumen and bituminous binders - Determination of the flexural creep stiffness - Bending Beam Rheometer (BBR)*
- [8] EN ISO 2719, *Determination of flash point - Pensky-Martens closed cup method (ISO 2719:2002)*
- [9] EN 14769, *Bitumen and bituminous binders - Accelerated long-term ageing conditioning by a Pressure Ageing Vessel (PAV)*
- [10] EN 15323, *Bitumen and bituminous binders - Accelerated long-term ageing/conditioning by the rotating cylinder method (RCAT)*
- [11] EN 13302, *Bitumen and bituminous binders - Determination of dynamic viscosity of bituminous binder using a rotating spindle apparatus*
- [12] EN ISO 9001:2008, *Quality management systems - Requirements (ISO 9001:2008)*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™