

Glass in building — Heat soaked thermally toughened soda lime silicate safety glass —

Part 2: Evaluation of conformity/Product standard

The European Standard EN 14179-2:2005 has the status of a
British Standard

ICS 81.040.20

National foreword

This British Standard is the official English language version of EN 14179-2:2005.

The UK participation in its preparation was entrusted by Technical Committee B/520, Glass and glazing in building, to Subcommittee B/520/1, Glass and glazing in building — Basic and transformed glass products, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 34, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 12 July 2005

© BSI 12 July 2005

ISBN 0 580 46115 7

EUROPEAN STANDARD

EN 14179-2

NORME EUROPÉENNE

EUROPÄISCHE NORM

May 2005

ICS 81.040.20

English version

Glass in building - Heat soaked thermally toughened soda lime silicate safety glass - Part 2: Evaluation of conformity/Product standard

Verre dans la construction - Verre de silicate sodocalcique de sécurité trempé et traité Heat Soak - Partie 2: Evaluation de la conformité/Norme de produit

Glas im Bauwesen - Heißgelagertes thermisch vorgespanntes Kalknatron-Einscheibensicherheitsglas - Teil 2: Konformitätsbewertung/Produktnorm

This European Standard was approved by CEN on 24 March 2005.

CEN members are bound to comply with the CEN/GENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

	Page
Foreword.....	3
1 Scope.....	4
2 Normative references	4
3 Terms and definitions.....	5
4 Requirements	5
4.1 Product description.....	5
4.2 Conformity with the definition of heat soaked thermally toughened soda lime silicate safety glass	6
4.3 Determination of the characteristic's performances	6
4.3.1 Characteristics of heat soaked thermally toughened soda lime silicate safety glass	6
4.3.2 Determination of characteristics of heat soaked thermally toughened soda lime silicate safety glass products.....	7
4.4 Durability.....	9
4.5 Dangerous substances	10
5 Evaluation of conformity.....	10
5.1 General	10
5.2 Initial type testing of the product (see 5.1, b)).....	11
5.2.1 General	11
5.2.2 Initial type testing of heat soaked thermally toughened soda lime silicate safety glass	12
5.2.3 Initial type testing of characteristic's performances	14
5.3 Factory production control and inspection of samples in accordance with a prescribed test plan (see 5.1, a 1)) and a 2)).....	14
5.4 Initial inspection of factory and of factory production control (see 5.1, 1 c)).....	15
5.5 Continuous surveillance and assessment of the factory production control (see 5.1, a 3))	15
6 Marking and/or labelling	16
6.1 General	16
6.2 Product marking	16
6.3 Product characteristics.....	16
6.4 "Characteristics/performance identification paper"	16
Annex A (normative) Factory Production Control	17
Annex B (normative) Tests for factory production control	23
Annex C (informative) Provisions for voluntary involvement of third party(ies)	25
Annex ZA (informative) Clauses of this European Standard addressing the provisions of EU Construction Products Directive	26
Bibliography	34

Foreword

This European Standard (EN 14179-2:2005) has been prepared by Technical Committee CEN/TC 129 "Glass in building", the secretariat of which is held by IBN/BIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2005, and conflicting national standards shall be withdrawn at the latest by November 2005.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

No existing European Standard is superseded.

This Part of the European Standard does not stand alone, it is a part of one standard with the general title *Glass in building – Heat soaked thermally toughened soda lime silicate safety glass*:

- *Part 1: Definition and description*
- *Part 2: Evaluation of conformity/Product standard*

This European Standard includes a Bibliography.

This European Standard contains other aspects of importance of trade.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

1 Scope

This European Standard specifies requirements, the evaluation of conformity and the factory production control of flat heat soaked thermally toughened soda lime silicate safety glass for use in buildings.

NOTE For glass products with electrical wiring or connections for, e.g. alarm or heating purposes, other directives, e.g. Low Voltage Directive, may apply.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 356, *Glass in building – Security glazing – Testing and classification of resistance against manual attack*

EN 410, *Glass in building – Determination of luminous and solar characteristics of glazing*

EN 572-1, *Glass in building – Basic soda lime silicate glass products – Part 1: Definition and general physical and mechanical properties*

EN 572-2, *Glass in building – Basic soda lime silicate glass products – Part 2: Float glass*

EN 572-4, *Glass in building – Basic soda lime silicate glass products – Part 4: Drawn sheet glass*

EN 572-5, *Glass in building – Basic soda lime silicate glass products – Part 5: Patterned glass*

EN 673, *Glass in Building – Determination of thermal transmittance (U value) – Calculation method*

EN 1063, *Glass in Building – Security glazing – Testing and classification of resistance against bullet attack*

EN 1096-1, *Glass in building – Coated glass – Part 1: Definitions and classification*

EN 1096-2, *Glass in building – Coated glass – Part 2: Requirements and test methods for class A, B and S coatings*

EN 1096-3, *Glass in building – Coated glass – Part 3: Requirements and test methods for class C and D coatings*

EN 1288-3, *Glass in building – Determination of bending strength of glass – Part 3: Test with specimen supported at two points (four point bending)*

EN 12600, *Glass in building – Pendulum test – Impact test method and classification for flat glass*

EN 12758, *Glass in building – Glazing and airborne sound insulation – Product descriptions and determination of properties*

EN 12898, *Glass in building – Determination of the emissivity*

EN 13501-1, *Fire classification of construction products and building elements – Part 1: Classification using test data from reaction to fire tests*

EN 13501-2, *Fire classification of construction products and building elements – Part 2: Classification using data from fire resistance tests, excluding ventilation services*

prEN 13501-5, *Fire classification of construction products and building elements – Part 5: Classification using data from external fire exposure to roof tests*

EN 13541, *Glass in building – Security glazing – Testing and classification of resistance against explosion pressure*

prEN 14179-1:2001, *Glass in building – Heat soaked thermally toughened soda lime silicate safety glass – Part 1: Definition and description*

3 Terms and definitions

For the purposes of this European Standard, the terms and definitions given in prEN 14179-1:2001 and the following apply.

3.1

initial type testing

determination of the performance of a product (characteristic, durability), on the basis of either actual tests or other procedures (such as conventional, standardised, tabulated or general accepted values, standardised or recognised calculation methods, test reports when made available, ...), in accordance with this European Standard that demonstrates compliance with this European Standard

3.2

test report

document that covers the results of tests undertaken on a representative sample of the product from production or on a prototype design of the product

3.3

product description

document that details the relevant parameters, e.g. process conditions, structure, etc., for defining a product that complies with the standard. It includes specific reference(s) to characteristics that are modified by the production process

3.4

significant change

variation in performance beyond the permitted tolerance for the characteristic

4 Requirements

4.1 Product description

For conformity purposes the heat soaked thermally toughened glass manufacturer is responsible for the preparation and maintenance of the product description. This description shall describe the product and/or product families.

Disclosure of the product description shall be at the discretion of the heat soaked thermally toughened glass manufacturer or his agent except in the case of regulatory requirements.

The description shall contain at least a normative part. The description may also contain an informative part, when the manufacturer foresees further development of the product.

The normative part of the description shall contain the following minimum information:

EN 14179-2:2005 (E)

- a reference to prEN 14179 Parts 1 and 2 and all other standards with which the manufacturer claims compliance;
- the radiometric properties and durability of coated glass, i.e. coated glass that conforms with EN 1096-1, EN 1096-2, EN 1096-3, when those properties are changed, intentionally or unintentionally, by the thermal toughening and heat soaking process.

The definition of product families shall be consistent with the normative part of the product description.

The substitution of materials shall maintain the conformity with the product description. The substituting material can be added to the product family and also the product description when compliance has been demonstrated.

4.2 Conformity with the definition of heat soaked thermally toughened soda lime silicate safety glass

Products shall conform to the definition and fulfil the requirements of heat soaked thermally toughened soda lime silicate safety glass as defined in prEN 14179-1.

4.3 Determination of the characteristic's performances

4.3.1 Characteristics of heat soaked thermally toughened soda lime silicate safety glass

4.3.1.1 General

The characteristics of heat soaked thermally toughened soda lime silicate safety glass are in general those of the glass substrate (see 4.3.1.2).

4.3.1.2 Characteristics of the soda lime silicate glass panes used for the production of heat soaked thermally toughened soda lime silicate safety glass

Panels shall be made of soda lime silicate glass according to EN 572-1, EN 572-2, EN 572-4, EN 572-5. The panes can be coated according to EN 1096-1, EN 1096-2, EN 1096-3 and/or enamelled according to prEN 14179-1.

For the characteristics listed in Table 1, for the soda lime silicate glass panes, generally accepted values or calculated values shall be used.

Since the majority of the characteristics of Table 1 are not changed significantly by the thermal toughening process they shall be used for heat soaked thermally toughened soda lime silicate safety glass. The exceptions being the characteristic bending strength $f_{g,k}$ and the resistance against sudden temperature changes and temperature differentials.

Table 1 - Information on the characteristics of soda lime silicate glass panes, according to EN 572-1, used for the production of heat soaked thermally toughened soda lime silicate safety glass

Characteristic	Symbol	Unit
- density	ρ	kg/m ³
- hardness	HK _{0,1/20}	GPa
- Young's modulus	E	Pa
- Poisson's ratio	μ	Dimensionless
- Characteristic bending strength	$f_{g,k}$	Pa
- Resistance against sudden temperature changes and temperature differentials		K
- Specific heat capacity	c	J/(kg·K)
- Coefficient of linear expansion	α	K ⁻¹
- Thermal conductivity (for U -value)	λ	W/(m·K)
- Mean refractive index to visible radiation	n	Dimensionless
- Emissivity	ε	Dimensionless
- Light transmittance	τ_v	Dimensionless
- Solar direct transmittance	τ_e	Dimensionless
- Total energy transmittance	g	Dimensionless

If some coatings, i.e. coated glass conforming with the EN 1096 series, when heat soaked thermally toughened change their radiometric properties the manufacturer shall refer to the following for the determination of the appropriate characteristics, etc.:

- 4.3.2.12 for the emissivity;
- 4.3.2.13 for the light transmittance and reflectance;
- 4.3.2.14 for the solar energy transmittance;
- EN 1096-2 for the durability of A, B and S coatings;
- EN 1096-3 for the durability of C and D coatings.

4.3.2 Determination of characteristics of heat soaked thermally toughened soda lime silicate safety glass products

4.3.2.1 General

If the heat soaked thermally toughened glass manufacturer wishes to claim that any performance characteristic is independent of the production equipment used then the factory production control system shall be in accordance with this European Standard including his specific process control conditions.

EN 14179-2:2005 (E)

4.3.2.2 Safety in the case of fire - Resistance to fire

Fire resistance shall be determined and classified in accordance with EN 13501-2.

NOTE EN 357 may be used as a classification reference specific to fire resistant glazed elements.

4.3.2.3 Safety in the case of fire - Reaction to fire

Reaction to fire shall be determined and classified in accordance with EN 13501-1.

Heat soaked thermally toughened soda lime silicate safety glass products are products/materials that do not require to be tested for reaction to fire (e.g. Products/materials of Classes A1 according to Commission Decision 96/603/EC, as amended 2000/605/EC).

4.3.2.4 Safety in the case of fire - External fire behaviour

Where the manufacturer wishes to declare external fire performance (e.g. when subject to regulatory requirements), the product shall be tested in accordance with prEN 13501-5.

NOTE Compliance with this requirement is not possible until a version of prEN 13501-5 later than 2002 becomes available.

4.3.2.5 Safety in use - Bullet resistance: shatter properties and resistance to attack

Bullet resistance shall be determined and classified in accordance with EN 1063.

4.3.2.6 Safety in use - Explosion resistance: impact behaviour and resistance to impact

Explosion resistance shall be determined and classified in accordance with EN 13541.

4.3.2.7 Safety in use - Burglar resistance: shatter properties and resistance to attack

Burglar resistance shall be determined and classified in accordance with EN 356.

4.3.2.8 Safety in use - Pendulum body impact resistance: shatter properties (safe breakability) and resistance to impact

Pendulum body impact resistance shall be determined and classified in accordance with EN 12600.

4.3.2.9 Safety in use - Mechanical resistance: Resistance against sudden temperature changes and temperature differentials

The resistance against sudden temperature changes and temperature differentials is a generally accepted value that is given in prEN 14179-1 and shall be ensured by compliance with this European Standard.

4.3.2.10 Safety in use - Mechanical resistance: Resistance against wind, snow, permanent load and/or imposed loads of the glass unit

The mechanical strength of heat soaked thermally toughened soda lime silicate safety glass is a characteristic value that is given in prEN 14179-1 and shall be ensured by compliance with this European Standard.

As long as on the concerned construction or building site no part of the design standards¹ is applicable then the current method available in the country of destination shall be applied.

The manufactured or supplied thickness of heat soaked thermally toughened soda lime silicate safety glass shall conform to the ordered thickness.

4.3.2.11 Protection against noise - Direct airborne sound reduction

The sound reduction indexes shall be determined in accordance with EN 12758. However, the information supplied with the incoming glass can be used as the thermal toughening and heat soaking process does not alter the values.

4.3.2.12 Energy conservation and heat retention - Thermal properties

The thermal transmittance value (*U*-value) shall be determined by calculation in accordance with EN 673 with:

- emissivity ε : the declared value of the glass manufacturer. If the information is not available, the emissivity shall be determined in accordance with EN 12898;
- nominal thickness of the glass panes.

However, the information supplied about the thermal properties of the incoming glass can be used if the thermal toughening and heat soaking process does not alter the values.

4.3.2.13 Energy conservation and heat retention - Radiation properties: Light transmittance and reflectance

The light transmittance and reflectance shall be determined in accordance with EN 410.

However, the information supplied about the radiation properties of the incoming glass can be used if the thermal toughening and heat soaking process does not alter the values.

4.3.2.14 Energy conservation and heat retention - Radiation properties: Solar energy characteristics

The solar energy transmittance and reflectance shall be determined in accordance with EN 410.

However, the information supplied about the radiation properties of the incoming glass can be used if the thermal toughening and heat soaking process does not alter the values.

4.4 Durability

When products conform to the definition of heat soaked thermally toughened soda lime silicate glass as in 4.2, then the characteristics' performances in 4.3.2 are ensured during an economically reasonable working life.

The durability of glass products, including their characteristics, is ensured by the following:

- compliance with this standard;
- compliance with instructions from the glass product manufacturer or supplier.

¹ prEN 13474 series is currently being prepared.

EN 14179-2:2005 (E)

The manufacturer shall supply specific installation instructions or make reference to appropriate technical specifications.

NOTE Also the durability of glass products depends on:

- building and construction movements due to various actions;
- building and construction vibrations due to various actions;
- deflection and racking of the glass support due to various actions;
- glass support design (e.g. drainage of infiltrated water in the rebate, prevention of direct contact between glass support members and glass);
- accuracy of glass support and glass support member dimensions;
- quality of the assembling of glass support members up to a glass support;
- quality of installation of the glass support into or onto the buildings or constructions;
- glass support expansion due to adsorbed moisture from the air or other sources;
- the quality of installation of the glass product into or onto its support.

4.5 Dangerous substances

Materials used in products shall not release any dangerous substances in excess of the maximum permitted levels specified in a relevant European Standard for the material or permitted in the national regulations of the Member State of destination.

5 Evaluation of conformity

5.1 General

Evaluation of conformity in accordance with this standard shall be as a result of FPC and ITT in accordance with this European Standard:

Factory production control;

This shall include the following:

- a) Inspection of samples taken at the factory in accordance with a prescribed test plan;

Initial inspection of the factory and of factory production control;

Continuous surveillance and assessment of the factory production control.

- 2) Initial type testing of the product;

NOTE There may be a need to involve a third party, with 1b, 1c, and/or 2, for the purpose of regulatory marking (see Annex ZA).

5.2 Initial type testing of the product (see 5.1, 2))

5.2.1 General

The product's characteristics shall be initial type tested to verify they are in conformity with the requirements. Instead of performing any actual testing, initial type testing may make use of:

- generally accepted and/or conventional and/or standardised values, mentioned in the relevant standards, or in publications that are referred to in the relevant standards;
- standardised calculation methods and recognised calculation methods mentioned in the relevant standards, or in publications that are referred to in the relevant standards;
- test report(s) when made available except for the characteristics listed in 5.2.2.

NOTE There may be a need to involve a third party for the purpose of regulatory marking (see Annex ZA).

When actual testing is required then the Initial Type Testing (ITT) shall be undertaken on a sample representative of the product taken from direct production or a prototype, any plant and/or line.

Whenever a change occurs in the raw material or the production process (subject to the definition of the family), which would change significantly one or more of the characteristics, the type tests shall be repeated for the appropriate characteristics.

5.2.1.1 Multiple lines/sites

If a manufacturer operates one and/or more lines and/or sites, the following can reduce the requirement for multiple Initial Type Testing (ITT):

- a) the manufacturers' technical file for a product shall specifically covers all sites and/or lines of the same manufacturer²;
- b) the manufacturer shall establish a direct relationship between production control, initial type testing and on-going internal audit testing;
- c) the manufacturer has a responsible individual designated to ensure product compliance based on:
 - the operation of a consistent Factory Production Control system on all applicable sites and/or lines;
 - the manufacturer having obtained evidence that shows the product to be consistent, with respect to both product characteristics and intended use characteristics;
 - the manufacturer has in place an internal auditing scheme, including product consistency.

5.2.1.2 Historic data

Tests previously performed in accordance with the provisions of this European Standard (same product, same characteristic(s), same or more onerous test method, sampling method and attestation of conformity) may be taken into account.

² The terms 'manufacturer' and 'producer' are understood as being synonyms (see CPD working document NB-CPD/02/019-issued 24 April 2002 – page 1).

5.2.2 Initial type testing of heat soaked thermally toughened soda lime silicate safety glass

5.2.2.1 General

Initial type testing if a product conforms to the definition of heat soaked thermally toughened soda lime silicate safety glass, shall consist of:

- a) mechanical strength measurement in accordance with prEN 14179-1;
- b) fragmentation test in accordance with prEN 14179-1.

5.2.2.2 Test specimens

The test specimens needed for the initial type test shall be processed from float glass according to EN 572-1 and EN 572-2 in accordance with this European Standard.

The 'simplest' type of edge work specified in the manufacturers production control documentation shall be used. However, if an arris-edged edge is used then all other types of edge working are deemed to satisfy.

The number of test specimens are as follows:

- a) For mechanical strength measurement they are given in Table 2a for float glass, Table 2b for coated float glass and Table 2c for enamelled float glass.
- b) For fragmentation 5 test specimens per thickness are required.

Table 2a - Number of test specimen distributed over the product thickness range

Product thickness range ^a	Number of test specimen for the mechanical strength measurement
– minimum	≥ 2
– first after minimum	≥ 2
– centre of range	≥ 2
– last before maximum	≥ 2
– maximum	≥ 2
TOTAL	≥ 10
^a When the production range consists of: <ul style="list-style-type: none"> - two thicknesses, the distribution shall be as equal as possible; - a single thickness, all specimens are of the same thickness. 	

Table 2b - Number of test specimen of coated float glass, distributed over the product thickness range

Emissivity ϵ of incoming glass product	Product thickness range	Number of specimen for the mechanical strength measurement
$1 \geq \epsilon > 0,25$	Minimum	≥ 2
	Middle	≥ 2
	Maximum	≥ 2
Total		(min.10)
$0,25 \geq \epsilon > 0,1$	Minimum	≥ 2
	Middle	≥ 2
	Maximum	≥ 2
Total		(min.10)
$0,1 \geq \epsilon$	Minimum	≥ 2
	Middle	≥ 2
	Maximum	≥ 2
Total		(min.10)

NOTE 1 Tests according to this table are valid for all coated glasses within the respective emissivity ranges.

NOTE 2 Half number of test specimen shall be tested with the coated side in tension and the other half with the uncoated side in tension.

Table 2c - Number of test specimen of enamelled float glass, distributed over the product thickness range

Type of surface design	Product thickness range	Number of specimen for the mechanical strength measurement
Fully enamelled	Minimum	≥ 10

NOTE 1 This table covers all enamelled designs and all produced thicknesses.

NOTE 2 Mechanical test undertaken with enamelled surface in tension.

NOTE Strength measurement outcomes are expressed in force per unit of area and are therefore independent of the thickness. Hence strength measurements may be performed on a collection of test specimens with different thicknesses.

5.2.2.3 Test results

- When the mechanical strength is measured then no measured value shall be below that given in 11.4 of prEN 14179-1:2001. However, if one value falls below then the manufacturer shall ensure that the results relate to a 5 % probability of breakage at the lower limit of the 95 % confidence interval.
- In the fragmentation test, no test specimen shall exhibit a fragmentation assessment that does not meet Clause 10 of prEN 14179-1:2001.

5.2.2.4 Measurement of surface pre-stress

The manufacturer may also use surface pre-stress measurement as a means of product control. If this is done then all test specimens shall be measured prior to testing. This will show the relationship between surface pre-stress and mechanical strength/fragmentation.

Manufacturers with more than one production line can perform the initial type test on specimens from one line. The outcome value of surface pre-stress measurement can then be used as reference for the other production lines and shall be confirmed by factory production control (FPC). This may also be applicable for new production lines.

5.2.2.5 Heat soaked thermally toughened patterned glass

Initial type testing of heat soaked thermally toughened patterned glass may not be undertaken as a result of the wide variety of patterned surfaces of patterned glass in accordance with EN 572-5.

Compliance of heat soaked thermally toughened patterned glass shall be ensured by the sampling during product control given Annex A – Table A.1 – 3.1.3 together with either 3.1.4.2 or 3.1.4.3.

5.2.3 Initial type testing of characteristic's performances

For initial type testing, (see 5.2.1), of the characteristics refer to 4.3.2 of this European Standard.

NOTE Optimizing thermal toughening settings specifically for one characteristic may affect negatively the optimized settings for a different characteristic. When performance of both characteristics will be declared, new type testing of the affected characteristic is needed.

5.3 Factory production control and inspection of samples in accordance with a prescribed test plan (see 5.1, 1a) and 2a))

Factory production control means the permanent internal control of production exercised by the manufacturer.

All elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures. This production control system documentation shall ensure a common understanding of quality assurance and enable the achievement of the required product characteristics and the effective operation of the production control system to be checked.

A factory production control according to Annex A of this European Standard satisfies to this definition.

NOTE 1 A factory production control system similar to EN ISO 9001 made product specific to this European Standard is deemed to satisfy the requirements of this clause.

NOTE 2 There may be a need to involve a third party for the purpose of regulatory marking (see Annex ZA).

Annex A of this European Standard also summarizes the tests to be carried out by the manufacturer as part of the production control in the factory, and as further testing of samples taken at the factory in accordance with a prescribed test plan.

If the factory production control includes the optical pre-stress measurement for control purposes, the method shall be correlated. Therefore, prior to any initial type test on mechanical strength/fragmentation according to 5.2.2.1, all test specimens shall be measured to determine their optical pre-stress. Outcomes shall be used as reference values during factory production control.

5.4 Initial inspection of factory and of factory production control (see 5.1, 1 c))

The initial inspection of the factory and of the factory production control shall cover the parameters listed in Table 3.

NOTE There may be a need to involve a third party for the purpose of regulatory marking (see Annex ZA).

Table 3 - Characteristics of interest for the Factory Production Control

Nr	Characteristic	Interested parameter related to the characteristic	For details, refer to
A	Resistance to fire Reaction to fire External fire behaviour	- checking incoming glass - production control - product control after production - labelling outgoing glass product	Annex A
B	Release of dangerous substances	- checking incoming materials	Annex A
C	Bullet resistance Explosion resistance Burglar resistance Pendulum body impact resistance Resistance against sudden temperature Changes and temperature differentials Wind, snow, permanent and imposed load resistance of the glass unit	- checking incoming glass - production control - product control after production - labelling outgoing glass product	Annex A
D	Direct airborne sound reduction Thermal properties Radiation properties: – light transmittance and reflection – solar energy characteristic	- checking incoming glass - production control - product control after production - labelling outgoing glass product	Annex A

5.5 Continuous surveillance and assessment of the factory production control (see 5.1, 1 c))

The continuous surveillance, assessment and approval of the factory production control shall cover the parameters listed in Table 3.

NOTE There may be a need to involve a third party for the purpose of regulatory marking (see Annex ZA).

The frequency of production surveillance shall be twice per year for new production facilities or for facilities that do not already have an established factory production control system in accordance with

this European Standard. When assessment of FPC fails to identify major non-conformances during four successive assessments, the frequency can be reduced to once a year.

When a negative result is recorded, the inspection shall be repeated within two month. The frequency of production surveillance shall return to, or remain at twice a year. When the repeated inspection also results in a negative record, then the production shall be subject within two months to a repeated initial inspection of the factory and of the factory production control together with a surveillance inspection. When this repeated initial inspection and surveillance inspection also results in a negative record then the products are considered as no longer conforming to this European Standard.

6 Marking and/or labelling

6.1 General

All voluntary marking and/or labelling should comply with C.3.

Care shall be taken to ensure that any voluntary marking and/or labelling does not cause confusion with respect to the mandatory requirements.

NOTE All marking and/or labelling of product to demonstrate compliance with the regulatory requirement is detailed in Annex ZA.

6.2 Product marking

The heat soaked thermally toughened soda lime silicate safety glass product shall be marked in accordance with Clause 12 of prEN 14179-1:2001.

6.3 Product characteristics

The manufacturer or his agent shall organise a system of references that allows for the following:

- the identification of exactly which characteristics have to be assessed (see 4.3.2);
- those characteristics that will be assessed;
- the values, classes, categories, etc. that have been determined for those characteristics.

This system shall be documented as part of the evaluation of conformity.

6.4 “Characteristics/performance identification paper”

The manufacturer shall prepare a “characteristics/performance identification paper” based on the information collected on the product characteristics (see 6.3). This document shall be part of the manufacturers technical file and is the basis for the accompanying information as required for regulatory purposes.

The “characteristics/performance identification paper” can be a catalogue in any media format (paper, disk, website, etc.), always identifiable by the reference that accompanies the marking with the product. The catalogue shall contain the values or classes of the characteristics for which a performance is declared. If no performance is declared, an indication of no performance determined (NPD) shall be made.

NOTE The catalogue should not contain any information other than that relevant to the “characteristics/performance identification paper”.

Annex A (normative)

Factory Production Control

A.1 Factory Production Control requirements

A.1.1 General

The FPC system shall consist of procedures, regular inspections and tests and/or assessments and the use of the results to control [raw and other] incoming materials or components, equipment, the production process and the product.

A.1.2 Organisation

A.1.2.1 Responsibility and authority

The responsibility, authority and the interrelation of all personnel who manage, perform and verify work affecting conformity shall be defined, particularly for personnel who have the organizational freedom and authority to:

- a) initiate action to prevent the occurrence of product non-conformity;
- b) identify and record any product non-conformances.

A.1.2.2 Management representative for factory production control

The manufacturer shall appoint a management representative who, irrespective of other responsibilities, shall have defined authority and responsibility for ensuring that the requirements of this European Standard are implemented and maintained.

A.1.2.3 Management review

The production control system shall be reviewed by the manufacturer's management at appropriate intervals in accordance with the manufacturer's control to ensure its continuing suitability and effectiveness. Records of such reviews shall be maintained for a minimum of 5 years.

A.1.3 Control system

A.1.3.1 General

The manufacturer shall establish and maintain a documented system as a means of ensuring that the product conforms to prEN 14179-1. The following requirements shall be fulfilled.

A.1.3.2 Personnel

The manufacturer shall use appropriately trained personnel for the operation and inspections of all production and inspection equipment.

A.1.3.3 Documentation

The manufacturer's documentation and procedures shall be relevant to the production and process control of the heat soaked thermally toughened soda lime silicate safety glass, and shall be adequately described in a manual which shall include:

- a) The organizational structure, responsibilities and authorities of the management with regard to product conformity.
- b) The procedures for specifying and verifying the incoming materials.
- c) The manufacturing, production control and other techniques, processes and systematic actions that will be used.
- d) The inspections that will be carried out before production, the inspections and tests during and after production, and the frequency at which they will be carried out.
- e) Required records of the inspections, test and assessments.
- f) Non-conformity situations requiring corrective action and the action taken.
- g) Unless otherwise indicated in national regulation records shall be kept for a minimum of one year after manufacturing the product.

A.1.3.4 Test equipment

Calibration of test equipment necessary for factory production control shall be documented.

NOTE The precision of calibration required is implied by the accuracy of the test method and tolerances specified.

A.1.3.5 Inspection and testing

A.3 designates the inspections and tests by means of tables. The requirements and records are normative. Test methods are recommended and therefore only given as information. The frequencies are also recommended and therefore given as information, except when otherwise designated.

NOTE The recommended frequencies should be regarded as a minimum frequency.

A.2 Marking

The manufacturer shall establish, document and maintain procedures for marking of the products. The product shall be marked in accordance with the established documents.

For tracing purposes, the manufacturer shall establish and maintain the records required in A.3.

A.3 Inspection and testing tables of heat soaked thermally toughened soda lime silicate safety glass production

A.3.1 Information on Table A.1

Table A.1 consists of three parts:

- section 1: Material control

- section 2: Production control
- section 3: Product control

When a manufacturing process is such that one or more of the listed inspections or tests are not applicable or physically not practical, the concerned inspection or test shall be ignored.

The inspections and/or tests on incoming materials shall be carried before use.

In case of non-conforming materials, action shall be taken so that:

- non-conforming raw materials are not used;
- non-conforming products are not to be delivered.

The required records in Table A.1 can be any document, e.g. order documents, production documents, logbook, etc., as described in the quality procedures and associated documentation.

For those criteria where no record is required this situation only applies until a complaint regarding that criteria is received. Records shall subsequently be kept to show that corrective action has been successful.

A.3.2 Production control

Attention is drawn to the heat soak process. In order to ensure appropriate heat soak processing, the heat soak equipment shall be calibrated in accordance with prEN 14179-1. The control system documentation shall refer to the calibration method. Frequency of calibration shall be one year after initial calibration then every 5 years.

Records of heat soak process as defined in the manufacturers manual including information on any failures i.e. panels broken during the process shall be maintained for a minimum period of 5 years.

The machinery and equipment used for manufacturing the products are checked at periods consistent with the manufacturers' documented process control against defined parameters, maintained and adjusted for optimal results.

A.3.3 Product control

The inspection and testing of heat soaked thermally toughened soda lime silicate safety glass shall be undertaken after the completion of the manufacturing process, see prEN 14179-1.

NOTE Care should be taken to ensure that the degree of toughening i.e. level of surface compression is sufficiently high after toughening to take account of the reduction resulting from the heat soaking process.

A.3.4 Use of proxy testing

A manufacturer may employ a test method/method of evaluation other than those referred to in the Table A.1. However, it is the manufacturer's responsibility to prepare suitable documentation describing such tests and their correlation with the recommended method to ensure that the appropriate characteristic is as claimed.

Table A.1 - Inspection and test table for heat soaked thermally toughened soda lime silicate safety glass

Section 1: Incoming material					
Ref.	Material, inspection or test	Recommended method (decision to be made by manufacturer)	Requirement	Recommended minimum frequency (decision to be made by manufacturer)	Record
1.1	Incoming material glass				
1.1.1	Identification, including packaging and label	Visual	See purchase specification	Each delivery	Yes
1.1.2	Thickness	Visual	See purchase specification	Each delivery	Yes
1.2	Other materials, e.g. ceramic frit, paint				
1.2.1	Delivery documentation	Visual	See purchase specification	Each delivery	Yes
1.2.2	Chemical analysis	Visual	See purchase specification	Each delivery	Yes
Section 2: Production control, including material control prior to thermal toughening					
Ref.	Material, inspection or test	Recommended method (decision to be made by manufacturer)	Requirement	Recommended minimum frequency (decision to be made by manufacturer)	Record
2.1	Prior to toughening				
2.1.1	Type	Visual	See customer order	1 product type per order	Yes
2.1.2	Thickness	Measurement	See customer order	1 product type per order	Yes
2.1.3	Dimensions, shapes, holes, notches, etc.	Measurement	See customer order	1 product type per order	Yes
2.1.4	Edge work	Visual	See customer order	1 product type per order	Yes

(to be continued)

Table A.1 (continued)

2.1.5	Edge work for special applications, e.g. fire resistance	Assessment of edge work: see manual of manufacturer	See manual of the manufacturer	1 test specimen per week	Yes
2.1.6	Marking	Visual	prEN 14179-1	Each glass	No
2.2	Process control - toughening				
2.2.1	Relevant process conditions of oven and/or chiller and cooling as described in the manual	See instruction manual	See production instructions	Continuously ^a	Yes
2.2.2	In case of coated or enamelled glass: Identification of position of the coating/enamel	Visual	See production instructions	When required	No
2.3	Process control - heat soaking				
2.3.1	Relevant process conditions of heat soak equipment i.e. temperature control, time of holding phase, as described in the manual	See instruction manual	See production instructions	Continuously ^a	Yes

Table A.1 (concluded)

Section 3: Product control after toughening and heat soaking					
Ref.	Inspection or test	Recommended method (decision to be made by manufacturer)	Requirement	Recommended minimum frequency	Record
3.1	Product				
3.1.1	Overall bow, local bow	Measurement on test specimen or current production	See prEN 14179-1 or customer order	1 test per day ^b	Yes
3.1.2	Dimensions, notches, holes	Measurement on current production	See customer order	1 test per day	Yes
3.1.3	Fragmentation	Measurement (Annex B) on test specimens	See prEN 14179-1	minimum 1 test specimen (1 100 mm x 360 mm) daily ^b	Yes
3.1.4.1 ^c	Surface pre-stress	Measurement (Annex B) on test specimen or current production	See manual of the manufacturer	Minimum 1 test per day ^b	Yes
3.1.4.2 ^c	Mechanical strength	Measurement (Annex B) on test specimen	See prEN 14179-1	minimum 1 test specimen (1 100 mm x 360 mm) daily ^b	Yes
3.1.4.3 ^c	Proxy test of mechanical strength	Measurement (Annex B) on test specimen	See manual of the manufacturer	minimum 1 test specimen (1 000 mm x 360 mm) daily ^b	Yes
<p>^a Continuously means a frequency based on an assessment of the requirements of the process used by the manufacturer that will give assurance that product characteristics will comply with the initial type test.</p> <p>^b The test shall be undertaken to ensure that all glass types and thicknesses manufactured in one week are tested during that week. The test specimen shall be taken so as to ensure that all areas of the furnace have been sampled.</p> <p>^c The manufacturer shall choose to undertake one of 3.1.4.1, 3.1.4.2 or 3.1.4.3.</p>					

Annex B (normative)

Tests for factory production control

B.1 Strength measurement

B.1.1 Four point bending strength test

B.1.1.1 Requirements

For the requirements, refer to the value of prEN 14179-1 as measured in accordance with EN 1288-3.

B.1.1.2 Measurement method

This test should be performed in accordance with EN 1288-3.

B.1.1.3 Test specimens

The dimensions of the test specimens will be in accordance with EN 1288-3.

The test specimens will be manufactured in accordance with this European Standard.

B.1.2 Optical surface pre-stress measurement

B.1.2.1 General

If the optical surface pre-stress measurement is a part of the factory production control then the values obtained during factory production control cannot be less than the reference values obtained during the initial type test (see 5.2.2). Additionally if test specimens (1 100 mm by 360 mm) are used then the fragmentation should be in accordance with the requirements of prEN 14179-1.

B.1.2.2 Measurement method

Pre-stress measurements should conform to the recommendation of the test equipment supplier.

The pre-stress measurements should have place on five points as indicated in Figure B.1.

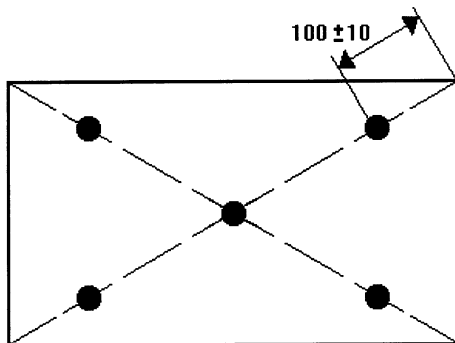


Figure B.1 - Positions for pre-stress measurements

B.2 Fragmentation test

B.2.1 Requirements

For the requirements, refer to prEN 14179-1.

B.2.2 Test method

Fragmentation tests should be performed in accordance with prEN 14179-1.

Annex C (informative)

Provisions for voluntary involvement of third party(ies)

C.1 General

A manufacturer may employ third party(ies) for conformity assessment, which may involve a combination of initial type testing, inspection of factory production control, continuous surveillance and auditing of the product. The results of the conformity assessment may be used by the bodies acting for regulators in carrying out their assigned tasks.

C.2 Voluntary tasks for third parties

A third party may be voluntarily contracted to perform the initial type testing, inspection of factory production control, continuous surveillance and auditing of the product.

Where a third party is voluntarily involved in the evaluation of conformity of the heat soaked thermally toughened soda lime silicate safety glass products covered by this document then the assessment should be in accordance with Clause 5, Evaluation of Conformity in this European Standard.

A manufacturer may also voluntarily involve a third party in the control of characteristics, e.g. visual aspects, colour, etc., that are over and above the characteristics that are required for regulatory purposes.

C.3 Marking and labelling

The format of the label and position should be agreed between the body involved and the manufacturer.

All marks and/or labels of a voluntary nature should be so affixed as not to be confused with those marks and/or labels that are required for regulatory purposes.

In order to prevent confusion with any regulatory marking and/or labelling then any marking and/or labelling associated with the involvement of third party(ies) on a voluntary basis should be accompanied with the following warning: "This marking/labelling has no relationship with any product characteristic covered by any legal marking and/or labelling".

Annex ZA (informative)

Clauses of this European Standard addressing the provisions of EU Construction Products Directive

ZA.1 Scope and relevant characteristics

This European Standard has been prepared under a mandate M/135 “Flat glass, profiled glass and glass block products” given to CEN by the European Commission and the European Free Trade Association.

The clauses of this European Standard shown in this annex meet the requirements of mandate M/135 given under the EU Construction Products Directive (89/106/EEC).

Compliance with these clauses confers a presumption of fitness of the heat soaked thermally toughened soda lime silicate safety glass product characteristics covered by this annex for the intended uses herein; reference should be made to the information accompanying the CE marking.

WARNING: Other requirements and other EU Directives, not affecting the fitness for intended uses, can be applicable to the heat soaked thermally toughened soda lime silicate safety glass falling within the scope of this European Standard.

NOTE 1 In addition to any specific clauses relating to dangerous substances contained in this standard, there may be other requirements applicable to products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the EU Construction Products Directive, these requirements need also to be complied with, when and where they apply.

NOTE 2 An informative database of European and national provisions on dangerous substances is available at the Construction web site on EUROPA (accessed through <http://europa.eu.int/comm/enterprise/construction/internal/dangsub/dangmain.htm>).

This annex has the same scope as Clause 1 of this standard with regard to the products covered. It establishes the conditions for the CE marking of heat soaked thermally toughened soda lime silicate safety glass intended for the use indicated below and shows the relevant clauses applicable (see Table ZA.1).

Construction Product: Heat soaked thermally toughened soda lime silicate safety glass

Intended uses: In buildings and construction works

The requirement on a certain characteristic is not applicable in those Member States where there are no regulatory requirements on that characteristic for the intended end use of the product. In this case, manufacturers placing their products on the market of these Member States are not obliged to determine nor declare the performance of their products with regard to this characteristic and the option “No performance determined” (NPD) in the information accompanying the CE marking (see ZA.3) may be used. The NPD option may not be used, however, where the characteristic is subject to a threshold level.

Table ZA.1 – Relevant clauses for heat soaked thermally toughened soda lime silicate safety glass and intended use in buildings and construction works

Product: Heat soaked thermally toughened soda lime silicate safety glass as covered under the scope of this standard			
Intended use: In buildings and construction works			
Essential characteristics	Requirements in this and other European Standard(s)	Mandated Levels and/or classes	Notes
Safety in the case of fire –			
Resistance to fire (for glass for use in a glazed assembly intended specifically for fire resistance)	4.2, 4.3.1 and 4.3.2.2	Any	Minutes
Reaction to fire	4.2, 4.3.1 and 4.3.2.3	Any	Euroclasses
External fire performance (for roof coverings only)	4.2, 4.3.1 and 4.3.2.4	Any	Euroclasses
Safety in Use –			
Bullet resistance: Shatter properties and resistance to attack	4.2, 4.3.1 and 4.3.2.5	-	Classes of convenience
Explosion resistance: Impact behaviour and resistance to attack	4.2, 4.3.1 and 4.3.2.6	-	Classes of convenience
Burglar resistance: Shatter properties and resistance to attack	4.2, 4.3.1 and 4.3.2.7	-	Classes of convenience
Pendulum body impact resistance: Shatter properties (safe breakability) and resistance to impact	4.2, 4.3.1 and 4.3.2.8	-	Classes of convenience
Mechanical resistance: Resistance against sudden temperature changes and temperature differentials	4.2, 4.3.1 and 4.3.2.9	-	K and/or °C
Mechanical resistance: Resistance against wind, snow, permanent and imposed load and/or imposed loads of the glass unit	4.2, 4.3.1 and 4.3.2.10	-	mm
Protection against noise: Direct airborne sound reduction	4.2, 4.3.1 and 4.3.2.11	-	dB
Energy conservation and heat retention:			
Thermal properties	4.2, 4.3.1 and 4.3.2.12	-	W/(m ² .K)
Radiation properties:			
- light transmittance and reflectance	4.2, 4.3.1 and 4.3.2.13	-	Fractions or %
- solar energy characteristics	4.2, 4.3.1 and 4.3.2.14	-	Fractions or %

ZA.2 Procedure(s) for the attestation of conformity of heat soaked thermally toughened soda lime silicate safety glass products

ZA.2.1 System(s) of attestation of conformity

The systems of conformity for heat soaked thermally toughened soda lime silicate safety glass indicated in Table ZA.1, are in accordance with the Decision of the Commission 2000/245/EC of 2000-02-02, amended by 01/296/EC and as given in Annex III of the mandate for "Flat glass, profiled glass and glass block products", is shown in Table ZA.2 for the indicated intended use(s) and relevant level(s) or classes:

Table ZA.2 – System(s) of attestation of conformity

Product(s)	Intended use(s)	Level(s) or class(es)	Attestation of conformity system(s)
Heat soaked thermally toughened soda lime silicate safety glass	For used in a glazed assembly intended specifically to provide fire resistance	Any	1
	For uses subject to reaction to fire regulations	Euroclasses A1, A2, B, C, D, E	4
		----- Euroclass A1*	
	For uses subject to external fire performance regulations	Products requiring testing	3
		----- products "deemed to satisfy" without testing	4
	For use as anti-bullet, or anti-explosion glazing	-	1
	----- For other uses liable to present "safety-in-use" risks and subject to such regulations	----- -	3
For uses relating to energy conservation and/or noise reduction	-	3	
For uses other than those specified above	-	4	
System 1: see Directive 89/106/EEC (CPD) Annex III.2.(i), without audit-testing of samples.			
System 3: see Directive 89/106/EEC (CPD) Annex III.2.(ii), Second possibility.			
System 4: see Directive 89/106/EEC (CPD) Annex III.2.(ii), Third possibility.			
* Products/materials that do not require to be tested for reaction to fire (e.g. Products/materials of Classes A1 according to Commission Decision 96/603/EC, as amended 2000/605/EC).			

The attestation of conformity of the heat soaked thermally toughened soda lime silicate safety glass in Tables ZA.1 shall be based on the evaluation of conformity procedures indicated in Tables ZA.3.1 to ZA.3.3 resulting from the application of the clauses of this or other European Standard indicated therein.

Where more than one table applies for the product, i.e. because its intended use makes different characteristics relevant, Table ZA.3.1 has to be read in conjunction with subsequent tables in order to determine which characteristics assigned by the manufacturer in Table ZA.3.1 are type tested by a notified test lab (system 3) and which by the manufacturer (system 4).

Table ZA.3.1 – Assignment of evaluation of conformity tasks for heat soaked thermally toughened soda lime silicate safety glass under system 1

Tasks		Content of the task	Evaluation of conformity clauses to apply
Tasks for the Manufacturer	Factory production control (F.P.C.)	Parameters related to all relevant characteristics of Table ZA.1	5.3
	Further testing of samples taken at factory	All relevant characteristics of Table ZA.1	Annex A
	Initial type testing	All relevant characteristics of Table ZA.1, except: resistance to fire; anti-bullet; anti-explosion	5.2
Tasks for the notified body	Initial type testing	Resistance to fire; Anti-bullet; Anti-explosion	5.2
	Initial inspection of factory and F.P.C.	Parameters related to all the characteristics of Table ZA.1 relevant for the intended uses in particular: resistance to fire; anti-bullet; anti-explosion	5.4
	Continuous surveillance, assessment and approval of F.P.C.	Parameters related to all relevant characteristics of Table ZA.1, in particular: resistance to fire; anti-bullet; anti-explosion	5.5

Table ZA.3.2 – Assignment of evaluation of conformity tasks for heat soaked thermally toughened soda lime silicate safety glass under system 3

Tasks		Content of the task	Evaluation of conformity clauses to apply
Tasks for the Manufacturer	Factory production control (F.P.C.)	Parameters related to all relevant characteristics of Table ZA.1	5.3
	Initial type testing	All other relevant characteristics of Table ZA.1 other than those shown below	5.2
Tasks for the notified body	Initial type testing	External fire performance Burglar resistance Pendulum body impact resistance Direct airborne sound insulation Thermal properties Radiation properties: – light transmittance and reflection; – solar energy characteristics	5.2

Table ZA.3.3 – Assignment of evaluation of conformity tasks for heat soaked thermally toughened soda lime silicate safety glass under system 4

Tasks		Content of the task	Evaluation of conformity clauses to apply
Tasks for the Manufacturer	Factory production control (F.P.C.)	Parameters related to all relevant characteristics of Table ZA.1	5.3
	Initial type testing	All relevant characteristics of Table ZA.1	5.2

ZA.2.2 EC Certificate and Declaration of conformity

In case of products with system 1: When compliance with the conditions of this annex is achieved, the certification body shall draw up a certificate of conformity (EC Certificate of conformity), which entitles the manufacturer to affix the CE marking. This certificate shall include:

- name, address and identification number of the certification body;
- name and address of the manufacturer, or his authorised representative established in the EEA, and place of production;
- description of the product (type, identification, use, ...);
- provisions to which the product conforms (i.e. Annex ZA of this EN 14179-2);
- particular conditions applicable to the use of the product (e.g. provisions for use under certain conditions, etc.);
- the number of the certificate;
- conditions and period of validity of the certificate, where applicable;

- name of, and position held by, the person empowered to sign the certificate.

In addition, the manufacturer shall draw up a declaration of conformity (EC Declaration of conformity) including the following:

- name and address of the manufacturer, or his authorised representative established in the EEA;
- name and address of the certification body;
- description of the product (type, identification, use, ...), and a copy of the information accompanying the CE marking;
- provisions to which the product conforms (i.e. Annex ZA of this EN 14179-2);
- particular conditions applicable to the use of the product (e.g. provisions for use under certain conditions, etc.);
- number of the accompanying EC Certificate of conformity;
- name of, and position held by, the person empowered to sign the declaration on behalf of the manufacturer or of his authorised representative.

In case of products under system 3: When compliance with the conditions of this annex is achieved, the manufacturer or his agent established in the EEA shall prepare and retain a declaration of conformity (EC Declaration of conformity), which entitles the manufacturer to affix the CE marking. This declaration shall include:

- name and address of the manufacturer, or his authorised representative established in the EEA, and place of production;
- description of the product (type, identification, use,...), and a copy of the information accompanying the CE marking;
- provisions to which the product conforms (i.e. Annex ZA of this EN 14179-2);
- particular conditions applicable to the use of the product, (e.g. provisions for use under certain conditions, etc.);
- name and address of the notified laboratory(ies);
- name of, and position held by, the person empowered to sign the declaration on behalf of the manufacturer or his authorised representative.

In case of products under system 4: When compliance with this annex is achieved, the manufacturer or his agent established in the EEA shall prepare and retain a declaration of conformity (EC Declaration of conformity), which entitles the manufacturer to affix the CE marking. This declaration shall include:

- name and address of the manufacturer, or his authorised representative established in the EEA, and place of production;
- description of the product (type, identification, use,...), and a copy of the information accompanying the CE marking;
- provisions to which the product conforms (i.e. Annex ZA of this EN 14179-2);
- particular conditions applicable to the use of the product (e.g. provisions for use under certain conditions, etc.);
- name of, and position held by, the person empowered to sign the declaration on behalf of the manufacturer or of his authorised representative.

NOTE Duplication of information between the declaration and certificate should be avoided. To avoid duplication of information, cross-reference between documents may be made when one contains more information than the other.

The above mentioned declaration and certificate shall be presented in the official language or languages of the Member State in which the product is to be used.

ZA.3 CE marking and labelling

The manufacturer or his authorised representative established within the EEA is responsible for the affixing of the CE marking. The CE marking symbol to affix shall be in accordance with Directive 93/68/EC and shall be shown on the heat soaked thermally toughened soda lime silicate safety glass (or when not possible it may be on the accompanying label, the packaging or on the accompanying commercial documents e.g. a delivery note). The following information shall accompany the CE marking symbol:

- identification number of the certification body (only for products under systems 1);
- name or identifying mark and registered address of the producer;
- the last two digits of the year in which the marking is affixed;
- number of the EC Certificate of conformity or factory production control certificate (if relevant);
- reference to this European Standard;
- description of the product: generic name, material, dimensions, ... and intended use;
- information on those relevant essential characteristics listed in Table ZA.1 which are to be declared presented as [see NOTE 1]:
 - declared values and, where relevant, level or class (including “pass” for pass/fail requirements, where necessary) to declare for each essential characteristic as indicated in “Notes” in Table ZA.1;
 - as an alternative, standard designation(s) alone or in combination with declared values as above, and;
 - “No performance determined” for characteristics where this is relevant.

The “No performance determined” (NPD) option may not be used where the characteristic is subject to a threshold level. Otherwise, the NPD option may be used when and where the characteristic, for a given intended use, is not subject to regulatory requirements in the Member State of destination.

NOTE 1 When a standard designation is used, this should give information on all the relevant mandated characteristics; if all are not covered, then values for those not covered should be additionally given. Care should be taken, however, that using standard designations does not bring information on non-harmonised characteristics into the CE marking.

Figure ZA.1 gives an example of the information to be given on the product, label, packaging and/or commercial documents.

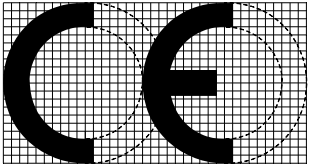
 <p>01234</p>	<p>CE conformity marking, consisting of the "CE"-symbol given in directive 93/68/EEC.</p> <p>Identification number of the certification body (where relevant) (see NOTE 2)</p>																												
<p>AnyCo Ltd, PO Box 21, B-1050</p> <p>05</p> <p>01234-CPD-00234</p>	<p>Name or identifying mark and registered address of the producer</p> <p>Last two digits of the year in which the marking was</p> <p>Certificate number (where relevant) (see NOTE 3)</p>																												
<p>EN 14179-2</p> <p>Heat soaked thermally toughened soda lime silicate safety glass, intended to be used in buildings and construction works</p> <p>Characteristics</p> <table border="0"> <tr> <td>Resistance to fire</td> <td>npd</td> </tr> <tr> <td>Reaction to fire</td> <td>A1</td> </tr> <tr> <td>External fire performance</td> <td>npd</td> </tr> <tr> <td>Bullet resistance</td> <td>npd</td> </tr> <tr> <td>Explosion resistance</td> <td>npd</td> </tr> <tr> <td>Burglar resistance</td> <td>npd</td> </tr> <tr> <td>Pendulum body impact resistance</td> <td>1(C)2</td> </tr> <tr> <td>Resistance against sudden temperature changes and temperature differentials</td> <td>200 K</td> </tr> <tr> <td>Wind, snow, permanent and imposed load resistance</td> <td>6 mm</td> </tr> <tr> <td>Direct airborne sound insulation</td> <td>36 dB</td> </tr> <tr> <td>Thermal properties</td> <td>5,6 W/(m²K)</td> </tr> <tr> <td colspan="2">Radiation properties:</td> </tr> <tr> <td>light transmission and reflection</td> <td>0,70/0,13</td> </tr> <tr> <td>solar energy characteristics</td> <td>0,55/0,11</td> </tr> </table>	Resistance to fire	npd	Reaction to fire	A1	External fire performance	npd	Bullet resistance	npd	Explosion resistance	npd	Burglar resistance	npd	Pendulum body impact resistance	1(C)2	Resistance against sudden temperature changes and temperature differentials	200 K	Wind, snow, permanent and imposed load resistance	6 mm	Direct airborne sound insulation	36 dB	Thermal properties	5,6 W/(m ² K)	Radiation properties:		light transmission and reflection	0,70/0,13	solar energy characteristics	0,55/0,11	<p>No. of European Standard</p> <p>Description of product and information on regulated characteristics</p>
Resistance to fire	npd																												
Reaction to fire	A1																												
External fire performance	npd																												
Bullet resistance	npd																												
Explosion resistance	npd																												
Burglar resistance	npd																												
Pendulum body impact resistance	1(C)2																												
Resistance against sudden temperature changes and temperature differentials	200 K																												
Wind, snow, permanent and imposed load resistance	6 mm																												
Direct airborne sound insulation	36 dB																												
Thermal properties	5,6 W/(m ² K)																												
Radiation properties:																													
light transmission and reflection	0,70/0,13																												
solar energy characteristics	0,55/0,11																												

Figure ZA.1 - Example CE marking information

NOTE 2 The identification of the notified body is only relevant for system.

NOTE 3 Reference to the Certificate number should only be made under system 1.

In addition to any specific information relating to dangerous substances shown above, the product should also be accompanied, when and where required and in the appropriate form, by documentation listing any other legislation on dangerous substances for which compliance is claimed, together with any information required by that legislation.

NOTE 4 European legislation without national derogations need not be mentioned.

Bibliography

- [1] EN 357 *Glass in building – Fire resistant glazed elements with transparent or translucent glass products – Classification of fire resistance*
- [2] EN ISO 9001 *Quality management systems – Requirements (ISO 9001:2000)*
- [3] prEN 13474 (all parts), *Glass in building – Design of glass panes*

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.