



BSI Standards Publication

Solid recovered fuels — Determination of particle size distribution

Part 2: Maximum projected length method
(manual) for large dimension particles

National foreword

This British Standard is the UK implementation of EN 15415-2:2012.

The UK participation in its preparation was entrusted to Technical Committee PTI/17, Solid biofuels.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012. Published by BSI Standards Limited 2012

ISBN 978 0 580 71988 2

ICS 75.160.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2012.

Amendments issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN 15415-2

NORME EUROPÉENNE

EUROPÄISCHE NORM

April 2012

ICS 75.160.10

English Version

**Solid recovered fuels - Determination of particle size distribution
- Part 2: Maximum projected length method (manual) for large
dimension particles**

Combustibles solides de récupération - Détermination de la
distribution granulométrique - Partie 2: Méthode (manuelle)
de projection de la longueur maximale des particules de
grande dimension

Feste Sekundärbrennstoffe - Bestimmung der
Partikelgrößenverteilung - Teil 2: Manuelles Verfahren zur
Bestimmung der größten projizierten Länge für große
Partikel

This European Standard was approved by CEN on 9 March 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 List of symbols and abbreviations.....	6
5 Principle.....	6
5.1 Principle of sampling	6
5.2 Principle of the determination of dimension	7
6 Apparatus	8
7 Procedure	8
7.1 Preparation of the sampling plan.....	8
7.2 Procedure for taking the field sample and producing the laboratory sample(s)	8
7.3 Procedure for quantification of maximum projected length	9
8 Precision.....	10
9 Test report	10
Bibliography	12

Foreword

This document (EN 15415-2:2012) has been prepared by Technical Committee CEN/TC 343 “Solid recovered fuels”, the secretariat of which is held by SFS.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2012, and conflicting national standards shall be withdrawn at the latest by October 2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

EN 15415, *Solid recovered fuels — Determination of particle size distribution*, consists of the following parts:

- *Part 1: Screen method for small dimension particles*
- *Part 2: Maximum projected length method (manual) for large dimension particles*
- *Part 3: Method by image analysis for large dimension particles*

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

This document is dedicated to outlining a manual method for characterizing the size of pieces of solid recovered fuel (SRF) that exhibit an irregular shape and are generally large in size. Typical examples are shredded, end-of-life tyres and demolition woods.

When such products reach the end-of-life stage, they continue to exhibit the very strong mechanical properties for which they were designed and fabricated. For instance, tyres are designed and fabricated to withstand cutting. Therefore, it is wise to minimise shredding when producing SRF from these end-of-life products..This results in a general production of SRF pieces exhibiting an irregular shape and large size.

These SRF pieces cannot be characterised using the sieving method specified in EN 15415-1 which utilises well-known distribution curves and a series of test sieves. Consequently, the method specified in this document is a manual method based on the determination of the maximum projected length and accompanied by an appropriate statistical evaluation. This maximum projected length approach is needed for the sake of testing; but it is mainly needed to facilitate the use of these solid recovered fuels. Safe transportation (e.g. with a conveyer) and introduction into the combustion zone are dependent on the design and operations adapted to such maximum length.

In this document, the maximum projected length is determined without considering the filaments protruding from the SRF pieces (see 3.1). In EN 15415-3, an image analysis method is specified which allows the characterisation of these filaments protruding from shredded tyre pieces.

This document is based on CEN/TS 14243, AFNOR XP T47-751 and AFNOR XP T47-756.

1 Scope

This European Standard specifies the determination of particle size distribution of solid recovered fuels. It establishes a manual method for the determination of the maximum projected length for large dimension particles. It applies to both agglomerated and non-agglomerated solid recovered fuel pieces exhibiting an irregular shape, such as shredded end-of-life tyres and demolition woods.

This document does not apply to filaments protruding from the SRF pieces.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 15357:2011, *Solid recovered fuels — Terminology, definitions and descriptions*

ISO 565, *Test sieves — Metal wire cloth, perforated metal plate and electroformed sheet — Nominal sizes of openings*

ISO 3310-1 *Test sieves — Technical requirements and testing — Part 1: Test sieves of metal wire cloth*

3 Terms and definitions

For the purpose of this document, the terms and definitions given in EN 15357:2011 and the following apply:

3.1

filaments

filiform parts protruding from pieces of a solid recovered fuel (SRF), generally of a metallic and/or textile nature

3.2

format of a large piece of SRF

format based on the distribution of the maximum projected length

4 List of symbols and abbreviations

The following symbols and abbreviations are used in this document:

<i>LDF</i>	Lower dimension of the format (mm)
<i>HDF</i>	Higher dimension of the format (mm)
<i>L</i>	Maximum projected length
<i>MS</i>	Mass of the laboratory sample (kg)
<i>MF</i>	Mass of the fine pieces (kg)
<i>MLM</i>	Mass of the loose metal wires
<i>NCC</i>	Number of central classes
<i>NCR</i>	Number of classes in the range from <i>LDF</i> to <i>HDF</i>
<i>TNP</i>	Total number of pieces in the sample not including the fine pieces
<i>MPF</i>	Mass percentage of the fine pieces
<i>MPM</i>	Mass percentage of the loose metal wires
<i>NPL</i>	Number percentage of large pieces
<i>MPL</i>	Mass percentage of large pieces (optional)
<i>NPC</i>	Number percentage of <i>NCC</i>
<i>MPC</i>	Mass percentage of <i>NCC</i> (optional)
<i>SRF</i>	Solid recovered fuel

NOTE In this document "mass percentage" is used for "mass fraction expressed as percent" to maintain continuity with other symbols and their abbreviations that do not designate mass fractions.

5 Principle

5.1 Principle of sampling

The main principle of sampling is to obtain a representative sample or representative samples from a whole lot (of defined material) from which a characteristic is to be determined. If the lot is to be represented by a sample, then it is necessary that every particle in the lot have an equal probability of being included in the sample (i.e. probabilistic sampling). Whenever this principle cannot be applied in practice, the sampler shall define a procedure as close as possible to probabilistic sampling in their judgement (i.e. judgemental sampling) and note the limitations in the sampling plan and sampling report.

In general, it is difficult to take samples in a way that satisfies the principle of correct sampling if a material is stationary (for example in a stockpile, big bag or silo). With regard to large pieces of irregular shape (e.g. pieces that include protruding filaments), it is necessary to take samples if the material is in movement.

NOTE The determination of properties other than dimensions can result in different sampling requirements. This is the case when determining physical properties such as bulk density or chemical composition.

5.2 Principle of the determination of dimension

A laboratory sample of at least $TNP > 100$ separate elements not passing through the LDF sieve is taken for the test. The mass of the laboratory sample, MS , is weighed to within $\pm 0,01$ kg. Any elements consisting solely of metal wires released from the pieces of solid recovered fuel are not counted in the TNP pieces. They are collected and weighed together (MLM in kilograms).

After passing through a LDF sieve, the mass of the fine pieces, MF , is weighed to within $\pm 0,01$ kg. The pieces not passing through the sieve (without loose metal wires) are used to determine the maximum lengths and constitute the test portion for determination purposes.

Each piece of this test portion is treated individually. As these pieces are not usually flat, the largest length is defined as the largest length projected onto a plane on which the piece in question lies. This length is measured to within ± 5 mm without deforming the piece and excluding protruding filaments.

The measurements of the different maximum projected lengths, L , are used for drawing a histogram (see Figure 1) that is a characteristic of the distribution of the pieces of the test portion, i.e. the laboratory sample without the fine pieces and without the loose metal wires. This histogram consists of the large pieces (a class larger than the HDF threshold dimension of the large pieces) and $NCR = 7$ classes of the same width between the LDF and HDF dimensions.

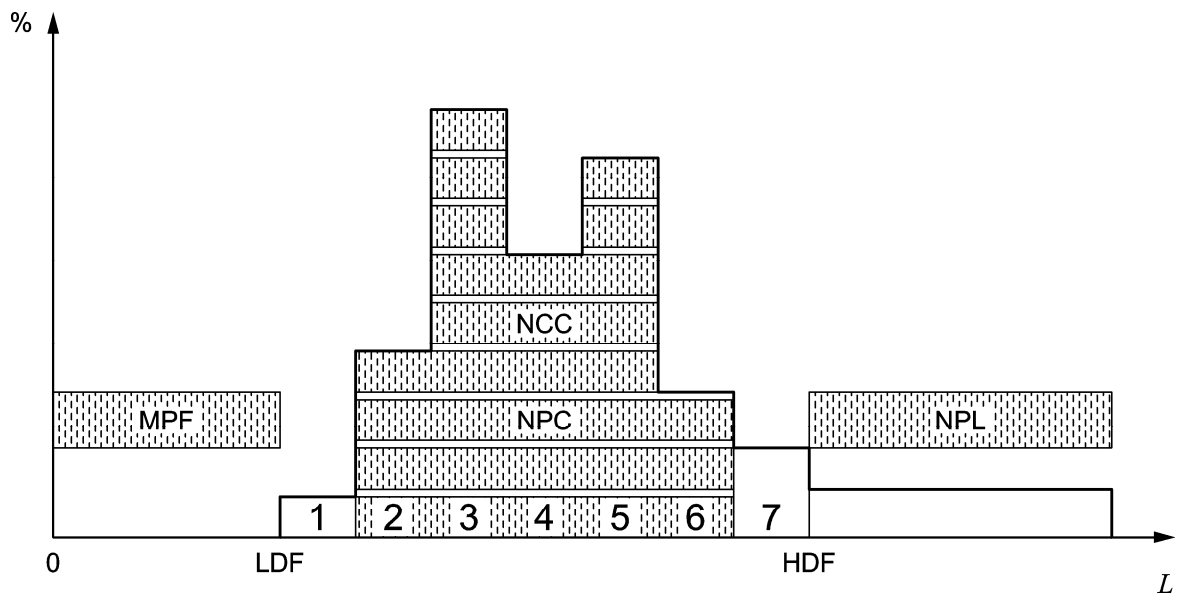


Figure 1 — Example of a histogram

The following three characteristics of the histogram are extracted from these measurements:

- the number percentage of large pieces, NPL (and optionally, the mass percentage of large pieces, MPL , corresponding to the pieces larger than the higher dimension of the HDF format where HDF is one of the characteristics of the format of the product under consideration, e.g. 350 mm);
- the mass percentage of the fine pieces, $MPF = 100 \times MF/MS$ (mass percentage of the pieces passing through the sieve with a mesh of LDF where LDF is one of the characteristics of the product format under consideration, e.g. 25 mm);
- the number percentage, NPC (and optionally the mass percentage, MPC) of the pieces in the number of central classes (NCC) (2-3-4-5-6) amongst the classes $NCR = 7$ between the lower and higher dimensions of the format (LDF and HDF).

6 Apparatus

- 6.1 Vessel**, large enough to contain at least 100 pieces;
- 6.2 Illuminated measurement plane**, with a ruler graduated in millimetres for measurements up to 500 mm on this measurement plane;
- 6.3 Balance**, with an accuracy of $\pm 0,01$ kg;
- 6.4 Circular mesh sieve**, in accordance with ISO 565 or ISO 3310-1, with a mesh of *LDF*.

7 Procedure

7.1 Preparation of the sampling plan

First, the property required in the testing programme and the lot in relation to which it is defined, e.g. "maximum projected length on a SRF production of 300 Mg", shall be identified.

The lot size shall be based on management decisions about the production quality or specific customer requirements. It may be defined by the producer as a fixed quantity produced between machine settings, a fixed quantity of a production day/shift/week or simply a fixed quantity. With regard to certain pieces exhibiting large dimensions, the tools for taking an increment shall be sufficiently large so that the large pieces are equally sampled. Typically this results in a case of increments of more than 100 pieces (3 kg to 15 kg).

NOTE 1 Larger increments would slightly improve the sampling quality while increasing the size of the field sample, therefore complicating the size reduction into laboratory sample(s). It is preferable to increase the number of increments and thus directly increase the reproducibility.

For reference testing (contractual or pre-contractual) concerning SRF dimension(s), the field sample shall be a composite sample constituted of 3 increments taken on dates selected randomly along the period of time during which the lot is produced. If there is no SRF on a particular date at the sampling location, the increment shall be taken on another date preselected prior to sampling, unless this is caused by a major change in the production process (see below).

For routine testing concerning the dimension(s) of SRF, the field sample shall consist of 1 increment taken on a date selected randomly along the period of time during which the lot is produced. If there is no SRF on this date at the sampling location, the increment shall be taken on another date preselected prior to sampling, unless this is caused by a major change in the production process (see below).

NOTE 2 The random taking of three increments allows for a first approximation of the variability inside the considered lot. The random taking of one increment in routine testing also allows another evaluation of the variability when considering the lots obtained under comparable conditions.

In the case of a major change in the production process, consider a lot before and a lot after this change.


NOTE 3 Major changes can occur on the feed and on the production process. A major change would induce in the sample two different subpopulations, before and after the major change.

7.2 Procedure for taking the field sample and producing the laboratory sample(s)

Take the increment(s) at the output of the conveyer in the falling zone. The tool used shall be a typical rectangular open scoop, i.e. it shall not have an edge at one of the long sides so as to be capable of "cutting" the entire flow. Such a scoop (see also Figure 2) shall have:

- a width, *L*, at least 1,5 times the width of the falling flow;
- a depth, *P*, at least 2/3 of the width, *L*, and at least 2,5 times the higher dimension *HDF*;

- an edge height, H , at least to $1/3$ of the width, L , and at least 2 times the higher dimension HDF .

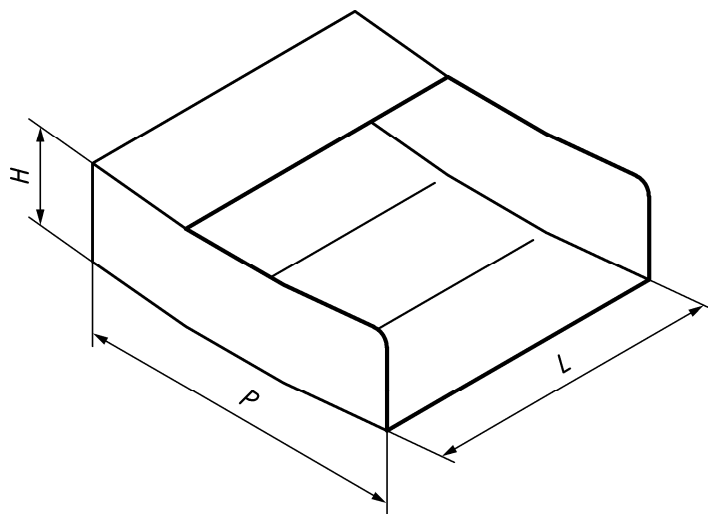

Key

H height
 P depth
 L width

Figure 2 —Example of scoop

This scoop may be moved for example, with a loader according to a detailed procedure adapted to the site condition. It may be the bucket of a loader, provided that its cleanliness conforms to the requirement of the dimension measurement, i.e. the absence of deposit. The increment taken shall be considered as valid if both criteria are fulfilled, i.e., the increment consists of at least 100 pieces (after sieving of fines) and the mass of the increment does not exceed 15 kg.

NOTE The minimum size of the increment is specified as a minimum number of pieces in view of the statistical evaluation of the measurements of the maximum projected length of each piece. A specification in mass would result in significant differences depending on the size of the pieces.

For the determination of dimension(s), each increment shall constitute a laboratory sample. If there are several increments, determine the dimension of each increment and calculate the average of these dimensions. This is easier than reducing the size of the field sample prior to measuring the dimension.

7.3 Procedure for quantification of maximum projected length

Carry out the following steps for this manual procedure:

- identify the LDF and HDF dimensions in the test specifications and calculate the limits of the 7 classes of the same width. Deduce the limits of the central range defined by NCC classes 2-3-4-5-6;

NOTE 1 HDF and LDF should be different enough in order to define in practice the 7 classes.

- take a laboratory sample of the SRF material in accordance with the sampling scheme using a vessel (6.1) for checking whether for the site in question the TNP criterion > 100 elements after sieving at LDF is satisfied;
- weigh the laboratory sample, MS , using the balance (6.3);
- sieve the laboratory sample at LDF with the circular mesh sieve (6.4); (to make the sieving easier, the coarsest fractions may be removed manually, ensuring that they do not contain any fines);

e) weigh the undersized material with the balance (6.3), i.e. the *MF* fine pieces small enough to pass through the *LDF* sieve;

f) the elements not passing through the sieve shall be used to determine the maximum lengths as follows:

Place each element not passing through the sieve on the flat measurement surface. Use the ruler to measure to within ± 5 mm the largest length projected onto the illuminated measurement plane (6.2) without deforming the piece and excluding filaments. Any foreign body identified during this step shall be reported with a warning that it cannot be representative since the sampling plan is not designed for such foreign bodies;

g) obtain the total mass of any elements consisting solely of metal wires released from the pieces of end-of-life tyre (and which are not counted in the *TNF* pieces), *MLM*;

h) calculate the mass percentage of the loose metal wires, $MPM = 100 \times MLM/MS$;

i) calculate the mass percentage of the fine pieces, $MPF = 100 \times MF/MS$;

j) from the projected lengths excluding filaments, calculate the numerical percentages per class (and optionally the mass percentages);

NOTE 2 The histogram traced from these percentages gives an overview of the distribution of the maximum projected dimensions excluding filaments.

k) calculate the number percentage of large pieces, *NPL* (and optionally the mass percentage, *MPL*) corresponding to the piece larger than the higher dimension of the *HDF* format;

l) calculate the number percentage, *NPC* (and optionally the mass percentage, *MPC*) of the pieces in the *NCC* central classes amongst the *NCR* classes between the lower and higher dimensions of the format (*LDF* and *HDF*).

8 Precision

The method specified in this document has not yet been validated and therefore data on robustness, repeatability and reproducibility are currently unavailable.

9 Test report

The test report shall include at least the following information:

a) General information:

- 1) address of the sampling establishment and of the testing laboratory,
- 2) establishment responsible for the whole testing (sampling establishment or quantification establishment),
- 3) date of the test,
- 4) a reference to this European Standard, i.e. EN 15415-2,
- 5) any deviation from this European Standard;

- b) Information concerning sampling plan, taking of the field sample and producing the laboratory sample(s):
- 1) name of the sampler,
 - 2) place where the sample(s) were taken, possibly with photograph,
 - 3) date/hour of increment taking,
 - 4) size of population and lot,
 - 5) weighing results at the different sampling steps,
 - 6) storage conditions;

- c) Information concerning preparation of the test portion from the laboratory sample:

- 1) mass of the laboratory sample (*MS*, in kilograms),
- 2) report on any eventual observed foreign body;

NOTE Presently there is no systematic test method available for foreign bodies especially for efficient sampling procedures.

- d) Information concerning measurement of the lengths and statistical assessment:

- 1) name(s) of the person(s) performing the measurement,
- 2) mass of the fine pieces (*MF*, in kilograms),
- 3) results of the measurement of the projected lengths excluding filaments (in millimetres),
- 4) mass of the loose metal parts (*MLM*, in kilograms),
- 5) mass fraction of the loose metal wires (*MPM*, in percent),
- 6) mass fraction of the fine pieces (*PMF*, in percent),
- 7) number percentage of large pieces (*NPL*, in percent) corresponding to the piece larger than the higher dimension of the *HDF* format,
- 8) number percentage *NPC*, in percent, of the fractions in the number of central classes (*NCC*) amongst the number of classes between the lower and higher dimensions of the *LDF* and *HDF* format (*NCR*).

Bibliography

AFNOR XP T47-751, *Non reusable used tyres (NRUT) — Determination of the format of products from primary shredding — Manual method based on the measurement of the largest projected length*

AFNOR XP T47-756, *End-of-life tyres (ELT) — Sampling of products from primary shredding — Conveyor scenario*

CEN/TS 14243, *Materials produced from end of life tyres — Specification of categories based on their dimension(s) and impurities and methods for determining their dimension(s) and impurities*

CEN/TS 15414-2, *Solid recovered fuels — Determination of moisture content using the oven dry method — Part 2: Determination of total moisture by a simplified method*

ISO 3310-2, *Test sieves — Technical requirements and testing — Part 2: Test sieves of perforated metal plate*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™