

BS EN 15684:2012



BSI Standards Publication

Building hardware — Mechatronic cylinders — Requirements and test methods

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of EN 15684:2012.

The UK participation in its preparation was entrusted to Technical Committee B/538/4, Building hardware.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012. Published by BSI Standards Limited 2012

ISBN 978 0 580 77564 2

ICS 91.190

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2012.

Amendments issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN 15684

NORME EUROPÉENNE

EUROPÄISCHE NORM

October 2012

ICS 91.190

English Version

Building hardware - Mechatronic cylinders - Requirements and test methodsQuincaillerie pour le bâtiment - Cylindres mécatroniques -
Exigences et méthodes d'essaiSchlösser und Baubeschläge - Mechatronische
Schließzylinder - Anforderungen und Prüfverfahren

This European Standard was approved by CEN on 23 September 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG**Management Centre: Avenue Marnix 17, B-1000 Brussels**

Contents

Page

Foreword.....	4
Introduction	5
1 Scope	6
2 Normative references	6
3 Terms and definitions	7
4 Requirements	9
4.1 General.....	9
4.2 Category of use.....	9
4.2.1 Key strength.....	9
4.2.2 Stability of electronic key	9
4.2.3 Wrong electronic code	9
4.2.4 Bump requirements	9
4.2.5 Vibration requirements	9
4.2.6 Electrostatic discharge requirement	10
4.2.7 Minimum knob transmission	10
4.3 Durability requirements	10
4.4 Fire/smoke resistance	10
4.5 Environmental resistance	10
4.5.1 Corrosion resistance requirements	10
4.5.2 Resistance of MC against water.....	11
4.5.3 Dry Heat	11
4.5.4 Cold	11
4.5.5 Damp heat cyclic.....	11
4.5.6 Resistance of electronic key against water	11
4.6 Key related security.....	12
4.6.1 General.....	12
4.6.2 Minimum number of effective mechanical code variations	12
4.6.3 Minimum numbers of movable detainers.....	13
4.6.4 Maximum number of identical steps.....	13
4.6.5 Direct coding on key	14
4.6.6 Torque resistance of plug/cylinder relevant to key related security.....	14
4.6.7 Minimum number of electronic code variations.....	14
4.7 System management.....	15
4.8 Attack resistance requirements	15
4.8.1 General.....	15
4.8.2 Resistance to drilling	15
4.8.3 Resistance to attack by chisel.....	15
4.8.4 Resistance to attack by twisting	15
4.8.5 Resistance to attack by plug/cylinder extraction	16
4.8.6 Torque resistance of plug/cylinder relevant to attack resistance	16
4.8.7 Attack by hits	16
4.8.8 Attack by vibrations	16
4.8.9 Increased voltage attack.....	16
4.8.10 Electrostatic discharge attack.....	16
4.8.11 Magnetic field attack	16
4.9 Requirements for product information.....	17
5 Testing, assessment and sampling methods	18
5.1 General.....	18
5.2 Operational test.....	19

5.2.1	MC's operated by key	19
5.2.2	MC's operated by knob or thumb turn.....	19
5.2.3	MC's with freely rotating means, operated by key	20
5.2.4	MC's with freely rotating means, operated by knob or thumb turn.....	20
5.3	Performance tests.....	20
5.4	Category of use.....	21
5.4.1	Key strength	21
5.4.2	Stability of electronic key	21
5.4.3	Bump test (cylinder)	21
5.4.4	Vibration test.....	22
5.5	Durability tests	22
5.6	Fire/smoke resistance tests.....	24
5.7	Environmental resistance tests.....	24
5.7.1	Corrosion tests	24
5.7.2	Resistance of MC against water.....	24
5.7.3	Dry heat test (functional)	24
5.7.4	Cold test.....	25
5.7.5	Damp heat test (cyclic).....	25
5.7.6	Resistance of electronic key against water	26
5.8	Key related security.....	26
5.8.1	General.....	26
5.8.2	Minimum number of effective mechanical code variations	26
5.8.3	Torque resistance of plug/cylinder relevant to key related security.....	26
5.8.4	Minimum number of electronic code variations	26
5.9	System Management	26
5.10	Attack resistance tests.....	26
5.10.1	Resistance to drilling	26
5.10.2	Resistance to attack by chisel.....	27
5.10.3	Resistance to attack by twisting	28
5.10.4	Resistance to attack by plug/cylinder extraction	28
5.10.5	Torque resistance of plug/cylinder	32
5.10.6	Attack by hits test	33
5.10.7	Attack by vibrations test	34
5.10.8	Increased voltage attack test.....	34
5.10.9	Electrostatic discharge attack test	34
5.10.10	Magnetic field attack test	35
6	Classification system	35
6.1	Classification.....	35
6.2	Category of use: (1st character).....	36
6.3	Durability (2nd character):	36
6.4	Fire/smoke resistance (3rd character):	36
6.5	Environmental resistance (4th character):.....	36
6.6	Mechanical key related security (5th character):	36
6.7	Electronic key related security (6th character):	36
6.8	System Management (7th character):.....	36
6.9	Attack resistance (8th character):.....	37
6.10	Example of classification	37
7	Marking	37
Annex A	(normative) Suitability for use on fire/smoke resistant doors	38
Annex B	(normative) Tool sets for attack resistance tests.....	39
Annex C	(normative) Table of test procedures	42
Annex D	(informative) Installation instructions	44
Bibliography	45

Foreword

This document (EN 15684:2012) has been prepared by Technical Committee CEN/TC 33 “Doors, windows, shutters, building hardware and curtain walling”, the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2013, and conflicting national standards shall be withdrawn at the latest by April 2013.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

Mechanical cylinders have been used to provide security and control of locks. Increasing demand for higher security, flexibility of master key systems, flow control, copy control of keys, etc. have made it desirable to incorporate additional functions to such mechanical cylinders, and new technologies have made it possible to develop electronically controlled cylinders.

Mechanically performance of the mechatronic cylinder are based on EN 1303:2005.

Mechatronic Cylinder can technically be described in three main designs:

- a cylinder with both electrically and mechanically operated locking parts;
- a cylinder with electrically operated locking part and a key for mechanically rotating the plug;
- a cylinder with electrically operated locking part and with manual operated opening/closing function.

Increasingly such Mechatronic Cylinders (MCs) form a part of the security system of a building and may involve the use of electrical locking and controlling elements.

The performance tests incorporated in this European Standard are considered to be reproducible and as such will provide a consistent and objective assessment of the performance of these devices throughout CEN Member States.

It is assumed that mechatronic cylinders will conform to the legal regulations i.e. of the Electromagnetic Compatibility (**EMC**) - **Directive** 2004/108/EG, The Low Voltage (LV) - Directive 2006/95/EG, Radio & Telecommunications Terminal Equipment (**R&TTE**) - **Directive** 1999/5/EC and other relevant directives concerning electronic apparatus.

On occasions there may be a need for additional functions within the design of the cylinder. Purchasers should satisfy themselves that the products are suitable for their intended use. This is particularly important when the operation of such additional functions is safety-related. Accordingly, this European Standard includes assessment of such features when they are included in the cylinder design.

1 Scope

This European Standard specifies requirements for performance and testing of Mechatronic Cylinders and their keys and/or electronic keys.

It applies to cylinders for such locks designed to be normally used in buildings. It also applies to cylinders for use with other hardware products such as exit devices, door operators, etc. or monitoring facilities and alarm systems.

It establishes categories of use based on performance tests and grades of security based on design requirements and on performance tests that simulate attack.

This European Standard includes assessment of additional features when they are included in the cylinder design.

This European Standard does not cover any other element of a security system, other than those directly involved in the control of a cylinder.

The suitability of cylinders for use on fire or smoke-door assemblies is determined by fire performance tests conducted in addition to the performance testing specified by this European Standard; see Annex A.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 636:2003, *Plywood — Specifications*

EN 1303:2005, *Building hardware — Cylinders for locks — Requirements and test methods*

EN 1634-1, *Fire resistance and smoke control tests for door, shutter and openable window assemblies and elements of building hardware — Part 1: Fire resistance tests for doors, shutters and openable windows*

EN 1634-2, *Fire resistance and smoke control tests for door, shutter and openable window assemblies and elements of building hardware — Part 2: Fire resistance characterisation test for elements of building hardware*

EN 1634-3, *Fire resistance and smoke control tests for door and shutter assemblies, openable windows and elements of building hardware — Part 3: Smoke control test for door and shutter assemblies*

EN 1670:2007, *Building hardware — Corrosion resistance — Requirements and test methods*

EN 1906, *Building hardware — Lever handles and knob furniture — Requirements and test methods*

EN 60068-2-1, *Environmental testing — Part 2-1: Tests — Test A: Cold (IEC 60068-2-1)*

EN 60068-2-2, *Environmental testing — Part 2-2: Tests — Test B: Dry heat (IEC 60068-2-2)*

EN 60068-2-6:2008, *Environmental testing — Part 2-6: Tests — Test Fc: Vibration (sinusoidal) (IEC 60068-2-6:2007)*

EN 60068-2-29:1993, *Environmental testing — Part 2: Tests — Test Eb and guidance: Bump (IEC 60068-2-29:1987)*

EN 60068-2-30:2005, *Environmental testing — Part 2-30: Tests — Test Db: Damp heat, cyclic (12 h + 12 h cycle) (IEC 60068-2-30:2005)*

EN 60529:1991, *Degrees of protection provided by enclosures (IP Code) (IEC 60529:1989)*

EN 61000-4-2, *Electromagnetic compatibility (EMC) — Part 4-2: Testing and measurement techniques — Electrostatic discharge immunity test (IEC 61000-4-2)*

EN ISO 10666:1999, *Drilling screws with tapping screw thread — Mechanical and functional properties (ISO 10666:1999)*

EN ISO 15480, *Hexagon washer head drilling screws with tapping screw thread (ISO 15480)*

EN ISO 15481, *Cross recessed pan head drilling screws with tapping screw thread (ISO 15481)*

EN ISO 15482, *Cross recessed countersunk head drilling screws with tapping screw thread (ISO 15482)*

EN ISO 15483, *Cross recessed raised countersunk head drilling screws with tapping screw thread (ISO 15483)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

audit trail capability

degree of functionality intended to provide a record of mechatronic cylinder and/or its electronic key events that will identify the individual credential used to operate the mechatronic cylinder

3.2

attack

unauthorised attempt to open a mechatronic cylinder by various techniques (destructive and or non-destructive techniques)

3.3

cam

component of the cylinder to provide the movement necessary to effect locking

3.4

cylinder

device, usually distinct from its associated lock or latch, operated by a key

3.5

effective differ

difference between cylinders of similar design, achieved only by the movable detainer, which enables each cylinder to be operated only by its own key

Note 1 to entry: The number of effective differs is equal to the number of theoretical differs after deduction of the differs excluded by the manufacturer due to technical constraints and those differs excluded in accordance with the restraints of 4.8.4

3.6

electronic dummy key

electronic key which cannot electronically operate the mechatronic cylinder

Note 1 to entry: If applicable the electronic dummy key has the right mechanical code.

- 3.7**
electronic key
device containing information necessary to authorise operation of the (mechatronic) cylinder
- 3.8**
key
separate device corresponding to the cylinder, which can mechanically operate the cylinder
- 3.9**
key way
aperture extending along the whole or part of the length of the plug into which the key is inserted
- 3.10**
knob
element of the cylinder for mechanical hand operation of the cylinder
- 3.11**
mechatronic cylinder
MC
device with an integrated or a remote electronic system, which is to be used with a lock for the purpose of operating the lock and/or detaining elements after verifying the authorisation of an electronic key, and which can be replaced by a mechanical cylinder conforming to EN 1303 without replacing any door furniture
- 3.12**
moveable detainer
part of the mechanism of a cylinder, which should first be moved by the key into a pre-determined position before the key and/or plug can move
- 3.13**
plug
part of a cylinder that can be moved when the proper key is used
- 3.14**
steps
cuts in the surface of a bit or blade which operates movable detainers
- 3.15**
thumb turn
element of the cylinder for mechanical finger operation of the cylinder
- 3.16**
time zone
degree of functionality intended to provide security by limiting the time that a valid credential will operate the MC
- 3.17**
manufacturer
entity or organisation that is legally responsible for putting the product on the market

4 Requirements

4.1 General

The structure of the following requirements and test procedures reflects the classification in accordance with Clause 6.

4.2 Category of use

4.2.1 Key strength

When tested in accordance with 5.4.1 the electronic key shall not break under the applied maximum torque of 2,5 Nm.

After the test, the electronic key shall be capable of being removed from the MC and re-used to operate the same MC with a torque not exceeding 1,5 Nm.

4.2.2 Stability of electronic key

The electronic key shall be able to withstand a freefall from 1,5 m height, without loss of function and without the need to reassemble it.

Compliance is checked by the test method given in 5.4.2.

4.2.3 Wrong electronic code

When using a electronic dummy key with the right mechanical code the MC shall be capable of resisting a torque on the key of 3,5 Nm (or the maximum torque that can be transmitted with the normal manufacturers key if less than 3,5 Nm) without loss of function.

Compliance is checked by the test method given in 5.10.5.3, however with a torque of 3,5 Nm.

If a MC is equipped with a knob or thumb turn on the outside (replacing the key function) and this MC is not protected by a clutch to prevent damage in case of excessive torque being applied to the knob or thumb turn, the MC shall be capable of resisting a torque of 5 Nm (+5 %), without loss of function.

4.2.4 Bump requirements

The MC and its electronic keys shall be able to withstand bumps.

The MC shall conform to the requirements given in Table 1.

The MC and the electronic key may have temporary degradation or loss of function and/or data, but the MC shall remain in secured position. The loss of function and/or data shall be self-recoverable within 5 s.

Compliance is checked by the test methods given in 5.4.3.

4.2.5 Vibration requirements

The MC and its electronic keys shall be able to withstand vibrations.

The MC shall conform to the requirements given in Table 1.

The MC and the electronic keys may have temporary degradation or loss of function and/or data, but the MC shall remain in secured position. The loss of function and/or data shall be self-recoverable within 5 s. The loss of function and/or data shall be self-recoverable within 5 s after the vibration test.

Compliance is checked by the test methods given in 5.4.4.

Table 1 — Bump and Vibration requirements

Test method	Grade 1
1. Bump test EN 60068-2-29:1993	40 g (100 bumps / 3 directions) duration per bump 6 ms
3.a Vibrations EN 60068-2-6:2008	-Frequency range: 10 to 150 Hz -Displacement amplitude: 0,35 mm -Acceleration amplitude: 5 g -Duration of endurance in sweep cycles for each axis: 5 -Cross-over frequency : 58 Hz to 62 Hz -Sweep rate: 1 octave per minute

4.2.6 Electrostatic discharge requirement

The MC and its electronic keys shall be able to withstand high voltage and static electricity. It shall conform to the requirements given in EN 61000-4-2 and conform to the specification in Table 9, grade 0.

The MC and the electronic keys may have temporary degradation or loss of function and/or data, but the electric blocking of the MC shall remain in secured position. The loss of function and/or data shall be self-recoverable within 5 s.

Compliance is checked by the test method given in 5.10.9.

4.2.7 Minimum knob transmission

If a MC is equipped with a knob on the outside and this MC is protected by a clutch to prevent damage in case of excessive torque being applied to the knob, the clutch shall be able to transmit a minimum torque of 1,5 Nm having been released 100 times within 20 min.

4.3 Durability requirements

When tested in accordance with 5.5, it shall be possible to operate the MC with a new original authorised electronic key with a torque not exceeding 1.5 Nm after the number of completed test cycles specified in 6.3.

Compliance is checked by the test method given in 5.2.

4.4 Fire/smoke resistance

The MC shall conform to the requirements of Annex A.

4.5 Environmental resistance

4.5.1 Corrosion resistance requirements

After the corrosion test of 5.7.1, the MC shall operate, using a maximum torque on the electronic key of 1,5 Nm.

Compliance is checked by the test method in 5.2.

Corrosion resistance is applicable for environmental resistance, grades 2, 3 and 4 (see Table 2). This corrosion test shall apply to functionality only.

No distinction is made between the inside and the outside of cylinder and/or door.

4.5.2 Resistance of MC against water

The MCs shall have protection, against water.

After been tested as in 5.7.2 for grades 2, 3 and 4 in Table 2 the MC shall operate with its authorised electronic key.

4.5.3 Dry Heat

The MC and its electronic key shall be able to function correctly at different temperatures. It shall also be able to function correctly after being exposed to thermal shocks. See Tables 2 and 3 for environmental resistance MC and electronic keys.

Compliance is checked by the test methods of 5.7.3.

4.5.4 Cold

The MC and its electronic key shall be able to function correctly at different low temperatures. It shall also be able to function correctly after being exposed to thermal shocks. See Tables 2 and 3 for environmental resistance MC and electronic keys.

Compliance is checked by the test methods of 5.7.4.

4.5.5 Damp heat cyclic

The MC and its electronic keys shall be able to function correctly in an environment of high relative humidity. See Tables 2 and 3 for environmental resistance MC and electronic keys.

Compliance is checked by the test method of 5.7.5.

4.5.6 Resistance of electronic key against water

The electronic keys shall be able to operate its MC after they have been exposed to water in accordance with the test described in 5.7.6.

Table 2 — Environmental resistance MC

Requirement	Test clause	Grade				
		0	1	2	3	4
4.5.1 Corrosion resistance	5.7.1	-	-	Yes	Yes	Yes
4.5.2 Protection of MC against water	5.7.2	-	-	Yes	Yes	Yes
4.5.3 Dry heat	5.7.3	-	+55° C, 16 h	+55° C, 16 h	+55° C, 16 h	+65° C, 16 h
4.5.4 Cold	5.7.4	-	+5° C, 16h	+5° C, 16 h	-10° C, 16 h	-25° C, 16 h
4.5.5 Damp Heat (cyclic)	5.7.5	-	-	-	-	+55° C, 6 cycles

Table 3 — Environmental resistance MC Key

Requirement	Test clause	Grade				
		0	1	2	3	4
4.5.6 Resistance of electronic key against water	5.7.6	-	-	Yes	Yes	Yes
4.5.3 Dry heat	5.7.3	-	+55° C, 16 h	+55° C, 16 h	+55° C, 16 h	+65° C, 16 h
4.5.4 Cold	5.7.4	-	+5° C, 16 h	+5° C, 16 h	-10° C, 16 h	-25° C, 16 h
4.5.5 Damp Heat (cyclic)	5.7.5	-	-	-	-	+55° C, 6 cycles

4.6 Key related security

4.6.1 General

For classification of mechanical code variation (5th character), the following requirements shall be fulfilled:

- 4.6.2;
- 4.6.3;
- 4.6.4;
- 4.6.5;
- 4.6.6.

For classification of electronic code variation (6th character), the following requirements shall be fulfilled:

- 4.6.5;
- 4.6.6;
- 4.6.7.

In case of a double cylinder, it is assumed that the grades for both categories apply to the attack side/outside of the cylinder. This side shall have a proper indication/markings, either on the product or on the documents with the product.

4.6.2 Minimum number of effective mechanical code variations

The minimum number of effective mechanical code variations of the MC shall be as specified in Table 4.

Table 4 — Mechanical codes

	Mechanical codes	Correlation with EN 1303:2005	Torque resistance of plug/cylinder
Grade A:	-	no grade in EN 1303:2005	
Grade B:	100	grade 1 of EN 1303:2005	2,5 Nm
Grade C:	300	grade 2 of EN 1303:2005	5 Nm
Grade D:	15 000	grade 3 of EN 1303:2005	15 Nm
Grade E:	30 000	grades 4 or 5 of EN 1303:2005	15 Nm
Grade F:	100 000	grade 6 of EN 1303:2005	15 Nm

Compliance is checked by the test method of 5.8.2.

NOTE Grade A includes MCs without mechanical code variations.

4.6.3 Minimum numbers of movable detainers

The minimum number of movable detainers shall be as specified in Table 5.

Table 5 — Numbers of movable detainers

	Min number of detainers	Correlation with EN 1303:2005
Grade A:	-	no grade in EN 1303:2005
Grade B:	2	grade 1 of EN 1303:2005
Grade C:	3	grade 2 of EN 1303:2005
Grade D:	5	grade 3 of EN 1303:2005
Grade E:	5	grades 4 or 5 of EN 1303:2005
Grade F:	6	grade 6 of EN 1303:2005

4.6.4 Maximum number of identical steps

The choice of key steps for movable detainer operation, which have the same operating level, shall be as specified in Table 6.

Table 6 — Maximum number of identical steps

	Max numbers of identical steps	Correlation with EN 1303:2005
Grade A:	-	no grade in EN 1303:2005
Grade B:	100 %	grade 1 of EN 1303:2005
Grade C:	70 % , max. 2 adjacent	grade 2 of EN 1303:2005
Grade D:	60 % , max. 2 adjacent	grade 3 of EN 1303:2005
Grade E:	60 % , max. 2 adjacent	grades 4 or 5 of EN 1303:2005
Grade F:	60 % , max. 2 adjacent	grade 6 of EN 1303:2005

NOTE The requirements as specified in Table 6 relate to one row only of movable retainers.

4.6.5 Direct coding on key

Direct key coding shall not be used on electronic keys for key related security grades A to F.

4.6.6 Torque resistance of plug/cylinder relevant to key related security

Torque resistance of plug/cylinder shall be classified in relation to mechanical code variations. When tested as in 5.8.3 the MC shall resist the torque in Table 4 without operating the cylinder. If the torque cannot be applied, the cylinder shall be deemed to have passed the test.

This requirement is not applicable if the requirement of 4.8.6 is applied.

4.6.7 Minimum number of electronic code variations

The minimum number of electronic codes (different keys) of the MC shall be as specified in Table 7.

Table 7 — Electronic codes

	Electronic codes
Grade A:	10 000
Grade B:	100 000
Grade C:	1 000 000
Grade D:	10 000 000
Grade E:	100 000 000 Communication shall be protected This requirement shall be verified by the manufacturers declaration as described in 4.9.
Grade F:	1 000 000 000 Communication shall be protected This requirement shall be verified by the manufacturers declaration as described in 4.9.

Compliance is checked by the test method of 5.8.4.

4.7 System management

The audit trail record shall be stored in a form of non-volatile memory or data shall otherwise be preserved during removal of power supply. The MC shall have time zoning capability as specified in Table 8.

Table 8 — Audit trail and time zone

Grade 0	No requirement
Grade 1	Time zone without audit trail
Grade 2	Audit trail capability without time zone
Grade 3	Audit trail capability and time zone

Time zone and audit trail capability shall be protected against manipulation.

Compliance is checked by the test method of 5.9.

4.8 Attack resistance requirements

4.8.1 General

The MC shall conform to the requirements based on:

- Mechanical part without electronic lock (only MC);
- Electronic part with a electronic dummy key with right mechanical code;
- Both parts.

In case a MC is equipped with a knob or thumb turn on the attack side the MC should conform to the same performance (test requirements) in accordance with 5.10.4, using an appropriate tool for pulling a knob or thumb turn. When the knob or thumb turn can be removed with common tools and/or hitting in accordance with the chisel test given in 5.10.2, the test shall be performed without the knob or thumb turn.

The requirements for each grade are described in Table 9.

4.8.2 Resistance to drilling

After testing in accordance with 5.10.1, the lock driving element of the cylinders shall not rotate without the correct key, using a maximum torque of 5 Nm. It is not necessary for the correct key to operate the cylinder after testing.

4.8.3 Resistance to attack by chisel

After testing in accordance with 5.10.2, the lock driving element of the cylinders shall not rotate without the correct key, using a maximum torque of 5 Nm. It is not necessary for the correct key to operate the cylinder after testing.

4.8.4 Resistance to attack by twisting

After testing in accordance with 5.10.3, the lock driving element of the cylinders shall not rotate without the correct key, using a maximum torque of 5 Nm. It is not necessary for the correct key to operate the cylinder after testing.

4.8.5 Resistance to attack by plug/cylinder extraction

After testing in accordance with 5.10.4, the cam of the cylinders shall not rotate manually with 5 Nm through 360°, or in the case of cylinders with restricted plug movement, to the maximum permitted by the design.

It is not necessary for the correct key to operate the cylinder after testing.

4.8.6 Torque resistance of plug/cylinder relevant to attack resistance

After testing in accordance with 5.10.5, the plug and/or cylinder in attack resistance grades 0, 1 and 2 shall not rotate using the applied torque.

It is not necessary for the correct key to operate the cylinder after testing.

4.8.7 Attack by hits

When tested in accordance with 5.10.6 the MC and its electronic keys shall be able to withstand opening by hits within the time specified in Table 9.

4.8.8 Attack by vibrations

When tested in accordance with 5.10.7 the MC and its electronic keys shall be able to withstand opening by vibrations within the time specified in Table 9.

4.8.9 Increased voltage attack

The MC and its electronic keys shall be able to withstand electrical attacks by using higher voltage than the normal supply voltage DC specified by the manufacturer. The MC or electronic key may have degradation or loss of function which is not recoverable, due to damage of equipment or software, or loss of data. The electric blocking of the MC shall remain in a locked position.

Compliance is checked by the test method given in 5.10.8.

4.8.10 Electrostatic discharge attack

The MC and its electronic keys should be able to withstand electrical attacks and manipulation using high voltage and static electricity specified in Table 9.

For grades 1 and 2 the MC or electronic key may have degradation or loss of function which is not recoverable, due to damage of equipment or software, or loss of data. The electric blocking of MC shall remain in locked position.

Compliance is checked by the test method given in 5.10.9.

4.8.11 Magnetic field attack

The MC and its electronic keys, shall in grade 1 and grade 2 be able to withstand attacks and manipulation using a magnetic field. It shall not be possible to move the electronic blocking element from a closed to an open position by a magnet from any direction of the MC available after installation.

The MC shall withstand 2 min of attack by a maximum 0,6 T magnet.

The MC or electronic key may have degradation or loss of function which is not recoverable, due to damage of equipment or software, or loss of data. The electric blocking of the MC shall remain in locked position.

Compliance is checked by the test method given in 5.10.10.

Table 9 — Attack resistance

Sub clause number	Requirement	Test clause		Grade 0	Grade 1	Grade 2
4.8.2	Resistance to drilling	5.10.1	Effective time	No requirements	3 min	5 min
			Total time		5 min	10 min
4.8.3	Resistance to attack by chisel	5.10.2	Number of blows	No requirements	30 blows	40 blows
4.8.4	Resistance to attack by twisting	5.10.3	Number of twists	No requirements	20 twists	30 twists
4.8.5	Resistance to attack by plug/cylinder extraction	5.10.4	Time	No requirements	3 min	5 min
			Force		10 kN	15 kN
4.8.6	Torque resistance of plug/cylinder	5.10.5	Test 5.10.5.2	No requirements	20 Nm	30 Nm
			Test 5.10.5.3		key break or minimum 5 Nm	key break or minimum 7 Nm
4.8.7	Attack by hits	5.10.6	Effective time	No requirements	3 min	5 min
4.8.8	Attack by vibrations	5.10.7	Effective time	No requirements	3 min	5 min
4.8.9	Increased voltage attack test	5.10.8	Voltage	No requirements	Normal supply voltage + 6 V by a max. of 600 mA	Normal supply voltage + 48 V by a max. of 600 mA
4.8.10	Electrostatic discharge attack test	5.10.9	Contact	8 kV	8 kV	8 kV
			Air	15 kV	21 kV	21 kV
4.8.11	Magnetic field attack test	5.10.10	Time	No requirements	2 min	2 min

NOTE Grade 0 represents the requirements of 4.2 Category of use.

4.9 Requirements for product information

A MC and its electronic keys manufactured to this European Standard shall have clear and detailed instructions in its product documentation and/or product information for its installation operation and maintenance.

These instructions shall at least include the following:

- a) The limitations on its intended use, such as the limitation of the rated voltage, temperature range, environment and allowed back set, etc.
- b) The following warning in a prominent position: "The product should not be modified in any way except in accordance with those modifications described in the instructions."

- c) Installation and fixing instructions to ensure that the MC can achieve the performance requirements in this document, including any restriction in use, for example conditions under which the MC and its electronic key could be rendered inoperable. See Annex D.
- d) Maintenance and operation instructions to ensure that the MC and its electronic key continues to achieve the performance declared by the manufacturer for a reasonably economic working life.
- e) A list of all elements that are tested and approved for use with this MC and which may be packaged separately, e.g. cylinder accessories, etc.
- f) Information about the following product features:
 - 1) time zone possibilities (like number of time profiles, special time functions);
 - 2) the quality of time zones (for example recurring (daily, weekly) or calendar);
 - 3) authorisation process for an access modification (code, master card...);
 - 4) audit trails: quantity, with or without time-stamp, authorised access, denied access also, access programming;
 - 5) what happens with the access during and after the removal of main power;
 - 6) battery change: how long the data are been protected;
 - 7) battery low or main power failure, deeper than the minimum of working voltage;
 - 8) how long the audit trails will be stored.
- g) When a cylinder needs additional protection, e.g. security furniture in order to conform to a grade claimed by the manufacturer, then this shall be stated on the fixing instructions or other information which shall be provided with the product.

NOTE There are different ways of supporting/distributing this information.

5 Testing, assessment and sampling methods

5.1 General

In the event of a failure, the MC or key is considered to have failed the test. If not stated in the test procedure a new MC or key should then be submitted, and should then pass the failed test and the following tests in the sequence of this MC.

In the case of double sided MCs, where one side is of a different security grade than the other, both sides shall be subjected to the appropriate test schedule, and the higher security side shall be marked accordingly.

The test sequence is shown in Annex C, Table C.1 and Table C.2.

The test methods are described in this paragraph. MCs intended for use with a specific lock shall be tested together with the lock.

Unless stated otherwise, all values are $\pm 2\%$.

Fit the MC to the test rig in accordance with the manufacturer's instructions. The ambient temperature of the test environment shall be controlled throughout the tests to between $+15^{\circ}\text{C}$ and $+30^{\circ}\text{C}$. The environment shall be free from draughts.

Instruments with an accuracy of 1,5 % of measured values, or better, shall be used for measurements in accordance with these test methods.

All cycle testing equipment shall include means of recording the number of cycles attained.

The test rigs described in this document are principal examples. The test apparatus shall be rigid enough to avoid influencing test measurements.

The test method presumes that an electronic key can be put into the MC. If this is not necessary, the described test shall be made in a similar manner.

If a product is designed so that a torque cannot be applied to it (e.g. it is free spinning) it is deemed to pass the test.

During the tests parts of the MC shall not be repaired or replaced except for the battery.

5.2 Operational test

5.2.1 MC's operated by key

Fit the MC to a test rig simulating the installation in a door.

This test shall be conducted in the following sequence:

- a) insert a electronic dummy key into the MC;
- b) turn the electronic dummy key with a maximum torque of 2,5 Nm, or 3,5 Nm for 5.4.3, 5.4.4, 5.10.8, 5.10.9 and 5.10.10 in both directions consecutively, and maintain the torque for 5 s in each direction, verifying that the applied torque is not transferred to the cam;
- c) remove the electronic dummy key from the MC;
- d) insert a authorised electronic key into the MC;
- e) turn the electronic key with a maximum torque of 1,5 Nm;
- f) verify that the MC can be operated;
- g) remove the electronic key from the MC.

Repeat the test sequence five times.

5.2.2 MC's operated by knob or thumb turn

Fit the MC to a test rig simulating the installation in a door.

This test shall be conducted in the following sequence:

- a) try to operate the MC with a electronic dummy key;
- b) apply a maximum torque of 5 Nm in both directions consecutively, and maintain the torque for 5 seconds in each direction, verifying that the applied torque is not transferred to the cam;
- c) operate the MC with the electronic key;
- d) turn the knob or thumb turn with a maximum torque of 1,5 Nm;

- e) verify that the MC can be turned in both open and closed directions.

Repeat the test sequence five times.

5.2.3 MC's with freely rotating means, operated by key

Fit the MC to a test rig simulating the installation in a door.

This test shall be conducted in the following sequence:

- a) insert an electronic dummy key into the MC;
- b) turn the electronic dummy key in both directions consecutively, verifying that no torque higher than 0,3 Nm applied to the freely rotating means can be transferred to the cam;
- c) remove the electronic dummy key from the MC;
- d) insert a authorised electronic key into the MC;
- e) turn the electronic key with a maximum torque of 1,5 Nm;
- f) verify that the freely rotating means make the MC operable;
- g) remove the electronic key from the MC.

Repeat the test sequence five times.

5.2.4 MC's with freely rotating means, operated by knob or thumb turn

Fit the MC to a test rig simulating the installation in a door.

This test shall be conducted in the following sequence:

- a) try to operate the MC with a electronic dummy key;
- b) turn the knob or thumb turn in both directions consecutively, verifying that no torque higher than 0,3 Nm applied to the freely rotating means can be transferred to the cam;
- c) operate the MC with the authorised electronic key;
- d) turn the knob or thumb turn with a maximum torque of 1,5 Nm;
- e) verify that the freely rotating means make the MC operable and can be turned in both open and closed directions.

Repeat the test sequence five times.

If a system needs a different way of operating the MC the test should be in accordance with the product specification.

5.3 Performance tests

Testing of the MC should be carried out with the number of samples shown in Table C.1, testing should follow the sequence shown in Table C.1 in Annex C.

Except for test 5.4.2, 5.10.6, 5.10.7 and 5.10.10 the sequence shall be done on one sample.

a) Re-testing:

If the test fails, re-testing on two new samples shall be done. If none of the new object fails the test has been passed.

Otherwise the test fails and a documented change shall be shown for new complete sequence on the modified object. Repetition of already conducted successful tests is only necessary if the documented modifications affect these previous test results.

Each test of 5.10.6, 5.10.7 and 5.10.10, use two samples and each sample shall be tested by two tester, total four tests.

The result is accepted if non or one test fails of four in each of 5.10.6, 5.10.7 and 5.10.10.

b) Re-testing of 5.10.6, 5.10.7 and 5.10.10:

If two or more tests fail, new attempts shall be repeated in the presence of the manufacturer.

If none or one of the new attempts fails the test has been passed otherwise the test fails and a documented change must be shown for new complete sequence on the modified sample.

Repetition of already conducted successful tests is only necessary if the documented modifications affect these previous test results.

5.4 Category of use

5.4.1 Key strength

The MC shall be mounted; with the cam blocked against rotation, in the metal fixture illustrated in, Figure 4. The authorised electronic key shall be fully inserted in the MC and a torque of 2,5 Nm +/- 0,1 Nm applied to the electronic key without shock for a period of 5 s (+ 1 / - 0 s).

The electronic key shall than be removed, reinserted and shall operate the MC with a torque not exceeding 1.5 Nm.

NOTE In case a key is not intended to operate a cylinder mechanically this test can be omitted.

5.4.2 Stability of electronic key

Place the electronic key on a horizontal flat surface randomly orientated at a height of 1,5 m, push the key slowly over the edge. The surface on which the key falls shall be of concrete. The key shall operate the MC.

Number of tested keys: 10.

Repeat the test three times.

One failure is accepted.

5.4.3 Bump test (cylinder)

The test consists of exposing the MC and its electronic key, not inserted, to bumps.

Place the MC and related electronic key on a bump apparatus.

Follow the test procedure from EN 60068-2-29 with the parameters specified in Table 1.

After the test, subject the MC and its electronic key to the operational test of 5.2.

5.4.4 Vibration test

The test consists of long time exposing the MC and electronic key, not inserted, to sinusoidal vibration.

Place the MC and its electronic key on a vibration apparatus.

Follow the procedure from EN 60068-2-6.

Before the test, subject the MC to the operational test of 5.2 with its electronic key.


After changing the vibration axis, subject the MC to the operational test of 5.2 with its electronic key.

After the test, subject the MC with its electronic key to the operational test of 5.2.

5.5 Durability tests

The MCs shall conform to the requirements of 4.3.

Test the endurance of the MC using test apparatus as Figure 1.

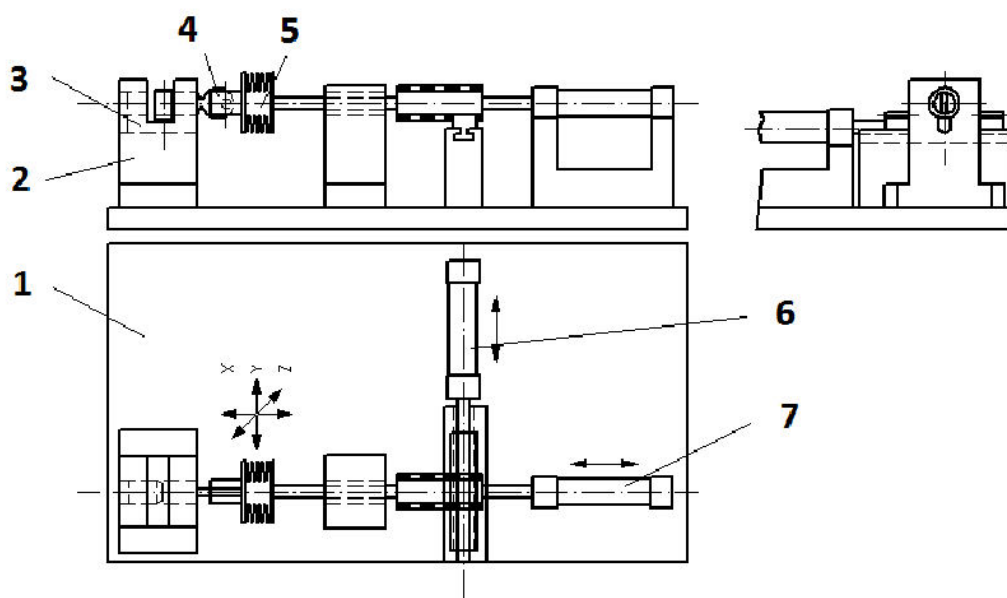

Key

- 1 fixture
- 2 cylinder fixture
- 3 cylinder
- 4 key
- 5 flexible key holder
- 6 motor for turning the key
- 7 motor for axial movement of key

Figure 1 — Durability test apparatus

Test the apparatus as follows:

- insert the electronic key and/or bring the cylinder in the state for operation;
- rotate it clockwise to 360° or to the maximum rotation limit of the design; during rotation the electronic key, knob or thumb turn has to overcome a torque applied to the plug of at least 0,15 Nm once to ensure that the cam will drive the deadbolt;
- withdraw the electronic key and/or bring the cylinder in the locked position;
- insert the electronic key and/or bring the cylinder in the state for operation;
- rotate it anticlockwise to 360° or to the maximum rotation limit of the design. During the rotation the electronic key, knob or thumb turn has to overcome a torque applied to the plug of at least 0,15 Nm once to ensure that the cam will drive the deadbolt;
- withdraw the electronic key and/or bring the cylinder in the locked position.

Count the number of successful test cycles.

The plug shall be free from torque during insertion and withdrawal of the electronic key. The resistive torque shall not be applied before an angle of 15° from the position of the electronic key extraction.

Repeat the sequence at a speed of three to twelve cycles per minute.

Between each step a) to f) and each cycle the rest time has to be specified by the manufacturer, if applicable.

During the cycle test, the electronic key may remain partly inserted in the cylinder but shall have cleared all movable retainers.

The electronic key used for the durability test can be cleaned and the MC shall be lubricated in accordance with the instructions of the manufacturer at the start of the test and after each 5 000 cycles using a lubricant recommended by the manufacturer.

After completion of the appropriate number of cycles the operation of the cylinders shall be tested using a new authorised electronic key. The rotation shall be obtained with a maximum torque of 1,5 Nm.

In cases where it is not possible to use the Standard cycle sequence, the manufacturer shall specify an alternative sequence that conforms as closely as possible to the Standard procedure. Subject to the approval of the testing authority the modified sequence shall then be used. The test report shall include a description of the special cycle used and the approval of the test authority.

If the cylinder should jam and cease to operate during the test, then providing the cylinder continues to operate in the proper manner when released, the test shall continue.

After each 10 000 cycles compliance is checked by the test method of 5.2 (only one sequence).

The durability test excludes the battery lifetime in cylinder, knob and/or key.

Final measurements: After the test, subject the MC to the operational test of 5.2.

If a cylinder is uniquely suitable for use with a particular lock unit, or where a cylinder is sold with and intended for use with a particular lock unit, then the cylinder shall be tested with the lock without applying the 0,15 Nm resistive torque in the test.

5.6 Fire/smoke resistance tests

Reference is made to Annex A.

5.7 Environmental resistance tests

5.7.1 Corrosion tests

The MC shall be tested with a neutral salt spray in accordance with 6.1 of EN 1670:2007, grade 3.

For this test the cylinders shall be mounted in a block in accordance with the manufacturer's instructions and stood in the cabinet, so that the cylinders are oriented in the manner that they would assume in use.

After the salt spray procedure, it shall be possible to operate a cylinder with the proper key using a maximum torque described in 4.5.1 within 5 min where the electronic key may be inserted several times and/or moved in a rotating way.

This test shall be started within one minute after completion of the salt spray test.

The MC may be lubricated before and/or during the operational test in accordance with the manufacturer's instructions.

5.7.2 Resistance of MC against water

The MCs shall be mounted in a fixture with provision for the fitting of any necessary reinforcement or protection devices supplied with the cylinder. This test rig should conform to the installation of the MC in practice.

Except for the acceptance criteria, the MCs shall be tested with the IP X4 test methods as described in EN 60529:1991 and EN 60529:1991/A1:2000.

After the test, wait 10 minutes in ambient temperature before operate the MC with it's authorised electronic key.

After a maximum of three attempts the electronic key shall operate the MC as in 5.2.

The key may be dried after each attempt.

Unless otherwise specified, testing refers to the attack side of the MC.

5.7.3 Dry heat test (functional)

Expose the MC and its electronic keys to the temperature for sufficient time to allow temperature stability to be reached, and for functional tests to be conducted.

The MC shall be placed in a test chamber using the test rig in accordance with the manufacturer's instructions. The keys shall be kept at room temperature.

The test apparatus and procedure shall be as described in EN 60068-2-2. The tests with gradual changes in temperature shall be used.

Before the test, subject the MC to the operational test of 5.2.

a) Conditioning of MC:

- 1) Place MC into a test chamber;

- 2) Apply a conditioning temperature in accordance with the classification of Table 2;
- 3) Keep the keys at a room temperature (between 15° C and 25° C).

b) Conditioning of electronic key:

- 1) Place the electronic key into a test chamber
- 2) Apply a conditioning temperature in accordance with the classification of Table 3;
- 3) Keep the MC at a room temperature (between 15° C and 25° C).

After the test period, remove the MC respectively the electronic key from the test chamber. Subject the MC and the electronic key to the operational test of 5.2 within 5 min.

Both tests may be combined.

5.7.4 Cold test

Expose the MC and its electronic keys to the temperature for sufficient time to allow temperature stability to be reached, and for functional tests to be conducted.

The MC shall be placed in a test chamber using the test rig in accordance with the manufacturer's instructions.

The keys shall be kept at room temperature.

The test apparatus and procedure shall be as described in EN 60068-2-1. The tests with gradual changes in temperature shall be used.

Before the test, subject the MC to the operational test of 5.2.

a) Conditioning of MC:

- 1) Place MC into a test chamber;
- 2) Apply a conditioning temperature in accordance with the classification of Table 2;
- 3) Keep the keys at a room temperature (between 15° C and 25° C).

b) Conditioning of key:

- 1) Place the key/electronic key into a test chamber;
- 2) Apply a conditioning temperature in accordance with the classification of Table 3;
- 3) Keep the MC at a room temperature (between 15° C and 25° C).

After the test period, remove the MC respectively the electronic key from the test chamber. Subject the MC and the electronic key to the operational test of 5.2 within 5 min.

5.7.5 Damp heat test (cyclic)

Expose the MC and its electronic keys to cyclic temperature and humidity variations as specified in EN 60068-2-30:2005, variant 1 (see Tables 2 and 3). The rates of increase of temperature are such that condensation should occur on the surface of the specimen.

The MC and its electronic keys shall be placed in the test chamber using the test rig in accordance with the manufacturer's instructions.

The test apparatus and procedure shall be as described in EN 60068-2-30. The Variant 1 test cycle and controlled recovery conditions shall be used.

Apply a conditioning upper temperature of 25° C and carry out two cycles.

After the test period, subject the MC to the operational test of 5.2.

5.7.6 Resistance of electronic key against water

The electronic key programmed and operating its MC shall be placed in water at ambient temperature and 10 cm deep for 10 s \pm 10 %.

Wipe the key dry.

Insert/present the key in/to the MC within 2 min after starting the test.

After a maximum of three attempts the electronic key shall operate the MC and conform to 5.2.

5.8 Key related security

5.8.1 General

All information for mechanical and/or electronic code variations should be submitted in a form of a declaration by the manufacturer.

In case of a double cylinder, it is assumed that the grades for both categories apply to the attack side/outside of the cylinder. This side shall have a proper indication/markings, either on the product or on the documents with the product.

5.8.2 Minimum number of effective mechanical code variations

Check in accordance with 4.6.2, based on manufacturer's information.

5.8.3 Torque resistance of plug/cylinder relevant to key related security

Torque resistance of plug and/or cylinder shall be tested in accordance with-5.10.5.

5.8.4 Minimum number of electronic code variations

Check in accordance with 4.6.7, based on manufacturer's information.

5.9 System Management

Check the information from the manufacturer's product documentation with the graded performance of the MC and/or the electronic keys and verify it conforms to 4.7.

5.10 Attack resistance tests

5.10.1 Resistance to drilling

The MC shall resist drilling in accordance with 4.8.2 and Table 9.


The cylinders shall be mounted in a fixture with provision for the fitting of any necessary reinforcements or protection devices supplied with the cylinder (example see Figure 2). A 700 W \pm 10 % (power consumption) hand drilling machine with a speed of 500 rpm to 800 rpm shall be mounted on a sliding block.

A force not exceeding $300 \text{ N} \pm 5 \%$ shall be applied axially to the drill without shock.

High-speed steel drills (see bibliography) shall be used with a maximum diameter of 12 mm.

The test authority shall choose the actual diameter and the points of application to the face of the cylinder. A maximum of three drills per cylinder can be used.

Drilling shall continue for the appropriate maximum net drilling time within the total time allowed for each test, including time taken to attempt rotation of the cylinder, as follows: within the allowed total test time the lock driving element of the cylinder shall not rotate to the opening position when applying a maximum torque of 5 Nm by means of a suitable tool.

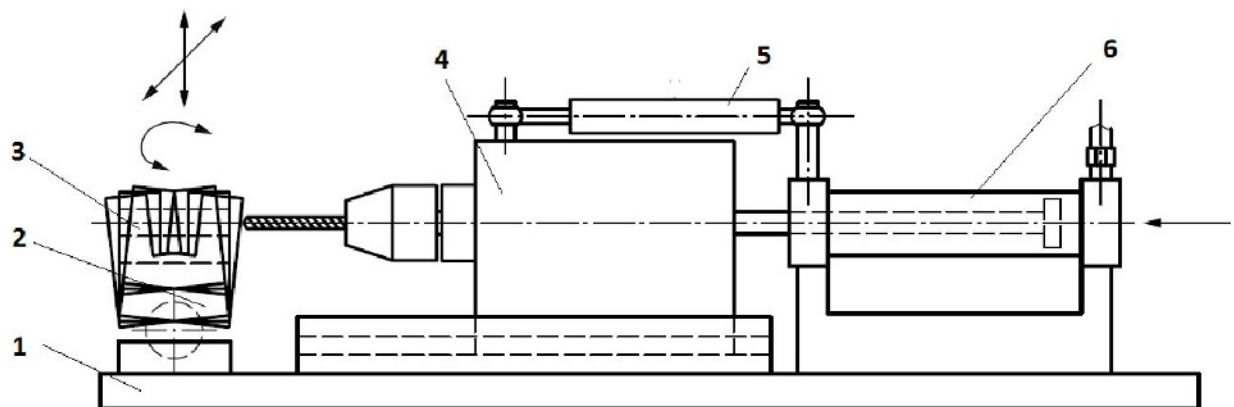

Key

- 1 fixture
- 2 cylinder fixture adjustable
- 3 cylinder
- 4 drill machine
- 5 chock absorber
- 6 motor for axial movement of drill

Figure 2 — Drilling fixture

5.10.2 Resistance to attack by chisel

The MC shall resist attack by chisel in accordance with 4.8.3 and Table 9.

The cylinders shall be tested in an apparatus as illustrated in Figure 3.

The test shall be carried out with a steel chisel (30 ± 1) mm wide, by (200 \pm 20) mm long, with a bit angle of $60^\circ \text{ C } -0 / + 5$ whose hardness is 52 Rockwell C to 58 Rockwell C.

The MC, including any reinforcement or protection device supplied with them, shall be mounted to the wooden block (using packers where appropriate) to give the maximum permissible projection, in accordance with the manufacturer's instructions, and the chisel applied to the protection or the cylinder at an angle not exceeding 10° from the plane of the surface of the test block. The wood test block shall be of laminated wood (EN 636:2003, class F 30/40, E 40/50 having between 18 and 22 laminates, or similar) with dimensions (100 \pm 5) mm \times (300 \pm 5) mm \times (40 \pm 2) mm.

The thickness of the wood test block to be defined in accordance with the manufacturers mounting instructions. A maximum of 30 blows in attack resistance grade 1 and 40 blows in attack resistance grade 2

shall be applied to the chisel by a drop hammer with a mass of 6 kg +/- 0,25 kg and falling from a height of 700 mm +/- 10 mm.

The test shall be discontinued if failure to conform to 4.8.2 becomes obvious during the test.

If the cylinder is fitted with furniture in accordance with EN 1906, then the security furniture shall conform to the appropriate clause. If the manufacturers' combination of escutcheon / security furniture prevents the chisel from being applied then it is deemed to have passed the test.

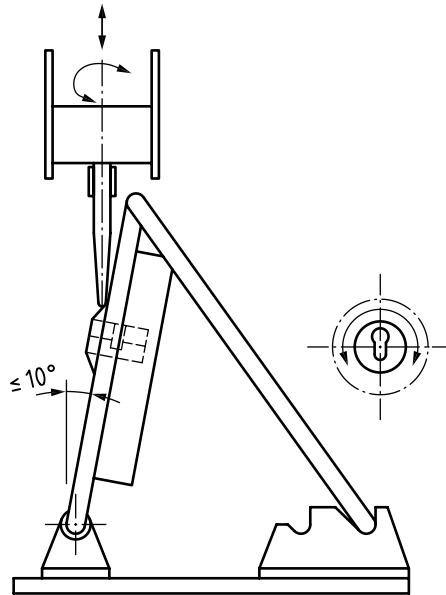


Figure 3 — Chisel attack fixture

5.10.3 Resistance to attack by twisting

The MC shall conform to the requirements of 4.8.4 and Table 9.

The cylinders shall be fitted to a test apparatus as described in 5.10.2 in accordance with the manufacturer's instructions. Any suitable tool can be used to grip the cylinders and/or the protection device and an attempt shall be made to break them by twisting using an applied maximum torque of 250 Nm.

The torque shall be applied progressively and without shock in 5 s and sustained for 4 s at each cylinder.

If the cylinder and/or its protecting device cannot be gripped and the cylinder does not project beyond the protecting device and/or face of the door more than 3 mm, then the test is passed.


A maximum of 20 twists in attack resistance grade 1 and 30 twists in attack resistance grade 2 shall be performed, 10 and 15 times respectively in each direction clockwise and anticlockwise.

The test shall be discontinued if failure to conform to 4.8.4 becomes obvious during the test.

5.10.4 Resistance to attack by plug/cylinder extraction

The MC shall conform to the requirements of 4.8.5 and Table 9.

The cylinder, including any necessary reinforcement or protection devices recommended by the manufacturer or supplied with them, shall be mounted in the metal fixture as illustrated in Figure 4 in accordance with the manufacturer's instructions.

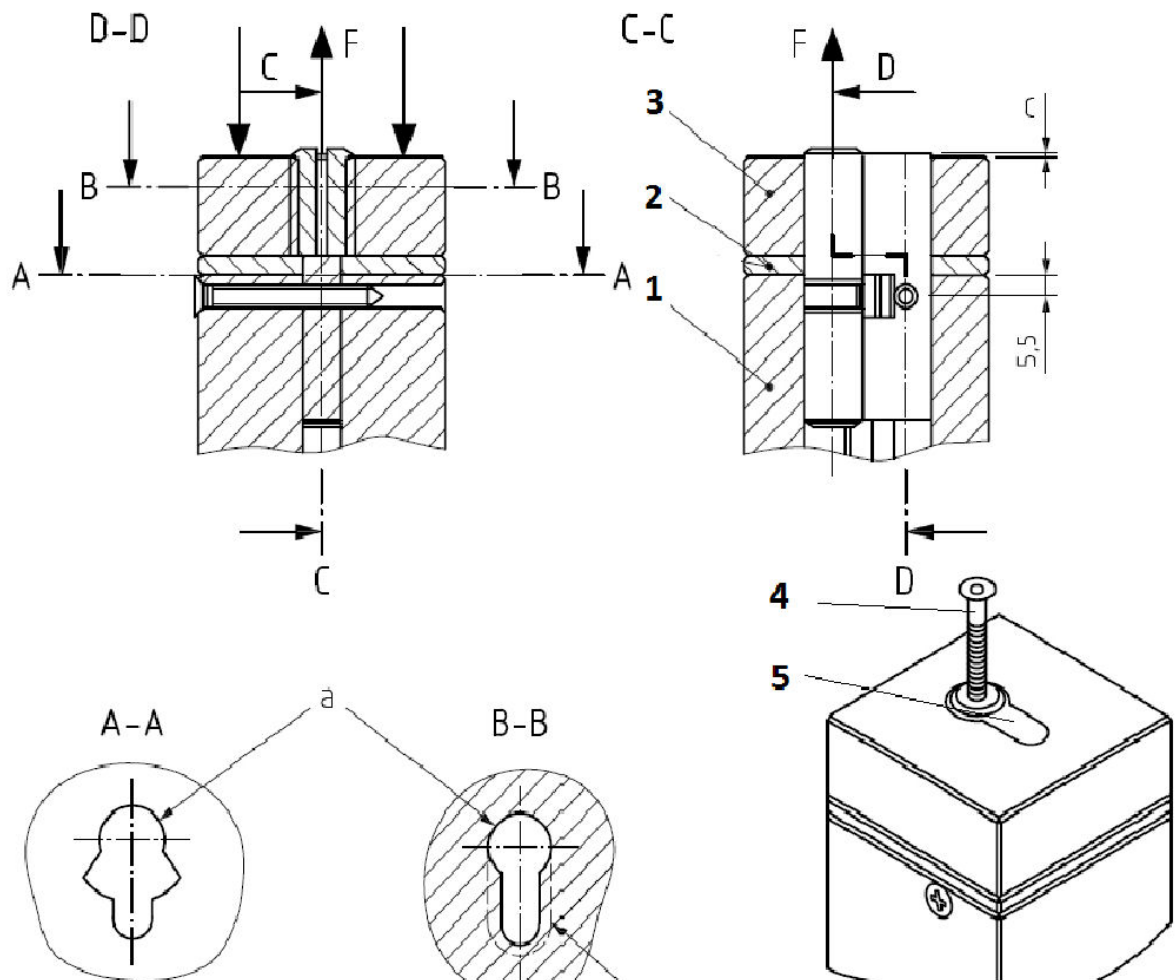


Key

- 1 fixture
- 2 distance for different cylinder length
- 3 cylinder holder
- 4 pulling screw
- 5 cylinder

- a) gap 0,2 to max cylinder and cam dimension for all parts (pos 1, 2 and 3)
- b) cut out for additional fixations according to manufacturers specification
- c) max 3 mm overlap

Figure 4a) — Fixture for Resistance to attack by plug/cylinder extraction "Euro profile"

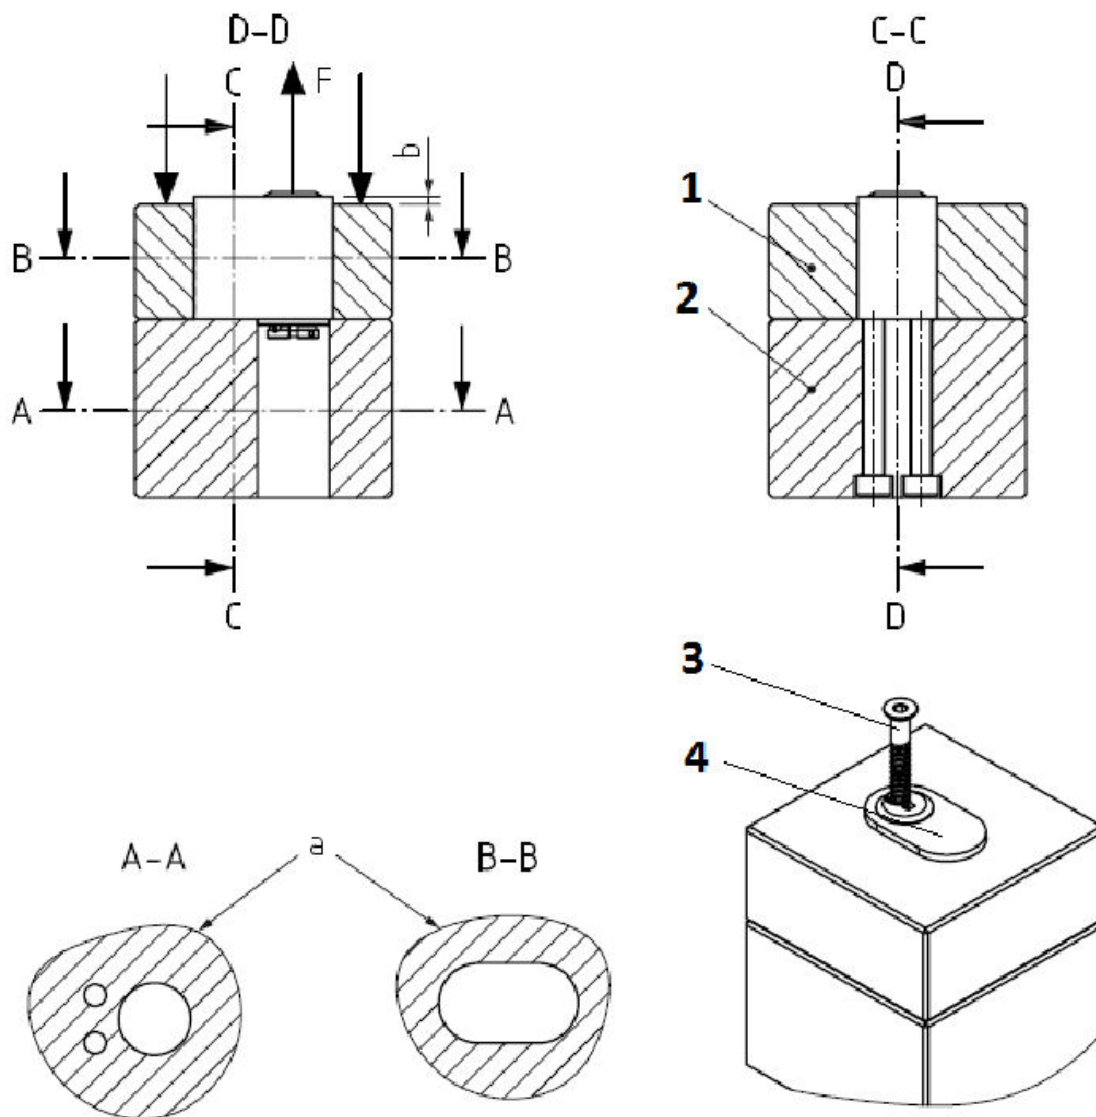


Key

- 1 distance for different cylinder length
- 2 fixture
- 3 pulling screw
- 4 cylinder

- a) gap 0,2 mm to max cylinder and cam dimension for all parts (pos 1 and 2)
- b) max 3 mm overlap

Figure 4b) — Fixture for Resistance to attack by plug/cylinder extraction "Scandinavian cylinder"

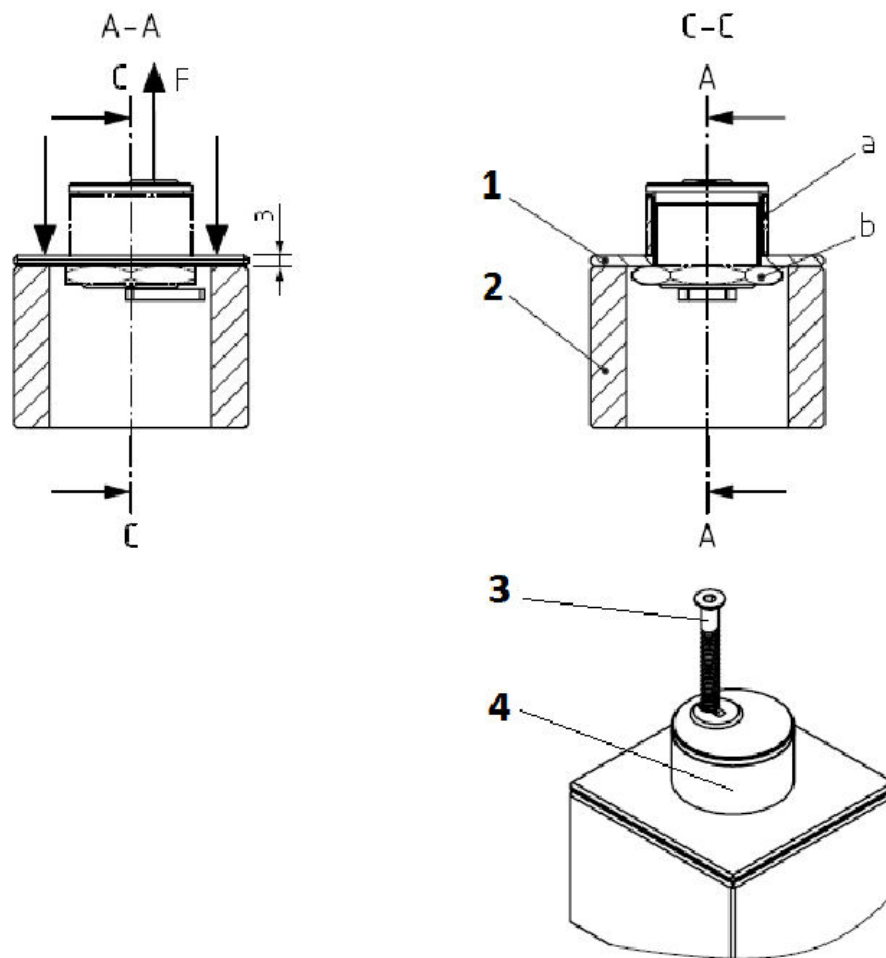

Key

- 1 distance for different cylinder length
- 2 fixture
- 3 pulling screw
- 4 cylinder

- a) sleeve according installation instruction
- b) alternative fixation with nut

Figure 4c) — Fixture for Resistance to attack by plug/cylinder extraction "Screw in or Cam cylinder"

A self cutting traction screw to EN ISO 10666, EN ISO 15480 - EN ISO 15483 of a maximum diameter of 5,5 mm shall be screwed into the plug/cylinder and an attempt made to withdraw the plug/cylinder by means of the appropriate maximum force specified in Table 8 applied progressively without shock within the time allowed. The time allowance begins from commencing to insert the traction screw.

NOTE: The self cutting traction may screw to DIN 7504 K.N.P.Q.

If the design of the security furniture used to protect the cylinder does not enable the force to be applied then it is deemed to have passed the test.

The washer or fixing tool has to be designed in such a way that it can be used without unscrewing the screw.

The diameter of the hole shall not be drilled or enlarged to insert a screw of larger diameter than that inserted in the first attempt.

The pulling test is conducted with one screw only at the same time.

The screw or the plug shall not be lubricated before or during the attempt to insert the screw.

Perform a pull test on a screw which is screwed into the plug. The pulling shall continue until either:

- the pulling force in Table 9 for the grade has been reached or;
- the whole cylinder is removed or;
- the plug is removed from the cylinder or;
- the screw is completely withdrawn from the plug or;
- the screw is broken.

More than one pulling test is allowed on the same cylinder with different screw diameters within the time for the test according to the grade in Table 9.

The screw shall not reach the coupling area of the cylinder (to prevent damage to the housing).

The cylinder has to be put horizontally before applying the screw.

The screw shall be applied parallel (tolerance $\pm 5^\circ$) to the rotation of the cylinder plug.

The use of an electric screwdriver with a maximum torque of 12 Nm is allowed and shall be specified in the test report.

Net time is defined as the maximum time for active testing.

The time starts when the screw touches the cylinder and ends when:

- the maximum time is achieved;
- the follower turned with a torque of max 5 Nm in 360° or;
- the angle corresponding to the normal turning of the cylinder or;
- termination by the test operator.

The time restarts when the pulling force starts to pull. The time will be stopped when the screw is out of the cylinder. If a second attempt with an additional screw will be made, the time shall restart when screwing in the additional screw.

The pulling force shall linearly increase from 0 kN up to 15 kN within a period of $30 \text{ s} \pm 5 \text{ s}$. The maximum force shall be held for 5 s.

5.10.5 Torque resistance of plug/cylinder

5.10.5.1 General

The torque resistance of plug and/or cylinder shall conform to 4.6.6 for key related security and 4.8.6 for attack related security. The cylinders shall be mounted in the metal fixture illustrated in Figure 5 in accordance with the manufacturer's instructions. A torque shall be applied to the plug as described in 5.10.5.2 or 5.10.5.3.

5.10.5.2 Torque resistance applied with any tool

The MC shall be in the mode where all blocking parts (mechanical and/or electrically operated) are in action.

A torque from Tables 4 or 9 shall be applied linearly without shocks to the plug by an appropriate tool inserted in the keyway. The maximum torque shall be held for 5 s.

If the cylinder does not have a keyway the torque shall be applied to those parts of the cylinder that transmit the torque for mechanical operation.

5.10.5.3 Torque resistance applied with key blank

The test is performed to MC with both mechanical and electrical operated blocking and for grade 1 and grade 2 of 4.8.6 the cylinder shall be in the mode where only the electrically blocking parts are in action.

A torque from Table 9 shall be applied linearly without shock to the plug by an key with right mechanical code but wrong electrical code inserted in the keyway. The torque shall be held for 5 s. Increase the torque with the same speed until the key breaks. The torque shall not be transferred to the cam. If the key breaks with a torque less than the torque required in Table 9 the electrically operated blocking shall be checked by applying the torque directly to the plug (with appropriate means).

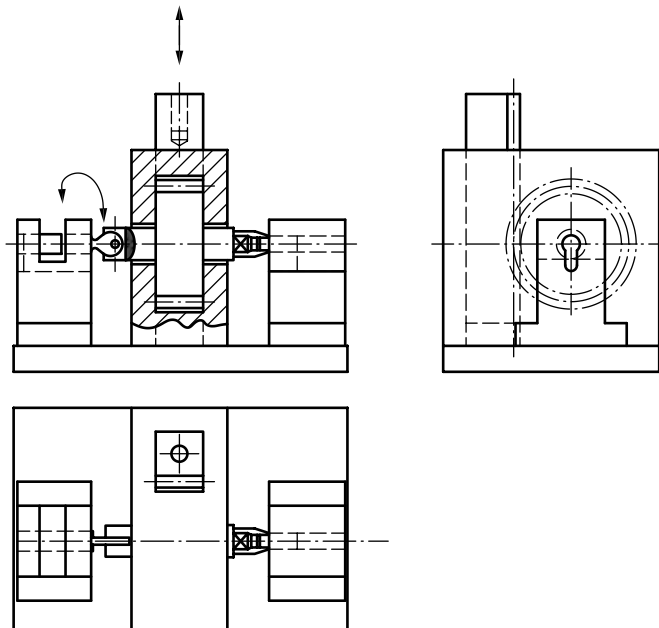


Figure 5 — Torque resistance fixture

5.10.6 Attack by hits test

This test is to verify that the electrical operated locking element is resistant against attacks caused by hits direct to the cylinder, key, knob, thumb turn and device visible after mounting on the fixture.

For attack resistance grades 1 and 2, two cylinders shall be tested by two testers independent of each other as described in Annex C, Tables C.1 and C.2.

The cylinders shall be mounted in a fixture with provision for the fitting of any necessary reinforcement or protection devices supplied with the cylinder. This test rig should conform to the installation of the MC in practice.

The manual attack shall be performed using the tools from the tool set for hits specified in annex B, table B.1 to move the electrically operated blocking element in order to operate the cylinder or cam mechanism with a key with right mechanical code but with wrong electronic code or with the tools using a torque of approx. 1 Nm.

The hits shall not give marks on the objects that can be related to the hits.

Verify with 5.2.1 to 5.2.4 a) and b) after the test that the MC shall not operate without the correct key or by its knob. It is not necessary to operate the MC after the test with the correct key.

5.10.7 Attack by vibrations test

This test is to verify that the electrical operated locking element is resistant against attacks caused by vibrations direct to the cylinder, key, knob, thumb turn and device visible after mounted on the fixture.

For attack resistance grades 1 and 2, two cylinders shall be tested by two testers independent of each other as described in Annex C, Table C.1 and C.2.

The cylinders shall be mounted in a fixture with provision for the fitting of any necessary reinforcement or protection devices supplied with the cylinder. This test rig should conform to the installation of the MC in practice.

A manual attack shall be performed using the tools out of tool set for vibration specified in Annex B, Table B.2 to move the electrically operated blocking element so it is possible to operate the cylinder or cam mechanism with a key with right mechanical code but with wrong electronic code or with the tools using a torque of approx. 1 Nm.

The vibrations shall not give marks on the objects that can be related to the vibrations.

Verify with 5.2.1 to 5.2.4, a) and b) after the test that the MC shall not operate without the correct key or by its knob. It is not necessary to operate the MC after the test with the correct key.

5.10.8 Increased voltage attack test

This test is to verify that the electronic blocking element shall not move from a closed to an open position when a voltage higher than that for which the MC is rated is applied through contacts or by other means.

The MC shall be installed in a test rig in accordance with the manufactures instruction as it is intended for normal use (door, lock, escutcheons).

Apply the appropriate voltage, as specified in 4.8.8, to electric contacts accessible from the secured side or other visible parts of MC. The time of the current supply is 10 s.

For MC with mechanical operated blocking the electronic dummy key shall be used.

The added voltage and currency shall be limited in the test apparatus.

Verify with 5.2.1 to 5.2.4 a) and b) after the test that the MC shall not operate without the correct key or by its knob. It is not necessary to operate the MC after the test with the correct key.

5.10.9 Electrostatic discharge attack test

This test is to verify that the electronic blocking element shall not move from a closed to an open position by using high voltage electric discharge.

The MC shall be installed in a test rig in accordance with the manufactures instruction as it is intended for normal use (door, lock, escutcheons).

Test the MC in accordance with EN 61000-4-2 from the secured side to visible parts of MC, with voltage levels defined in Table 7.

For MC with mechanical operated blocking the electronic dummy key shall be used.

Test the MC for ungrounded and grounded equipment as follows :

- polarity: + & -
- apply discharges to the parts of MC accessible after installation
- number of discharges: 10 for each position, voltage and polarity
- time interval between successive discharges: ≥ 1 s
- maximum five positions

After each discharge, verify with 5.2,1 to 5.2.4 a) and b) that the MC shall not operate without the correct key or by its knob. It is not necessary to operate the MC after the test with the correct key.

5.10.10 Magnetic field attack test

This test is to verify that the electronic blocking element shall not move from a closed to an open position by a magnetic field of a permanent magnet from any direction of the MC available after installation.

If the MC has mechanical operated blocking, the test should consider the use of a key with the right mechanical code but with no, or the wrong, electric code.

The MC shall be installed in the test rig made of non-magnetic material in accordance with the manufacturer's instructions.

The test shall be done by two permanent magnet of different sizes:

- a) field strength of $0,6 \text{ T} \pm 10\%$ by a distance of 0 mm, having a diameter size between 10 mm and 20 mm and a maximum lifting force on iron of 100 N;
- b) field strength of $0,6 \text{ T} \pm 10\%$ by a distance of 0 mm, having a diameter size between 40 mm and 60 mm and a lifting force on iron between 400 and 600 N.

The electronic blocking element shall be tested using the permanent magnets being placed in any direction and as close as possible to the specimen accessible after installation without removing any escutcheons or protective security furniture recommended by the manufacturer.

During the attack try to operate the cylinder using the key or tools specified in Annex B, Table B.3. Use the permanent magnet to open the cylinder within an overall time of 2 min. The torque on the key or attack tool is restricted to only torque produced by fingers applied to the key bow (approx. 1 Nm).

Verify with 5.2.1 to 5.2.4 a) and b) after the test that the MC shall not operate without the correct key or by its knob. It is not necessary to operate the MC after the test with the correct key.

6 Classification system

6.1 Classification

Classification of the MC and the electronic key shall be in accordance with the classification system as shown in Table 10 and as described in 6.2 to 6.9.

The MC and the electronic key may be classified independently from each other.

The grade awarded under each character will be the lowest performance level achieved.

Table 10 — Classification system

1	2	3	4	5	6	7	8
Category of use	Durability	Fire/smoke resistance	Environmental resistance	Mechanical key related security	Electronic key related security	System management	Attack Resistance

6.2 Category of use: (1st character)

The MC and the electronic key shall be classified in category of use grade 1 for use by people with a high incentive to exercise care and with a small chance of misuse in accordance with 4.2.

6.3 Durability (2nd character):

Three grades of durability are identified as follows:

- Grade 4: 25 000 test cycles;
- Grade 5: 50 000 test cycles;
- Grade 6: 100 000 test cycles.

6.4 Fire/smoke resistance (3rd character):

Three grades of fire/smoke resistance are identified; reference is made to Annex A:

- Grade 0: not approved for use on fire/smoke door assemblies;
- Grade A: suitable for use on smoke door assemblies;
- Grade B: for use on fire and smoke door assemblies.

6.5 Environmental resistance (4th character):

Five grades (grade 0 to grade 4) of environmental resistance are identified in accordance with Tables 2 and 3.

6.6 Mechanical key related security (5th character):

Six grades (grade A to grade F) of mechanical key related security are identified in accordance with Tables 4, 5 and 6.

6.7 Electronic key related security (6th character):

Six grades (grade A to grade F) of electronic key related security are identified in accordance with Table 7.

6.8 System Management (7th character):

Four grades (grade 0 to grade 3) of system management are identified in accordance with Table 8.

6.9 Attack resistance (8th character):

Three grades (grade 0 to grade 2) of attack resistance are identified in accordance with Table 9.

6.10 Example of classification

Table 11 — Example of classification of MC

1	2	3	4	5	6	7	8
Category of use	Durability	Fire/smoke resistance	Environmental resistance	Mechanical key related security	Electronic key related security	System management	Attack Resistance
1	5	0	3	E	D	1	1

Table 12 — Example of classification of electronic key

1	2	3	4	5	6	7	8
Category of use	Durability	Fire/smoke resistance	Environmental resistance	Mechanical key related security	Electronic key related security	System management	Attack Resistance
1	5	0	3	E	D	1	1

7 Marking

The classification in Clause 6 shall be quoted in the accompanying documents relevant to the cylinder or in the product documents, on its labelling or packaging and/or by marking the product itself or by more than one of these methods.

Annex A (normative)

Suitability for use on fire/smoke resistant doors

A.1 Three grades of fire/smoke resistance are identified:

- Grade 0: not approved for use on fire/smoke door assemblies;
- Grade A: for use on smoke door assemblies, based on the requirements of A.2;
- Grade B: for use on fire/smoke door assemblies "in accordance with the requirements in A.3".

A.2 Products for grade A shall fulfil one of the following requirements:

- The material for the parts of the MC which are responsible for preventing any leakage of smoke shall have a melting point of not less than 300°C;
- A smoke doorset incorporating a MC shall be subjected to a smoke test in accordance with EN 1634-3.

A.3 Products for grade B representative of their type shall have been subjected to a successful fire test, in accordance with EN 1634-1 or EN 1634-2, to prove the effect of the product on the fire resistance of the complete door assembly. It is not necessary for the product to be operable after such a fire test.

The cylinder should be tested with a battery as recommended in the product information.

In addition to the classification for suitability of fire doors the following information shall be included in the installation instructions:

- reference to the fire test report;
- type of test door for the product family (wood, metal sheet, etc.).

NOTE It is not necessary for the cylinder to operate after the fire test.

Annex B
(normative)

Tool sets for attack resistance tests

Table B.1 — Tool set to be used for hit attack test 5.10.6


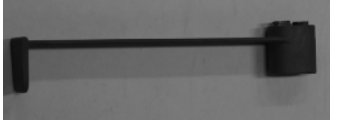
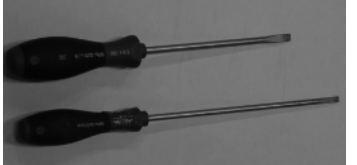



<p>Metal and Plastic hammer weight max 200 grams length max 250 mm</p>		<p>For hits not visible after the attack time</p>
<p>Tomahawk weight 70 grams Length max 300 mm</p>		<p>For hits not visible after the attack time</p>
<p>Screwdrivers, size 150 mm and 170 mm</p>		<p>Only for turning/moving the plug/knob/thumb turn with a small torque (approx. 1 Nm)</p>
<p>Long nose pliers Length max 180 mm</p>		<p>Only for turning/moving the plug/knob/thumb turn with a small torque (approx. 1 Nm)</p>
<p>Tweezers Length max 100 mm</p>		<p>For turning/moving/grabbing parts of the MC such as plug/knob/thumb turn</p>
<p>Electronic dummy key</p>		<p>Only for turning/moving the plug with a small torque (approx. 1 Nm)</p>

Table B.2 — Tool set to be used for vibration attack test 5.10.7









<p>Cordless drill machine with impact function, limited to 25 000 hits per minute, and a pin with a diameter of 5 mm to transmit the vibrations No drills</p>		<p>For vibration not visible after the attack time</p>
<p>Rubber adapter</p>		<p>For the purpose to be combined with the pin</p>
<p>Screwdrivers, size 150 mm and 170 mm</p>		<p>Only for turning/moving the plug/knob/thumb turn with a small torque (approx. 1 Nm)</p>
<p>Long nose plier Length max 180 mm</p>		<p>Only for turning/moving the plug/knob/thumb turn with a small torque (approx. 1 Nm)</p>
<p>Tweezer Length max 100 mm</p>		<p>For turning/moving/grabbing parts of the MC such as plug/knob/thumb turn</p>
<p>Electronic dummy key</p>		<p>Only for turning/moving the plug with a small torque (approx. 1 Nm)</p>

Table B.3 — Tool set to be used for magnetic attack test 5.10.10

<p>Examples of permanent magnets maximum 0,6 T</p> <p>Dimensions diameter between 10 – 60 mm</p> <p>Maximum lifting force on iron 500N</p>		
<p>Screwdrivers, size 150 mm and 170 mm</p>		<p>Only for turning/moving the plug/knob/thumb turn with a small torque (approx. 1Nm)</p>
<p>Long nose plier</p> <p>Length max 180 mm</p>		<p>Only for turning/moving the plug/knob/thumb turn with a small torque (approx. 1 Nm)</p>
<p>Tweezer</p> <p>Length max 100 mm</p>		<p>For turning/moving/grabbing parts of the MC such as plug/knob/thumb turn</p>
<p>Electronic dummy key</p>		<p>Only for turning/moving the plug with a small torque (approx. 1 Nm)</p>

Annex C (normative)

Table of test procedures

Table C.1 — Test procedures MC

Test cylinder number			1	2	3	4	5	6	7	8	9	
Number of authorised keys			1	1	1	1	1	1	1	1	1	
Number of keys with right mechanical but wrong electronic codes			1		1				1			
Clause	Test clause	Test	sequence									
	5.2	Operational test		X	X	X	X	X	X	X		
4.2.3	5.10.5.3	Wrong electronic code	X									
4.2.4	5.4.3	Bump Tests	X									
4.2.5	5.4.4	Vibration test	X									
4.2.6	5.10.9	ESD	X									
4.2.7	5.2.2 5.2.4	Minimum knob/thumb turn transmission		X								
4.3	5.5	Durability test			X							
4.5.1	5.7.1	Corrosion test				X						
4.5.2	5.7.2	Resistance of MC against water					X					
4.5.3	5.7.3	Dry heat: Cylinder					X					
4.5.4	5.7.4	Cold test: Cylinder					X					
4.5.5	5.7.5.	Damp heat cycle Cylinder					X					
4.6.6	5.8.3	Torque resistance of cylinder (plug)						X				
4.7	5.9	Audit trail and time zone capability	X									
4.8.2	5.10.1	Drilling test		X								
4.8.3	5.10.2	Chisel test			X							
4.8.4	5.10.3	Twisting				X						
4.8.5	5.10.4	Plug extraction					X					
4.8.6	5.10.5.1	Torque resistance MC/plug						X				
4.8.6	5.10.5.2	Torque resistance with electronic dummy key						X				
4.8.7	5.10.6	Attack by hits (manual) Tester 1								X	X	
		Attack by hits (manual) Tester 2								X	X	
4.8.8	5.10.7	Attack by vibrations Tester 1								X	X	
		Attack by vibrations Tester 2								X	X	
4.8.9	5.10.8	Increased voltage attack								X	X	
4.8.10	5.10.9	ESD							X			
4.8.11	5.10.10	Magnetic field attack Tester 1									X	X
		Magnetic field attack Tester 2									X	X
The sequence of the tests and the number of samples may vary depending on the design and function of the cylinder.												

Table C.2 — Test procedures electronic keys

Test key number			1	2	3	4	5	6 -15
Number of authorised keys			1	1	1	1	1	10
Clause	Test clause	Test						
4.2.1	5.4.1	Key strength	x					
4.2.2	5.4.2	Stability of electronic keys						x
4.5.6	5.7.6	Resistance of electronic key against water		x				
4.5.3	5.7.3	Dry heat: key			x			
4.5.4	5.7.4	Cold test: key				x		
4.5.5	5.7.5	Damp heat cycle key					x	

Annex D (informative)

Installation instructions

Minimum information and installation guidance and/or product information to the MC and its key.

D.1 Before fitting a MC to a fire/smoke resisting door, the fire certification should be examined, to ensure conformity.

D.2 Care should be taken to ensure that any seals or weather-stripping fitted to the complete door assembly, does not inhibit the correct operations of the MC.

D.3 Where the MC is manufactured in more than one size it is critical that the correct size is selected.

D.4 The instructions should be carefully followed during installation. These instructions and any maintenance instructions should be passed on by the installer to the user.

D.5 Care should be taken to ensure that no projection of the MC and associated parts, can prevent the door swinging freely.

D.6 All components necessary for the specific installation should be fitted in order to ensure compliance with this European Standard.

Bibliography

DIN 7504 K.N.P.Q, *Self Drilling Screw*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™