

BS EN 16054:2012



BSI Standards Publication

BMX bicycles — Safety requirements and test methods

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of EN 16054:2012.

The UK participation in its preparation was entrusted to Technical Committee GME/25, Cycles.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012.
Published by BSI Standards Limited 2012.

ISBN 978 0 580 69835 4

ICS 43.150

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2012.

Amendments issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD

EN 16054

NORME EUROPÉENNE

EUROPÄISCHE NORM

September 2012

ICS 43.150

English Version

BMX bicycles - Safety requirements and test methodsBicyclette BMX - Exigences de sécurité et méthodes
d'essaiBMX-Fahrräder - Sicherheitstechnische Anforderungen und
Prüfverfahren

This European Standard was approved by CEN on 27 July 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG**Management Centre: Avenue Marnix 17, B-1000 Brussels**

Contents

Page

Foreword.....	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 Requirements and test methods	7
4.1 Numbers and condition of test specimens	7
4.2 Accuracy tolerances and test conditions	7
4.2.1 Accuracy — Tolerances	7
4.2.2 Test conditions — Fatigue tests	8
4.3 Crack detection methods	8
4.4 Sharp edges	8
4.5 Protrusions.....	8
4.5.1 Requirements	8
4.5.2 Test method.....	10
4.5.3 Pegs	10
4.6 Security and strength of safety-related fasteners	11
4.6.1 Security of screws	11
4.6.2 Minimal failure torque	11
4.6.3 Folding bicycle.....	11
4.6.4 Quick release devices	11
4.7 Pegs/axles assembly.....	11
4.7.1 Pegs — Resistance to loosening	11
4.7.2 Resistance to deflection	12
4.8 Brakes	13
4.8.1 Braking-systems	13
4.8.2 Hand-operated brakes.....	13
4.8.3 Attachment of brake assembly and cable requirements	16
4.8.4 Brake adjustment.....	16
4.8.5 Brake-block and brake-pad assemblies — Security test.....	16
4.8.6 Hand-operated braking-system — Strength test.....	17
4.8.7 Braking performance.....	17
4.9 Steering.....	27
4.9.1 Handlebar dimensions	27
4.9.2 Handlebar grips and plugs	27
4.9.3 Handlebar-stem with quill — Insertion-depth mark or positive stop	28
4.9.4 A-head set stem Handlebar stem-extension to fork-stem — Clamping requirements.....	28
4.9.5 Steering stability	29
4.9.6 Handlebar and stem assembly.....	29
4.9.7 Handlebar-stem to fork-stem — Torsional security test.....	32
4.9.8 Handlebar and stem assembly — Fatigue test.....	33
4.9.9 Handlebar/stem assembly impact test	34
4.10 Frame	35
4.10.1 Dummy fork characteristics	35
4.10.2 Frame — Impact test (falling mass)	36
4.10.3 Frame — Impact test (falling frame).....	38
4.10.4 Frame — Fatigue test with pedalling forces	39
4.10.5 Frame — Fatigue test with horizontal forces.....	41
4.11 Fork	42
4.11.1 Front fork — Means of location of the axle and wheel retention.....	42
4.11.2 Front fork — Static bending test.....	42
4.11.3 Front fork — Rearward impact test.....	43

4.11.4	Front fork – Bending fatigue test.....	45
4.12	Wheels and wheel/tyre assemblies	45
4.12.1	Rotational accuracy	45
4.12.2	Wheel/tyre assembly — Clearance	46
4.12.3	Wheel/tyre assembly — Static strength test.....	47
4.12.4	Wheel retention.....	47
4.13	Rims, tyres and tubes	48
4.13.1	General	48
4.13.2	Tyre inflation pressure.....	48
4.13.3	Tyre and rim compatibility.....	48
4.13.4	Rim-wear.....	49
4.13.5	Wheel/tyre assembly – Impact test.....	49
4.14	Pedals and pedal/crank drive system	50
4.14.1	Pedal tread	50
4.14.2	Pedal clearance	50
4.14.3	Pedal/pedal-spindle assembly —Static strength test.....	51
4.14.4	Pedal/pedal-spindle — Dynamic durability test	52
4.14.5	Crank/pedal assembly impact test and plastic pedal impact test.....	53
4.14.6	Drive-system - Static strength test.....	54
4.14.7	Crank assembly — Fatigue tests	55
4.15	Saddle and seat-pillars	57
4.15.1	General	57
4.15.2	Limiting dimensions.....	57
4.15.3	Seat-pillar — Insertion-depth mark or positive stop.....	57
4.15.4	Saddle/seat pillar - Security test	58
4.15.5	Saddle - Static strength test.....	59
4.15.6	Saddle and seat-pillar clamp — Fatigue test.....	59
4.15.7	Seat-pillar clamp - Static test	60
4.16	Drive-chain	61
4.17	Chain guard.....	61
4.17.1	Requirement.....	61
4.17.2	Chain-wheel disc diameter	61
4.17.3	Chain protective device	62
4.18	Lighting systems and reflectors	63
4.18.1	Lighting and reflectors.....	63
4.18.2	Wiring harness.....	63
4.19	Warning device	63
5	Manufacturer's instructions	63
6	Marking.....	64
6.1	Requirement.....	64
6.2	Durability test.....	65
6.2.1	Requirement.....	65
6.2.2	Test method	65
	Bibliography.....	66

Foreword

This document (EN 16054:2012) has been prepared by Technical Committee CEN/TC 333 “Cycles”, the secretariat of which is held by UNI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2013, and conflicting national standards shall be withdrawn at the latest by March 2013.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

1 Scope

This European Standard specifies safety and performance requirements for the design, assembly and testing of BMX bicycles and sub-assemblies intended for use in any type of location such as roads and/or tracks and/or ramps. It applies to specialised types of bicycle designed and equipped for activities such as acrobatic ground manoeuvres, stunting and aerobic manoeuvres and lays down guidelines for instructions on the use and care of such BMX bicycles.

It applies to BMX bicycles on which the saddle height can be adjusted to provide a minimum saddle height of 435 mm or more.

It applies to:

- a) category 1, BMX designed for a rider mass of 45 kg or less;
- b) category 2, BMX designed for a rider mass more than 45 kg.

It does not apply to BMX bicycles for use in sanctioned competition events.

No requirements on lighting set, reflectors and warning devices are specified in this European Standard due to the existence of several different national regulations applicable in the European countries.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN ISO 1101, *Geometrical Product Specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out (ISO 1101)*

ISO 9633, *Cycle chains — Characteristics and test methods*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

BMX

bicycle designed for use in any type of location such as roads, tracks and/or ramps and equipped with single speed freewheel transmission, no suspension systems and no back pedal brake

3.2

free-wheel transmission

gearing mechanism which is designed to disengage the wheel from the pedal mechanism in one rotating direction

3.3

peg

component that allows the rider to stand during aerobic manoeuvres or to slide on static objects

3.4

rotor

part of the brake system that allows an infinite rotation of the steering system around its axis

3.5
cycle
vehicle that has at least two wheels and is propelled solely or mainly by the muscular energy of the person on that vehicle, in particular by means of pedals

3.6
bicycle
two-wheeled cycle

3.7
fully-assembled bicycle
bicycle fitted with all components necessary for its intended use

3.8
maximum saddle height
vertical distance from the ground to the top of the seat surface, measured with the seat in a horizontal position and with the seat-pillar set to the minimum insertion depth

3.9
braking distance
distance travelled by a bicycle between the commencement of braking (3.10) and the point at which the bicycle comes to rest

3.10
commencement of braking
point on the test track or test machine at which the brake actuating device operated directly by the rider's hand or by a test mechanism starts to move from its rest position, on the test track this point being determined by the first brake actuating device (front or rear) to operate

3.11
braking force
 F_{Br}
tangential rearward force between the tyre and the ground or the tyre and the drum or belt of the test machine

3.12
rim-brake
brake in which brake-shoes act on the rim of the wheel

3.13
pedal tread-surface
surface of a pedal that is presented to the underside of the foot

3.14
crank assembly
assembly which, for fatigue testing, consists of the two cranks, the pedal-spindles (possibly with adaptors), the bottom-bracket spindle, and the first component of the drive system, e.g. the chain-wheel cluster

3.15
visible crack
crack which results from a test where that crack is visible to the naked eye

3.16
fracture
unintentional separation into two or more parts

3.17
wheel-base
distance between the axes of the front and rear wheels of an un-laden bicycle

3.18

wheel

assembly or combination of hub, spokes or disc, and rim, but excluding the tyre

3.19

quick-release device

device to fix or release a part without a tool

3.20

maximum inflation pressure

maximum tyre pressure recommended by the tyre manufacturer

3.21

exposed protrusion

protrusion which, through its location and rigidity, could present a hazard to the rider either through heavy contact with it in normal use or should the rider fall onto it in an accident

4 Requirements and test methods

4.1 Numbers and condition of test specimens

In general, for static, impact and fatigue tests, each test shall be conducted on a new test sample, but if only one sample is available, it is permissible to conduct all of these tests on the same sample with the sequence of testing being fatigue, static and impact.

If more than one test is conducted on the same sample, the test sequence shall be clearly recorded in the test report or record of testing.

NOTE It should be noted that if more than one test is conducted on the same sample, earlier tests can influence the results of subsequent tests. In addition, if a sample fails when it has been subjected to more than one test, a direct comparison with single testing is not possible.

In all strength tests, specimens shall be in the fully finished condition.

4.2 Accuracy tolerances and test conditions

4.2.1 Accuracy — Tolerances

Unless stated otherwise, accuracy tolerances based on the nominal values shall be as follows:

- forces and torques 0/+ 5 %;
- masses and weights ± 1 %;
- dimensions ± 1 mm;
- angles ± 1 ;
- time duration ± 5 s;
- temperatures ± 2 °C;
- pressures ± 5 %.

4.2.2 Test conditions — Fatigue tests

The shape of the signal is not specified in the standard. However, the intention is for the force to be applied and released progressively.

Unless stated otherwise, the frequency shall be adapted to insure a good application of the loading and shall not exceed 10 Hz.

To allow for the initial settling of carbon-fibre components, the initial value has to be taken on the mean of 10 cycles after 1 000 load cycles.

4.3 Crack detection methods

Standardised methods should be used to emphasise the presence of cracks where visible cracks are specified as criteria of failure in tests specified in this standard (see 3.15).

NOTE For example, suitable dye-penetrant methods are specified in EN ISO 3452 series.

4.4 Sharp edges

Exposed edges that could come into contact with the rider's hands, legs, etc., during normal riding or normal handling and normal maintenance shall not be sharp.

4.5 Protrusions

4.5.1 Requirements


4.5.1.1 Exposed protrusions

Any rigid exposed protrusion longer than 8 mm (see L in Figure 1) after assembly except:

- a) the rim-brake mechanism at the front and rear wheels;
- b) a lamp-bracket fitted on the headtube;
- c) reflectors;
- d) clipless attachment mechanism;
- e) chainwheels and sprockets;
- f) bottle carrier;
- g) brake rotor;
- h) pedal tread;

shall terminate in a radius, R (see Figure 1), of not less than 6,3 mm. Such protrusions shall have a major end dimension, A , not less than 12,7 mm and a minor dimension, B , not less than 3,2 mm.

Dimensions in millimetres

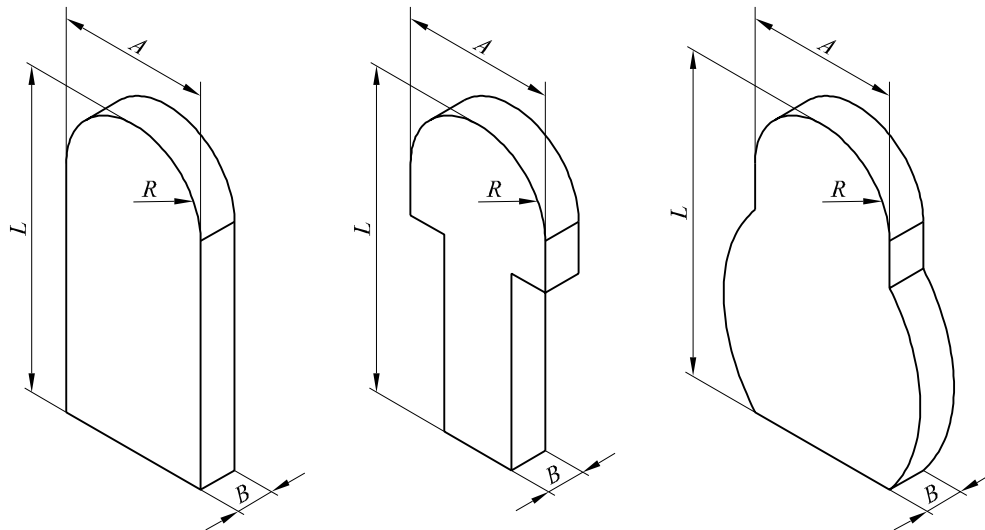

Key

$R \geq 6,3$

$A \geq 12,7$

$B \geq 3,2$

Figure 1 — Examples of minimum dimensions of exposed protrusions (which apply only when L is greater than 8 mm)

Dimensions in millimetres

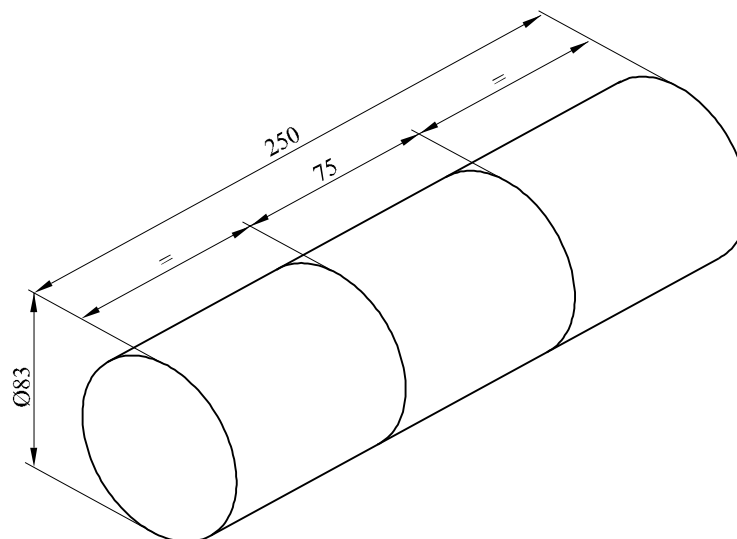


Figure 2 — Exposed protrusion test cylinder

4.5.1.2 Exclusion zone, protective devices and screw threads

There shall be no protrusions on the top tube of a bicycle frame between the saddle and a point 300 mm forward of the saddle, with the exception that outer cable casing no greater than 6,4 mm in diameter and cable guides and outer cable stops made from material no thicker than 4,8 mm may be attached to the top tube.

Foam pads attached to the bicycle frame to act as protective cushions are permitted, provided that the bicycle meets the requirements for protrusions when the pads are removed.


A screw thread that is an exposed protrusion shall be limited to a protrusion length of one major diameter of the screw beyond the internally threaded mating part.

4.5.2 Test method

Conduct the test with a protrusion test cylinder (which simulates a limb) having the dimensions shown in Figure 2.

Manoeuvre the test cylinder in all possible attitudes towards any rigid protrusion on the bicycle. If the central 75 mm long section of the cylinder contacts the protrusion that protrusion shall be considered to be an exposed protrusion and it shall comply with 4.5.1.1.

Examples of protrusions which need and do not need to comply with the requirements are shown in Figure 3.

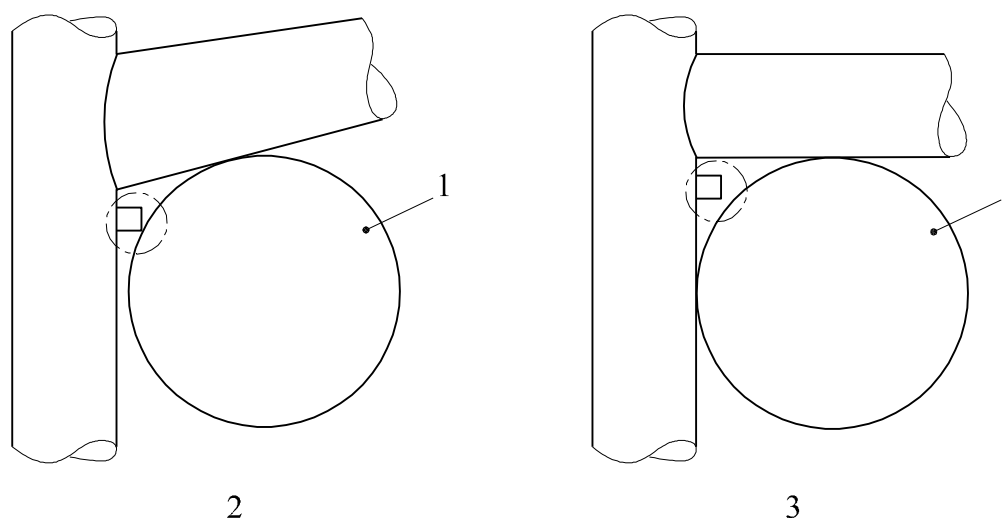

Key

- 1 test cylinder
- 2 protrusion shall comply
- 3 protrusion need not to comply

Figure 3 — Examples of protrusions

4.5.3 Pegs

External extremities of the pegs (see Figure 4) shall have a chamfer or a fillet of at least 1,6 mm and an angle from 30° min to 45° max. The dimension A shall be at least 1,6 mm.

Dimensions in millimetres

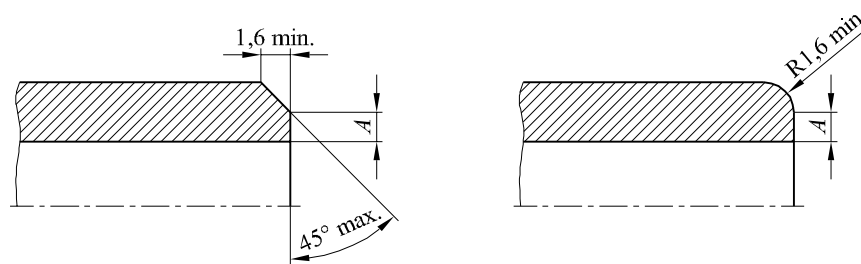


Figure 4 — Peg's extremity

4.6 Security and strength of safety-related fasteners

4.6.1 Security of screws

Any screws used to attach brake-mechanisms to the frame or fork, and the saddle to the seat-pillar shall be provided with suitable locking devices, e.g., lock-washers, lock-nuts, or stiff nuts.

4.6.2 Minimal failure torque

The minimum failure torque of bolted joints for the fastening of handlebars, handlebar stems, seats and seat pillars shall be at least 50 % greater than the manufacturer's recommended tightening torque.

4.6.3 Folding bicycle

Folding bicycles shall meet all test requirements.

Folding mechanisms shall be designed so that the bicycle can be locked for use in a simple, stable, safe way and when folded no damage shall occur to any cables. No locking mechanism shall contact the wheels or tyres during riding, and it shall be impossible to unintentionally loosen or unlock the folding mechanisms during riding.

4.6.4 Quick release devices

No form of quick release system shall be permitted for wheel axle retention.

4.7 Pegs/axles assembly


4.7.1 Pegs — Resistance to loosening

4.7.1.1 Requirements

When tested according to test method described in 4.7.1.2, pegs shall not unscrew.

4.7.1.2 Test method

Apply a tangential force of 700 N at the midpoint of each peg, in such a way to produce the maximum unscrewing torque as shown in Figure 5. Apply the load for one minute and check if the requirements are met.

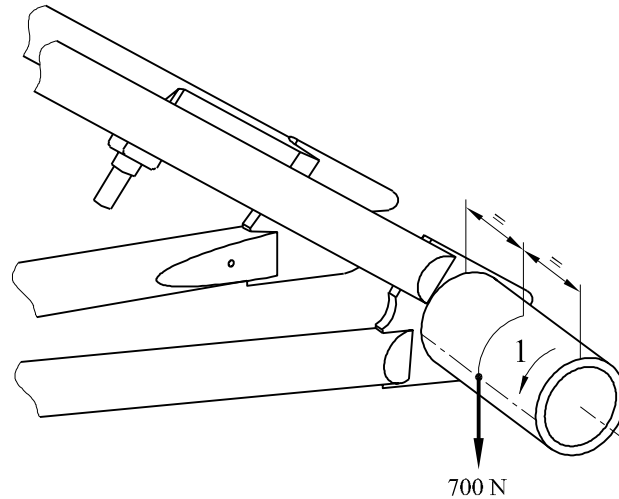

Key

1 unscrewing

Figure 5 — Pegs – Resistance loosening

In case of noncircular cross section, apply the tangential load at the longer side.

4.7.2 Resistance to deflection


4.7.2.1 Requirements

Pegs shall not show a total deflection under load, greater than 30° (measured on the pegs) to the axle axis when tested according to test method described in 4.7.2.2.

4.7.2.2 Test method

Perform a separate static test on each pair of front and back peg/axle assembly of a complete bike with the pegs supported at their midpoint.

Apply a vertical force, F , of 3 000 N on the wheel, in a direction normal to the peg longitudinal axis and corresponding to the vertical direction, with the bicycle standing on the ground, as shown in Figure 6. Apply the load for one minute and check if the requirements are met before removing the load.

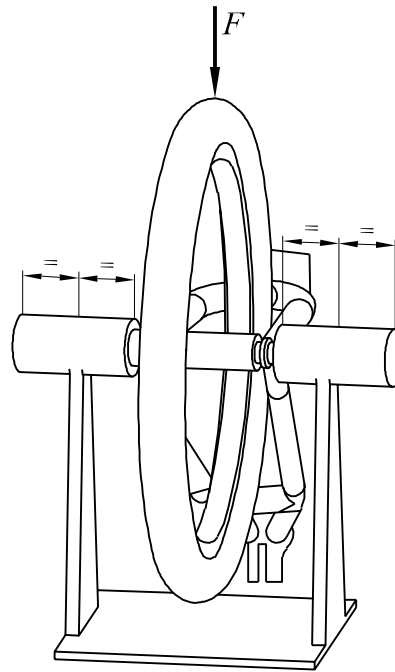

Key

$F = 3\,000\text{ N}$

Figure 6 — Pegs — Resistance to deflection (example of test configuration)

4.8 Brakes

4.8.1 Braking-systems

A bicycle shall be equipped with at least two independent braking-systems.

At least one shall operate on the front wheel and one on the rear wheel. The braking-systems shall operate without binding and shall be capable of meeting the braking-performance requirements of 4.8.7.

NOTE The inner cable should be protected from corrosion, e.g. by suitable impervious liner to the outer casing.

4.8.2 Hand-operated brakes

4.8.2.1 Brake-lever position

The handbrake levers for front and rear brakes shall be positioned according to the legislation or custom and practice of the country in which the bicycle is to be sold, and the bicycle manufacturer shall state in the manufacturer's instructions which lever operates the front brake and which lever operates the rear brake (see also Clause 5, list entry b)).

4.8.2.2 Brake-lever grip dimensions

4.8.2.2.1 Requirement

The maximum grip dimension, d , measured between the outer surfaces of the brake-lever in the region intended for contact with the rider's fingers and the handlebar or any other covering present shall over a distance of not less than 40 mm as shown in Figure 7, conform to the following:

— for category 1 d shall not exceed 75 mm;


— for category 2 d shall not exceed 90 mm.

Conformance shall be established by the method detailed in 4.8.2.2.2.

NOTE The range of adjustment on the brake-lever should permit these dimensions to be obtained.

The dimension a , shown in Figure 7 which is used in 4.8.2.3 to establish the position for applying test loads, shall be established by the method detailed in 4.8.2.2.2.

Dimension in millimetres

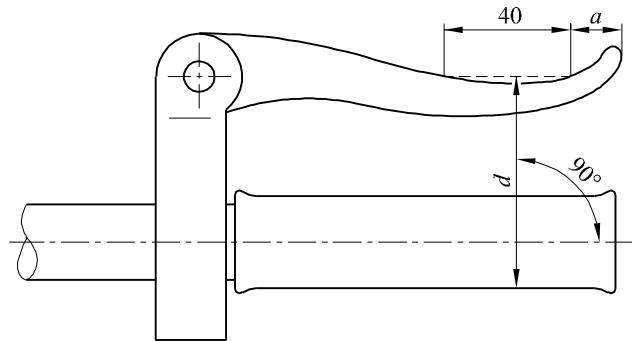

Key


- a distance between the last part of the lever intended for contact with the rider's fingers and the end of the lever
- d maximum grip dimension

Figure 7 — Handbrake-lever grip dimensions

4.8.2.2.2 Test method

Fit the gauge illustrated in Figure 8 a) and b) over the handlebar-grip or the handlebar (where the manufacturer does not fit a grip) and the brake-lever as shown in Figure 9 so that the face A is in contact with the handlebar or grip and the side of the brake-lever. Ensure that the face B spans an area of that part of the brake-lever that is intended for contact with the rider's fingers without the gauge causing any movement of the brake-lever towards the handlebar or grip. Measure the distance a , the distance between the last part of the lever intended for contact with the rider's fingers and the end of the lever (see 4.8.2.1, Figures 7 and 8 and 4.8.2.3).

Dimension in millimetres

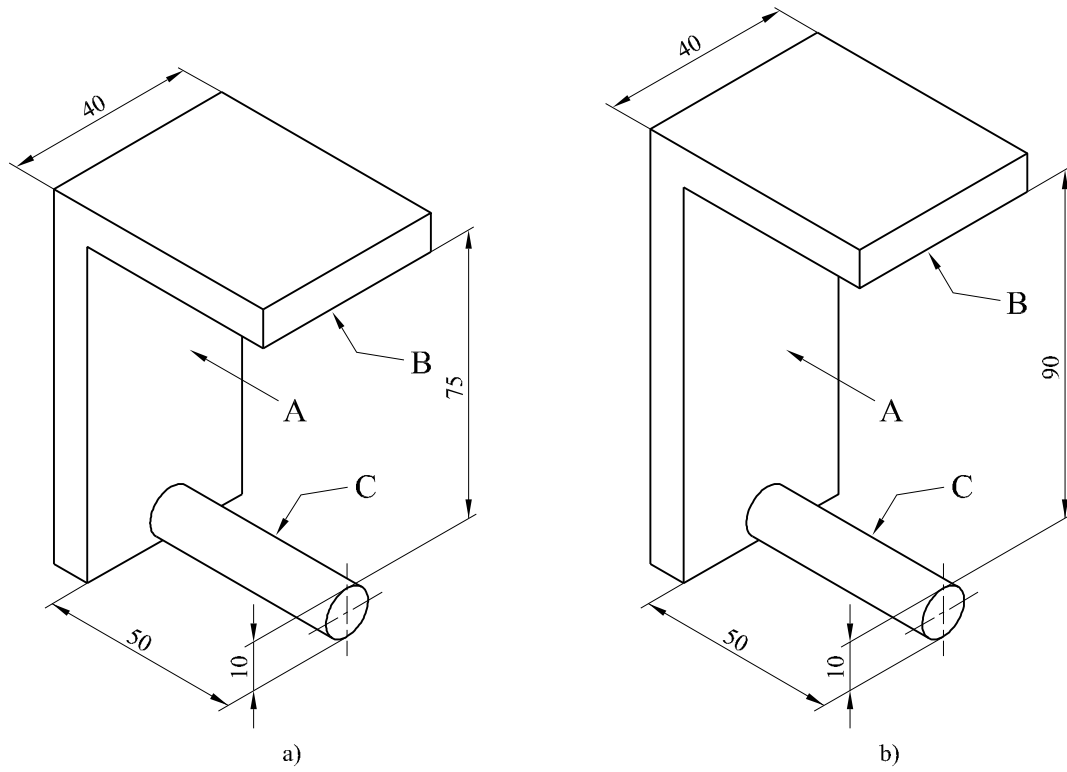

Key

- a) category 1
- b) category 2
- A face A
- B face B
- C rod

Figure 8 — Handbrake-lever grip-dimension gauges


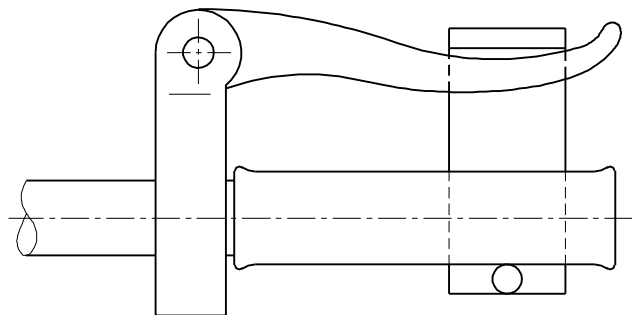


Figure 9 — Method of fitting the gauge to the handbrake-lever and handlebar

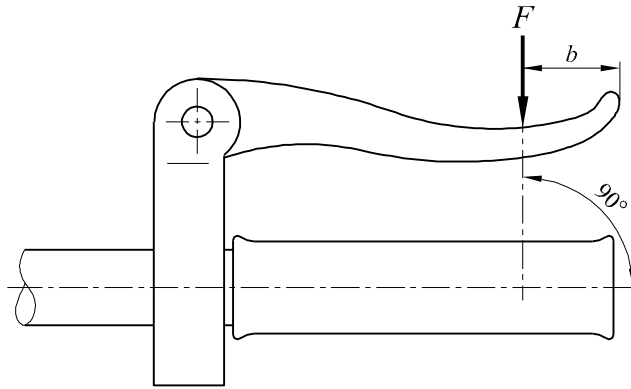

Key

- F applied force
- $b \geq 25$ mm

Figure 10 — Position of applied force on the handbrake-lever (see also Figure 7)

4.8.2.3 Handbrake-levers — Position of applied force

For the purposes of all braking tests in this European Standard the test force shall be applied at a distance, b , which is equal to either dimension a as determined in 4.8.2.2.2 or 25 mm from the free end of the brake-lever, whichever is the greater (see Figure 10).

4.8.3 Attachment of brake assembly and cable requirements

NOTE 1 See 4.6 in relation to fasteners.

Cable pinch-bolts shall not sever any of the cable strands when assembled to the manufacturer's instructions. In the event of a cable failing, no part of the brake mechanism shall inadvertently inhibit the rotation of the wheel.

The cable end shall either be protected with a cap that shall withstand a minimum removal force of 20 N or be otherwise treated to prevent unravelling.

NOTE 2 The inner cable should be protected from corrosion, e.g. by a suitable impervious liner to the outer casing.

4.8.4 Brake adjustment

Each brake shall be capable of adjustment without the use of a tool to an efficient operating position until the friction material has worn to the point of requiring replacement as recommended in the manufacturer's instructions.

In addition, when correctly adjusted, the friction material shall not contact anything other than the intended braking surface.

4.8.5 Brake-block and brake-pad assemblies — Security test

4.8.5.1 Requirement

The friction material shall be securely attached to the holder, backing-plate, or shoe and there shall be no failure of the assembly when tested by the method specified in 4.8.5.2. The brake system shall be capable of meeting the strength test specified in 4.8.6 and braking performance requirements of 4.8.6.1 after completion of the test specified in 4.8.5.2.

4.8.5.2 Test method

Use a machine such as those described in 4.8.7.2.4.2 at a velocity of 12,5 km/h.

With a vertical force applied to the bicycle sufficient to prevent skidding of the tyre on the wheel under test, accelerate the driving mechanism to the specified velocity in a rearward direction, and then apply an operating-force of 180 N.

Repeat the operation 5 times.

4.8.6 Hand-operated braking-system — Strength test

4.8.6.1 Requirement

When tested by the method described in 4.8.6.2, there shall be no failure of the braking-system or of any component (including brake rotor if any) thereof.

4.8.6.2 Test method

Conduct the test on a fully assembled bicycle.

After it has been ensured that the braking system is correctly adjusted according to recommendations in the manufacturer's instructions, apply a force to the brake-lever at the point specified in 4.8.2.3.

This force shall be 450 N, or such lesser force as is required to bring a brake-lever into contact with the handlebar grip or the handlebar where the manufacturer does not fit a grip.

Repeat the test for a total of 10 times on each hand-brake lever.

4.8.7 Braking performance

4.8.7.1 General

Two test methods are specified and experience has shown that the test track method is not suitable for category 1 due to the required size of the rider.

One test method is the machine test in which braking force is measured: the progressive characteristics of the brake are determined by linearity measurements. A final, simple track test checks for smooth, safe, stopping characteristics.

The second test method is the track test in which braking distance is measured directly with the progressive characteristics of the brakes being self-evident. The ratio between wet and dry performance cannot be evaluated with this method.

4.8.7.2 Machine test method

4.8.7.2.1 Principle

The braking force F_{Br} is measured on a test machine. The progressive characteristics of the brake are determined by linearity measurements. A final, simple track test checks for smooth, safe, stopping characteristics.

4.8.7.2.2 Test bicycle

Conduct the braking-performance test on a fully assembled bicycle after the brakes have been subjected to the strength test detailed in 4.8.6.

Before testing the bicycle, inflate the tyres and adjust the brakes all according to the manufacturer's instructions.

4.8.7.2.3 Requirements

4.8.7.2.3.1 Braking performance

The bicycle shall fulfil the requirements shown in Table 1.

Table 1 — Braking forces

Condition	Brakes in use	Braking force Category 1	Braking force Category 2
		F_{Br} N	F_{Br} N
Dry	Front	160	280
	Rear	130	240
Wet	Front	100	180
	Rear	85	150

4.8.7.2.3.2 Linearity

When tested by the methods described in 4.8.7.2.4.4, list entry e), the braking force $F_{Br\ average}$ shall be linearly proportional (within +20 %) to the progressively increasing intended operating forces $F_{Op\ intend}$. The requirement applies to braking forces $F_{Br\ average}$ equal to and greater than 80 N category 1 wet condition excluded.

4.8.7.2.3.3 Ratio between wet and dry braking performance

In order to ensure safety for both wet and dry braking, the ratio of braking performance wet/dry shall be greater than 4:10.

The methods for calculating this ratio are given in 4.8.7.2.4.4, list entry f).

4.8.7.2.3.4 Smooth, safe-stop characteristics

The bicycle shall show smooth, safe-stop characteristics.

4.8.7.2.4 Test methods

4.8.7.2.4.1 Symbols

— F_{Op} = operating force (i.e. force applied on handbrake lever)

— $F_{Op\ intend}$ = intended operating force (e.g. 60 N, 80 N)

— $F_{Op\ rec}$ = recorded operating force (e.g. 61 N, 79 N)

— F_{Br} = braking force

— $F_{Br\ rec}$ = recorded braking force

- $F_{Br\ corr}$ = corrected braking force (Corrected for difference between $F_{Op\ intend}$ and $F_{Op\ rec}$)
- $F_{Br\ average}$ = the arithmetic mean of the three $F_{Br\ corr}$ at one level of $F_{Op\ intend}$
- $F_{Br\ max}$ = the maximum $F_{Br\ average}$
- $F_{D\ Br}$ = dry braking-force
- $F_{W\ Br}$ = wet braking-force

4.8.7.2.4.2 Test machine

The test machine enables measurements of the individual braking forces of the front and rear brakes on a drum or belt.


The test machine shall incorporate a system which drives the wheel under test by tyre contact and a means of measuring the braking-force, and typical examples of two types of machine are illustrated in Figures 11 and 12.

Figure 11 shows a machine in which a roller drives the individual wheels, and Figure 12 shows a machine in which a driven belt contacts both wheels. Other types of machine are permitted, provided they meet the specific requirements listed below.

The specific requirements are as follows:

- a) the linear surface velocity of the tyre shall be 12,5 km/h and shall be controlled within $\pm 5\%$;
- b) a means of laterally restraining the wheel under test shall be provided which does not create any fore/aft restraint;
- c) a means of laterally applying forces to the hand-brake levers at the point specified in 4.8.2.3 shall be provided, with the width of the contact on the lever not greater than 5 mm;
- d) a water spray system, to provide wetting of the brakes of the bicycle, consisting of a water reservoir connected by tubing to a pair of nozzles arranged as shown in Figure 13; each nozzle shall provide a flow of water at ambient temperature to ensure that, in addition to the rim, any hub-or disc-brake is thoroughly wetted before a test begins;
- e) a system for loading the wheels of the bicycle against the driving mechanism (see 4.8.7.2.4.4).


Dimensions in millimetres

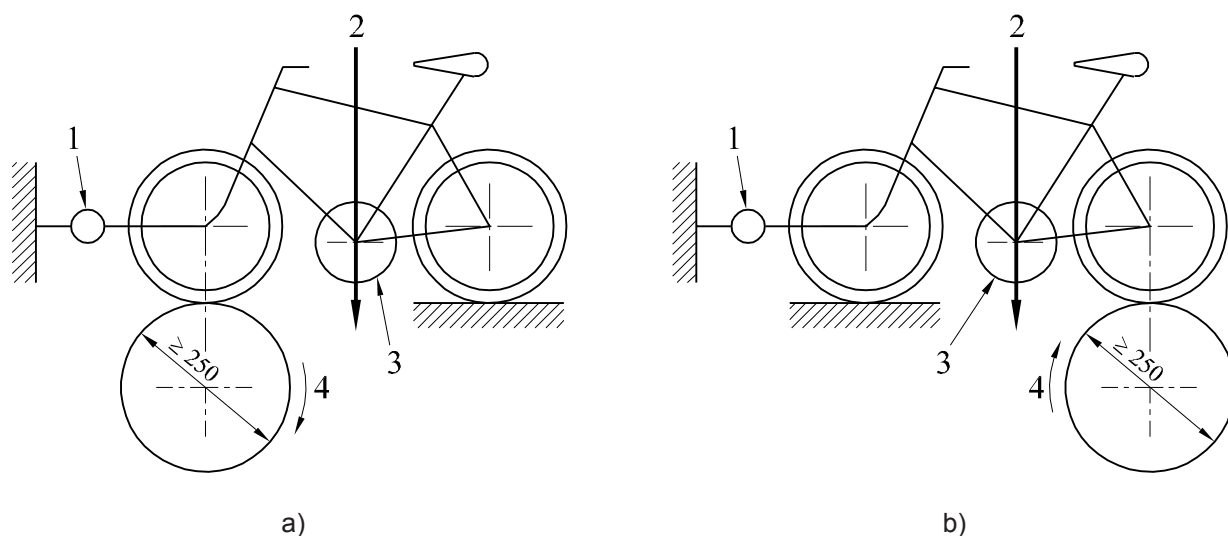

Key

- a) testing the front brake
- b) testing the rear brake
- 1 braking-force transducer
- 2 applied force or
- 3 additional mass
- 4 direction of drum rotation


Figure 11 — Braking performance test machine — Single drum type

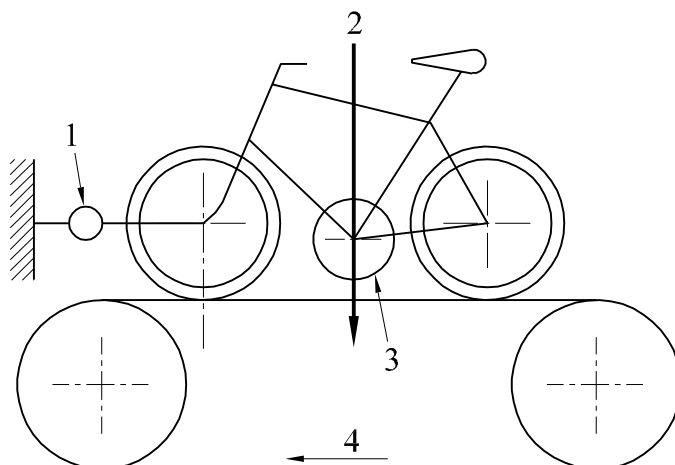

Key

- 1 braking-force transducer
- 2 applied force or
- 3 additional mass
- 4 direction of belt travel

Figure 12 — Braking performance test machine — Driven-belt type

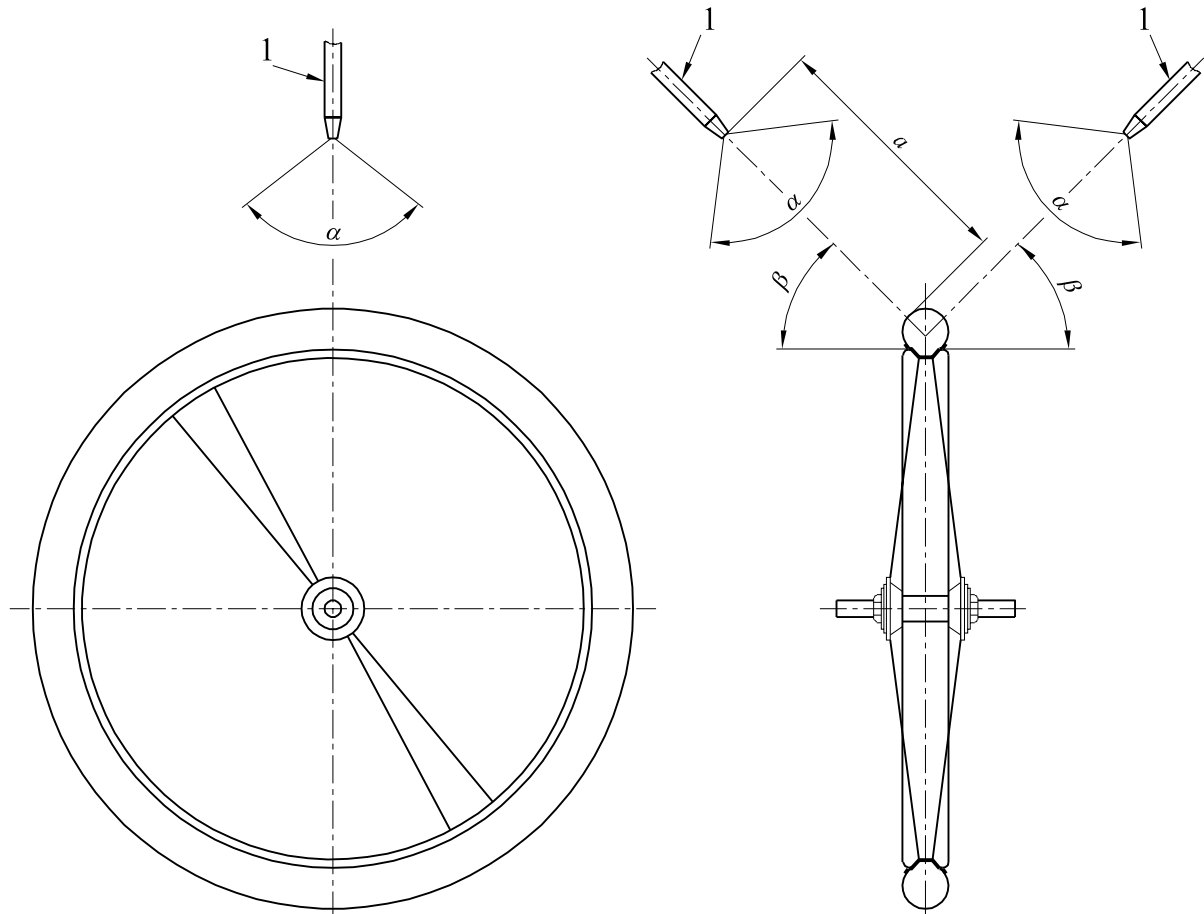

Key

α = 90° to 120°

β = 30° to 60°

a = 150 mm to 200 mm

1 water nozzles

Figure 13 — Water nozzle arrangement for the wet braking test (applicable to all types of brake)

4.8.7.2.4.3 Instrumentation

The test machine shall be instrumented to include the following:

- a) a device to record the surface velocity of the tyre, accurate to within $\pm 2\%$;
- b) a device to record the braking force (see Figures 11 and 12, for example), accurate to within $\pm 5\%$;
- c) a device to record the force applied to the hand-lever, accurate to within $\pm 5\%$.

4.8.7.2.4.4 Test method

- a) General:

Test the front and rear wheels individually.

- b) Vertical force on the test wheel:

The wheel to be tested shall be forced vertically downwards so that no skidding of the wheel occurs when tested according to 4.8.7.2.4.4, list entry d).

NOTE The necessary force may be applied anywhere on the bicycle (wheel-axle, bottom bracket, seat-post, etc) provided that it is exerted vertically downwards.

c) Running-in the braking surfaces:

Conduct a running-in process on every brake before carrying out the performance test.

In order to determine the operating force to be used during the running-in process, mount and load the bicycle on the test machine with the belt or drum running at the specified speed and apply an operating force to the handbrake lever that is high enough to achieve 50 % of the dry braking force \pm 10 %. Maintain this operating force for at least 2,5 s and note the value of the applied operating force.

Repeat the procedure (applying the operating force determined as above accurate to within \pm 5 %) ten times, or, with more repetitions if necessary, until the mean braking force from any one of the three latest tests does not deviate by more than \pm 10 % from the mean braking force from these same three tests.

d) Performance tests method:

1) Testing under dry conditions:

With a vertical force applied to the bicycle sufficient to prevent skidding of the tyre on the wheel under test, accelerate the driving mechanism to the specified velocity, then apply the operating-force in a series of 20 N increments from 60 N to either 180 N or to the force necessary to achieve a braking force of at least 700 N, whichever is the lesser. However, if the wheel locks, if any possible brake-overload device is actuated, or if the hand-lever comes into contact with the handlebar, do not increase the force further. For each increment of applied operating force, perform three tests within 1 min. Before applying the next level of operating force, allow the brake to cool for 1 min.

The applied operating forces shall lie within \pm 10 % of the intended operating forces, shall be applied as specified in 4.8.2.3, shall be recorded with an accuracy of \pm 1 % and shall be fully applied within 1 s of the commencement of braking.

For each increment of hand-lever force, record the braking force value, $F_{Br\ rec}$, for a period of between 2,0 s and 2,5 s, with measurement starting 0,5 s - 1,0 s after the commencement of braking (see 3.10). Record $F_{Br\ rec}$ as the average braking force during this measurement period.

The time at which the measurement of the braking force is started shall be related to the speed at which the operating force is applied. If the operating force is fully applied in less than 0,5 s after the commencement of braking, start the measurement after 0,5 s. However, if the operating force is fully applied between 0,5 s and 1,0 s after the commencement of braking, start the measurement when the operating force is fully applied.

2) Testing under wet conditions:

The method shall be as given in 4.8.7.2.4.4, list entry c) with the addition that wetting of the brake system shall commence not less than 5 s before the commencement of braking for each increment of operating force and shall continue until the measurement period has ended.

Water nozzles shall be arranged according to Figure 13.

e) Linearity:

Plot the calculated $F_{Br\ average}$ values (the arithmetic mean of the three corrected braking forces at each level of operating force) against the equivalent operating force values, $F_{Op\ intend}$, in order to assess the linearity against the requirement in 4.8.7.2.3.2. Plot the results on a graph, showing the line of best fit and the \pm 20 % limit lines obtained by the method of least squares.

f) Ratio between wet and dry braking:

For any operating force (F_{Op}) for which the measured dry braking-force ($F_{D Br average}$) is greater than 200 N, the ratio between the measured braking-force in wet conditions ($F_{W Br average}$) and the measured braking-force in dry conditions ($F_{D Br average}$) shall be greater than 40 %.

For each F_{Op} where $F_{D Br average}$ is > 200 N, determine (using the following formula) whether or not the requirements of have been met:

$$F_{W Br average} / F_{D Br max average} > 4:10$$

g) Simple track test:

After completion of the machine test, conduct a brief, simple track test with progressively increasing operating forces to determine whether or not the brakes bring the bicycle to smooth, safe stop.

4.8.7.3 Track test method — Category 2 only

4.8.7.3.1 Principle

On a track method braking test, braking performance is determined by the distance to stop (the braking distance). The progressive characteristics of the brakes are directly tested by the rider.

NOTE 1 Track test methods are not given for category 1 BMX due to the size of the bicycle and rider and are still under evaluation.

NOTE 2 When carrying out track test method, the rider may wear protective equipments.

4.8.7.3.2 Test bicycle

Conduct the braking-performance test on a fully assembled bicycle after the brakes have been subjected to the strength test detailed in 4.8.6. Before testing the bicycle, inflate the tyres and adjust the brakes all according to the manufacturer's instructions.

4.8.7.3.3 Requirements

4.8.7.3.3.1 Braking performance

The bicycle shall fulfil the requirements shown in Table 2.

Table 2 — Brake test velocities and braking distances (Category 2)

Condition	Velocity [km/h]	Brakes in use	Braking distance [m]
Dry	20	Both	4,50
		Rear only	8,50
Wet	13	Both	3,00
		Rear only	6,00

4.8.7.3.3.2 Smooth safe stop characteristics

The bicycle shall show smooth, safe stop characteristics with regard to the intended use of the bicycle and the ability of the expected user of the bicycle. Safe-stop characteristics are defined as stopping within the required distances without occurrence of any of the following:

- a) excessive juddering;
- b) front wheel locking;
- c) bicycle overturning (rear wheel lifting uncontrollably);
- d) rider's loss of control;
- e) excessive side-skid causing the rider to put his foot to the ground to retain control.

With certain types of braking system, it may not be possible to avoid entirely some skidding of the rear wheel during braking; this is considered acceptable provided that d) or e) above do not occur as a result.

4.8.7.3.3.3 Velocity/distance correction factor

A correction factor shall be applied to the measured braking distance if the velocity as checked by the timing device is not precisely that specified in Table 2.

The corrected braking distance shall be determined from the formula:

$$S_c = \left(\frac{V_s}{V_m} \right)^2 S_m$$

where

- S_c is the corrected braking distance (m);
- S_m is the measured braking distance (m);
- V_s is the specified test velocity (m/s);
- V_m is the measured test velocity (m/s).

4.8.7.3.3.4 Validity of test runs

- a) A test run shall be considered invalid if:
 - 1) excessive side-skid causing the rider to put his foot to the ground to retain control, or
 - 2) loss of control occurs.

With certain types of braking system, it may not be possible to avoid entirely some skidding of the rear wheel during braking; this is considered acceptable provided that 1) or 2) above do not occur as a result.

- b) If the corrected braking distance exceeds the braking distance specified in Table 2, a test run shall be considered invalid if the velocity at the commencement of the test exceeds the specified test velocity by more than 1,5 km/h as specified in Table 2.

- c) If the corrected braking distance is less than the braking distance specified in Table 2, a test run shall be considered invalid if the velocity at the commencement of braking is more than 1,5 km/h below the specified test velocity.

If the corrected braking distance exceeds the braking distance specified in Table 2, the test run shall be considered valid.

4.8.7.3.3.5 Test results

- a) Braking under dry conditions

Depending on the gradient of the test track, the test result shall be the average value of the corrected braking distance (see 4.8.7.3.4.8) of the test results.

For compliance with the requirements of 4.8.7.3.3.1 the above average values shall not exceed the relevant braking distances specified in Table 2.

- b) Braking under wet conditions

Depending on the gradient of the test track, the test result shall be the average value of the corrected braking distances (see 4.8.7.3.4.8) of the test results.

For compliance with the requirements of 4.8.7.3.3.1, the above average values shall not exceed the relevant braking distance specified in Table 2.

4.8.7.3.4 Test method

4.8.7.3.4.1 Test track

- a) Use an indoor test-track if possible. If an outdoor test-track is used, pay special attention to ambient conditions throughout the test.
- b) The gradient of the track shall not exceed 0,5 %. If the gradient is less than 0,2 % carry out all runs in the same direction. If the gradient lies between 0,2 % and 0,5 % carry out alternate runs in opposite directions.
- c) The surface shall be hard, of concrete or fine asphalt free from loose dirt or gravel. The minimum coefficient of friction between the dry surface and the bicycle tyre shall be 0,75.
- d) The track shall be essentially dry at the commencement of tests. When testing to the requirements of 4.8.7.3.3.1, the track shall remain dry throughout the tests.
- e) The wind speed on the track shall not exceed 3 m/s during the tests.

4.8.7.3.4.2 Instrumentation

The test bicycle or the test track shall be instrumented to include the following:

- a) A calibrated speedometer or tachometer (accurate to within ± 5 %) to indicate to the rider the approximate speed at the commencement of braking (3.10).
- b) A velocity recording device (accurate to within ± 2 %) to record the velocity at the commencement of braking (3.10).
- c) A distance recording system (accurate to within ± 1 %) to record the braking distance (3.9).
- d) A water spray system, to provide wetting of the braking surface, consisting of a water reservoir connected by tubing to a pair of nozzles at the front wheel and a pair of nozzles at the rear wheel. A quick-acting on/off valve shall be included for control by the rider. Each nozzle shall provide a flow of

water at ambient temperature of not less than 4 ml/s. Details of the positions and directions of nozzles are given in Figure 13.

- e) A brake-actuation indicating system to record independently when each lever or pedal is actuated.

4.8.7.3.4.3 Mass of bicycle, rider and instrumentation

The combined mass of the bicycles, the rider, and the instrumentation shall be $100 \text{ kg} \pm 2\text{Kg}$.

When wet condition braking tests are performed, the combined mass can decrease throughout the test due to water consumption, but it shall not be less than 95 kg at the end of the valid test runs.

Where a manufacturer specifies that his bicycle can carry a mass such that the total of that mass plus that of the bicycle is in excess of 100 kg, the bicycle shall be tested at that greater total mass and it shall meet the specified braking distances.

4.8.7.3.4.4 Force applied to the handbrake-levers

- a) Magnitude and position of force on handbrake-levers:

Apply a handgrip force not exceeding 180 N at the point as specified in 4.8.2.3. Check before and after each series of test runs to verify the lever force.

- b) Optional brake-force application device:

It is permissible to use a test mechanism to operate the hand brake-lever and, when such a device is used, it shall meet the requirements of 4.8.7.3.4.4, list entry a) and shall additionally control the rate of application of the handbrake-lever force such that 63 % of the intended lever force is applied in not less than 0,2 s.

4.8.7.3.4.5 Running-in the braking surfaces

A running-in process shall be conducted on every brake before performance testing is carried out.

Apply the brakes for not less than three seconds to maintain steady deceleration whilst the bicycle is being ridden at a speed of approximately 16 km/h. Repeat this operation 10 times.

4.8.7.3.4.6 Test method — Test runs under dry conditions

Pedal the test bicycle until the specified test velocity is attained (see Table 2). Then stop pedalling and apply the brakes. The bicycle shall be brought to a smooth, safe stop (see 4.8.7.3.3.2).

4.8.7.3.4.7 Test method — Test runs under wet conditions

The method shall be as given in 4.8.7.3.4.6, with the addition that wetting of the brake system(s) shall commence not less than 25 m prior to the commencement of braking (3.10) and shall continue until the bicycle comes to rest.

NOTE Excessive amounts of water may be swept from the test-track surface between runs.

4.8.7.3.4.8 Number of valid test runs

- a) If the gradient of the track is less than 0,2 %, the following runs shall be made:
- 1) five consecutive valid runs under dry conditions;
 - 2) two acclimatisation runs under wet conditions (results not recorded);
 - 3) five consecutive valid runs under wet conditions.

- b) If the gradient of the track lies between 0,2 % and 0,5 %, the following runs shall be made:
- 1) six consecutive valid runs under dry conditions with alternate runs in opposite directions;
 - 2) two acclimatisation runs under wet conditions (results not recorded);
 - 3) six consecutive valid runs under wet conditions with alternate runs in opposite directions.

NOTE A rest period not exceeding 3 min may be taken between successive runs.

4.9 Steering

4.9.1 Handlebar dimensions

The handlebar shall have an overall width between 350 mm and 1 000 mm unless national regulations dictate otherwise.

4.9.2 Handlebar grips and plugs

4.9.2.1 Requirement 1

The ends of the handlebar shall be fitted with handgrips or end plugs. When tested by the method described in 4.9.2.2, the handgrips or plugs shall withstand a removal force of 70 N.

4.9.2.2 Test method

Apply a force of 70 N to the grip or plug in the loosening direction. Maintain the force for 1 min.

4.9.2.3 Requirement 2

Handlebar tube end shall not be visible.

4.9.2.4 Test method 2

Install the handlebar with the grip or plug on the test fixture as shown in Figure 14. Raise the test fixture to have a height of 100 mm between the solid and flat contact surface and the end of the grip or plug.

Release the fixture.

Repeat the operation 10 times.

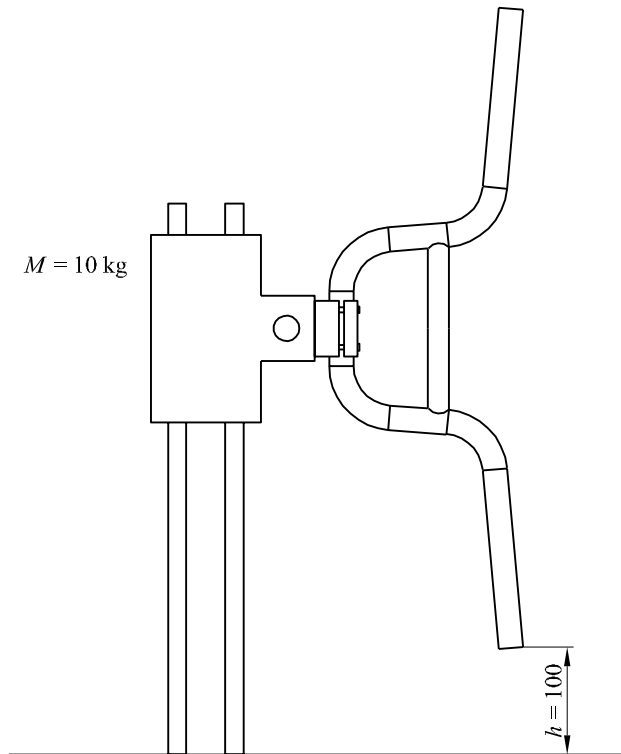


Figure 14 — Handlebar with the grip or plug test fixture (example of typical arrangement)

NOTE M = 10 kg, mass of the handlebar excluded.

4.9.3 Handlebar-stem with quill — Insertion-depth mark or positive stop

The handlebar-stem shall be provided with one of the two following alternative means of ensuring a safe insertion depth into the fork-stem:


- a) it shall contain a permanent, transverse mark, of length not less than the external diameter of the stem that clearly indicates the minimum insertion-depth of the handlebar-stem into the fork-stem; the insertion mark shall be located at a position not less than 2,5 times the external diameter of the handlebar-stem from the bottom of the stem, and there shall be at least one stem diameter's length of contiguous, circumferential stem material below the mark;
- b) it shall incorporate a permanent stop to prevent it from being drawn out of the fork-stem such as to leave the insertion less than the amount specified in a) above.

4.9.4 A-head set stem Handlebar stem-extension to fork-stem — Clamping requirements

The distance g (see Figure 15) between the upper, external part of the handlebar stem clamp and the upper, inner part of the fork stem to which the handlebar is clamped shall not be greater than 5 mm.

The upper part of the fork-stem to which the stem-extension is clamped shall not be threaded.

The dimension g shall also ensure that the proper adjustment of the steering system can be achieved.

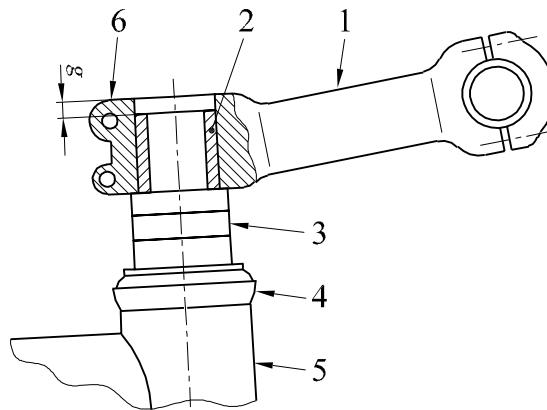

Key

- g* distance between the upper external part of the handlebar-stem clamp and the upper part of the fork-stem
- 1 stem extension
- 2 extended fork-stem
- 3 spacer rings
- 4 bearing assembly
- 5 head-tube
- 6 stem-extension to stem clamp

Figure 15 — Clamping between the handlebar stem-extension and fork-stem

NOTE For aluminium and carbon-fibre fork-stem, the avoidance of any internal device that could damage the internal surface of the fork-stem is recommended.

4.9.5 Steering stability

The steering shall be free to turn through at least 180° either side of the straight-ahead position and shall exhibit no tight spots, stiffness or slackness in the bearings when correctly adjusted.

4.9.6 Handlebar and stem assembly

4.9.6.1 Handlebar and stem assembly — Lateral bending test

4.9.6.1.1 Requirement

When tested by the method described in 4.9.6.1.2, there shall be no cracking or fracture of the handlebar, stem or clamp-bolt and the permanent set measured at the point of application of the test force shall not exceed 15 mm.

4.9.6.1.2 Test method

Assemble the handlebar and stem in accordance with the manufacturer's instructions and, unless the handlebar and stem are permanently connected, e.g. by welding or brazing, align the grips portion of the handlebar in a plane perpendicular to the stem axis (see Figure 16). For stems which have a quill for insertion in to a fork-stem, clamp the quill securely in a fixture to the minimum insertion depth, or, for stem extensions which clamp directly onto an extended fork-stem attach the extension to a fork-stem according to the manufacturer's instructions and clamp this fork-stem securely in a fixture to the appropriate height. Apply a force, *F*, of 600 N for category 1 and 1 000 N for category 2 at a distance of 50 mm from the free end of the handlebar as shown in Figure 17. Maintain this force for 1 min.




Figure 16 — Adjustable handlebars: orientation for tests

Dimension in millimetres

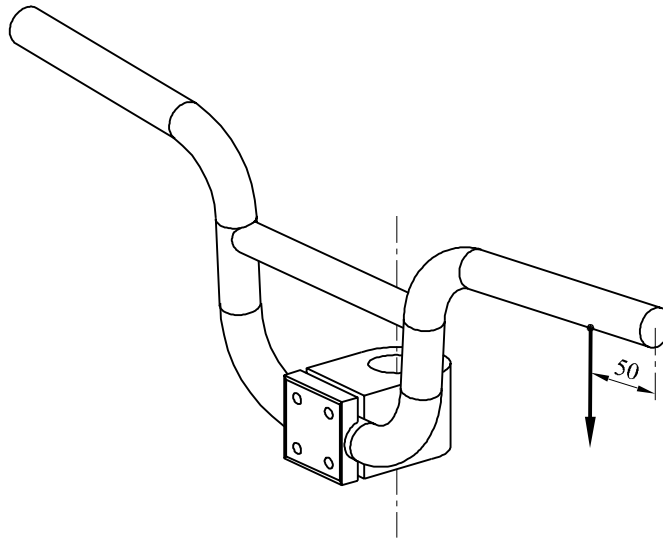


Figure 17 — Handlebar and stem assembly: lateral bending test

4.9.6.2 Handlebar-stem — Forward bending test

4.9.6.2.1 General

Conduct the test on the same assembly as follows.

4.9.6.2.2 Requirement


When tested by the method described in 4.9.6.2.3, there shall be no visible cracks or fractures and the permanent set measured at the point of application of the test force and in the direction of the test force shall not exceed 10 mm.

4.9.6.2.3 Test method

For stems which have a quill for insertion in to a fork-stem, clamp the quill securely in a fixture to the minimum insertion depth, or, for stem extensions which clamp directly on to an extended fork-stem attach the extension to a fork-stem according to the manufacturer's instructions and clamp this fork-stem securely in a fixture to the appropriate height. Clamp a dummy handle bar securely into the handlebar stem.

NOTE The length of the dummy handlebar is not critical.

Apply a force F of 1 600 N for category 1, 3 000 N for category 2 through the handlebar attachment point in a forward and downward direction and at 45° to the axis of the quill or steel bar as shown in Figure 18 and maintain this force for 1 min. Release the test force and measure any permanent set (see 4.9.6.2.2).

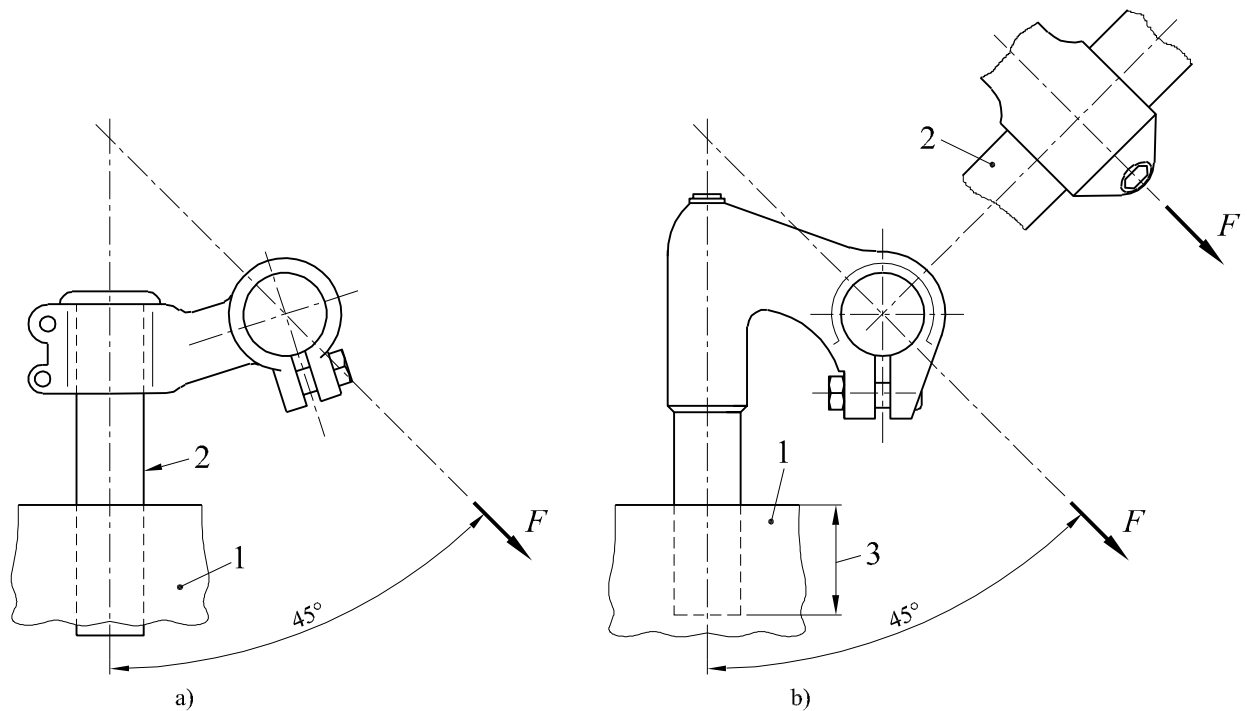

Key

- a) stem extension
- b) combined stem and quill
- 1 clamping fixture
- 2 solid steel bar
- 3 minimum insertion depth

Figure 18 — Handlebar stem: forward bending test

4.9.6.3 Handlebar / handlebar stem — Torsional security test

4.9.6.3.1 Requirements

When tested by the method described in 4.9.6.3.2, there shall be no cracking or fracture or movement of the handlebar relative to the handlebar stem clamp. Permanent deformation shall not exceed 15 mm.

4.9.6.3.2 Test method

Assemble the handlebar and stem in accordance with the manufacturer's instructions. Clamp the handlebar stem, with its axis vertical, securely in a fixture to the minimum insertion depth. Apply a force F of 400 N for category 1 and 800 N for category 2 at a distance of 50 mm from each free end of the handlebar and in direction giving the maximum lever arm with respect to the clamp axis. An example is shown in Figure 19. Maintain this force for 1 min.

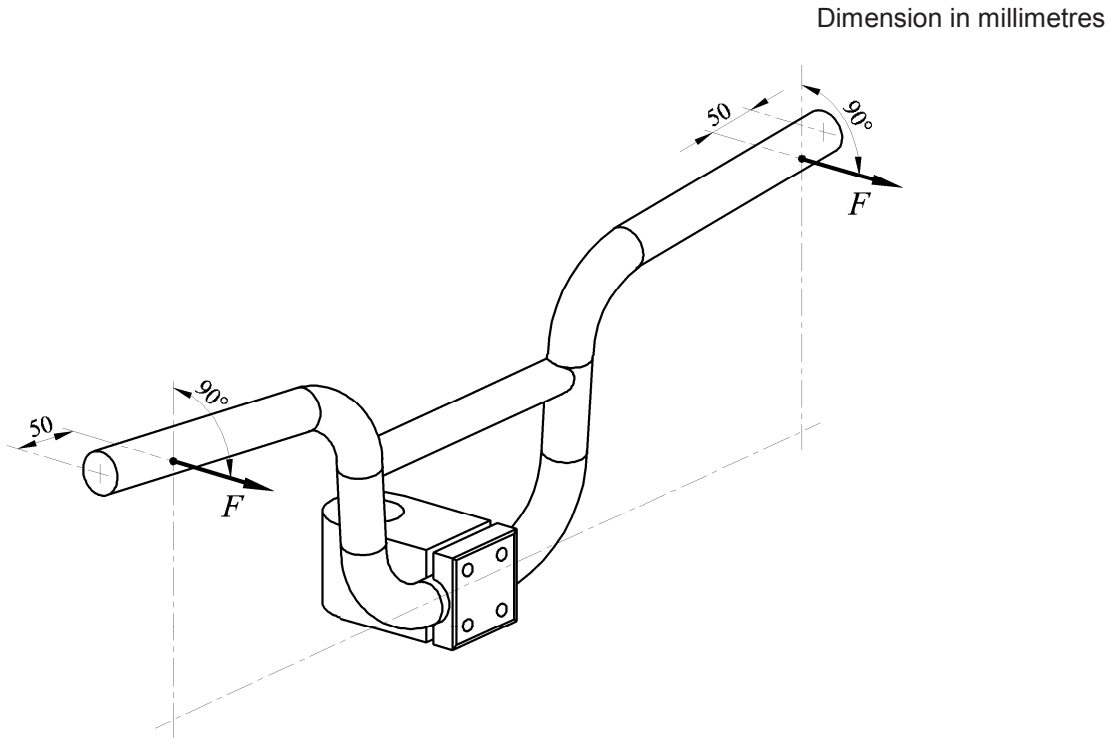


Figure 19 — Handlebar/handlebar stem — Torsional security test

4.9.7 Handlebar-stem to fork-stem — Torsional security test


4.9.7.1 Requirement

When tested by the method described in 4.9.7.2, there shall be no movement of the handlebar-stem relative to the fork-stem.

4.9.7.2 Test method

Assemble the fork-stem correctly in the frame and attach the handlebar-stem to the fork-stem with the locking system tightened in accordance with the manufacturer's instructions, and apply a torque of 50 Nm once in each direction of possible rotation in a plane perpendicular to the axis of the fork/handlebar-stem. Maintain each torque for 1 min.

The exact method of applying the torque may vary, and an example is shown in Figure 20.

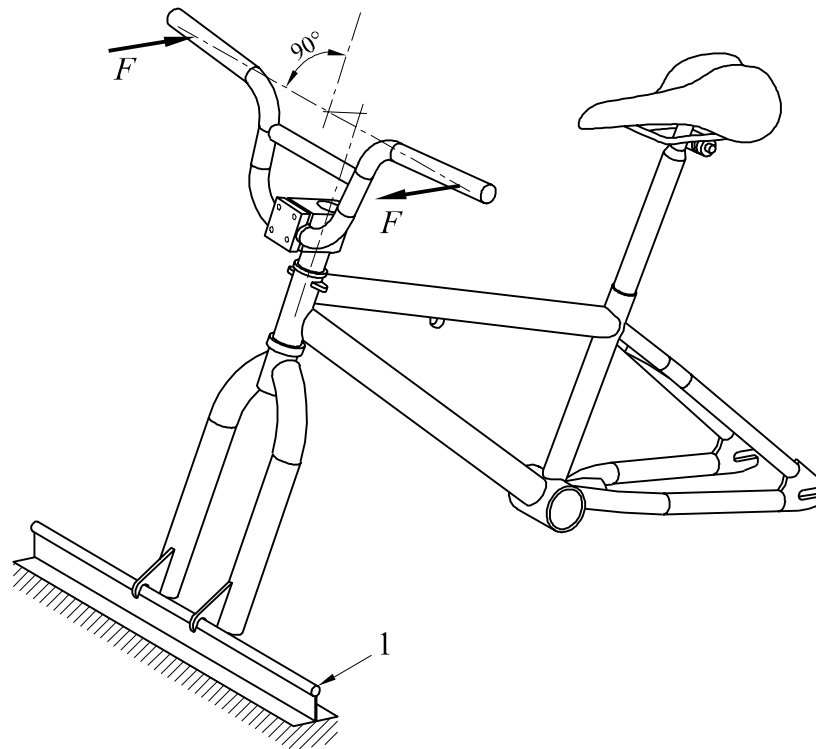

Key

- 1 fork clamping to prevent fork rotation

Figure 20 — Application of the torque — Example

4.9.8 Handlebar and stem assembly — Fatigue test

4.9.8.1 General

Handlebar-stems can influence test failures of handlebars and for this reason, a handlebar shall always be tested mounted in a stem, but it is permitted to test a stem with a solid bar in place of the handlebar with dimensions corresponding to handlebars suitable for that stem.

When the fatigue test is for the stem only, the manufacturer of the stem shall specify the types and sizes of handlebar for which the stem is intended and the test shall be based on the most severe combination.

Conduct the test in two stages on the same assembly in accordance with 4.9.8.2 to 4.9.8.5.

4.9.8.2 Requirement for Stage 1

When tested by the method described in 4.9.8.3, there shall be no visible cracks or fractures in any part of the handlebar and stem assembly.


For carbon-fibre handlebars or stems, the peak deflections during the test in either direction from the mean position shall not increase by more than 20 % of the initial values.

4.9.8.3 Test method for Stage 1

Align the grip portion of the handlebar in a plane perpendicular to the stem axis (see Figure 21 a)), and secure the handlebar to the stem according to the manufacturer's instructions.

Clamp the handlebar stem securely in a fixture to the minimum insertion depth (see 4.9.3), or in the case of a stem extension which is intended to be clamped to an extended fork-stem secure the extension using the manufacturer's recommended tightening procedure to an extended fork-stem which is secured in fixture to the appropriate length. For handlebars, apply fully reversed forces F according to Table 3 at a position 50 mm from the free end each side of the handlebar for 100 000 cycles, with the forces at each end of the handlebar being out of phase with each other and parallel to the axis of handlebar stem as shown in Figure 21 a).

Dimensions in millimetres

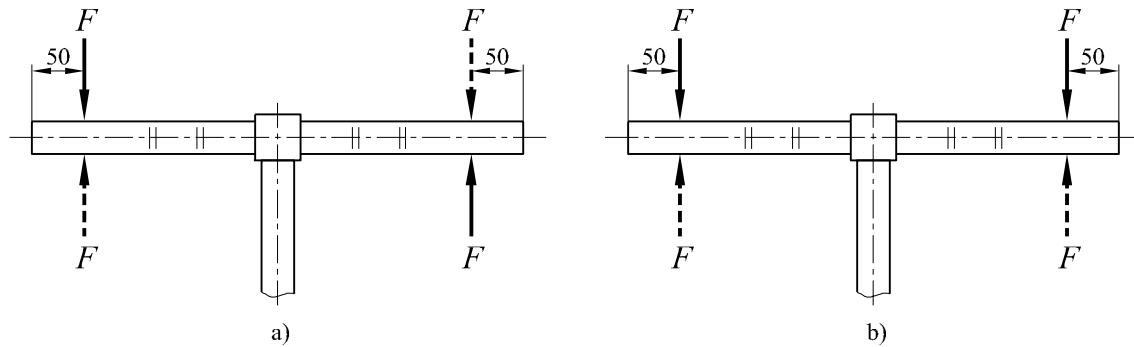

Key

- a) stage 1 – out-of-phase loading
- b) stage 2 – in-phase loading

Figure 21 — Handlebar and stem: fatigue tests

4.9.8.4 Requirement for Stage 2

When tested by the method described in 4.9.8.5, there shall be no visible cracks or fractures in any part of the handlebar and stem assembly.

For carbon-fibre handlebars or stems, the peak deflection during the test in direction from the mean position shall not increase by more than 20 % of the initial values.

4.9.8.5 Test method for Stage 2

Apply fully-reversed forces F according to Table 3 at a position 50 mm from the free end each side of the handlebar for 100 000 cycles, with the forces at each end of the handlebar being in phase with each other and parallel to the axis of the handlebar stem as shown in Figure 21 b).

Table 3 — Value of forces

	Category 1	Category 2
Out-of-phase	200 N	270 N
In-phase	250 N	450 N

4.9.9 Handlebar/stem assembly impact test

4.9.9.1 Requirements

When tested by the method in 4.9.9.2, there shall be no visible cracks or fracture in the handlebar or stem.

4.9.9.2 Test method


Assemble the handlebar and stem in accordance with the manufacturer's instructions.

Impact the handlebar 50 mm from the handlebar end. Position the handlebar in such a way that the plane defined by the clamping axis and the impact point shall be vertical.

The impactor shall be according to Figure 22.

Drop the impactor on the impact point from a height of 500 mm according to Figure 22.

Dimensions in millimetres

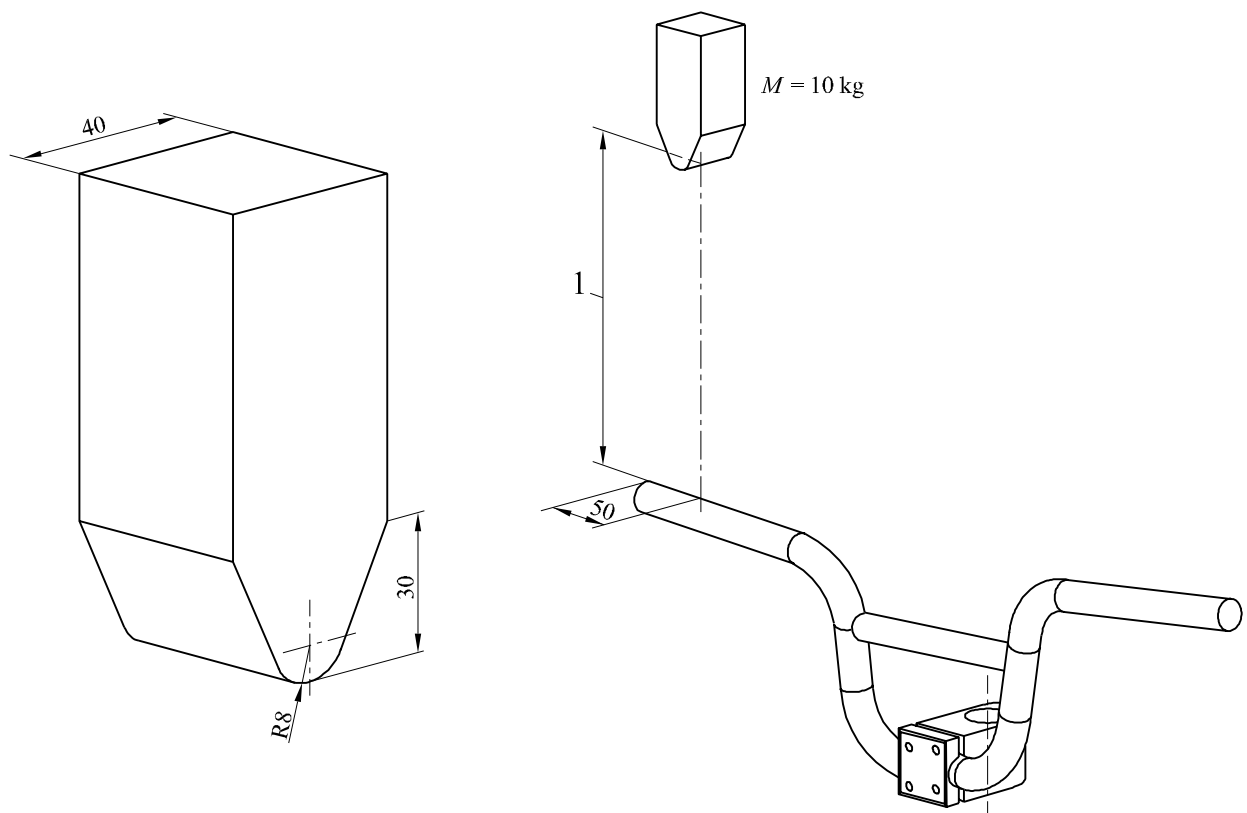

Key

1 h = 500 mm

Figure 22 — Handlebar/stem assembly impact test – Impactor

4.10 Frame

4.10.1 Dummy fork characteristics

The dummy fork shall be designed to mount in a manner similar to the original fork, or in a manner using typical procedures.

The dummy fork when mounted, shall be the same length, L , as the longest fork designed for use with the frame.

The deflection of the dummy fork, δ , is measured at the front axle centre, resulting from the application of a vertical 1 200 N load at that point. The fork is fixed in position only at the fork stem by a clamping device with

a minimum length of 75 mm. The steering stem axis is fixed horizontally with the crown race seat adjacent to the clamping device.

The deflection, δ , for the test fork for horizontal and vertical loading fatigue test impact test shall not exceed the value:

$$\delta \leq \frac{L^3}{K \times 10000} \quad (1)$$

where

K is constant, is equal to 1 417;

L and δ are length and deflection in millimetres.

For example, for a fork length of 460 mm, the maximum acceptable fork deflection (δ) would be 6,9 mm. Similar for a fork length of 330 mm, the maximum is 2,5 mm.

4.10.2 Frame — Impact test (falling mass)


4.10.2.1 Requirement

When tested by the method described in 4.10.2.2, there shall be no visible cracks or fractures in the frame.

The permanent set measured between the axes of the wheel axles (the wheel-base, see 3.17 and Figure 23) shall not exceed the following values:

- a) 30 mm where a fork is fitted (when tested with the original combination of frame and fork);
- b) 10 mm where a dummy fork is fitted in place of a fork (when tested as a component).

Dimensions in millimetres

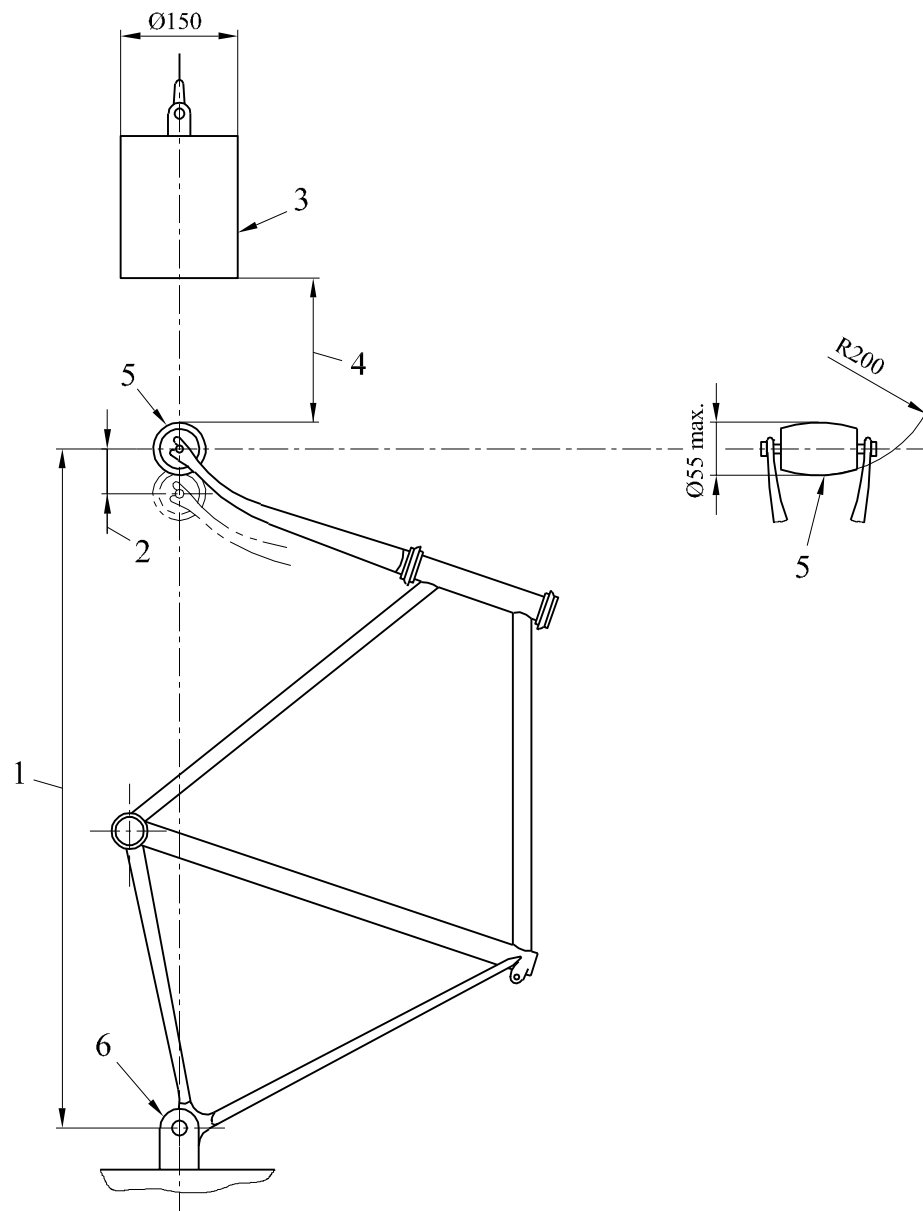

Key

- 1 wheel-base
- 2 permanent set
- 3 22,5 kg striker
- 4 360 mm drop height
- 5 low mass roller (1 kg max.)
- 6 rigid mounting for rear axle attachment point

Figure 23 — Frame and front fork assembly – Impact test (falling mass)

4.10.2.2 Test method

Assemble a roller of mass less than or equal to 1 kg and with dimensions conforming to those shown in Figure 23 in the fork. Hold the frame-fork assembly vertically with clamping to a rigid fixture by the rear-axle attachment points as shown in Figure 23.

Rest a striker of mass 22,5 kg on the roller in the fork drop-outs and measure the wheel-base. Raise the striker to a height of 180 mm for category 1 and 360 mm for category 2 above the low-mass roller and release it to strike the roller at a point in line with the wheel centres and against the direction of the fork rake. The striker will bounce and this is normal. When the striker has come to rest on the roller, measure the wheel-base again.

4.10.3 Frame — Impact test (falling frame)

4.10.3.1 Requirement

When tested by the method described in 4.10.3.2, there shall be no visible cracks or fractures in the frame and the permanent set of the wheel-base shall not exceed 60 mm.


4.10.3.2 Test method

Conduct the test on the assembly used for the test in 4.10.2.2.

As shown in Figure 24, mount the frame-dummy fork assembly at its rear axle attachment points so that it is free to rotate about the rear axle in a vertical plane. Support the dummy fork on a flat steel anvil so that the frame is in its normal position of use. Securely fix masses of 10 kg, 30 kg, and 50 kg to the top of the steering head, the seat-post, and the bottom bracket respectively, as shown in Figure 24.

Measure the wheel-base with the three masses in place. Rotate the assembly about the rear axle until the distance between the low-mass roller and the anvil is 300 mm, and then allow the assembly to fall freely to impact on the anvil. Repeat the test and then measure the wheel-base again with the three masses in place and the roller resting on the anvil.

Dimension in millimetres

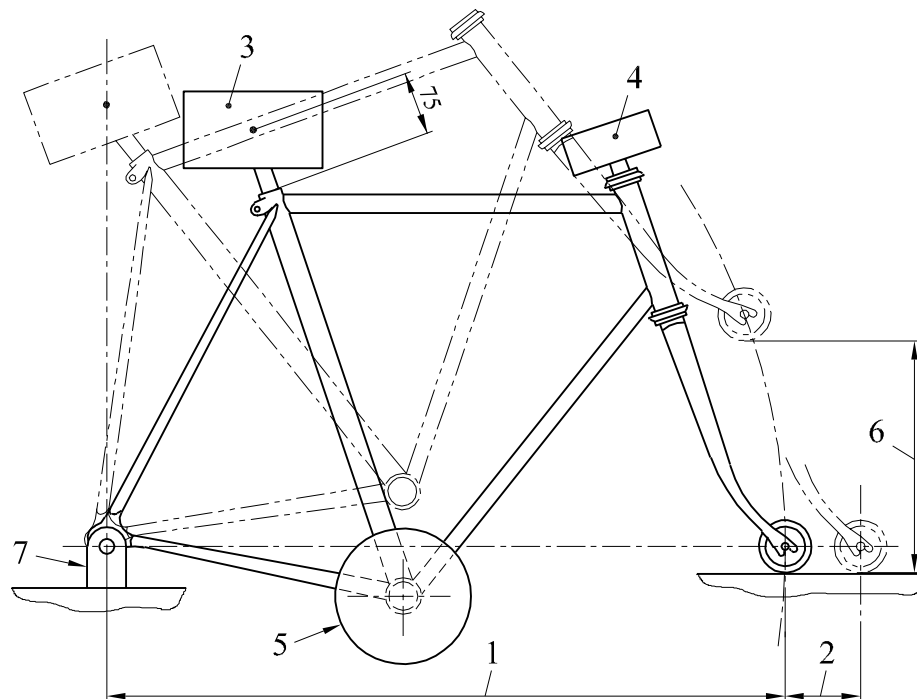

Key

- 1 wheel-base
- 2 permanent set
- 3 30 kg mass
- 4 10 kg mass
- 5 50 kg mass
- 6 300 mm drop height
- 7 rigid mounting for rear axle attachment point

Figure 24 — Frame: impact test (falling frame)

4.10.4 Frame — Fatigue test with pedalling forces

4.10.4.1 Requirement

When tested by the method described in 4.10.4.2, there shall be no visible cracks or fractures in the frame. For carbon-fibre frames, the peak deflections during the test at the points where the test forces are applied shall not increase by more than 20 % of the initial values.

4.10.4.2 Test method

Mount the frame assembly on a base as shown in Figure 25 with the dummy fork defined in 4.10.1 secured by its axle to a rigid mount of height R_w (the radius of the wheel/tyre assembly ± 30 mm) and with the hub free to swivel on the axle.

Secure the rear drop-outs by means of an axle to a stiff, vertical link of the same height as that of the front, rigid mount, the upper connection of the link being free to swivel about the axis of the axle but providing rigidity in a lateral plane, and the lower end of the link being fitted with a ball-joint.

Fit a crank, chain-wheel or chain-wheel set and chain assembly or, preferably, a strong, stiff, adaptor assembly to the bottom-bracket as shown in Figure 25 and described in a) or b) below.


- a) If a crank/chain-wheel assembly is used, incline both cranks forwards and downwards at an angle of 45° to the horizontal and secure the front end of the chain to the chain-wheel and attach the rear end of the chain to the rear axle and perpendicular to the axis of the axle.
- b) If an adaptor is used as shown in Figure 25 ensure that the assembly is free to swivel about the axis of the bottom-bracket and that both replacement arms are 175 mm long (L) and that they are both inclined forwards and downwards at an angle of $(45 \pm 2)^\circ$ to the horizontal. Secure the position of the crank replacement arms by a vertical arm (which replaces the chain wheel) and a tie-rod which has ball-joints at both ends and which is attached to the rear axle perpendicular to the axis of the rear axle. The length of the vertical arm (R_c) shall be 75 mm, and the axis of the tie-rod shall be parallel to and 50 mm from the vertical plane through the centre-line of the frame.

If by design the axis of the tie-rod cannot be set parallel, minimize the angle.

Subject each dummy pedal-spindle to a repeated downward force of 900 N for category 1 and 1 200 N for category 2 at a position 150 mm from the centre-line of the frame in a vertical, transverse plane and inclined at $7,5^\circ$ (accurate to within $\pm 0,5^\circ$) to the fore/aft plane of the frame as shown in Figure 25.

During application of these test forces, ensure that the force on a "dummy pedal-spindle" falls to 5 % or less of the peak force before commencing application of the test force to the other "pedal-spindle". Apply the test forces for 100 000 test cycles where one test cycle consists of the application and removal of the two test forces.

Dimensions in millimetres

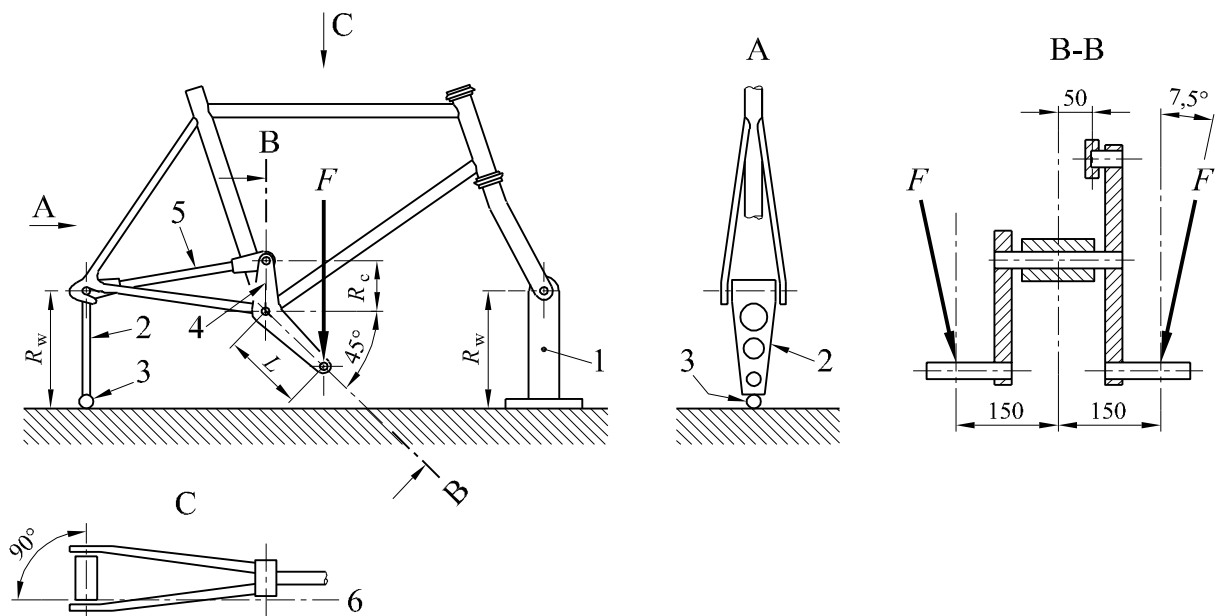

Key

- R_w height of rigid mount and vertical link
- R_c length of vertical arm (75 mm)
- L length of crank replacement (175 mm)
- 1 rigid mount
- 2 vertical link
- 3 ball-joint
- 4 vertical arm
- 5 tie-rod
- 6 centre-line of tie-rod

Figure 25 — Frame: fatigue test with pedalling forces


4.10.5 Frame — Fatigue test with horizontal forces

4.10.5.1 Requirement

When tested by the method described in 4.10.5.2, there shall be no visible cracks or fractures in the frame. For carbon-fibre frames, the peak deflections during the test in either direction from the mean position shall not increase by more than 20 % of the initial values.

4.10.5.2 Test method

Mount the frame in its normal attitude and secured at the rear drop-outs so that it is not restrained in a rotary sense (i.e. preferably by the rear axle) as shown in Figure 26. Ensure that the axes of the front and rear axles are horizontally in line.

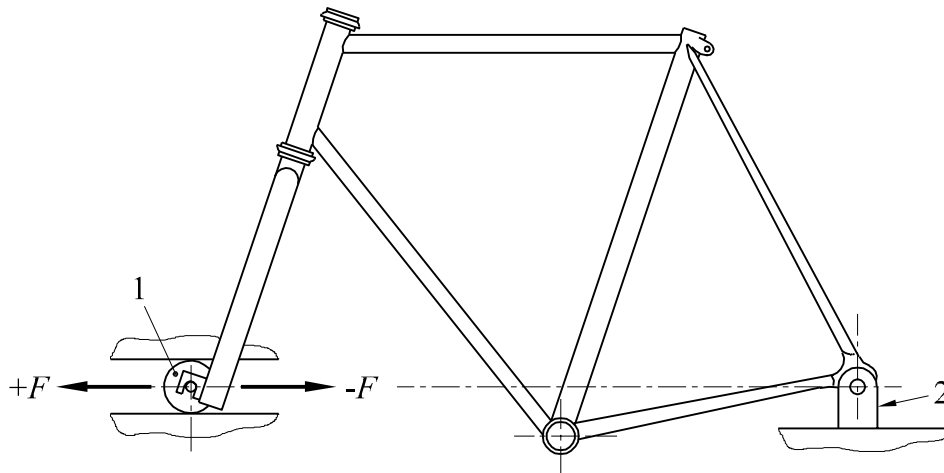

Key

- 1 free-running guided roller
- 2 rigid, pivoted mounting for rear axle attachment point

Figure 26 — Frame: fatigue test with horizontal forces

For category 1: Apply cycles of dynamic, horizontal forces, F , of + 450 N in a forward direction and - 450 N in a rearward direction to the front fork drop-outs for 50 000 cycles as shown in Figure 26, with the front fork constrained in vertical direction but free to move in a fore/aft direction under the applied forces.

For category 2: Apply cycles of dynamic, horizontal forces, F , of + 650 N in a forward direction and - 650 N in a rearward direction to the front fork drop-outs for 50 000 cycles as shown in Figure 26 with the front fork constrained in vertical direction but free to move in a fore/aft direction under the applied forces.

4.11 Fork

4.11.1 Front fork — Means of location of the axle and wheel retention

The slots or other means of location for the wheel-axle within the front fork shall be such that when the axle or cones are firmly abutting the top face of the slots, the front wheel remains central within the fork. The front fork and wheel shall also fulfil the requirements of 4.12.4.

4.11.2 Front fork — Static bending test

4.11.2.1 Requirement


When tested by the method described in 4.11.2.2, there shall be no fractures or visible cracks in any part of the fork, and the permanent set, measured as the displacement of the axis of the wheel-axle or simulated axle in relation to the axis of the fork-stem, shall not exceed 5 mm for category 1 and 2.

4.11.2.2 Test method

Mount the fork in a fixture representative of the head-tube and gripped in the normal head-bearings and fit a loading-attachment and swivel on an axle located in the axle-slots of the blades (see Figure 27). Locate a deflection measuring device under the loading-attachment in order to measure deflection and permanent set of the fork perpendicular to the stem axis and in the plane of the wheel.

Apply a static, pre-loading force of 100 N to the roller perpendicular to the stem axis, against the direction of travel, and in the plane of the wheel. Remove and repeat this loading until a consistent deflection reading is obtained. Adjust the deflection measuring device to zero. Increase the static force to 800 N for category 1 and

1 500 N for category 2 and maintain this force for 1 min, then reduce the force to 100 N and record any permanent set.

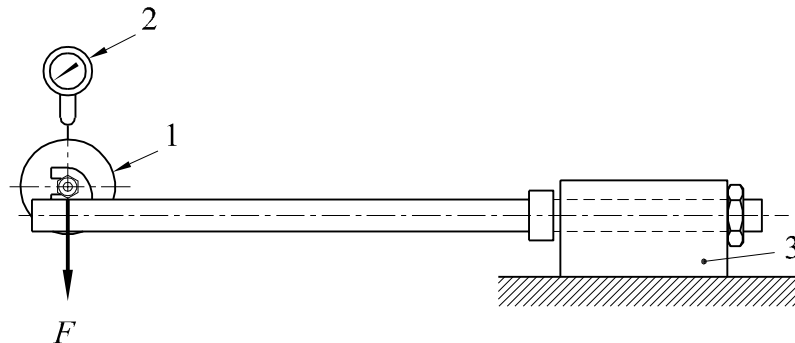

Key

- 1 loading-attachment to swivel on axle
- 2 deflection measuring device
- 3 rigid mount incorporating head bearings

Figure 27 — Front fork: static bending test (typical arrangement)

4.11.3 Front fork — Rearward impact test

4.11.3.1 Crown/stem joint assembled by welding or brazing

4.11.3.1.1 Requirement


When tested by the method described in 4.11.3.1.2, there shall be no fractures or visible cracks in any part of the fork, and the permanent set, measured as the displacement of the axis of the wheel-axle or simulated axle in relation to the axis of the fork-stem, shall not exceed 45 mm for category 1 and 2.

4.11.3.1.2 Test method

Mount the fork in a fixture representative of the head-tube and gripped in the normal bearings as shown in Figure 28. Assemble a roller of mass less than 1 kg and with dimensions conforming to those shown in Figure 23 in the fork.

Rest a striker of mass 22,5 kg on the roller in the fork drop-outs such that it is exerting a force against the direction of travel and in the plane of the wheel. Position a deflection measuring device under the roller and record the position of the underside of the roller in a direction perpendicular to the axis of the fork-stem and in the plane of the wheel and note the vertical position of the fork.

Remove the deflection measuring device, raise the striker through a height, d , of 180 mm for category 1 and 360 mm for category 2 and release it to strike the roller against the rake of the fork. The striker will bounce and this is normal. When the striker has come to rest on the roller, measure the permanent set under the roller.

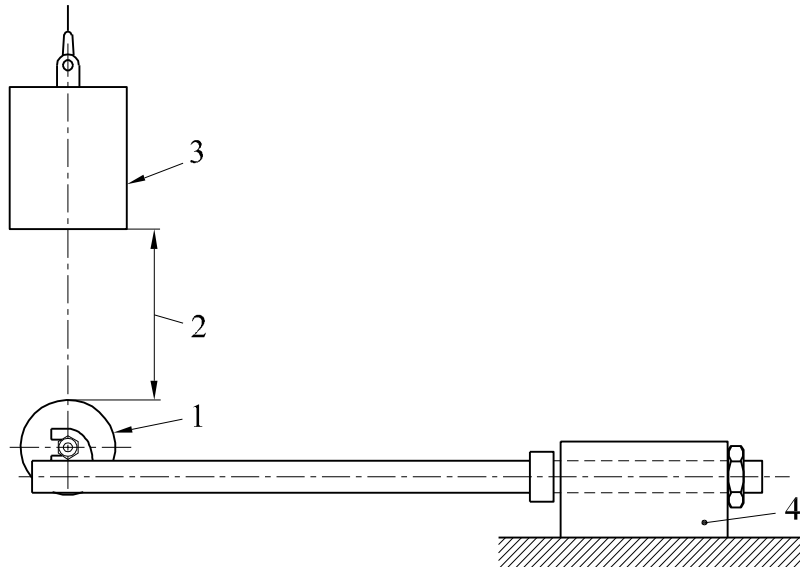

Key

- 1 low-mass roller (see Figure 23)
- 2 drop height: 180 mm for category 1, 360 mm category 2
- 3 22,5 kg striker
- 4 rigid mount incorporating head bearing

Figure 28 — Front fork: rearward impact test

4.11.3.2 Crown/stem joint assembled by press-fitting, bonding, or clamping

4.11.3.2.1 Requirement

When tested by the method described in 4.11.3.2.2, list entry a), if there are any fractures or visible cracks in any part of the fork, and the permanent set, measured as the displacement of the axis of the wheel-axle or simulated axle in relation to the axis of the fork-stem, exceeds 45 mm for category 1 and 2, the fork shall be considered to have failed.

For the category 2 if the fork meets these criteria then it shall be subjected to a second test as described in 4.11.3.2.2, list entry b), after which, it shall exhibit no fractures or visible cracks.

For both categories, there shall be no relative movement between the stem and the crown when the assembly is subjected to 4.11.3.2.2, list entry c).

4.11.3.2.2 Test method

- a) This test is that described in 4.11.3.1.2 for both categories.
- b) This test applies only to category 2. It is similar to that described in 4.11.3.1.2 except that the drop height is 600 mm.
- c) Apply a torque of 80 Nm applied and maintained for 1 min in each direction of possible rotation about the stem axis.

4.11.4 Front fork – Bending fatigue test


4.11.4.1 Requirement

When tested by the method described in 4.11.4.2, there shall be no fractures or visible cracks in any part of the fork. For carbon-fibre forks, the peak deflections during the test in either direction from the mean position shall not increase by more than 20 % of the initial values.

4.11.4.2 Test method

Mount the fork in a fixture representative of the head-tube and gripped in the normal bearings as shown in Figure 29.

Apply cycles of fully reversed, dynamic forces, F , of ± 450 N for category 1 and ± 650 N for category 2 in the plane of the wheel and perpendicular to the stem-tube to a loading attachment and swivel on an axle located in the axle-slots of the blades for 100 000 test cycles.

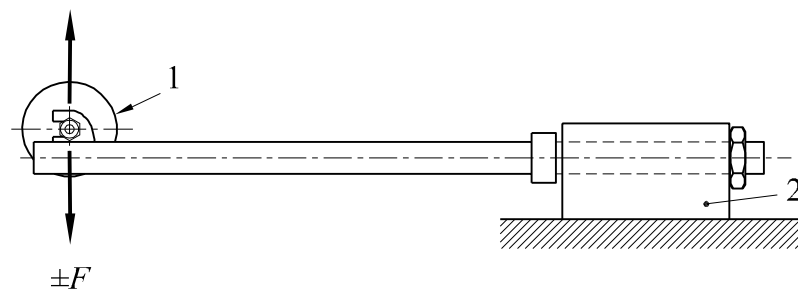

Key

- 1 pivoted force application device
- 2 rigid mount incorporating head bearings

Figure 29 — Front fork: bending fatigue test

4.12 Wheels and wheel/tyre assemblies

4.12.1 Rotational accuracy


4.12.1.1 General

Rotational accuracy shall be as defined in EN ISO 1101 in terms of axial run-out tolerance (lateral). The run-out tolerances given in 4.12.1.2 and 4.12.1.3 represent the maximum variation of position of the rim (i.e., full indicator reading) of a fully assembled and adjusted wheel during one complete revolution about the axle without axial movement.

For measurement of axial run-out the wheel shall be fitted with a tyre inflated to the maximum pressure as moulded on the tyre; concentricity may be checked with or without the tyre.

4.12.1.2 Wheel/tyre assembly — Concentricity tolerance

For wheels intended for rim-brakes, the run-out shall not exceed 1 mm when measured perpendicular to the axle at a suitable point along the rim (see Figure 30).

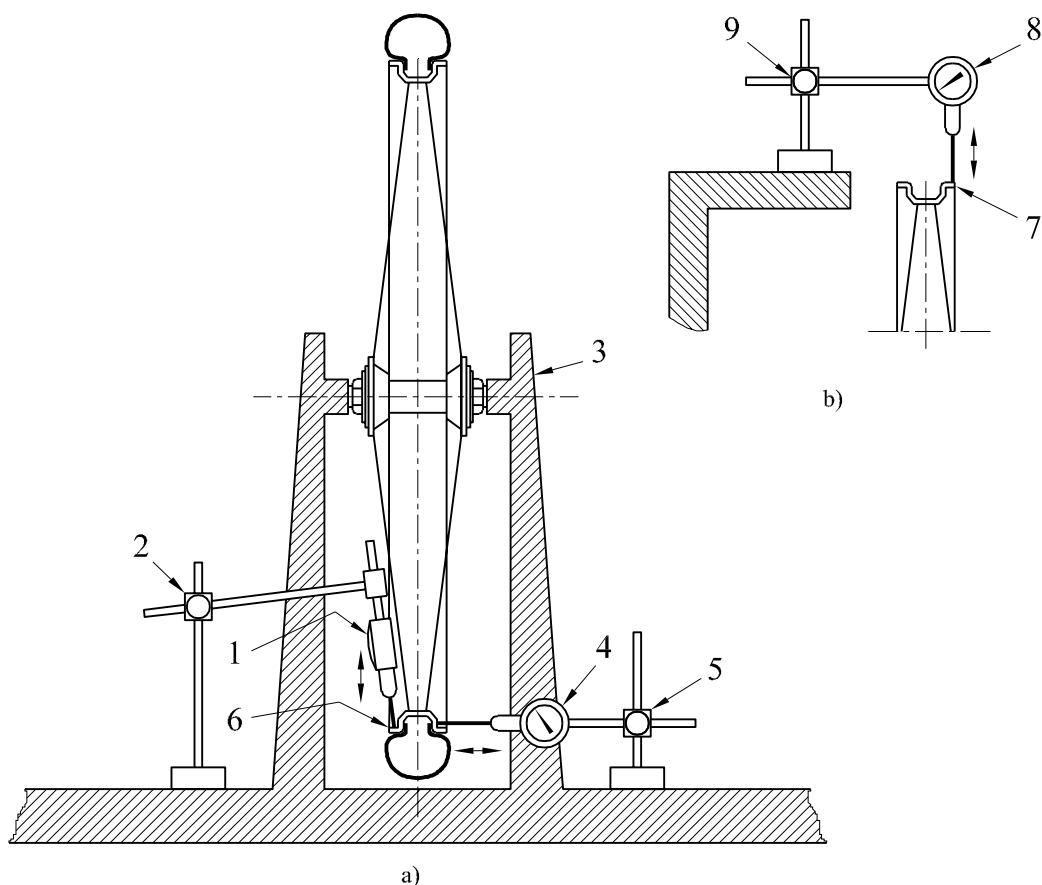

Key

- a) rim with tyre
- b) rim without tyre
- 1 dial-gauge (concentricity)
- 2 instrument stand
- 3 hub axle support
- 4 dial-gauge (lateral run-out)
- 5 instrument stand
- 6 rim with tyre
- 7 rim without tyre
- 8 dial gauge (concentricity)
(alternative position)
- 9 instrument stand

Figure 30 — Wheel/tyre assembly — Concentricity and lateral tolerance

4.12.1.3 Wheel/tyre assembly — Lateral tolerance

For wheels intended for rim-brakes, the run-out shall not exceed 1 mm when measured parallel to the axle at a suitable point along the rim (see Figure 30).

4.12.2 Wheel/tyre assembly — Clearance

Alignment of the wheel/tyre assembly in a bicycle shall allow not less than 6 mm clearance between the tyre and any frame or fork element.


4.12.3 Wheel/tyre assembly — Static strength test

4.12.3.1 Requirement

When a fully assembled wheel fitted with a tyre inflated to the maximum pressure as permanently marked on the tyre is tested by the method described in 4.12.3.2, there shall be no failure of any of the components of the wheel, and the permanent set, measured at the point of application of the force on the rim, shall not exceed 1,5 mm for both categories.

4.12.3.2 Test method

Clamp and support the wheel suitably as shown in Figure 31. Apply a 50 N pre load at one point on the rim, perpendicular to the plane of the wheel. Adjust the deflection measuring device to zero. Increase the static force according to Table 4. Apply the force once only for a duration of 1 min. In the case of a rear wheel apply the force from the sprocket side of the wheel as shown in Figure 31.

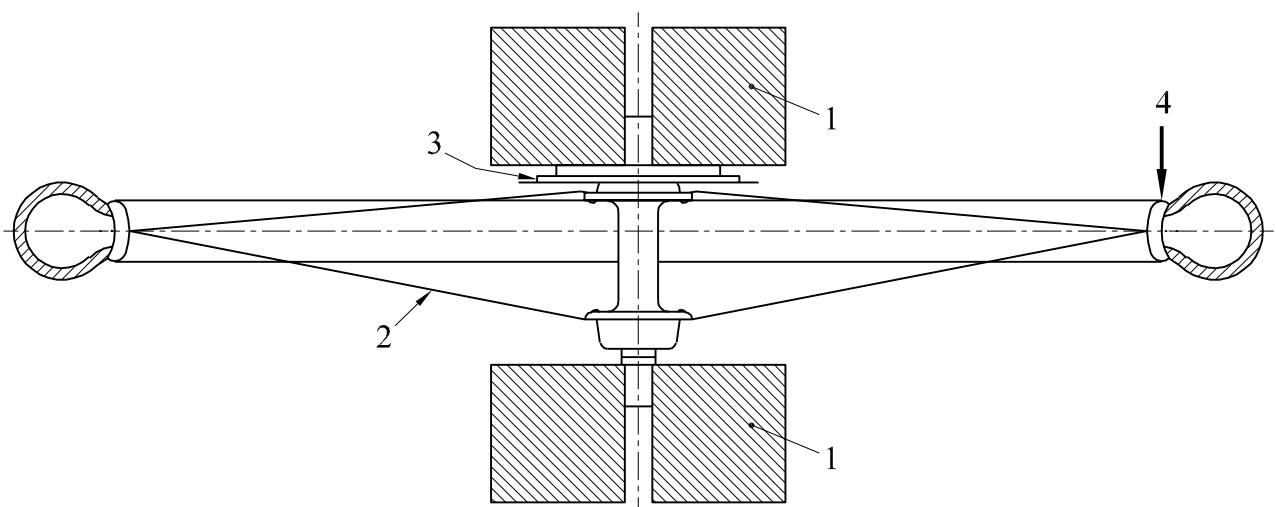

Key

- 1 clamping fixture
- 2 wheel/tyre assembly
- 3 drive sprocket
- 4 load

Figure 31 — Wheel/tyre assembly: static strength test

Table 4 — Static forces

Loading	Category 1	Category 2
	300 N	500 N

4.12.4 Wheel retention

4.12.4.1 General

Wheel retention safety is related to the combination of wheel, retention device, and drop-out design. Wheels shall be secured to the bicycle frame and fork such that, when adjusted to the manufacturer's recommendations, they comply with 4.12.4.2, 4.12.4.3 and 4.12.4.4.

4.12.4.2 Front wheel retention - Retention devices secured

4.12.4.2.1 Requirement

When tested by the method described in 4.12.4.2.2, there shall be no relative motion between the axle and the front fork.

4.12.4.2.2 Test method

Apply a force of 2 300 N distributed symmetrically to both ends of the axle for a period of 1 min in the direction of the removal of the wheel.

4.12.4.3 Rear wheel retention - Retention devices secured

4.12.4.3.1 Requirement

When tested by the method described in 4.12.4.3.2, there shall be no relative motion between the axle and the frame.

4.12.4.3.2 Test method

Apply a force of 2 300 N distributed symmetrically to both ends of the axle for a period of 1 min in the direction of the removal of the wheel.

4.12.4.4 Front wheel retention - Retention devices unsecured

Where threaded axles and nuts are fitted, and the nuts are unscrewed by at least 360° from the finger tight condition and the brake system disconnected or released, the wheel shall not detach from the fork when a force of 100 N is applied radially outwards for a period of 1 min, in line with the drop-out slots.

4.13 Rims, tyres and tubes

4.13.1 General

Non-pneumatic tyres are excluded from the requirements of 4.13.2 and 4.13.3.

4.13.2 Tyre inflation pressure

The maximum inflation pressure recommended by the manufacturer shall be permanently marked on the sidewall of the tyre so as to be readily visible when the latter is assembled on the wheel.

NOTE It is recommended that the minimum inflation pressure specified by the manufacturer also be permanently marked on the sidewall of the tyre.

4.13.3 Tyre and rim compatibility

The tyre, tube and tape shall be compatible with the rim design.

When inflated to 150 % of the maximum inflation pressure for a period of not less than 5 min, the tyre shall remain intact on the rim.

NOTE Tyres should comply with the requirements of ISO 5775-1 and rims should comply with the requirements of ISO 5775-2. In the absence of suitable information from these International Standards, other publications may be used (see Bibliography).

4.13.4 Rim-wear

In the case where the rim forms part of the braking system and there is a danger of failure due to wear, the manufacturer shall make the rider aware of this danger by durable and legible marking on the rim in an area not obscured by the tyre (see also Clause 5, list entry o), and 6.1).

4.13.5 Wheel/tyre assembly – Impact test

4.13.5.1 Requirement

On impact, inner tube (if present) or tyre shall not burst.

NOTE Instantaneous deflation is considered as a burst.

On impact no element of the wheel shall become detached or expelled outwards. If the wheel breaks, it shall not present any shattered, or any sharp or serrated surfaces that could harm users and shall not cause the hub to become separated from the rim in such a way that the wheel becomes detached from the forks.

4.13.5.2 Test method

The wheels shall be fitted with a tyre inflated to the lowest pressure as moulded on the tyre or 80 % of the maximum tyre pressure if the lowest pressure is not indicated.


The impactor shall have a flat surface covering the foot print of the tyre during impact with mass of 22,5 kg.

NOTE For example a plate of (200 x 200) mm is appropriate.

The impact shall be carried out at the weakest point on the wheel. i.e. rim joint. For plastic wheels, the test shall be performed at mid-span including the valve hole (see Figure 32).

Table 5 — Mass of the impactor and falling height

	Category 1	Category 2
Mass	22,5 kg	
Drop height	400 mm	1000 mm

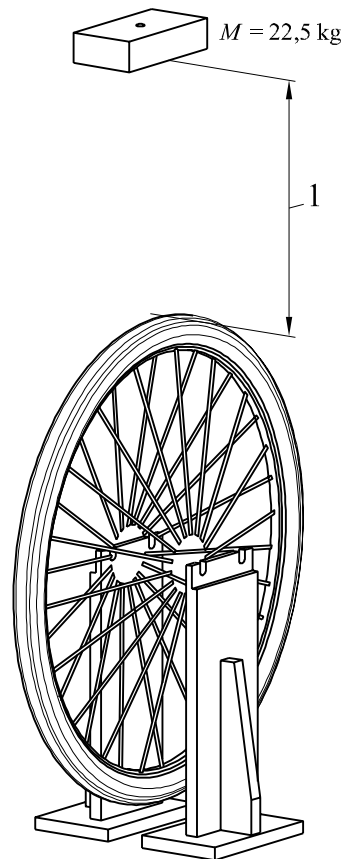

Key

1 drop height (see Table 5)

Figure 32 — Wheel/tyre assembly impact test rig

4.14 Pedals and pedal/crank drive system

4.14.1 Pedal tread

The tread surfaces of a pedal shall be secured against movement within the pedal assembly.

Any protrusion from the base of the tread surfaces which is made by screws shall be limited to a length of one major diameter of the screw beyond the internally threaded mating part.

Any other protrusion less than 8 mm in length shall terminate in a rounding-off radius not less than 2 mm.


4.14.2 Pedal clearance

4.14.2.1 Ground clearance

With the bicycle un-laden, the pedal at its lowest point and the tread surface of the pedal parallel to the ground and uppermost where it has only one tread surface, the bicycle shall be capable of being leaned over at an angle of 25° from the vertical before any part of the pedal touches the ground.

4.14.2.2 Toe clearance

Bicycles shall have at least 100 mm clearance between the pedal and front tyre. The clearance shall be measured forward and parallel to the longitudinal axis of the bicycle from the centre of either pedal to the arc swept by the tyre when turned either side of the forward riding direction (see Figure 33).

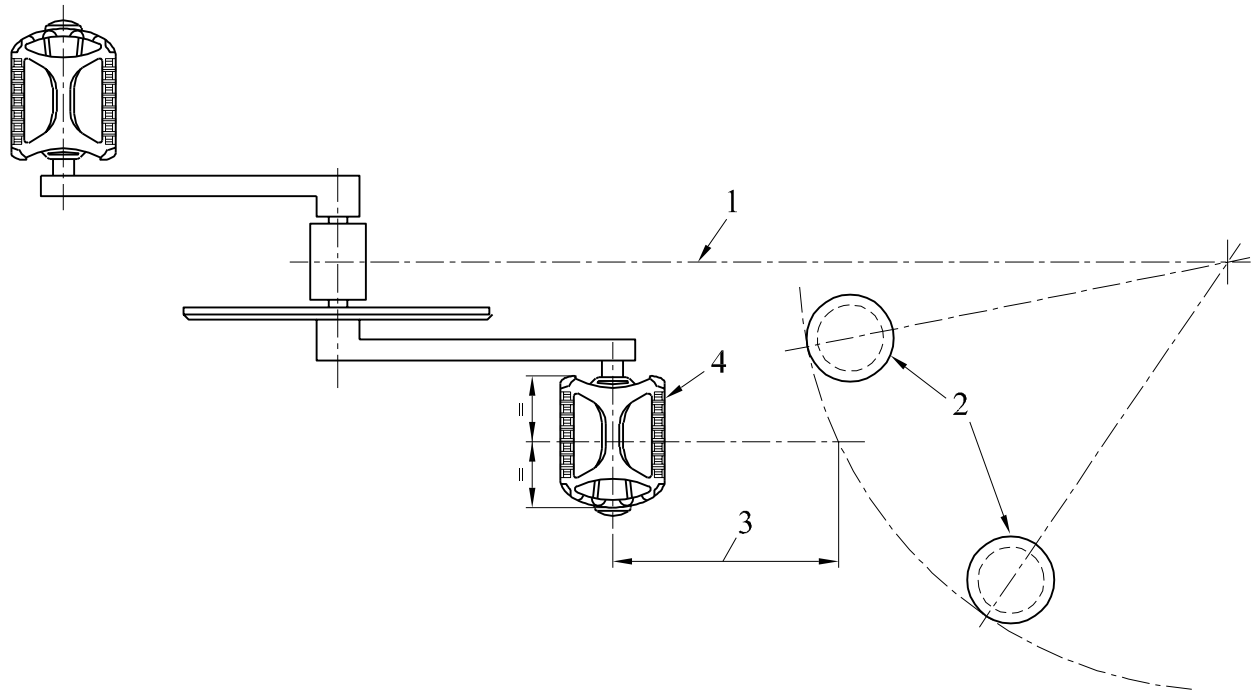

Key

- 1 longitudinal axis
- 2 front tyre
- 3 clearance
- 4 pedal

Figure 33 — Pedal to wheel toe clearance


4.14.3 Pedal/pedal-spindle assembly —Static strength test

4.14.3.1 Requirement

When tested by the method described in 4.14.3.2, there shall be no fractures, visible cracks, or distortion of the pedal or spindle that could affect the operation of the pedal and pedal-spindle.

4.14.3.2 Test method

Screw the pedal-spindle securely into a suitable rigid fixture with its axis horizontal, as shown in Figure 34, and apply a vertically-downward force of 1 500 N for 1 min to the centre of the pedal as shown in Figure 34. Release the force and examine the pedal assembly and the spindle.

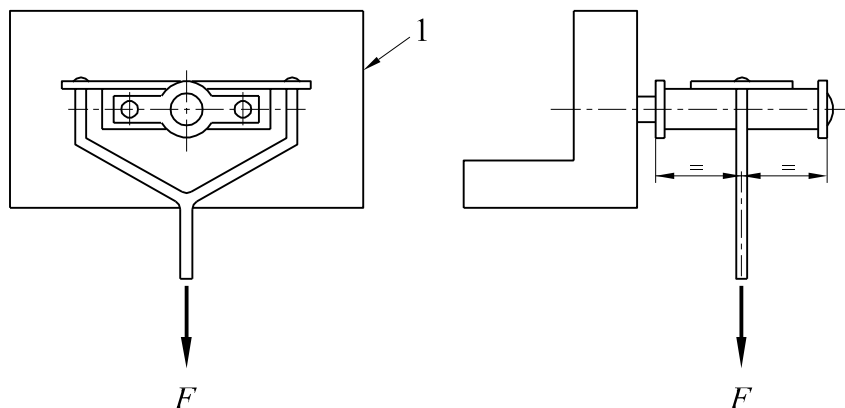

Key

1 rigid mount

Figure 34 — Pedal/pedal-spindle assembly: static strength test


4.14.4 Pedal/pedal-spindle — Dynamic durability test

4.14.4.1 Requirement

When tested by the method described in 4.14.4.2, there shall be no fractures or visible cracking of any part of the pedal, the pedal-spindle nor any failure of the bearing system.

4.14.4.2 Test method

Screw each pedal securely into a threaded hole in a rotatable test-shaft as shown in Figure 35 and suspend a mass of 90 kg at the centre of the pedal-width by means of a tension-spring to each pedal as shown in Figure 35, the object of the springs being to minimise oscillations of the load. Drive the shaft at a speed not exceeding 100 min^{-1} for a total of 100 000 revolutions. If the pedals are provided with two tread surfaces, rotate them through 180° after 50 000 revolutions.

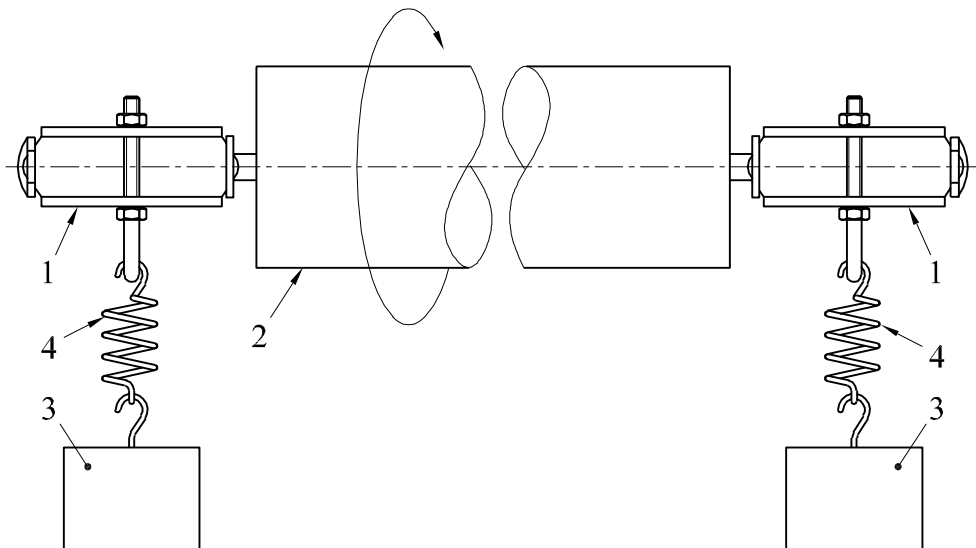

Key

- 1 pedal
- 2 test-shaft
- 3 90 kg mass
- 4 tension-spring

Figure 35 — Pedal/pedal-spindle: dynamic durability test

4.14.5 Crank/pedal assembly impact test and plastic pedal impact test

4.14.5.1 Crank/pedal assembly impact test

4.14.5.1.1 Requirements

When tested by the method described in 4.14.5.1.2, there shall be no fractures or visible cracking of any part of the crank, pedal, the pedal-spindle or any failure of the bearing system.

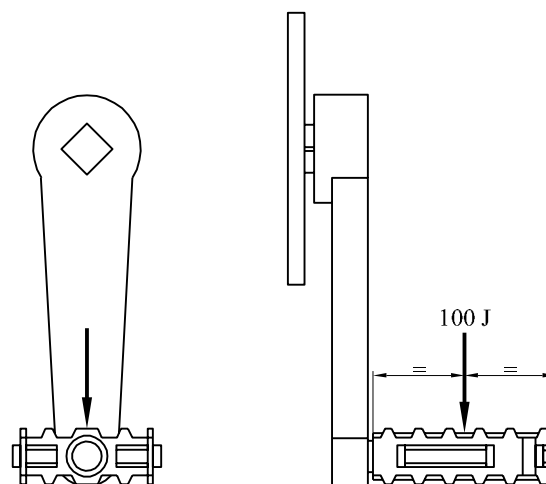


Figure 36 — Crank/pedal body impact test - Application of the impact force

4.14.5.1.2 Test method

Mount the pedal assembly and crank in a fixture with a housing representative of the bottom-bracket with the crank axis vertical and the pedal axis horizontal as shown in Figure 36. Impact the pedal at its centre with an impact force of 100 J.

The impactor shall be according to Figure 22.

4.14.5.2 Plastic pedal impact test

4.14.5.2.1 Requirements

When tested by the method described in 4.14.5.2.2 there shall be no fractures or visible cracking of any part of the pedal body.

4.14.5.2.2 Test method

Screw the pedal securely into a suitable rigid fixture with its axis horizontal as shown in Figure 37 and release the impactor of the design shown in Figure 22 for achieving the appropriate energy.

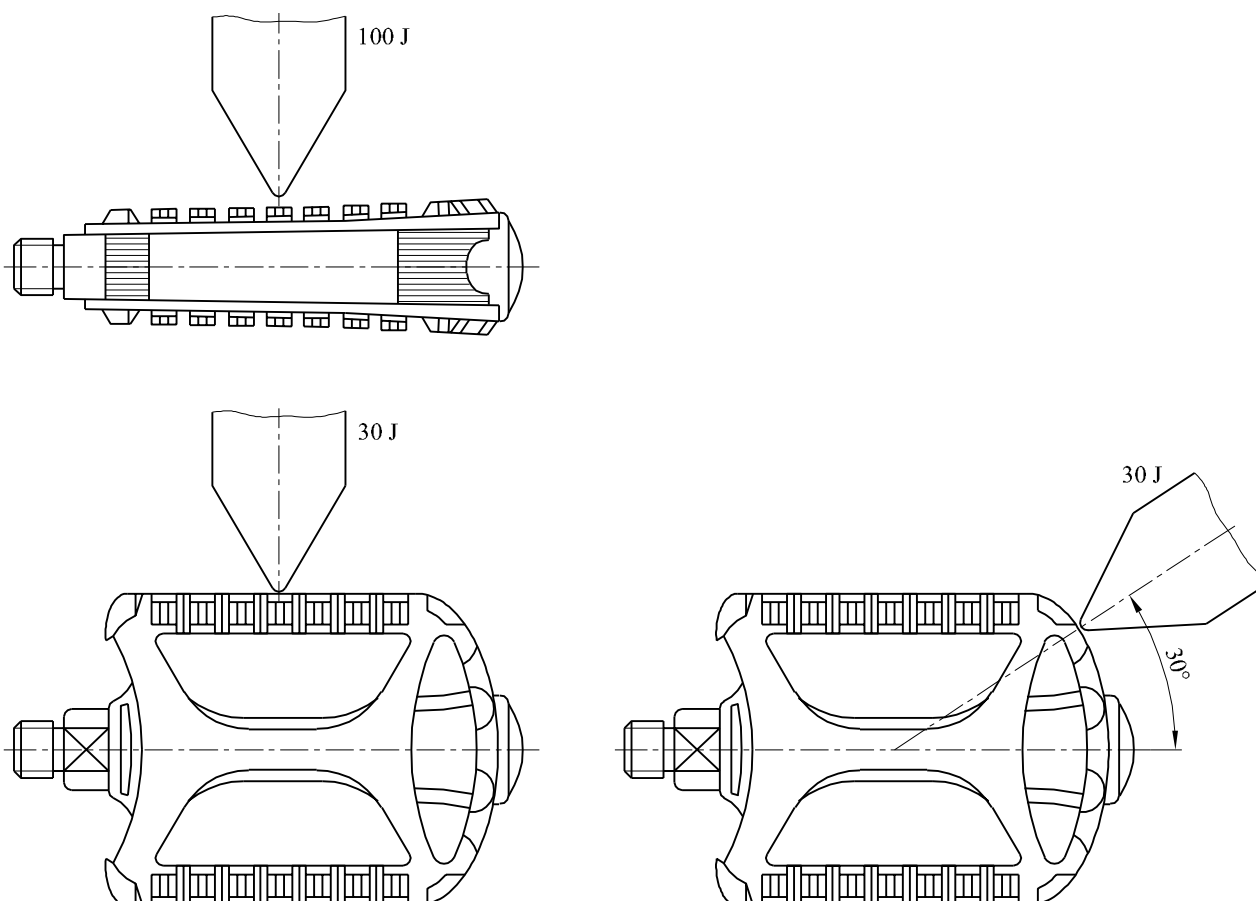


Figure 37 — Application of the impacts

4.14.6 Drive-system - Static strength test

4.14.6.1 Requirement

When tested by the method described in 4.14.6.2, there shall be no fracture of any component of the drive system, and drive capability shall not be lost.

4.14.6.2 Test method

Conduct the drive system static load test on an assembly comprising the frame, pedals, transmission system, rear wheel assembly. Support the frame with the central plane vertical and with the rear wheel held at the rim to prevent the wheel rotating.

With the left-hand crank in the forward, horizontal position, apply a force, F , increasing progressively to 1 500 N vertically downwards to the centre of the left-hand pedal. Maintain this force for 1 min. Should the system yield or the drive-sprockets tighten such that the crank rotates while under load to a position more than 30° below the horizontal, remove the test force, return the crank to the horizontal position or some appropriate position above the horizontal to take account of yield or movement and repeat the test.

On completion of the test on the left-hand crank, repeat the test with the right-hand crank in the forward position and with the force applied to the right-hand pedal.

4.14.7 Crank assembly — Fatigue tests

4.14.7.1 General

Two types of fatigue test are specified, one with the cranks positioned at 45° to the horizontal to simulate the forces due to pedalling, and the second test with the cranks positioned at 30° to the horizontal which has been found to simulate the forces due to the rider standing on the pedals during acrobatic manoeuvres. Tests shall be conducted on the same assembly.

4.14.7.2 Requirement


When tested by the methods described in 4.14.7.3 and 4.14.7.4, there shall be no fractures or visible cracks in the cranks, the bottom-bracket spindle or any of the attachment features, or loosening or detachment of the chain-wheel from the crank. For carbon-fibre cranks, the peak deflection of either crank during the test shall not increase by more than 20 % of the initial value.

4.14.7.3 Test method with the cranks at 45 degrees to the horizontal

Mount the assembly of the two pedal spindle adaptors, the two cranks, the chain-wheel set (or other drive component), and the bottom-bracket spindle located on its normal-production bearings in a fixture with bearing-housings representative of the bottom-bracket, as shown in Figure 38. Incline the cranks at 45° to the horizontal. Prevent rotation of the assembly by locating a suitable length of drive-chain around the largest or only chain-wheel and securing it firmly to a suitable support, or, for any other type of transmission (e.g. belt- or shaft-drive) by securing the first stage of the transmission.

NOTE It is permissible to have the left crank in either of the two positions shown in Figure 38, provided the test force is applied in the appropriate direction as specified in the next paragraph.

Apply repeated, vertical, dynamic forces of 1 300 N alternately to the pedal-spindles of the left- and right-hand cranks at a distance of 65 mm from the outboard face of each crank (as shown in Figure 38) for 50 000 cycles (where one test cycle consists of the application of the two forces). The direction of the force on the right-hand crank shall be downwards and that on the left-hand crank shall be upwards for a rearward-pointing crank or downwards for a forward-pointing crank. During applications of these test forces, ensure that the force on a pedal-spindle falls to 5 % or less of the peak force before commencing application of the test force to the other pedal-spindle.

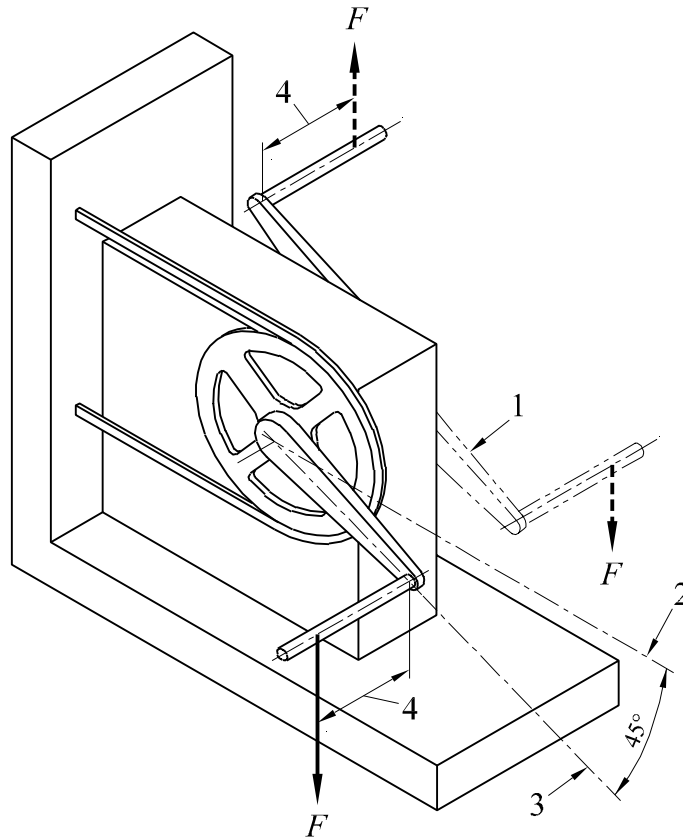


Key

- 1 alternative left crank arrangement
- 2 horizontal axis
- 3 axis of crank
- 4 65 mm from outboard face of crank

Figure 38 — Crank assembly: fatigue test with cranks at 45° (typical test arrangement)

4.14.7.4 Test method with the cranks at 30° to the horizontal

Mount the assembly of the two pedal spindle adaptors, the two cranks, the chain-wheel cluster (or other drive component), and the bottom-bracket spindle located on its normal-production bearings in a fixture with bearing-housings representative of the bottom-bracket, as shown in Figure 39. Incline the cranks at 30° to the horizontal as shown in Figure 39. Restrain the left-hand crank to the base of the test machine by a device attached to the pedal-spindle at a distance of 65 mm from the outboard face of the crank. Apply a repeated, vertically-downward, dynamic force, F , of 1 300 N to the pedal-spindle of the right-hand crank at a distance of 65 mm from the outboard face of the crank (as shown in Figure 39) for 50 000 cycles.

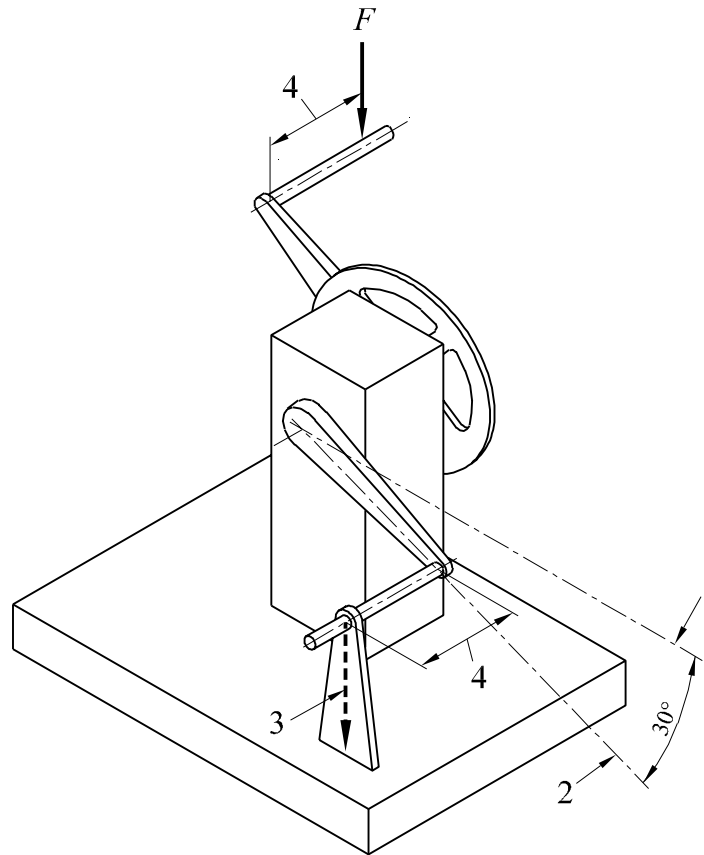

Key

- 1 horizontal axis
- 2 axis of crank
- 3 reactive force (equal and opposite to test force)
- 4 65 mm from outboard face of crank

Figure 39 — Crank assembly: fatigue test with cranks at 30° (typical test arrangement)

4.15 Saddle and seat-pillars

4.15.1 General

All strength tests involving the saddle or any plastic materials shall be performed at an ambient temperature in the range (20 ± 5) °C.

4.15.2 Limiting dimensions

No part of the saddle, saddle supports, or accessories to the saddle shall be more than 125 mm above the top saddle surface at the point where the saddle surface is intersected by the seat-pillar axis.

4.15.3 Seat-pillar — Insertion-depth mark or positive stop

The seat-pillar shall be provided with one of the two following alternative means of ensuring a safe insertion-depth into the frame:

- a) It shall contain a permanent, transverse mark of length not less than the external diameter or the major dimension of the cross-section of the seat-pillar that clearly indicates the minimum insertion-depth of the pillar into the frame. For a circular cross-section, the mark shall be located not less than two

diameters of the pillar from the bottom of the pillar (i.e. where the diameter is the external diameter). For a non-circular cross-section, the insertion-depth mark shall be located not less than 65 mm from the bottom of the pillar (i.e. where the seat-pillar has its full cross-section).

- b) It shall incorporate a permanent stop to prevent it from being drawn out of the frame such as to leave the insertion less than the amount specified in a) above.

4.15.4 Saddle/seat pillar - Security test

4.15.4.1 Saddles with adjustment-clamps

4.15.4.1.1 Requirement


When tested by the method described in 4.15.4.1.2, there shall be no movement of the saddle adjustment clamp in any direction with respect to the pillar, or of the pillar with respect to the frame.

4.15.4.1.2 Test method

With the saddle and seat-pillar correctly assembled to the bicycle frame, and the clamps tightened to the torque recommended by the bicycle manufacturer, apply a force of 650 N vertically downwards at a point 25 mm from the front and the rear of the saddle at its maximum rearward and forward position in the clamp whichever produces the greater torque on saddle-clamp.

Remove this force and apply a lateral force of 250 N horizontally at a point 25 mm from either the front or rear of the saddle, whichever produces the greater torque on the clamp (see Figure 40).

Dimension in millimetres

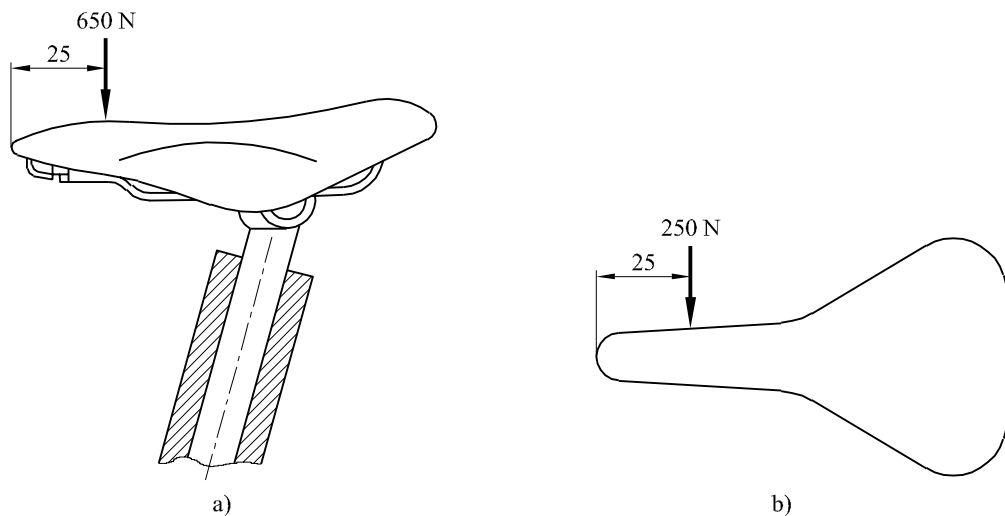

Key

- a) vertical force
- b) horizontal force

Figure 40 — Saddle/seat-pillar: security test

4.15.4.2 Saddles without adjustment-clamps

Saddles which are not clamped, but are designed to pivot in a vertical plane with respect to the pillar, shall be tested by the method described in 4.15.4.1.2. and shall be allowed to move within the parameters of the design without failure of any components.


4.15.5 Saddle - Static strength test

4.15.5.1 Requirement

When tested by the method described in 4.15.5.2, the saddle cover and/or plastic moulding shall not disengage from the chassis of the saddle, and there shall be no cracking or permanent distortion of the saddle assembly.

4.15.5.2 Test method

With the saddle clamped to a suitable fixture representative of a seat-pillar and the clamps tightened to the torque recommended by the bicycle manufacturer, apply forces of 400 N in turn under the rear and nose of the saddle cover longitudinal plane, as shown in Figure 41, ensuring that the force is not applied to any part of the chassis of the saddle.

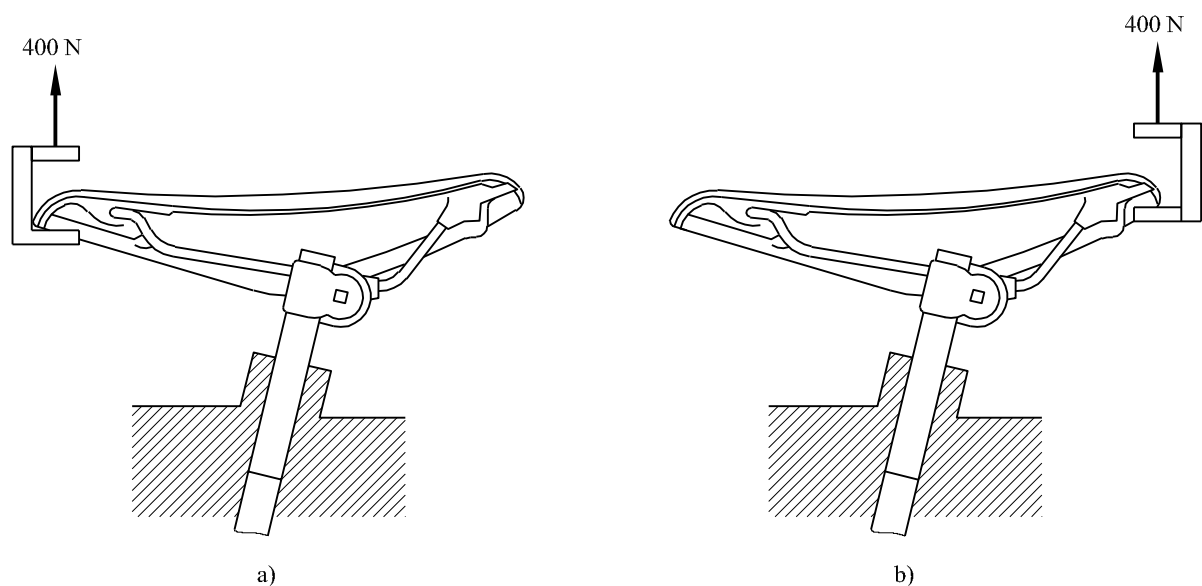

Key

- a) force under nose
- b) force under rear

Figure 41 — Saddle: static strength test

4.15.6 Saddle and seat-pillar clamp — Fatigue test

4.15.6.1 General

Seat-pillars can influence test failures of saddles and, for this reason, a saddle shall always be tested in combination with a seat-pillar of a type recommended by the saddle manufacturer.


4.15.6.2 Requirement

When tested by the method described in 4.15.6.3, there shall be no fractures or visible cracks in the seat-pillar or saddle, and no loosening of the clamp.

4.15.6.3 Test method

Insert the seat-pillar to its minimum insertion depth (see 4.15.3) in a rigid mount representative of that on the bicycle and with its axis at 73° to the horizontal. Mount the saddle on the seat-pillar, adjust the saddle to have

its upper surface in a horizontal plane and to be at its maximum rearward position in the clamp, and tighten the clamp to the torque recommended by the bicycle manufacturer. Apply a repeated, vertically-downward force F of 1 000 N for 100 000 cycles, in the position shown in Figure 42 by means of a suitable pad shown in Figure 42 to prevent localised damage of the saddle cover. The test frequency shall not exceed 4 Hz.

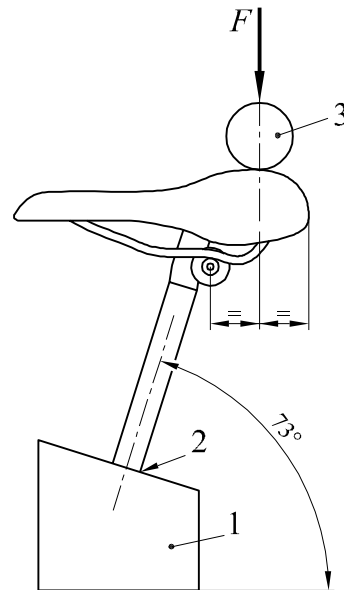

Key

- 1 rigid mount
- 2 minimum insertion depth
- 3 pad (length = 300 mm, diameter = 80 mm)

Figure 42 — Saddle and seat-pillar clamp: fatigue test

4.15.7 Seat-pillar clamp - Static test

4.15.7.1 Requirements

When tested by the method described in 4.15.7.2, no cracks or fracture shall appear in the saddle assembly. No movements shall appear between saddle and seat pillar, seat pillar and frame.


Permanent distortion is acceptable provided that the saddle assembly does not exhibit complete failure.

4.15.7.2 Test method

Mount the frame in its normal attitude and secured at the rear drop-outs so that is not restrained in a rotary direction (i.e. preferably by the rear axle) as shown in Figure 43. Fit a suitable roller to the front axle in order to permit the frame to flex in a fore/aft sense under the test forces.

Insert the seat-pillar to its minimum insertion depth in the frame. Mount the saddle on the seat-pillar, adjust the saddle to have its upper surface in a horizontal plane and to be at its maximum rearward position in the clamp, and tighten the clamp to the torque recommended by the bicycle manufacturer. Apply for 1 min a vertically-downward force of 800 N for category 1 and 1 300 N for category 2, at 25 mm from the rear of the saddle by means of a cylinder (diameter 80 mm).

Dimension in millimetres

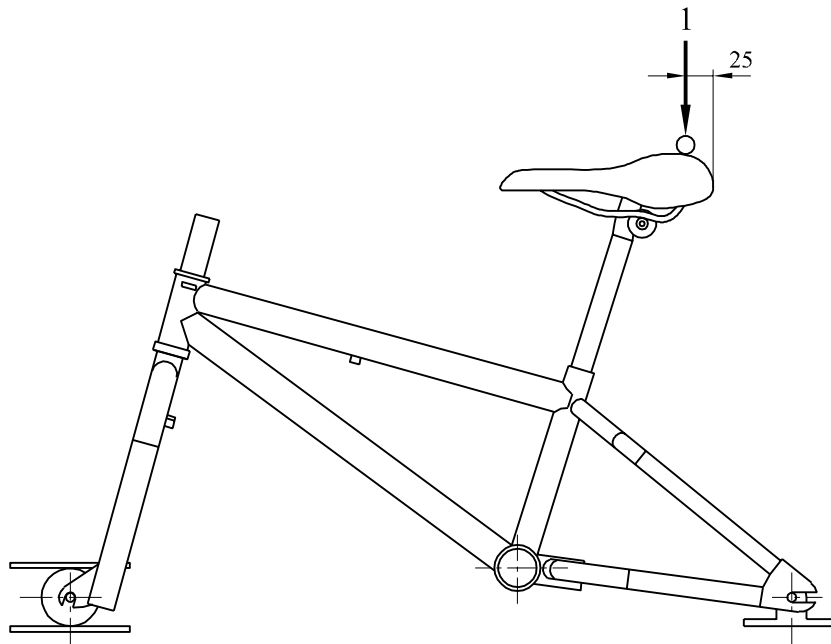

Key

1 category 1: 800 N, category 2: 1300 N

Figure 43 — Seat pillar static test

4.16 Drive-chain

Where a chain-drive is used as a means of transmitting the motive force, the chain shall operate over the front and rear sprockets without binding. The chain shall conform to the mechanical requirements of ISO 9633.

4.17 Chain guard

4.17.1 Requirement


A bicycle shall be equipped with one of the following:

- a) a chain-wheel disc which conforms to 4.17.2; or
- b) a protective device which conforms to 4.17.3.

4.17.2 Chain-wheel disc diameter

A chain-wheel disc shall exceed the diameter of the outer chain-wheel, when measured across the tips of the teeth, by not less than 10 mm (see Figure 44).

NOTE Where the design is such that the pedal-crank and chain-wheel are too close together to accommodate a full disc, a partial disc can be fitted which closely abuts the pedal-crank.

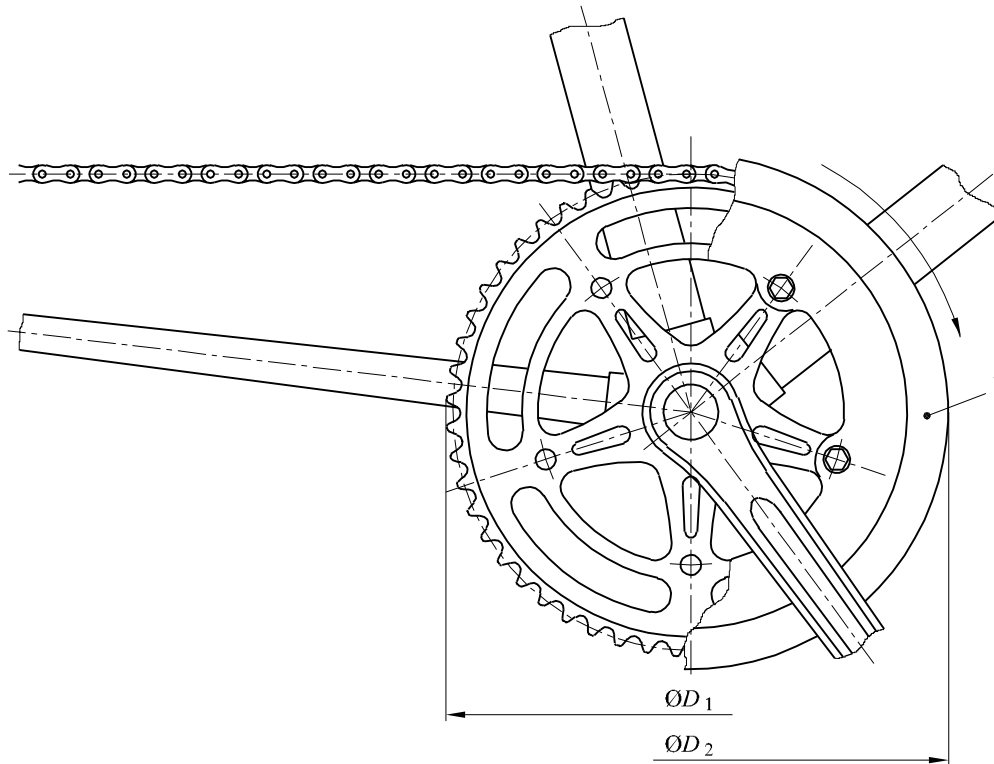

Key

$$D_2 \geq D_1 + 10$$

1 chain-wheel disc

Figure 44 — Chain-wheel disc

4.17.3 Chain protective device

A protective device shall, as a minimum, shield the side-plates and top surface of the chain and the chain-wheel for a distance of at least 25 mm rearwards along the chain from the point where the chain-wheel teeth first pass between the side-plates of the chain and forwards round the outer chain-wheel to a horizontal line passing through the bottom-bracket axle centre (see Figure 45).

Dimension in millimetres

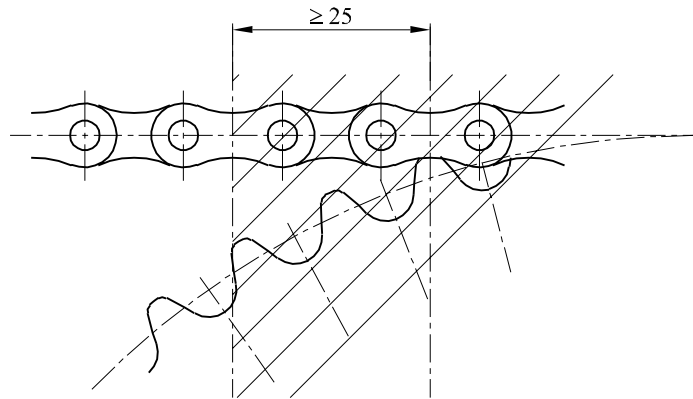


Figure 45 — Chain and chain-wheel junction

4.18 Lighting systems and reflectors

4.18.1 Lighting and reflectors

Lighting systems and reflectors will not normally be fitted to a BMX but the manufacturer's instructions shall advise the user to take note of national regulations for the country in which the bicycle is to be used (see Clause 5, list entry f)).

4.18.2 Wiring harness

When a wiring harness is fitted, it shall be positioned to avoid any damage by contact with moving parts or sharp edges. All connections shall withstand a tensile force in any direction of 10 N.

4.19 Warning device

Where a bell or other suitable device is fitted, it shall comply with national regulation.

5 Manufacturer's instructions

Each bicycle shall be provided with a set of instructions in the language of the country to which the bicycle will be supplied, containing information on:

- the type of use for which the bicycle has been designed (i.e. the type of terrain for which it is suitable, detailed information of the capability of the product) with a warning about the hazards of incorrect use;
- preparation for riding – how to measure and adjust the saddle height to suit the rider with an explanation of the insertion-depth warning marks on the seat-pillar and handlebar-stem; clear information on which lever operates the front brake, which lever operates the rear brake, with an explanation of their function, including the function of the rotor system if fitted, and adjustment;
- indication of minimum saddle height and the way to measure it;
- recommendations for safe riding – use of a bicycle helmet and others protectors, regular checks on brakes, tyres, steering, rotor, pegs, rims, and caution concerning possible increased braking distances in wet weather;

WARNING — BMX pedals are designed to provide greater grip capability of the pedal tread surface than that provided by an ordinary bicycle pedal. This can result in the pedal tread surface being very rough and containing sharp edges. Riders should therefore wear adequate safety protection.

- e) the permissible total weight of the rider plus luggage (i.e. backpack);
- f) an advisory note to draw attention to the rider concerning possible national legal requirements when the bicycle is to be ridden on public roads (e.g. lighting and reflectors);
- g) recommended tightening of fasteners related to the handlebar, handlebar-stem, saddle, seat-pillar, and wheels, with torque values for threaded fasteners;
- h) the method for determining the correct adjustment of quick-release devices;
- i) the correct method of assembling any parts supplied unassembled;
- j) lubrication – where and how often to lubricate, and the recommended lubricants;
- k) the correct chain tension and how to adjust it (if appropriate);
- l) adjustment of brakes, including rotor if any, and recommendations for the replacement of the friction components;
- m) recommendations on general maintenance;
- n) the importance of using only genuine replacement parts for safety-critical components;
- o) care of the wheel-rims and a clear explanation of any danger of rim-wear (see also 4.13.4 and 6.1);
- p) appropriate spares, i.e. tyres, tubes, and brake friction-components;
- q) accessories – where these are offered as fitted, details should be included such as operation, maintenance required (if any - including pegs if fitted) and any relevant spares (e.g. light bulbs);
- r) an advisory note to draw the attention of the rider to possible damage due to intensive use and to recommend periodic inspections of the frame, fork etc.

WARNING — As with all mechanical components, the bicycle is subjected to wear and high stresses. Different materials and components may react to wear or stress fatigue in different ways. If the design life of a component has been exceeded, it may suddenly fail possibly causing injuries to the rider. Any form of crack, scratches or change of colouring in highly stressed areas indicate that the life of the component has been reached and it should be replaced.

NOTE Any other relevant information can be included at the discretion of the manufacturer.

- s) an advisory note to draw the attention of the rider to the suitability of the bicycle for the fitment of pegs.

6 Marking

6.1 Requirement

The frame shall be:

- a) visibly and permanently marked with a successive frame number at a readily visible location;
- b) visibly and durably marked with the name of the manufacturer or the manufacturer's representative, and the number of this European Standard, i.e. EN 16054 Cat y¹⁾; the method of testing for durability is specified in 6.2.

1) For category 1, specify also the maximum rider mass.

- 1) EN 16054 Cat 1, max rider weight: 45 kg
- 2) EN 16054 Cat 1, masse max; du cycliste: 45 kg
- 3) EN 16054 Kat 1, zulaessiges Gewicht des Fahrers: 45 kg

Equivalent symbol can be used.

NOTE 1 In some countries there is a legal requirement concerning marking of bicycles.

NOTE 2 For components, currently there are no specific requirements, but it is recommended that the following safety-critical components be clearly and permanently marked with traceable identification, such as a manufacturer's name and a part number:

- a) front fork;
- b) handlebar and handlebar-stem;
- c) seat-pillar;
- d) brake-levers, rotor, brake-blocks and/or brake-block holders;
- e) outer brake-cable casing;
- f) hydraulic-brake tubing;
- g) disc-brake callipers, brake-discs, and brake pads;
- h) chain;
- i) pedals and cranks;
- j) bottom-bracket spindle;
- k) wheel-rims;
- l) pegs.

6.2 Durability test

6.2.1 Requirement

When tested by the method described in 6.2.2, the marking shall remain easily legible. It shall not be easily possible to remove any label nor shall any label show any sign of curling.

6.2.2 Test method

Rub the marking by hand for 15 s with a piece of cloth soaked in water and again for 15 s with a piece of cloth soaked in petroleum spirit.

Bibliography

- [1] EN ISO 3452 (all parts), *Non-destructive testing — Penetrant testing*
- [2] ISO 5775-1, *Bicycle tyres and rims — Part 1: Tyre designations and dimensions*
- [3] ISO 5775-2, *Bicycle tyres and rims — Part 2: Rims*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™