

BS EN 16261-3:2012



BSI Standards Publication

**Pyrotechnic articles —  
Fireworks, Category 4**  
Part 3: Test methods

**bsi.**

...making excellence a habit.™

**National foreword**

This British Standard is the UK implementation of EN 16261-3:2012.

The UK participation in its preparation was entrusted to Technical Committee CII/47, Pyrotechnic articles.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2013. Published by BSI Standards Limited 2013

ISBN 978 0 580 74438 9

ICS 71.100.30

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 January 2013.

**Amendments issued since publication**

Date	Text affected
------	---------------

---

EUROPEAN STANDARD

**EN 16261-3**

NORME EUROPÉENNE

EUROPÄISCHE NORM

December 2012

ICS 71.100.30

English Version

## Pyrotechnic articles - Fireworks, Category 4 - Part 3: Test methods

Articles pyrotechniques - Artifices de divertissement,  
Catégorie 4 - Partie 3: Méthodes d'essai

Pyrotechnische Gegenstände - Feuerwerkskörper,  
Kategorie 4 - Teil 3: Prüfverfahren

This European Standard was approved by CEN on 20 July 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**Management Centre: Avenue Marnix 17, B-1000 Brussels**

## Contents

Page

Foreword.....	4
<b>1 Scope .....</b>	<b>5</b>
<b>2 Normative references .....</b>	<b>5</b>
<b>3 Terms and definitions .....</b>	<b>5</b>
<b>4 Test environment for functioning test.....</b>	<b>5</b>
4.1 General.....	5
4.2 Wind measurement.....	5
<b>5 Apparatus .....</b>	<b>5</b>
<b>6 Test methods.....</b>	<b>9</b>
6.1 Construction and stability .....	9
6.1.1 Outer dimension of item .....	9
6.1.2 Determination of calibre.....	10
6.1.3 Determination of gross mass .....	10
6.2 Design – Verification .....	10
6.3 Determination of tube angle .....	10
6.3.1 Apparatus .....	10
6.3.2 Procedure .....	10
6.4 Angle of ascent and burst height.....	11
6.4.1 General.....	11
6.4.2 Dimensions of mortar.....	11
6.4.3 Support of mortar .....	11
6.5 Measurement of sound pressure level .....	11
6.5.1 Apparatus .....	11
6.5.2 Procedure .....	11
6.6 Extinguishing of flames .....	11
6.6.1 Apparatus .....	11
6.6.2 Procedure .....	11
6.7 Visual and audible inspections .....	12
6.8 Mechanical conditioning.....	12
6.8.1 Apparatus .....	12
6.8.2 Procedure .....	12
6.9 Thermal conditioning .....	12
6.9.1 Apparatus .....	12
6.9.2 Procedure .....	12
6.10 Function test .....	12
6.10.1 Apparatus .....	12
6.10.2 Procedure .....	13
6.10.3 Monitoring of effect, rising/bursting and drop height.....	13
6.10.4 Monitoring of effect range and effect dimensions of aquatic fireworks .....	13
6.11 Measuring of CE-marking .....	14
6.11.1 Apparatus .....	14
6.11.2 Procedure .....	14
<b>Annex A (informative) Mechanical Conditioning (Shock Apparatus) .....</b>	<b>15</b>
<b>Annex B (informative) Procedures for calculation of heights .....</b>	<b>18</b>
<b>Annex C (informative) Calculation method for safety-/protection distance.....</b>	<b>22</b>
<b>Annex D (informative) Overview of essential safety requirements and corresponding clauses of all parts of EN 16261.....</b>	<b>23</b>

<b>Annex ZA (informative) Relationship between this European Standard and the Essential Requirements of EU Directive 2007/23/EC on the placing on the market of pyrotechnic articles .....</b>	<b>24</b>
<b>Bibliography.....</b>	<b>25</b>

## Foreword

This document (EN 16261-3:2012) has been prepared by Technical Committee CEN/TC 212 "Pyrotechnic articles", the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2013, and conflicting national standards shall be withdrawn at the latest by June 2013.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of Directive 2007/23/EC on the placing on the market of pyrotechnic articles.

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

EN 16261 is divided into the following parts:

- EN 16261-1, *Pyrotechnic articles — Fireworks, category 4 — Part 1: Terminology*;
- EN 16261-2, *Pyrotechnic articles — Fireworks, category 4 — Part 2: Requirements*;
- EN 16261-3, *Pyrotechnic articles — Fireworks, category 4 — Part 3: Test methods*;
- EN 16261-4, *Pyrotechnic articles — Fireworks, category 4 — Part 4: Minimum labelling requirements and instructions for use*.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

## 1 Scope

This European Standard specifies test methods for fireworks of category 4.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 16261-1:2012, *Pyrotechnic articles — Fireworks, Category 4 — Part 1: Terminology*

EN 16261-2:2013, *Pyrotechnic articles — Fireworks, Category 4 — Part 2: Requirements*

EN 61672-1, *Electroacoustics — Sound level meters — Part 1: Specifications (IEC 61672-1)*

ISO 3599, *Vernier callipers reading to 0,1 and 0,05 mm*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 16261-1:2012 apply.

## 4 Test environment for functioning test

### 4.1 General

A large unobstructed area, which shall be wide open. The measuring points shall be positioned appropriately for the type of measurement being carried out.

For aquatic fireworks, a water test area shall be available for testing the resistance to moisture and functioning in the expected manner.

### 4.2 Wind measurement

The wind speed at a height of 1,50 m above the ground shall be measured and recorded using a wind speed meter (see 5.5). No performance testing shall be carried out if the wind speed exceeds 5,0 m/s.

## 5 Apparatus

Any equivalent apparatus with the same accuracy or better may be used.

### 5.1 Timing device.

Timing device, capable of being read to the nearest 0,1 s.

### 5.2 Calliper.

Calliper, flat faced vernier calliper reading to 0,1 mm, conforming to ISO 3599.

### 5.3 Ruler.

Ruler, with a scale resolution of 1,0 mm or better.

#### 5.4 Measuring tape.

Measuring tape, with a scale resolution of 10 mm or better.

#### 5.5 Wind speed meter.

The wind speed meter should accurate to at least 0,5 m/s.

#### 5.6 Balance.

Balance, with an accuracy of  $\pm 0,01$  g or better.

#### 5.7 Temperature chamber.

5.7.1 Up to  $(50 \pm 2,5)$  °C.

5.7.2 Up to  $(75 \pm 2,5)$  °C.

#### 5.8 Sound level meter.

Sound level meter of class 1 conform to EN 61672-1 with a free-field microphone.

#### 5.9 Shock apparatus.

The apparatus shall provide a deceleration of  $490 \text{ m/s}^2$  ( $-50/+100$ )  $\text{m/s}^2$  (when measured at the centre of an unloaded platform) and the shock impulse duration (time elapsed from the starting of the machine's deceleration to the time in which the deceleration reaches its maximum value during each first shock pulse) shall be  $2 \text{ ms} \pm 1 \text{ ms}$  working at a frequency of  $1 \text{ Hz} \pm 0,1 \text{ Hz}$ .

An example of an apparatus is shown in Annex A.

#### 5.10 Devices for measuring heights.

Heights shall be measured using universal surveying instruments (USI) such as theodolites, electronic spirit levels or video (visible and/or infrared) systems.

Examples of measuring methods and the calculation of the height are given in Annex B.

#### 5.11 Goniometer.

Goniometer reading to  $1^\circ$  or better.

#### 5.12 Mortar.

The rising height of shells depends particularly on the clearance of the shell in the mortar (ratio of the maximum cross section area of the shell ( $A_{\text{shell}}$ ) to the inner cross section area of the mortar ( $A_{\text{mortar}}$ )), also designated as " $Q$ ".  $Q$  is the ratio of the outer diameter of the shell ( $d_{\text{o,shell}}$ , including the fuse to the lifting charge) squared over the inner diameter of the mortar ( $d_{\text{i,mortar}}$ ) squared. The outer diameter of the shell shall be measured horizontally at the place of largest diameter including the fuse to the lifting charge. The following conditions shall be achieved:

$$0,9 \leq Q = \frac{A_{\text{shell}}}{A_{\text{mortar}}} = \frac{d_{\text{o,shell}}^2}{d_{\text{i,mortar}}^2} \leq 0,98$$



$$\sqrt{1,02 \cdot d_{o,shell}^2} \leq d_{i,mortar} \leq \sqrt{1,1 \cdot d_{o,shell}^2}$$


For calibre  $\leq 100$  mm, a wider tolerance can be accepted. The following conditions shall be achieved:

$$0,83 \leq Q_{\leq 100}^* \leq 0,98$$

$$\sqrt{1,02 \cdot d_{o,shell}^2} \leq d_{i,mortar}^* \leq \sqrt{1,2 \cdot d_{o,shell}^2}$$

Another determining factor influencing the rising height is the length of the mortar ( $l_{mortar}$ ) – length from the mortar muzzle to the mortar ground.

The dimensions of the mortar may also be determined from Figures 1, 2 and 3.

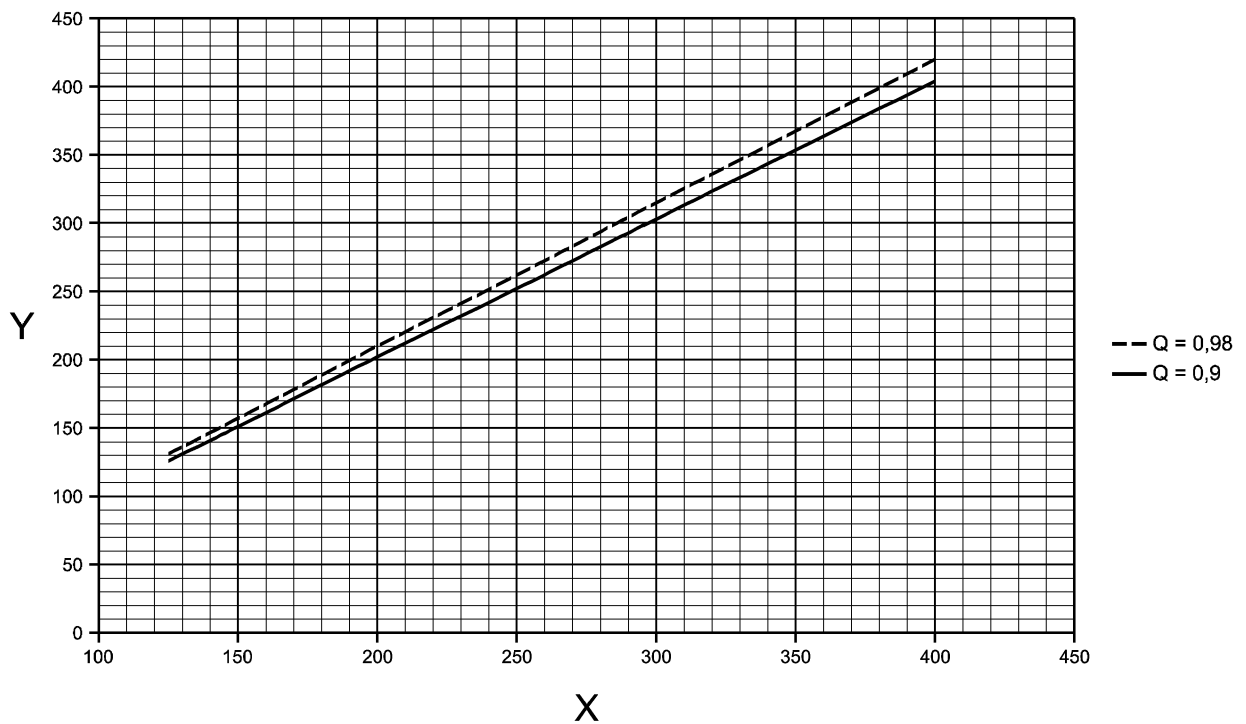


**Key**

X calibre of the shell (mm)

Y internal diameter of the mortar (mm)

**Figure 1 — Dimensions of the mortars for spherical shells – Calibre above 100 mm**

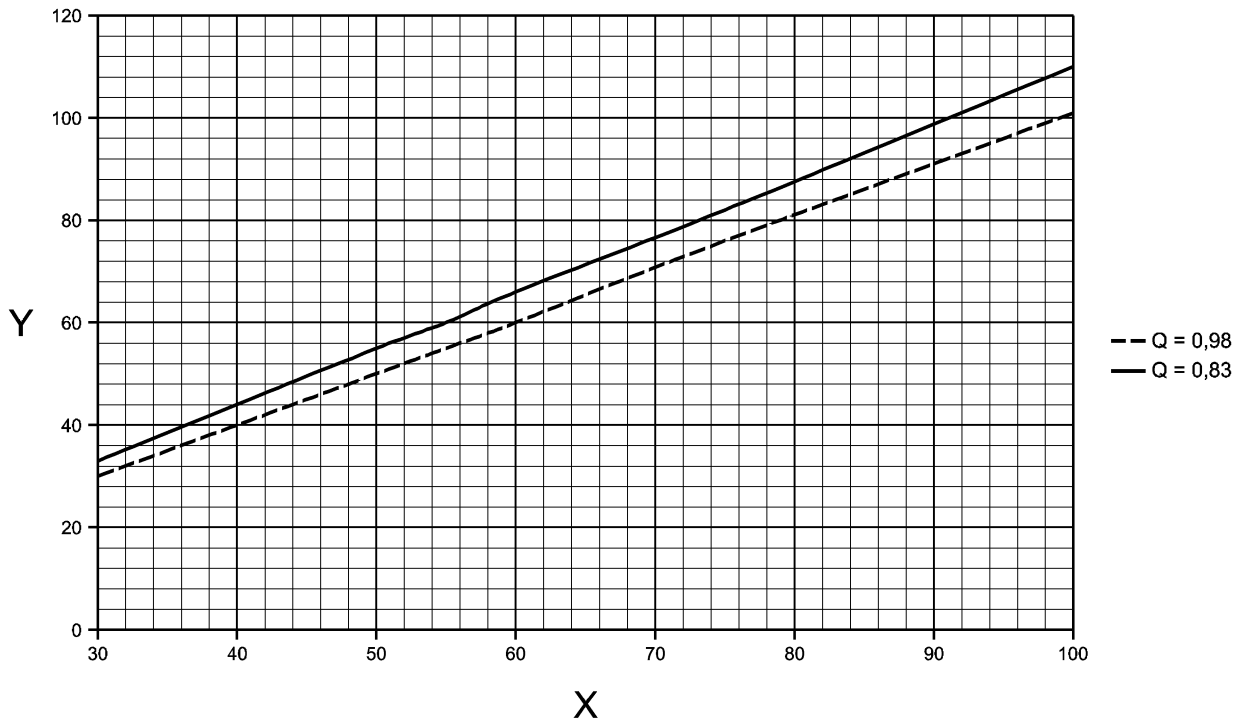


**Key**

X calibre of the shell (mm)

Y internal diameter of the mortar (mm)

**Figure 2 — Dimensions of the mortars for spherical shells – Calibre up to 100 mm**

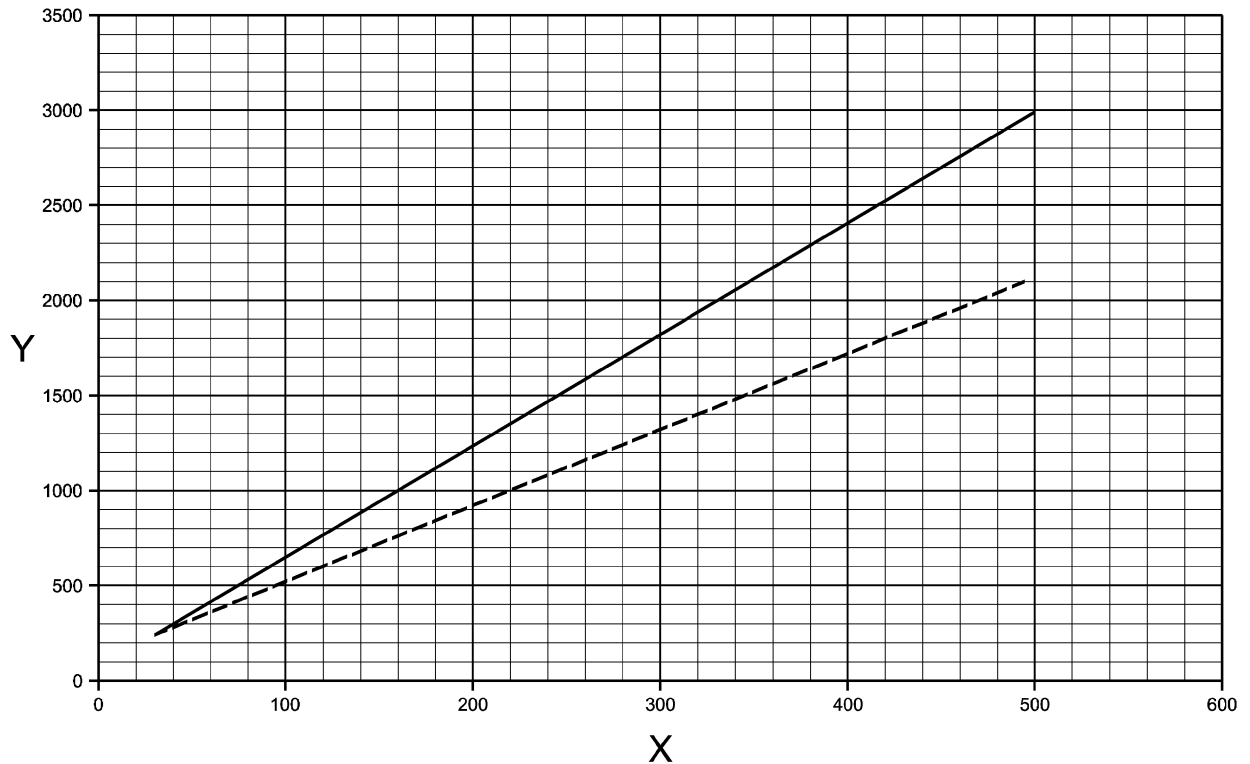

**Key**

**X** calibre of the shell (mm)

**Y** inside length of the mortar (mm)

—  $l_{\text{mortar}} = 6 X d_n + 70$

- - -  $l_{\text{mortar}} = 4 X d_n + 120$

$4 X d_n + 120 \leq l_{\text{mortar}} \text{ (mm)} \leq 6 X d_n + 70$

$d_n$  nominal calibre

**Figure 3 — Range of the mortar length for spherical shells**

**6 Test methods**

NOTE Any equivalent method with the same sensitivity and the same accuracy or better might be used.

**6.1 Construction and stability**

**6.1.1 Outer dimension of item**

**6.1.1.1 Apparatus**

— Ruler (see 5.3).

**6.1.1.2 Procedure**

Use the ruler to measure the outer dimensions of the tested article to the nearest of 1,0 mm and record the results.

## 6.1.2 Determination of calibre

### 6.1.2.1 Apparatus

— Calliper (see 5.2).

### 6.1.2.2 Procedure

Use the calliper (see 5.2) to measure the calibre of the tested article at least three times at different positions on the article and to the nearest of 0,1 mm and record the results.

## 6.1.3 Determination of gross mass

Use the balance (see 5.6) to measure the gross mass of the tested article and record the results.

## 6.2 Design – Verification

Compare the actual article with the detailed manufacturer's drawing.

Observe and record any nonconformity.


## 6.3 Determination of tube angle

### 6.3.1 Apparatus

Goniometer (see 5.11).

### 6.3.2 Procedure

For determination of the tube angle, dismantle the functioned article (if necessary) in such a way that the angle of the tube against the vertical can be measured with goniometer (see Figure 4) and record the results.

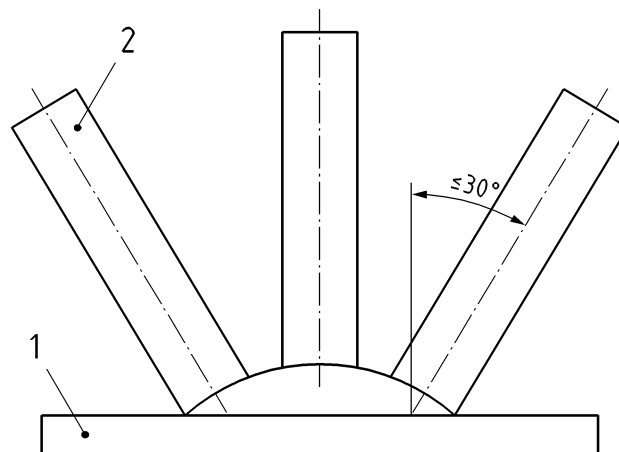

### Key

- 1 base of firework
- 2 tube of mine, Roman candle or shot tube

Figure 4 — Determination of tube angle

## 6.4 Angle of ascent and burst height

### 6.4.1 General

The fireworks shall be fired vertically (firing device at  $90^\circ \pm 2^\circ$ ).

The measurement of heights may be made according to one of the methods described in Annex B.

### 6.4.2 Dimensions of mortar

For type and batch tests, defined standard mortars (5.12) shall be used. Tables for the standardised inside diameter and inside length are given in 5.12.

When the height of a shell casing (excluding the lifting charge) is more than twice the calibre, for all shells with a calibre greater than 400 mm and for shells that are designed to be fired from a specific mortar, the mortar recommended by the manufacturer shall be used.

### 6.4.3 Support of mortar

The mortar shall be supported in such a way that it is not displaced by the firing of the tested article.

No deformable material shall be placed under the mortar.

## 6.5 Measurement of sound pressure level

### 6.5.1 Apparatus

- Sound level meter (see 5.8);
- Measuring tape (see 5.4).

### 6.5.2 Procedure

Set up the microphone of the sound level meter in the test area (Clause 4) at a height of 1,0 m. The sound level meter shall be orientated to the firing point.

The distance between the measuring and firing point may be the same as for the measuring of the Rising Height according to 6.4.

Place and ignite the test sample in accordance with the labelled instructions and instructions for use, and record the maximum A-weighted impulse sound pressure levels as measured by the sound level meter (see 5.8) and the distance from the firing point (see 5.4).

NOTE An example of the calculation method for safety/protection distance is given in Annex C.

## 6.6 Extinguishing of flames

### 6.6.1 Apparatus

- Timing device (see 5.1).

### 6.6.2 Procedure

At the moment the tested article ceases to function (see 6.10.2), immediately start the timing device (see 5.1) and record the time until all flames caused by the functioning of the fireworks have extinguished.

## 6.7 Visual and audible inspections

The visual inspection shall be done by naked eye.

The audible inspection shall be done by suitably protected ears at the relevant distance.

Record any anomalies.

## 6.8 Mechanical conditioning

### 6.8.1 Apparatus

- Shock apparatus (see 5.9);
- Balance (see 5.6);
- Timing Device (see 5.1).

### 6.8.2 Procedure

Place a sheet of paper on the platform of the mechanical shock apparatus and place the test samples on the top of the sheet of paper. For articles that are supplied in primary packs, condition the appropriate number of complete, unopened packs. Cover the test samples or packs and secure the covering to the platform around its edges. Run the shock apparatus (see 5.9) for 1 h.

At the end of the conditioning period stop the shock apparatus (see 5.9) and remove the test samples or primary packs. For samples which have been conditioned in primary packs, carefully open the packs, remove the samples and empty any loose material on to the sheet of paper. Separate any pyrotechnic composition from the loose material and weigh this pyrotechnic composition with the balance.

Where the tested article contains sealing paper, ignition head(s) and/or friction head(s), record whether there was any of these damaged or loose after the mechanical conditioning.

## 6.9 Thermal conditioning

### 6.9.1 Apparatus

Temperature chamber (see 5.7).

### 6.9.2 Procedure

Store the fireworks for 2 days at a temperature of  $(75 \pm 2,5)$  °C or 4 weeks at a temperature of  $(50 \pm 2,5)$  °C in the temperature chamber (see 5.7) and then for at least two days at ambient temperature  $(20 \pm 5,0)$  °C before testing. For fireworks which were supplied in primary packs, condition the fireworks by storing the appropriate number of complete unopened packs.

Record if any article presents sign of ignition or chemical reaction. If any signs are visible, the test is failed and no re-test is possible.

Record whether any articles are damaged to an extent that might affect their functioning.

## 6.10 Function test

### 6.10.1 Apparatus

- Test area (see Clause 4);
- Water test area where applicable (see 4.1);

- Mortar (see 5.12).

### 6.10.2 Procedure

Articles shall be fired vertically upwards specified otherwise by the manufacturer. For waterfalls, the article shall be fired vertically downwards, unless specified otherwise by the manufacturer.

Place the test sample onto the testing site as specified in 4.1 and ignite test sample in accordance with the labelled instructions and the instructions for use. Aquatic fireworks shall be tested in accordance with the instructions for use; the test may be performed on the ground (see 4.1). For checking the resistance to moisture and functioning under wet conditions, aquatic fireworks shall be ignited in the water test area. Aquatic fireworks shall be wetted and ignited in a way which replicates its normal use. The measurement, visible and audible inspection (see 6.7) while functioning (if this is applicable for the tested article) shall observe and record the conformity:

- to the related principle effect;
- to the angle of ascent and burst or effect height (see 7.2.4 of EN 16261-2:2013);
- to the sound pressure level (see 7.2.5 of EN 16261-2:2013);
- to the extinguishing of flames (see 7.2.6 of EN 16261-2:2013);
- to the projected debris (see 7.2.7 of EN 16261-2:2013);
- to check that all pyrotechnic units function completely;
- to check that the article remains in its initial position whilst functioning (if applicable);
- to check that no explosion or rupture occurs during function (except when explosion is intended or principal effect);
- to check that the elements of the tested article are securely attached;

and possible nonconformities as listed in Annex B of EN 16261-2:2013.

### 6.10.3 Monitoring of effect, rising/bursting and drop height

Two positions for monitoring the height of ascent and angle of flight shall be provided, at an adequate measured distance and at preferably 90° to each other or at a sufficient angle to ensure a good accuracy of the measuring (depending on the method of measurement and calculation of the heights). In order to achieve a reasonable accuracy the distance between firing point and measurement location, referred to as "base length" here, has to be adjusted to the measurement device.

The vertical angle should not exceed 60°; optimal would be having angles between 30° and 50°. If the monitoring positions are not in the same horizontal plane, appropriate corrections should be made in the calculation of heights. Generally the measuring distance should be adapted to the fireworks (anticipated rising/bursting height).

### 6.10.4 Monitoring of effect range and effect dimensions of aquatic fireworks

One position for monitoring the effect range and dimensions shall be provided at an adequate measuring distance.

In order to achieve reasonable accuracy, the distance between the firing point and the measurement location shall be adjusted to the measurement device.

The effect dimensions can also be measured during the ignition on the water test area.

## **6.11 Measuring of CE-marking**

### **6.11.1 Apparatus**

— Caliper (see 5.2).

### **6.11.2 Procedure**

Using the calliper (see 5.2), measure the dimensions of the CE-marking. Record whether the size and format of the CE-marking are correct.




## Annex A (informative)

### Mechanical Conditioning (Shock Apparatus)

Illustrated in the following figures, comprising the following components:

- a) a **flat horizontal platform** made of steel, 800 mm × 600 mm, 2 mm to 3 mm thick, with a 3 mm thick rim having a height of 15 mm; the platform is reinforced with eight steel ribs, 5 mm thick with a height of 30 mm, which are welded to the underside and run from the centre to each of the four corners and to the middle of each edge;
- b) a **20 mm thick plate of fibreboard**, firmly attached to the platform by screws;
- c) a **cylindrical steel boss**, diameter 125 mm and height 35 mm, located under the centre of the platform;
- d) a **284 mm long shaft**, with diameter of 20 mm, fixed to the centre of the boss;
- e) a **restraining peg**, to prevent the platform from rotating; the mass of the platform assembly (items a) to e)) is  $23 \pm 1$  kg;
- f) an **annular, elastomeric pressure spring**, with a Shore A hardness, when determined in accordance with EN ISO 868, of 68, outside diameter 125 mm, inside diameter 27 mm and height 32 mm, on which the cylindrical boss will rest;
- g) a **shallow steel cylinder**, inside diameter 126 mm, wall thickness 5 mm, outside height 30 mm, with a base 8 mm thick which has a 25 mm diameter hole drilled through the centre, to contain the elastomeric spring;
- h) a **supporting steel cylinder**, outside diameter 80 mm, inside diameter 60,1 mm and height 92,4 mm, to which the shallow cylinder is screwed;
- i) a **PVC liner**, outside diameter 60 mm, inside diameter 20,2 mm and height 92,4 mm, located inside the supporting cylinder and attached by a screw;
- j) a **steel mounting plate**, thickness 12 mm with a 25 mm hole drills through the centre, to which the supporting steel cylinder is screwed;
- k) a **steel base plate**, thickness 12 mm;
- l) **four supporting pillars**, height 260 mm and diameter 32 mm, screwed to the mounting plate and to the base plate;
- m) a **framework** to support the based plate so that the complete assembly is at a convenient height;
- n) an **attachment to the shaft**, allowing adjustment to the overall length, fitted with a cam wheel, outside diameter 30,0 mm, with a contact surface 8,0 mm wide;
- o) a **cylindrical cam**, outside diameter 120 mm, inside diameter 100 mm, wall thickness 10 mm, with a "vertical drop" of 50,0 mm between the high point and the low point;
- p) a **collar**, outside diameter 50 mm, height 4,0 mm;
- q) an **electric motor and suitable gearing**, to rotate the cam at a rotational frequency of 1 Hz;


- r) **cellular rubber sheet**, 100 mm thick. The material used should have an apparent density when determined in accordance with EN ISO 845, of  $35 \text{ kg/m}^3$  and an indentation hardness check, when determined in accordance with EN ISO 2439 of 215 N.

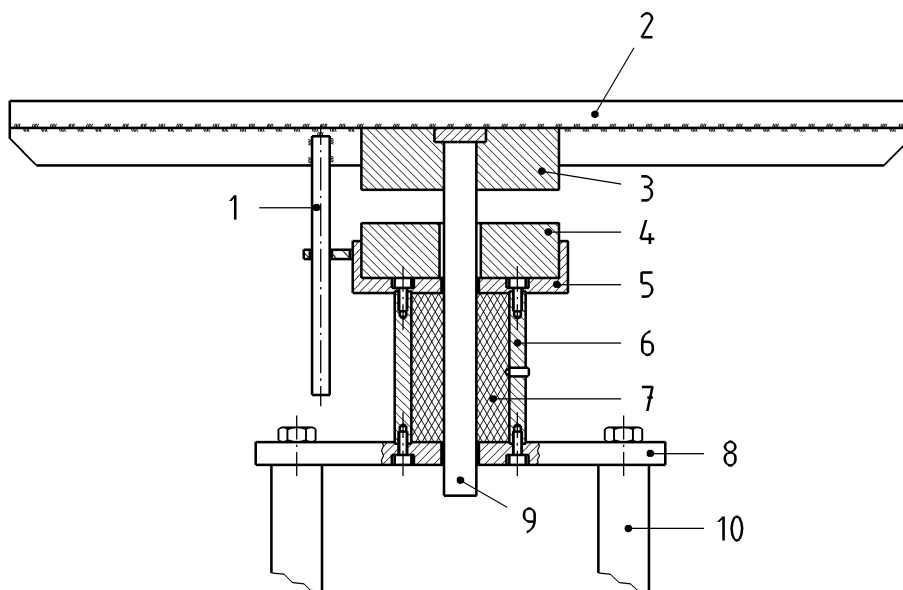

**Key**

- 1 restraining peg
- 2 platform
- 3 boss
- 4 pressure spring
- 5 cup
- 6 supporting cylinder
- 7 PVC liner
- 8 mounting plate
- 9 shaft
- 10 supporting pillar


**Figure A.1 — Detail of top section of mechanical shock apparatus**

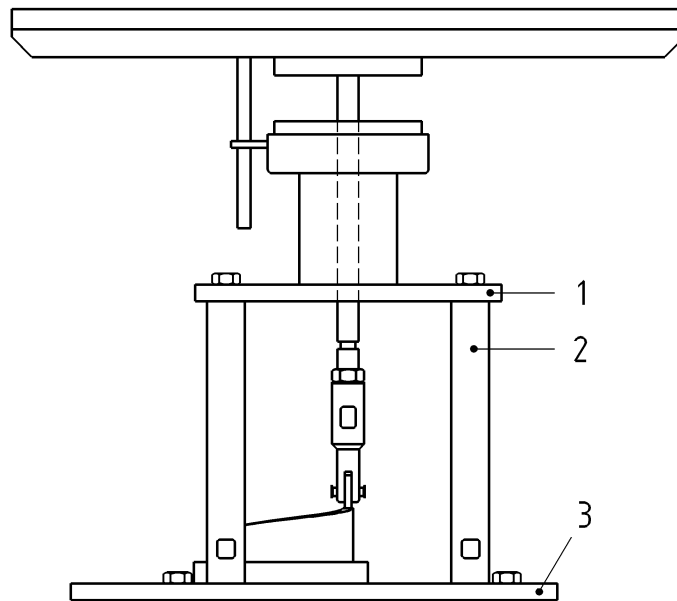

**Key**

- 1 mounting plate
- 2 supporting pillar
- 3 base plate

**Figure A.2 — General assembly of mechanical shock apparatus**

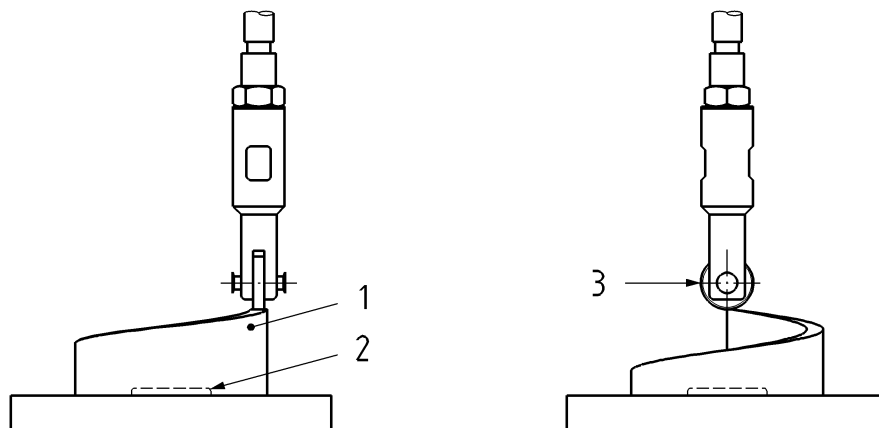

**Key**

- 1 cam
- 2 collar
- 3 cam wheel

**Figure A.3 — Detail of shaft attachment and cam assembly of mechanical shock apparatus**

## Annex B (informative)

### Procedures for calculation of heights

The following methods may be used for the calculation of heights:

#### a) Method 1

This procedure allows performing measurements with equipment that is not located at the same height as the firing point and at 90° to each other.

Firing takes place only in vertical direction (90° from the horizontal plane at the place of firing) and measurements shall only take place with a wind velocity of less than 5 m/s.

Measurement requires two locations – T1 and T2 – which should be preferably, but not necessarily, located at 90° to each other with respect to the firing point (see Figure B.1).

Suitable equipment for height measurement is any kind of regular device for measuring two angles at the same time, specifically the elevation angles  $\alpha_1$  and  $\alpha_2$  (0 - 90°, 1° steps) and the azimuth angles  $\beta_1$  and  $\beta_2$  (0 - 180°, 1° steps) of the bursting point B (or maximum point of effect) of the firework seen from T1 and T2.

Differences in height of the measurement locations T1 and T2 have to be taken into account, corresponding to  $h_1$  and  $h_2$  in Figure B.1.

The effect height (or rising height, or drop height)  $H$  is determined from the angles  $\alpha_1$  and  $\alpha_2$ ,  $\beta_1$  and  $\beta_2$ , and the horizontal distance  $D_{1,2}$  between T1 and T2 through the following formulae:


$$H_1 = \frac{D_{1,2} \sin \alpha_2}{\sin(\alpha_1 + \alpha_2)} \tan \beta_1 + h_1$$

$$H_2 = \frac{D_{1,2} \sin \alpha_1}{\sin(\alpha_1 + \alpha_2)} \tan \beta_2 + h_2$$

and

$$H = \frac{H_1 + H_2}{2}$$

With these formulae it is not necessary to know the distances of the two measurement locations T<sub>1</sub> and T<sub>2</sub> from the firing point O, or their angle to each other from this point.

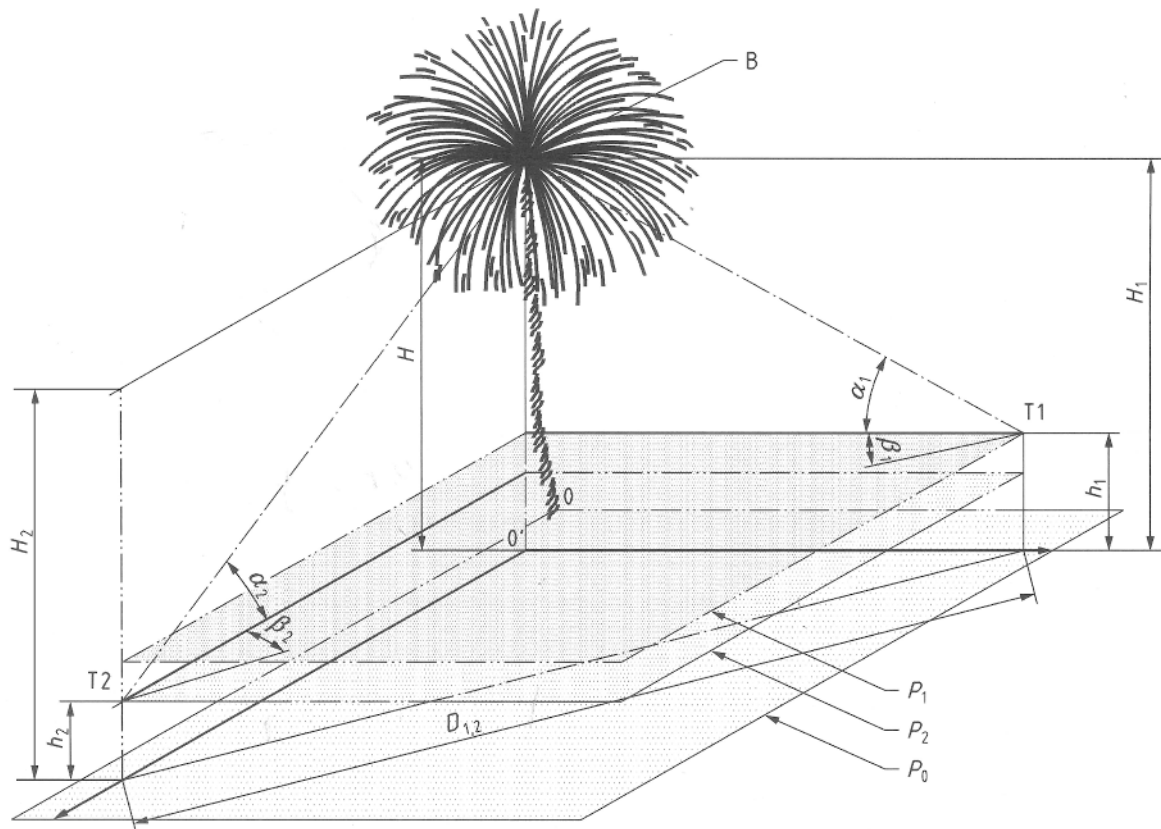

### Key

- $P_0$  horizontal plane passing through the firing point O
- $P_1$  horizontal plane passing through the measurement location T1
- $P_2$  horizontal plane passing through the measurement location T2
- $h_1, h_2$  heights of the measurement locations T1 and T2 from plane  $P_0$  respectively, measured and recorded by the suitable equipments located at points T1 and T2
- $O'$  vertical projection of the bursting point B (or maximum point of effect) of the firework on plane  $P_0$
- $D_{1,2}$  horizontal distance between T1 and T2
- $\alpha_1, \alpha_2$  elevation angles of the bursting point B (or maximum point of effect) of the firework measured and recorded by the suitable equipments located at T1 and T2
- $\beta_1, \beta_2$  azimuth angles of the bursting point B (or maximum point of effect) of the firework measured and recorded by the suitable equipments located at T1 and T2
- $H$  effect height to be calculated from  $D_{1,2}, h_1$  and  $h_2, \alpha_1$  and  $\alpha_2, \beta_1$  and  $\beta_2$

**Figure B.1 — Measurement set-up for shells**


Measurement of the horizontal distance  $D_{1,2}$  should take place with an accuracy of at least  $\pm 1\%$  of the distance.

**b) Method 2**

Suitable equipment for height measurement is any kind of regular device for measuring two angles at the same time, specifically the vertical angle (0 - 90°, 1° steps) and the horizontal angle (0 - 360°, 1° steps).

Measurement requires two locations which should be preferably located at 90° to each other with respect to the firing point (see Figure B.2).

When using a USI (see 5.10) both angles, the vertical and the horizontal angle, have to be measured. Differences in height of the measurement locations have to be taken into account.

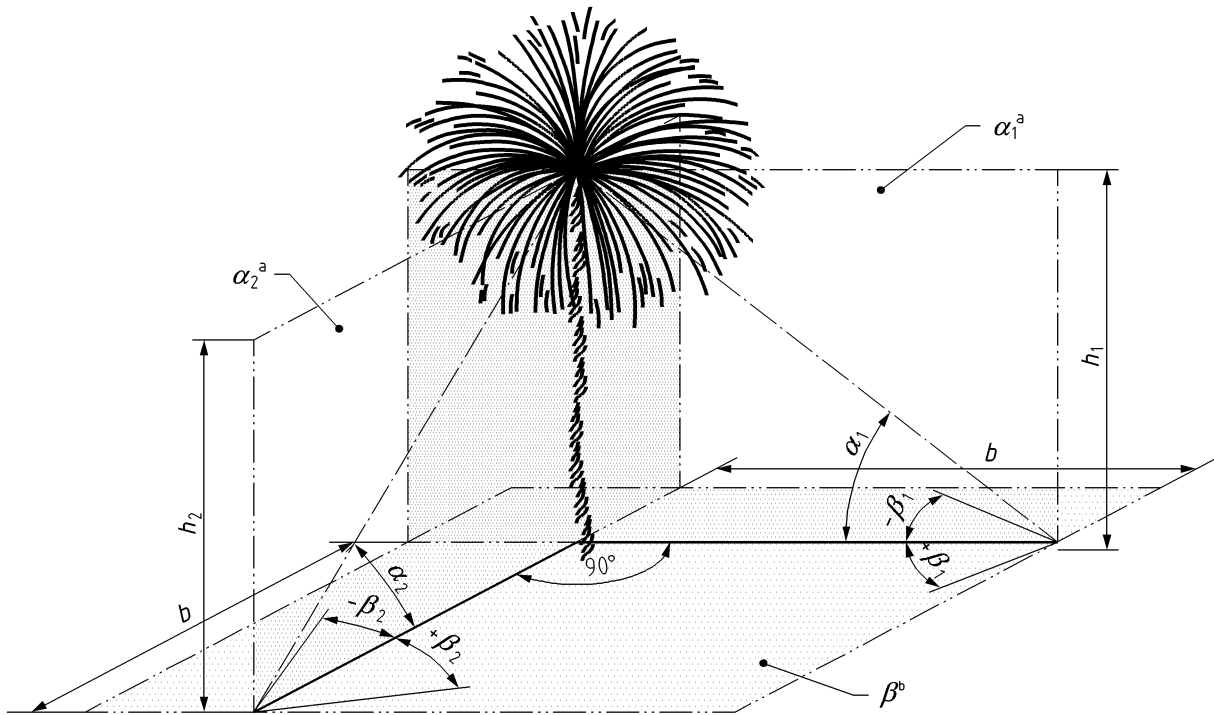

**Key**

- $h_1, h_2$  calculated heights from vertical planes
- $b$  horizontal distance between the measuring points and the firing point
- $\alpha_1, \alpha_2$  measured elevation angles of the bursting point (or maximum point of effect)
- $\beta_1, \beta_2$  measured azimuth angles of the bursting point (or maximum point of effect).
- <sup>a</sup> vertical plane
- <sup>b</sup> horizontal plane

**Figure B.2 — Measurement set-up for shells**

In the case of a vertical trajectory of the display shell (i. e. the horizontal angles are less than  $\pm 2^\circ$ ) the effect height, rising height, and drop height  $h$  is determined from the vertical angles  $\alpha_1$  and  $\alpha_2$  and the base length  $b$  (distance between firing point and measurement location) through the following formula:

$$h_{1,2} = b \cdot \tan \alpha_{1,2}$$

With this formula it is possible to calculate the heights independently for each measurement location, this making it possible to use different base lengths. Both values are averaged.

For a non-vertical trajectory the actual height is calculated according to the following formulae:

$$h_1 = b \cdot \tan \alpha_1 \cdot \frac{\cos \beta_2 - \sin \beta_2}{\cos(\beta_1 + \beta_2)}$$

and

$$h_2 = b \cdot \tan \alpha_2 \cdot \frac{\cos \beta_1 - \sin \beta_1}{\cos(\beta_1 + \beta_2)}$$

The angles  $\beta_1$  and  $\beta_2$  are the horizontal angles.

The effect height can be calculated as follows:


$$H = \frac{h_1 + h_2}{2}$$

In order to achieve a reasonable accuracy the distance between firing point and measurement location, referred to as base length here, has to be adjusted to the measurement device. For an expected rising height of 300 m the base length of at least 175 m is chosen, for example.

Measurement of the base length should take place with an accuracy of at least  $\pm 1\%$  of the distance.

## Annex C (informative)

### Calculation method for safety-/protection distance

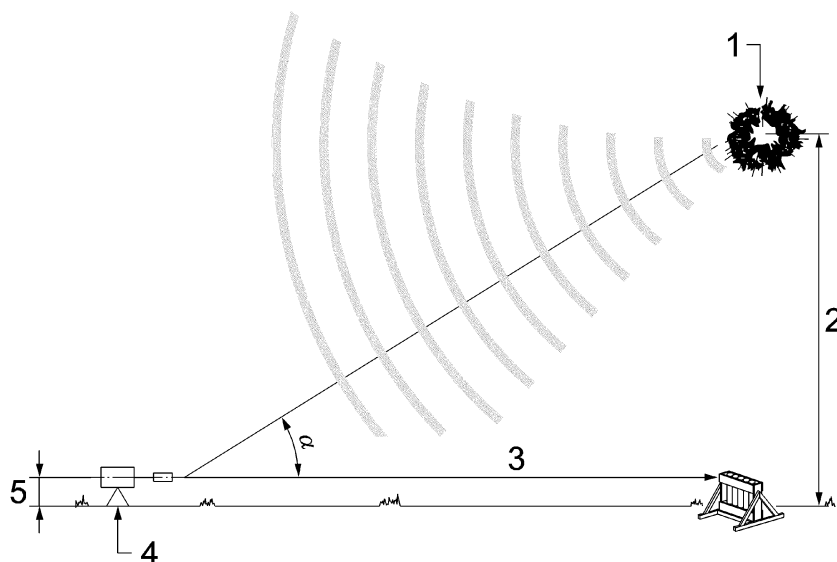

#### Key

- 1 bursting point
- 2 rising and bursting height
- 3 measuring distance / safety distance
- 4 technician in measurement  
 technology : audience
- 5 measuring height 1 m

**Figure C.1 — Measurement set-up for sound pressure level**

In the case of an effect with a high sound pressure level the safety/protection distance between the articles and the audience may be calculated as follows:

$$R_S = 10^{\left( \log_{10} R_m - \frac{L_S - L_m}{20 \text{ dB}} \right)} \quad (\text{C.1})$$

where

$R_S$  is the minimum safety distance (depending of sound pressure);

$R_m$  is the measuring distance;

$L_S$  is the sound pressure limit;

$L_m$  is the sound pressure level, measured on the measuring point.



## Annex D (informative)

### Overview of essential safety requirements and corresponding clauses of all parts of EN 16261

The correspondence between the parts of EN 16261 and Directive 2007/23/EC on the placing on the market of pyrotechnic articles can be found in Annex ZA of each part of EN 16261.

Table D.1 gives an overview about all essential safety requirements and the corresponding clauses and subclauses of all parts of EN 16261

**Table D.1 — Overview of essential safety requirements and corresponding clauses of all parts of EN 16261**

Essential Requirements (ESR) of Directive 2007/23/EC	Clause(s)/sub-clause(s) of			Qualifying remarks/Notes
	EN 16261-2:2013	EN 16261-3:2012	EN 16261-4:2012	
(1)	7			
(2)	1		5	
(3) 1 <sup>st</sup> paragraph	7.2, 9, 10	6.10		
(3) 2 <sup>nd</sup> paragraph		4		
3 (a)	5	6.1, 6.2, 6.3, 6.10		
3 (b)	1, 7.1, 7.2.2, 9.2	6.8, 6.9		
3 (c)	7.1, 7.2.2, 9.2	6.8		
3 (d)	7.2.2, 9.2	6.9		
3 (e)	9.2	4.1, 6.10		Specially for aquatic fireworks
3 (f)	7.2.2, 9.2	6.9		
3 (g)	6.2, 8, 9.3			
3 (h)			4.6, 5, Annex A	
3 (i)	7.1, 7.2.2, 8, 9.2, 9.3	6.8, 6.9		
3 (j)		5.12	5, Annex A	
3 (last paragraph)	7.1	6.8		
4 (a)	1			
4 (b)	1		1	
5 A (1)			4.3	
5 A.(2)	1, 5, 7.2.7	6.2, 6.10.2	Annex A	
5 A.(3)	6.1		4.12, 5	
5 A.(4)	7.2.2, 7.2.3	6.10		
5 A.(5)	6.2, 8, 9.3			

## Annex ZA (informative)

### Relationship between this European Standard and the Essential Requirements of EU Directive 2007/23/EC on the placing on the market of pyrotechnic articles

This European Standard has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association to provide a means of conforming to Essential Requirements of the New Approach Directive 2007/23/EC on the placing on the market of pyrotechnic articles. The Parts 1, 3 and 4 of the standard will support Part 2 to fulfil the Essential Requirements of the Directive 2007/23/EC Annex 1.

Once this standard is cited in the Official Journal of the European Union under that Directive and has been implemented as a national standard in at least one Member State, compliance with the clauses of this standard as given in Table ZA.1 confers, within the limits of the scope of this standard, a presumption of conformity with the Requirements of that Directive and associated EFTA regulations.

**Table ZA.1 — Correspondence between this European Standard and Directive 2007/23/EC on the placing on the market of pyrotechnic articles**

Essential Requirements (ESR) of Directive 2007/23/EC	Clause(s)/sub-clause(s) of EN 16261-3:2012	Qualifying remarks/Notes
(1)		
(2)		
(3) 1 <sup>st</sup> paragraph	6.10	
(3) 2 <sup>nd</sup> paragraph	4	
3 (a)	6.1, 6.2, 6.3, 6.10	
3 (b)	6.8, 6.9	
3 (c)	6.8	
3 (d)	6.9	
3 (e)	4.1, 6.10	Specially for aquatic fireworks
3 (f)	6.9	
3 (g)		
3 (h)		
3 (i)	6.8, 6.9	
3 (j)	5.12	
3 (last paragraph)	6.8	
4 (a)		
4 (b)		
5 A (1)		
5 A.(2)	6.2, 6.10.2	
5 A.(3)		
5 A.(4)	6.10	
5 A.(5)		

**WARNING —** Other requirements and other EU Directives may be applicable to the product(s) falling within the scope of this standard.

## Bibliography

- [1] EN ISO 845, *Cellular plastics and rubbers — Determination of apparent density (ISO 845)*
- [2] EN ISO 868, *Plastics and ebonite — Determination of indentation hardness by means of a durometer (Shore hardness) (ISO 868)*
- [3] EN ISO 2439, *Flexible cellular polymeric materials — Determination of hardness (indentation technique) (ISO 2439)*
- [4] EN ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025)*





# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™