

Household and similar electrical appliances – Safety –

**Part 2-42: Particular requirements for
commercial electric forced convection
ovens, steam cookers and
steam-convection ovens**

ICS 97.040.20

National foreword

This British Standard is the UK implementation of EN 60335-2-42:2003+A11:2012 incorporating corrigendum September 2007. It is derived from IEC 60335-2-42:2002, incorporating amendment 1:2008. It supersedes BS EN 60335-2-42:2003+A1:2008 which will be withdrawn on 21 December 2014.

The start and finish of text introduced or altered by amendment is indicated in the text by tags. Tags indicating changes to IEC text carry the number of the IEC amendment. For example, text altered by IEC amendment 1 is indicated by **A1** **A1**.

Where a common modification has been introduced by amendment, the tags carry the number of the amendment. For example, the common modifications introduced by CENELEC amendment A11:2012 are indicated by **C11** **C11**.

The UK participation in its preparation was entrusted by Technical Committee CPL/61, Safety of household and similar electrical appliances, to Subcommittee CPL/61/5, Commercial catering equipment.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

Amendments/corrigenda issued since publication

Amd. No.	Date	Comments
17478 Corrigendum No. 1	31 January 2008	Last paragraph of EN foreword replaced. Addition to Annex ZB deleted
	30 June 2009	Implementation of IEC amendment 1:2008 with CENELEC endorsement A1:2008
	31 May 2012	Implementation of CENELEC amendment A11:2012

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 16 June 2003

© The British Standards Institution 2012. Published by BSI Standards Limited 2012.

English version

**Household and similar electrical appliances -
Safety
Part 2-42: Particular requirements for commercial electric
forced convection ovens, steam cookers
and steam-convection ovens
(IEC 60335-2-42:2002)**

Appareils électrodomestiques
et analogues -
Sécurité
Partie 2-42: Règles particulières pour
les fours électriques à convection forcée,
les cuiseurs à vapeur électriques et
les fours combinés vapeur-convection
électriques à usage collectif
(CEI 60335-2-42:2002)

Sicherheit elektrischer Geräte für den
Hausgebrauch und ähnliche Zwecke
Teil 2-42: Besondere Anforderungen
für elektrische Heißumluftöfen,
Dampfgeräte und Heißluftdämpfer
für den gewerblichen Gebrauch
(IEC 60335-2-42:2002)

This European Standard was approved by CENELEC on 2003-02-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of document 61E/402/FDIS, future fifth edition of IEC 60335-2-42, prepared by SC 61E of the IEC Technical Committee 61, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 60335-2-42 on 2003-02-01.

This European Standard replaces EN 60335-2-42:2000 + corrigendum July 2001.

The following dates are applicable:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2003-11-01
- date on which national standards
conflicting with the EN have to be withdrawn (dow) 2006-02-01

This part 2 has to be used in conjunction with EN 60335-1, Household and similar electrical appliances – Safety – Part 1: General requirements. It was established on the basis of the 2002 edition of that standard. Amendments and revisions of Part 1 have also to be taken into account and the dates when such changes become applicable will be stated in the relevant amendment or revision of Part 1.

This part 2 supplements or modifies the corresponding clauses of EN 60335-1, so as to convert it into the European Standard: Safety requirements for commercial electric forced convection ovens, steam cookers and steam-convection ovens.

When a particular subclause of Part 1 is not mentioned in this part 2, that subclause applies as far as is reasonable. When this standard states "addition", "modification" or "replacement", the relevant text of Part 1 is to be adapted accordingly.

NOTE 1 The following numbering system is used:

- subclauses, tables and figures that are numbered starting from 101 are additional to those in Part 1;
- unless notes are in a new subclause or involve notes in Part 1, they are numbered starting from 101, including those in a replaced clause or subclause;
- additional annexes are lettered AA, BB, etc.;
- subclauses, notes and annexes that are additional to those in the IEC standard are prefixed with the letter Z.

NOTE 2 The following print types are used:

- requirements: in roman type;
- *test specifications: in italic type;*
- notes: in small roman type.

Words in **bold** in the text are defined in Clause 3. When a definition concerns an adjective, the adjective and the associated noun are also in bold.

There are no special national conditions causing a deviation from this European Standard, other than those listed in Annex ZA to EN 60335-1.

There are no national deviations from this European Standard, other than those listed in Annex ZB to EN 60335-1.

Introduction

Ⓒ11 The principle objectives of Low Voltage Directive, 2006/95/EC, are covered in this standard. The essential safety requirements of the Machinery Directive 2006/42/EC have also been taken into account for appliances covered by this part. Ⓒ11

Endorsement notice

The text of the International Standard IEC 60335-2-42:2002 was approved by CENELEC as a European Standard without any modification.

Foreword to amendment A1

The text of document 61E/618/FDIS, future amendment 1 to IEC 60335-2-42:2002, prepared by SC 61E, Safety of electrical commercial catering equipment, of IEC Technical Committee 61, Safety of household and similar electrical appliances, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as amendment A1 to EN 60335-2-42:2003 on 2008-07-01.

The following dates are applicable:

- latest date by which the amendment has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2009-04-01
- date on which national standards conflicting with the amendment have to be withdrawn (dow) 2011-07-01

This amendment supplements or modifies the corresponding clauses of EN 60335-2-42:2003.

There are no special national conditions causing a deviation from this amendment.

There are no national deviations from this amendment.

Endorsement notice

The text of amendment 1:2008 to the International Standard IEC 60335-2-42:2002 was approved by CENELEC as an amendment to the European Standard without any modification.

In the Bibliography, add the following note to the standard mentioned:

ISO 13732-1

NOTE Harmonized as EN ISO 13732-1:2006 (not modified).

Foreword to amendment A11

This document (EN 60335-2-42:2003/A11:2012) has been prepared by the CLC/TC 61, "Safety of household and similar electrical appliances".

The following dates are fixed:

- latest date by which the amendment has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2012-12-21
- latest date by which the national standards conflicting
with the amendment have to be withdrawn (dow) 2014-12-21

This amendment supplements or modifies the corresponding clauses of EN 60335-1:2012, EN 60335-2-42:2003 and EN 60335-2-42:2003/A1:2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For the relationship with EU Directive(s) see informative Annex ZZ, which is an integral part of this document.

CONTENTS

INTRODUCTION	6
1 Scope	7
2 Normative references	7
3 Definitions	7
4 General requirement	9
5 General conditions for the tests	9
6 Classification	11
7 Marking and instructions	11
8 Protection against access to live parts	13
9 Starting of motor-operated appliances	13
10 Power input and current	13
11 Heating	14
12 Void	15
13 Leakage current and electric strength at operating temperature	15
14 Transient overvoltages	15
15 Moisture resistance	15
16 Leakage current and electric strength	17
17 Overload protection of transformers and associated circuits	17
18 Endurance	17
19 Abnormal operation	17
20 Stability and mechanical hazards	19
21 Mechanical strength	20
22 Construction	20
23 Internal wiring	23
24 Components	23
25 Supply connection and external flexible cords	23
26 Terminals for external conductors	24
27 Provision for earthing	24
28 Screws and connections	24
29 Clearances, creepage distances and solid insulation	24
30 Resistance to heat and fire	25
31 Resistance to rusting	25
32 Radiation, toxicity and similar hazards	25
Annexes	27
Ⓒ11 Annex ZE (normative) Specific additional requirements for appliances and machines with power driven moving parts and intended for commercial use	28
Annex ZZ (informative) Coverage of Essential Requirements of EU Directives Ⓒ11	30
Bibliography	31
Figure 101 – Splash apparatus	26

INTRODUCTION

It has been assumed in the drafting of this International Standard that the execution of its provisions is entrusted to appropriately qualified and experienced persons.

This standard recognizes the internationally accepted level of protection against hazards such as electrical, mechanical, thermal, fire and radiation of appliances when operated as in normal use taking into account the manufacturer's instructions. It also covers abnormal situations that can be expected in practice and takes into account the way in which electro-magnetic phenomena can affect the safe operation of appliances.

This standard takes into account the requirements of IEC 60364 as far as possible so that there is compatibility with the wiring rules when the appliance is connected to the supply mains. However, national wiring rules may differ.

If an appliance within the scope of this standard also incorporates functions that are covered by another part 2 of IEC 60335, the relevant part 2 is applied to each function separately, as far as is reasonable. If applicable, the influence of one function on the other is taken into account.

When a part 2 standard does not include additional requirements to cover hazards dealt with in Part 1, Part 1 applies.

NOTE 1 This means that the technical committees responsible for the part 2 standards have determined that it is not necessary to specify particular requirements for the appliance in question over and above the general requirements.

This standard is a product family standard dealing with the safety of appliances and takes precedence over horizontal and generic standards covering the same subject.

NOTE 2 Horizontal and generic standards covering a hazard are not applicable since they have been taken into consideration when developing the general and particular requirements for the IEC 60335 series of standards. For example, in the case of temperature requirements for surfaces on many appliances, generic standards, such as ISO 13732-1 for hot surfaces, are not applicable in addition to Part 1 or part 2 standards.

An appliance that complies with the text of this standard will not necessarily be considered to comply with the safety principles of the standard if, when examined and tested, it is found to have other features that impair the level of safety covered by these requirements.

An appliance employing materials or having forms of construction differing from those detailed in the requirements of this standard may be examined and tested according to the intent of the requirements and, if found to be substantially equivalent, may be considered to comply with the standard.

HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES ± SAFETY ±

Part 2-42: Particular requirements for commercial electric forced convection ovens, steam cookers and steam-convection ovens

1 Scope

This clause of Part 1 is replaced by the following.

This International Standard deals with the safety of electrically operated commercial **forced convection ovens**, **steam cookers**, **steam-convection ovens** and, exclusive of any other use, **steam generators**, not intended for household use, their **rated voltage** being not more than 250 V for single-phase appliances connected between one phase and neutral and 480 V for other appliances.

☐₁₁ Additional requirements for appliances with power driven moving parts are given in Annex ZE.☐₁₁

NOTE 101 These appliances are used for example in restaurants, canteens, hospitals and commercial enterprises such as bakeries, butcheries, etc.

The electrical part of appliances making use of other forms of energy is also within the scope of this standard.

As far as is practicable, this standard deals with the common hazards presented by these types of appliances.

NOTE 102 Attention is drawn to the fact that

- for appliances intended to be used in vehicles or on board ships or aircraft, additional requirements may be necessary;
- in many countries additional requirements are specified by the national health authorities, the national authorities responsible for the protection of labour, the national water supply authorities and similar authorities;
- in many countries additional requirements are specified for pressure appliances.

☐₁₁ NOTE 103 This standard does not apply to

- machines designed exclusively for industrial purposes,
- machines intended to be used in locations where a corrosive or an explosive atmosphere is present (dust, vapour or gas),
- continuous process machines for the mass production of food,
- machinery for processing cosmetics, chemicals and pharmaceutical products,
- microwave ovens (IEC 60335-2-90).☐₁₁

2 Normative references

This clause of Part 1 is applicable.

3 Definitions

This clause of Part 1 is applicable except as follows.

3.1.4 Addition:

NOTE 101 The **rated power input** is the sum of the power inputs of all the individual elements in the appliance that can be on at one time; where there are several such combinations possible, that giving the highest power input is used in determining the **rated power input**.

3.1.9 *Replacement:*

normal operation

operation of the appliance under the following conditions

- Dry heat mode

The appliance is operated with all the shelves or the shelf trolley in position according to the manufacturer's instructions but with no load. The controls are set so that the mean value of the temperature over the **thermostat** cycle at the geometric centre of each usable space in the interior of the oven is maintained at $220\text{ °C} \pm 4\text{ °C}$. Stepped controls are set so that this temperature is $220\text{ °C} \pm 15\text{ °C}$.

For ovens that are unable to attain a temperature of 220 °C , the controls are set at the maximum.

For ovens that are capable of attaining temperatures in excess of 270 °C , the controls are set so that the mean value of the temperature is $50\text{ °C} \pm 4\text{ °C}$ below the maximum temperature attainable.

- Steaming only mode

The appliance is operated in accordance with the manufacturer's instructions with all controls intended to be operated by the user adjusted to their maximum setting until reaching operating temperature. They are then readjusted, if possible, to the lowest setting that maintains that temperature.

Appliances with **steam generators** intended to be filled by hand or by a manually operated tap are filled to the **indicated level** on the **steam generator**.

Appliances with **steam generators** intended to be filled automatically are connected to a water supply having the pressure designated by the manufacturer. Where the manufacturer specifies a range of pressures, the pressure is adjusted to give the most unfavourable conditions.

The incoming water is maintained at

- $15\text{ °C} \pm 5\text{ °C}$ in the case of appliances intended for connection to a cold water supply;
- $60\text{ °C} \pm 5\text{ °C}$ or the temperature indicated in the instruction sheet, whichever is the higher, in the case of appliances intended for connection to a hot water supply only.

NOTE 101 If the appliance is intended for connection to either a hot or cold water supply, the temperature of the water is that which gives the most unfavourable results.

Lids, doors, and covers are in position and closed.

The **cooking compartment** of the appliance contains a water load, initially at $15\text{ °C} \pm 5\text{ °C}$, comprising 0,5 l/kg of the manufacturer's declared maximum food load. The water load is evenly distributed between the shelves or pans.

NOTE 102 Since pans may be perforated to allow for circulation of steam, the water load may be contained in suitable containers evenly distributed over the shelves or pans.

- Combination mode

The appliance is operated as for the steaming only mode but with the forced convection fan/s and elements for heating the **cooking compartment** on and the temperature controls set as for the dry heat mode.

In all the above cases, motors incorporated in the appliance are operated in the intended manner under the most severe conditions that can be expected in normal use, taking into account the manufacturer's instructions.

3.101

forced convection oven

an appliance intended for the cooking of food by heated air that is circulated by mechanical means within the **cooking compartment**. The pressure within the **cooking compartment** does not differ significantly from atmospheric pressure

3.102**steam cooker**

an appliance intended for the cooking of food only by means of direct steam contact. The pressure within the **cooking compartment** can exceed atmospheric pressure

3.103**atmospheric steam cooker**

an appliance in which the pressure within the **cooking compartment** does not differ significantly from atmospheric pressure

3.104**steam-convection oven**

an appliance intended for the cooking of food either by means of direct steam contact or by heated air circulated by mechanical means within the **cooking compartment** or by a combination of these two modes. The pressure within the **cooking compartment** does not differ significantly from atmospheric pressure

3.105**rated pressure**

the maximum working pressure of **steam cookers** and **steam generators** assigned by the manufacturer to the pressurized parts of the appliance

3.106**steam generator**

that part of the appliance designed specifically for the generation of steam for exclusive use in a **cooking compartment**

NOTE The **steam generator** may be either combined within the **cooking compartment**, remote from the **cooking compartment** but contained within the same casing or function as a separate unit providing steam for one or more **cooking compartments**.

3.107**cooking compartment**

that part of the appliance in which the cooking or food heating process takes place

3.108**indicated level**

a mark on the appliance or **steam generator** to indicate the maximum liquid level for correct operation

3.109**installation wall**

C11 fixed construction containing supply facilities for wall mounted appliances on one or both sides **C11**

4 General requirement

This clause of Part 1 is applicable except as follows.

5 General conditions for the tests

This clause of Part 1 is applicable except as follows.

5.5 Addition:

- *Dry heat mode*

The appliance is operated with all the shelves or the shelf trolley in position according to the manufacturer's instructions but with no load. The controls are set so that the mean value of the temperature over the **thermostat** cycle at the geometric centre of each usable space in the interior of the oven is maintained at $220\text{ °C} \pm 4\text{ °C}$. Stepped controls are set so that this temperature is $220\text{ °C} \pm 15\text{ °C}$.

For ovens that are unable to attain a temperature of 220 °C , the controls are set at the maximum.

For ovens that are capable of attaining temperatures in excess of 270 °C , the controls are set so that the mean value of the temperature is $50\text{ °C} \pm 4\text{ °C}$ below the maximum temperature attainable.

- *Steaming only mode*

The appliance is operated in accordance with the manufacturer's instructions with all controls intended to be operated by the user adjusted to their maximum setting until reaching operating temperature. They are then readjusted, if possible, to the lowest setting that maintains that temperature.

Appliances with **steam generators** intended to be filled by hand or by a manually operated tap are filled to the **indicated level** on the **steam generator**.

Appliances with **steam generators** intended to be filled automatically are connected to a water supply having the pressure designated by the manufacturer. Where the manufacturer specifies a range of pressures, the pressure is adjusted to give the most unfavourable conditions.

The incoming water is maintained at

- $15\text{ °C} \pm 5\text{ °C}$ in the case of appliances intended for connection to a cold water supply,
- $60\text{ °C} \pm 5\text{ °C}$ or the temperature indicated in the instruction sheet, whichever is the higher, in the case of appliances intended for connection to a hot water supply only.

NOTE 101 If the appliance is intended for connection to either a hot or cold water supply, the temperature of the water is that which gives the most unfavourable results.

Lids, doors, and covers are in position and closed.

The **cooking compartment** of the appliance contains a water load, initially at $15\text{ °C} \pm 5\text{ °C}$, comprising $0,5\text{ l/kg}$ of the manufacturer's declared maximum food load. The water load is evenly distributed between the shelves or pans.

NOTE 102 Since pans may be perforated to allow for circulation of steam, the water load may be contained in suitable containers evenly distributed over the shelves or pans.

- *Combination mode*

The appliance is operated as for the steaming only mode but with the forced convection fan/s and elements for heating the **cooking compartment** on and the temperature controls set as for the dry heat mode.

In all the above cases, motors incorporated in the appliance are operated in the intended manner under the most severe conditions that can be expected in normal use, taking into account the manufacturer's instructions. **5.10**

5.10 Addition:

Appliances intended for installation in a bank of other appliances and appliances intended to be fixed to an **installation wall** are enclosed to obtain protection against electric shock and harmful ingress of water equivalent to that obtained when installed in accordance with the instructions provided with the appliance.

NOTE 101 Appropriate enclosures or additional appliances may be needed for test purposes.

5.101 Appliances are tested as **heating appliances**, even if they incorporate a motor.

5.102 Appliances, when assembled in combination with or incorporating other appliances, are tested in accordance with the requirements of this standard. The other appliances are operated simultaneously in accordance with the requirements of the relevant standards.

6 Classification


This clause of Part 1 is applicable except as follows.

6.1 Replacement:

Appliances shall be **class I** with respect to protection against electric shock.

Compliance is checked by inspection and by the relevant tests.

6.2 Addition:

Appliances normally used on a table shall be at least IPX3. Other appliances shall be at least IPX4. 

7 Marking and instructions

This clause of Part 1 is applicable except as follows.

7.1 Addition:

In addition, appliances shall be marked with

- the water pressure or range of pressures, in kilopascals (kPa), for appliances or **steam generators** intended to be connected to a water supply, unless this is indicated in the instruction sheet;
- the **rated pressure**, in kilopascals (kPa), on pressurized parts of the appliance.



7.6 Addition:



[symbol 5021 of IEC 60417-1]

equipotentiality

7.12 Addition:

 If symbols IEC 60417-5021, ISO 7000-0434 and ISO 7000-0790 are used on the product or in the instructions, their meaning shall be explained. 

The instructions of **steam cookers** and **steam-convection ovens** shall also include information with regard to the maximum food load in kilograms (kg).

 The front cover of the instructions shall include the substance of the following:

CAUTION: Read the instructions before using the machine.

This wording may be replaced by symbols ISO 7000-0434 and ISO 7000-0790. 

The instructions of **steam cookers** shall include the substance of the following warning:

WARNING: Do not open drain cocks or other emptying devices until the pressure has been reduced to approximately atmospheric pressure.

Ⓒ₁₁) The instructions shall also state the maximum weight of the empty appliance. Ⓒ₁₁)

Ⓐ₁) The appliance and trolley shall be clearly visible and permanently marked with the warning sign shown in Figure 102 at a height of 1,60 m above the floor, if required.

NOTE The warning sign at the trolley can be etched or stamped and the size can be reduced.

If the appliance is not marked, the required warning sign shall be a part of delivery and the instructions shall point out that this marking has to be mounted after installation at a height of 1,60 m above the floor.

The instructions shall include the substance of the following warning:

WARNING: To avoid scalding, do not use loaded containers with liquids or cooking goods which becomes fluid by heating in higher levels than those which can be easily observed.

Add the following:

Modification:

The instruction concerning persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge is not applicable. Ⓐ₁)

7.12.1 Replacement:

The appliance shall be accompanied by instructions detailing any special precautions necessary for installation. For appliances intended for installation in a bank of other appliances and appliances intended to be fixed to an **installation wall**, details of how to ensure appropriate protection against electric shock and harmful ingress of water shall be supplied. If the controls of more than one appliance are combined in a separate enclosure, detailed installation instructions shall be supplied. Instructions for **user maintenance**, for example cleaning, shall also be given. They shall include a statement that the appliance is not to be cleaned with a water jet.

Ⓒ₁₁) For appliances that are permanently connected to fixed wiring and for which leakage currents may exceed 10mA, particularly if disconnected or not used for long periods, or during the initial installation, the instructions shall give recommendations regarding the rating and type of the additional **protective devices**, such as residual-current device(s), to be installed. Ⓒ₁₁)

Compliance is checked by inspection.

7.12.4 Addition:

The instructions for **built-in appliances** having a separate control panel for several appliances shall state that the control panel is only to be connected to the specified appliances in order to avoid a possible hazard.

7.15 *Addition:*

When it is not practical to place the marking of **fixed appliances** so that it is visible after the appliance has been installed, the relevant information shall also be included in the instructions for use or on an additional label that can be fixed near the appliance after installation.

NOTE 101 An example of such a **fixed appliance** is a **built-in appliance**.

7.101 Appliances and **steam generators** intended to be filled by hand or by a manually operated tap shall be marked with an **indicated level**.

Compliance is checked by inspection.

7.102 Equipotential bonding terminals shall be marked with symbol 5021 of IEC 60417-1.

These markings shall not be placed on screws, removable washers or other parts that can be removed when conductors are being connected.

Compliance is checked by inspection.

8 Protection against access to live parts

This clause of Part 1 is applicable.

9 Starting of motor-operated appliances

This clause of Part 1 is applicable except as follows.

9.101 Fan motors providing a cooling effect in order to comply with the requirements of Clause 11 shall start under all voltage conditions that may occur in use.

*Compliance is checked by starting the motor three times at a voltage equal to 0,85 times **rated voltage**, the motor being at room temperature at the beginning of the test.*

*The motor is started each time under the conditions occurring at the beginning of **normal operation** or, for automatic appliances, at the beginning of the normal cycle of operation, the motor being allowed to come to rest between successive starts. For appliances provided with motors having other than centrifugal starting switches, this test is repeated at a voltage equal to 1,06 times **rated voltage**.*

*In all cases, the motor shall start and it shall function in such a way that safety is not affected and overload **protection devices** of the motor shall not operate.*

NOTE 1 The supply source must be such that during the test the drop in voltage does not exceed 1 %.

NOTE 2 A fan motor for the convection fan only is not considered to provide a cooling effect.

10 Power input and current

This clause of Part 1 is applicable except as follows.

10.1 *Addition:*

NOTE 101 For appliances having more than one heating unit, the total power input may be determined by measuring the power input of each heating unit separately (see also 3.1.4).

11 Heating

This clause of Part 1 is applicable except as follows.

11.2 Addition:

Appliances intended to be fixed to the floor and appliances with a mass greater than 40 kg and not provided with rollers, castors or similar means are installed in accordance with the manufacturer's instructions. If no instructions are given, these appliances are considered as appliances normally placed on the floor.

*Separate **cooking compartments** and **steam generators** are assembled in accordance with the manufacturer's instructions and located in the test corner in such a manner that they will have the most unfavourable effect on each other and on their surroundings.*

11.4 Replacement:

*Appliances are operated under **normal operation** such that the total power input of the appliance is 1,15 times **rated power input**. If it is not possible to switch on all heating elements at the same time, the test is made with each of the combinations that the switch arrangement will allow, the highest load possible with each switching arrangement being in circuit.*

If the appliance is provided with a control that limits the total power input, the test is made with whichever combination of heating units, as may be selected by the control, imposes the most severe condition.

*If the temperature rise limits of motors, transformers or **electronic circuits** are exceeded, the test is repeated with the appliance supplied at 1,06 times **rated voltage**. In this case only the temperature rises of motors, transformers or **electronic circuits** are measured.*

11.7 Replacement

The appliance is operated as follows.

*Appliances with **steam generators** incorporated in the **cooking compartment** are operated on continuous cycles until steady conditions are established. Each cycle comprises an operating period followed by a rest period strictly sufficient, but in no case longer than 5 min, to allow for replacing the water load, the water level in the **steam generators** intended to be filled by hand being, if necessary, restored to the **indicated level**, in accordance with the manufacturer's instructions.*

The operating period is equal to the maximum cooking time declared by the manufacturer or, if such declaration is not provided, to the time taken for the appliance to reach the maximum temperature conditions.

*Appliances with separate **steam generators** are switched on and allowed to operate until steady conditions are established in the **steam generator**. When these conditions have been reached, the appliance is operated as above.*

Other appliances are operated until steady conditions are established.

NOTE 101 The duration of the test may consist of more than one cycle of operation.

11.8 Addition:

During the test the pressure relief device shall not operate.

12 Void

13 Leakage current and electric strength at operating temperature

This clause of Part 1 is applicable except as follows.

13.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

± for cord and plug connected appliances	1 mA per kW rated power input of the appliance with a maximum of 10 mA
± for other appliances	1 mA per kW rated power input of the appliance with no maximum

14 Transient overvoltages

This clause of Part 1 is applicable.

15 Moisture resistance

This clause of Part 1 is applicable except as follows.

15.1.1 Addition:

In addition, IPX0, IPX1, IPX2, IPX3 and IPX4 appliances are subjected for 5 min to the following splash test.

The apparatus shown in Figure 101 is used. During the test, the water pressure is so regulated that the water splashes up 150 mm above the bottom of the bowl. The bowl is placed on the floor for appliances normally used on the floor. For all other appliances on a horizontal support 50 mm below the lowest edge of the appliance, the bowl is so moved around as to splash the appliance from all directions. Care is taken that the appliance is not hit by the direct jet.

15.1.2 Modification:

Appliances normally used on a table are placed on a support having dimensions that are 15 cm ± 5 cm in excess of those of the orthogonal projection of the appliance on the support.

15.2 Replacement:

Appliances shall be constructed so that spillage of liquid in normal use does not affect their electrical insulation.

Compliance is checked by the following test.

*Appliances with **type X attachment**, except those having a specially prepared cord, are fitted with the lightest permissible type of flexible cable or cord of the smallest cross-sectional area specified in 26.6 and other appliances are tested as delivered.*

Detachable parts are removed.

*A litre of cold water containing approximately 1 % NaCl is poured steadily over a period of 1 min over the bottom surface of the **cooking compartment**.*

The water containers of appliances intended to be filled with water by hand are completely filled with water and a further quantity equal to 15 % of the capacity of the container is poured in steadily over a period of 1 min.

Appliances with containers intended to be filled by a manually operated tap or automatically are connected to a water supply having the maximum supply pressure indicated by the manufacturer. The means for controlling the incoming water is held fully open and the filling continued for 1 min after the first evidence of overflow, or until a further protective system operates to stop the inflow.

*In addition, **forced convection ovens** with automatic fillers or spraying systems and intended for permanent connection to the water mains, are operated for 5 min with any means that limit the water intake, for example a water level device, flow control, etc., rendered inoperative in the most unfavourable conditions. The fan motor is operated, if it can be operated independently, with the heating elements on or not, whichever is the most severe condition.*

During this test the appliance is connected to a water supply (without salt) having the maximum pressure indicated by the manufacturer.

If more than one controlling device is fitted, the test is repeated with each device rendered inoperative in turn.

*The appliance shall withstand an electric strength test as specified in 16.3 and inspection shall show that water that may have entered the appliance does not impair compliance with this part: in particular, there shall be no trace of water on insulation for which **clearances** and **creepage distances** are specified in Clause 29.*

15.3 Addition:

NOTE 101 If it is not possible to place the whole appliance in the humidity cabinet, parts containing electrical components are tested separately, taking into account the conditions that occur in the appliance.

15.101 Appliances that are provided with a tap intended for filling or cleaning, shall be constructed so that the water from the tap cannot come into contact with **live parts**.

Compliance is checked by the following test.

The tap is fully opened for 1 min with the appliance connected to a water supply having the maximum water pressure indicated by the manufacturer. Tiltable and movable parts, including lids, are tilted or placed in the most unfavourable positions. Swivelling outlets of water taps are so positioned as to direct water on to those parts that will give the most unfavourable result. Immediately following this treatment the appliance shall withstand an electric strength test as specified in 16.3.

16 Leakage current and electric strength

This clause of Part 1 is applicable except as follows.

16.2 Modification:

Instead of the permissible leakage current for **stationary class I appliances**, the following applies:

\pm for cord and plug connected appliances	1 mA per kW rated power input of the appliance with a maximum of 10 mA
\pm for other appliances	1 mA per kW rated power input of the appliance with no maximum

17 Overload protection of transformers and associated circuits

This clause of Part 1 is applicable.

18 Endurance

This clause of Part 1 is applicable.

19 Abnormal operation

This clause of Part 1 is applicable except as follows.

19.1 Addition:

A control or switching device that is intended for different settings corresponding to different functions of the same part of the appliance and that are covered by different standards is, in addition, set in the most severe setting irrespective of the manufacturer's instructions.

Appliances provided with a control limiting the pressure during the tests of Clause 11 are also subjected to the tests of 19.4 with this control rendered inoperative.

NOTE 101 Continuous blowing-off of the pressure relief device is in itself disregarded.

19.2 Modification:

Instead of the first sentence, the following applies.

Dry heat mode:

Appliances are tested under the conditions specified in Clause 11, but with the fan motor rendered inoperative.

NOTE 101 If there is more than one fan motor, they are rendered inoperative in turn.

Steaming only and combination modes:

*Appliances are tested under the conditions specified in Clause 11, but without water load and with all doors or lids closed. **Steam generators** intended to be filled by hand are operated without water. **Steam generators** intended to be filled by a manually operated tap or automatically are operated with the water supply turned off and the **steam generator** dry.*

19.3 Addition:

Any adjustable temperature or pressure control within the appliance that is preset for correct operation but is not locked in position is adjusted to its most unfavourable position.

19.4 Addition:

NOTE 101 The main contacts of the contactor intended for switching on and off the heating element(s) in normal use are locked in the "ON" position. However, if two contactors operate independently of each other or if one contactor operates two independent sets of main contacts, these contacts are locked in the "ON" position in turn.

19.7 Modification:

Instead of the text preceding the table, the following applies.

*Moving parts of motor and fan assemblies are locked and the appliance is operated, starting from cold, under **normal operation**, at **rated voltage** or at the upper limit of the **rated voltage range**, as long as is necessary to establish steady conditions or, if a timer is provided, for the maximum period allowed by the timer.*

NOTE 101 If an appliance has more than one motor, the test is made for each motor separately.

NOTE 102 Alternative tests for protected motor units are given in Annex D.

Appliances incorporating motors having capacitors in the circuit of an auxiliary winding are operated with the rotor locked, the capacitors being open-circuited one at a time. The test is repeated with the capacitors short-circuited one at a time unless they comply with IEC 60252.

NOTE 103 This test is made with the rotor locked because certain motors with capacitors may or may not start so that variable results could be obtained.

During the test, the temperature of the windings shall not exceed the values shown in Table 8.

19.8 Addition:

Compliance is checked as for 19.7.

20 Stability and mechanical hazards

This clause of Part 1 is applicable except as follows.

20.1 Addition:

Covers, lids and accessories are placed in the most unfavourable positions.

Shelf trolleys are subjected to the following additional test.

The trolley, loaded in accordance with the manufacturer's instructions, is placed on a plane that is inclined at 10° to the horizontal. The braking mechanism is applied and the trolley shall not move by more than 100 mm.

NOTE 101 Any spillage of liquid is ignored.

20.2 Addition:

Add the following after the first requirement paragraph.

This applies also to operating means, i.e. handles or wheels.

Addition:

Moving parts of motor and fan assemblies of appliances where the fan motor can be operated when the **cooking compartment** door is open shall be arranged or enclosed so that adequate protection against injury is provided during normal use including cleaning.

It shall not be possible to touch the moving parts of the fan.

Compliance is checked by test probe 41 of IEC 61032 applied with a force of 10 N.

20.101 Appliances other than appliances intended to be fixed to the floor shall have adequate stability when the doors are open and subjected to a load.

Compliance is checked by the following tests.

Doors having a horizontal hinge at their lower edge are opened and a weight is gently placed on the surface of the door so that its centre of gravity is vertically over the geometric centre of the door. The contact area of the weight is such as will cause no damage to the door, and its mass is:

± *for appliances normally used on a floor:*

- *for **cooking compartment** doors: 23 kg or such higher value as, according to the manufacturer's cooking instructions, can be placed in the **cooking compartment**;*
- *for other doors: 7 kg;*

– *for appliances normally used on a table or similar support and provided with doors having a horizontal hinge at their lower edge and a projection of at least 225 mm from the hinge to the opening edge:*

- *7 kg or such higher value as, according to the manufacturer's cooking instructions, can be placed in the **cooking compartment**.*

*Doors, except those where the lower level of the **cooking compartment** is above a normal working surface, having a vertical hinge are opened through an angle of 90°, and a downward force of 140 N is then applied gently to the top of the door at the extremity furthest from the hinge.*

This test is repeated with the door opened as far as possible, but not through an angle of more than 180°.

During these tests, the appliance shall not tilt.

NOTE For the weight, a sandbag may be used.

For appliances provided with more than one door, the tests are made on each door separately.

For non-rectangular doors, the force is applied to that point furthest from the hinge where such a force might be exerted in normal use.

Damage and deformation of doors and hinges are neglected.

20.102 Guards fitted over motors and fan assemblies in order to comply with the requirements of 20.2 shall not be **detachable parts** unless

- a suitable interlock assembly is fitted that prevents the motor or fan from operating when the guard is removed, or
- the guard forms an integral part of the oven lining.

Compliance is checked by inspection and manual test.

21 Mechanical strength

This clause of Part 1 is applicable except as follows.

21.101 Shelves shall be constructed so that they do not fall away from the shelf supports either when inside the **cooking compartment** or extended out by 50 % of their depth. They shall not tip when extended out by 50 %.

Compliance is checked by the following test.

*Load a cake tin or similar container, having an area of 75 % of that of the shelf, with evenly distributed weights of mass totalling 40 kg for each square metre of tin area. Insert a shelf, with the loaded tin centrally disposed, on the supports provided in the **cooking compartment**. Move the shelf as far as possible to the left, leave for 1 min and then withdraw it. Re-insert the shelf and move it to the extreme right, leave for 1 min and again withdraw it.*

During this test the shelf shall not fall away from the support.

The test is then repeated with the shelf extended out by 50 % of its depth. Then apply an additional force of 10 N vertically downward on the centre of the exposed front edge of the shelf. During this test the shelf shall not tip.

NOTE A small angle of deflection is allowed.

22 Construction


This clause of Part 1 is applicable except as follows.

22.7 Replacement:

Steam cookers and **steam generators** that operate at a pressure in excess of atmospheric pressure (over-pressure) shall incorporate a suitable pressure relief device that prevents excessive pressure.

*Compliance is checked by operating the appliance at **rated power** input with the pressure controls rendered inoperative.*

The pressure relief device shall operate during this test so as to prevent the internal pressure exceeding the **rated pressure** by 20 %.

22.101  For three-phase appliances, **thermal cut-outs** protecting circuits with heating elements, and those for motors of which the unexpected starting may cause a hazard, shall be of the non-self-resetting and trip-free type, and shall provide **all-pole disconnection** from related supply circuits.


For single-phase appliances and for single-phase heating elements and/or motors connected between one phase and neutral or between phase and phase, **thermal cut-outs** protecting circuits with heating elements, and those for motors of which the unexpected starting may cause a hazard, shall be of the non-self-resetting and trip-free type, and shall provide at least one-pole disconnection.

If the **non-self-resetting thermal cut-out** is only accessible after removing parts with the aid of a **tool**, the trip-free type is not required.

NOTE 1 **Thermal cut-outs** of the trip-free type have an automatic action, with a reset actuating member, so constructed that the automatic action is independent of manipulation or position of the reset mechanism.

Thermal cut-outs of the bulb and capillary type that operate during the tests of Clause 19 shall be such that rupture of the capillary tube shall not impair compliance with the requirements of 19.13.

Compliance is checked by inspection, by manual test and by rupturing the capillary tube.

NOTE 2 Care must be taken to ensure that the rupture does not seal the capillary tube. 

22.102 Lights, switches or push-buttons shall only be coloured red for the indication of danger, alarm or similar situations.

Compliance is checked by inspection.

22.103 The operating pressure of **steam cookers** and **steam generators** shall not exceed the **rated pressure**.

Compliance is checked during the test of Clause 11.

22.104 It shall not be possible to open the **cooking compartment** door of a pressurized appliance until the pressure has been reduced to approximately atmospheric pressure.

Compliance is checked by inspection and by manual test.

22.105 For appliances designed to operate at atmospheric pressure, the steam vents shall be protected either by design, location, or other means against blockage.

Compliance is checked by inspection.

22.106 Means provided to allow drainage of water from **steam generators** and **cooking compartments** shall discharge the water in such a manner that electrical insulation is not affected.

Compliance is checked by inspection and by manual test.

22.107 The level to which manually filled water containers have to be filled shall be so located as to be readily visible when filling.

Compliance is checked by inspection.

22.108 Appliances shall be provided with a means whereby exhausted steam is condensed automatically before it is released to the drain.

Compliance is checked by inspection.

22.109 Pressurized appliances shall incorporate a vacuum release valve to prevent a partial vacuum forming unless it is designed for vacuum operation.

Compliance is checked by inspection.

22.110 Pressurized appliances shall be capable of withstanding the **rated pressure**.

*Compliance is checked by subjecting the pressurized parts for 30 min to a hydrostatic pressure equal to 1,5 times the **rated pressure**. All outlets are sealed and any pressure relief devices rendered inoperative. Means other than water may be used to create the hydrostatic pressure.*

During the test the pressurized parts shall show no signs of leaks or permanent deformation, nor shall they burst.

22.111 Interlock devices fitted on **cooking compartment** doors and guards in order to comply with the requirements of 20.2 and 20.101 shall be so arranged that

- the fan motor is disconnected from the supply when the **cooking compartment** door is opened to give a gap not greater than 50 mm;
- it shall not be possible to override any interlock using test probe B of IEC 61032.

Compliance is checked by inspection and by measurement, and by applying the test probe B in any position with the cooking compartment door open.

22.112 **Portable appliances** shall not have openings on the underside that would allow small items to penetrate and touch **live parts**.

*Compliance is checked by inspection and by measuring the distance between the supporting surface and **live parts** through openings. This distance shall be at least 6 mm. However, if the appliance is fitted with legs, this distance is increased to 10 mm if the appliance is intended to stand on the table and to 20 mm if it is intended to stand on the floor.*

22.113 The pressure relief device shall be positioned or constructed so that its operation does not cause injury to persons or damage to surroundings. Its construction shall be such that it cannot be made inoperative or set to a higher relief pressure without the aid of a special tool.

Compliance is checked by inspection.

22.115 Drain cocks and other emptying devices for hot liquids shall be constructed so that they cannot be opened inadvertently. Moreover, it shall not be possible to withdraw drain plugs inadvertently.

Compliance is checked by inspection and by manual test.

NOTE For example, this requirement is met when the valve handle is such that, when released, it returns automatically to the closed position or is of the wheel type or is placed in a recess.

22.116 If the dimensions of a **cooking compartment** exceed 700 mm by 1 500 mm by 700 mm, it shall be possible to open the door of the compartment from the inside with a force not exceeding 70 N.

Compliance is checked by inspection and by measurement.

22.117 Appliances provided with a means whereby condensate is automatically discharged shall be constructed so that the discharge does not result in a hazard.

Compliance is checked by inspection.

23 Internal wiring

This clause of Part 1 is applicable except as follows.

23.3 Addition:

*When the capillary tube of the **thermostat** is liable to flexing in normal use the following applies:*

- ± where the capillary tube is fitted as part of the internal wiring, Part 1 applies;*
- ± where the capillary tube is separate, it is subjected to 1 000 flexings at a rate not exceeding 30 per min.*

NOTE 101 If, in any of the above cases, it is not possible to move the movable part of the appliance at the given rate, due for example to the mass of the part, the rate of flexing may be reduced.

After the test, the capillary tube shall show no sign of damage within the meaning of this standard and no damage impairing its further use.

However, if a rupture of the capillary tube renders the appliance inoperative (fail-safe), separate capillary tubes are not tested, and those fitted as part of the internal wiring are not inspected for compliance with the requirements.

Compliance in this instance is checked by rupturing the capillary tube.

NOTE 102 Care must be taken to ensure that the rupture does not seal the capillary tube.

24 Components

This clause of Part 1 is applicable.

25 Supply connection and external flexible cords

This clause of Part 1 is applicable except as follows.

25.1 Modification:

Appliances shall not be provided with an appliance inlet.

25.3 Addition:

Fixed appliances and appliances with a mass greater than 40 kg and not provided with rollers, castors or similar means shall be constructed so that the **supply cord** can be connected after the appliance has been installed in accordance with the manufacturer's instructions.

Terminals for permanent connection of cables to fixed wiring may also be suitable for the **type X attachment** of a **supply cord**. In this case, a cord anchorage complying with 25.16 shall be fitted to the appliance.

If the appliance is provided with a set of terminals allowing the connection of a flexible cord, they shall be suitable for the **type X attachment** of the cord.

In both cases the instructions shall give full particulars of the power **supply cord**.

The connection to the supply wires of **built-in appliances** may be made before the appliance is installed.

Compliance is checked by inspection.

25.7 Modification:

Instead of the types of **supply cords** specified, the following applies.

Supply cords shall be oil-resistant, sheathed flexible cable not lighter than ordinary polychloroprene or other equivalent synthetic elastomer-sheathed cord (code designation 60245-IEC-57).

26 Terminals for external conductors

This clause of Part 1 is applicable.

27 Provision for earthing

This clause of Part 1 is applicable except as follows.

27.2 Addition:

Stationary appliances shall be provided with a terminal for the connection of an external equipotential conductor. This terminal shall be in effective electrical contact with all fixed exposed metal parts of the appliance, and shall allow the connection of a conductor having a nominal cross-sectional area of up to 10 mm². It shall be located in a position convenient for the connection of the bonding conductor after installation of the appliance.

NOTE 101 Small fixed exposed metal parts, for example nameplates and the like, are not required to be in electrical contact with the terminal.

28 Screws and connections

This clause of Part 1 is applicable.

29 Clearances, creepage distances and solid insulation

This clause of Part 1 is applicable except as follows.

29.2 Addition:

The microenvironment is pollution degree 3 and the insulation shall have a comparative tracking index (CTI) not less than 250, unless the insulation is enclosed or located so that it is unlikely to be exposed to pollution during normal use of the appliance.

30 Resistance to heat and fire

This clause of Part 1 is applicable except as follows.

30.2.1 Modification:

The glow-wire test is carried out at 650 °C.

30.2.2 Not applicable

30.101 *Filters, if any, of non-metallic materials intended for the absorption of grease are subjected to the burning test specified in ISO 9772 for category HBF material, if relevant, or shall be classified at least HB40 according to IEC 60695-11-10, except that the thickness of the specimen is the same as that in the appliance.*

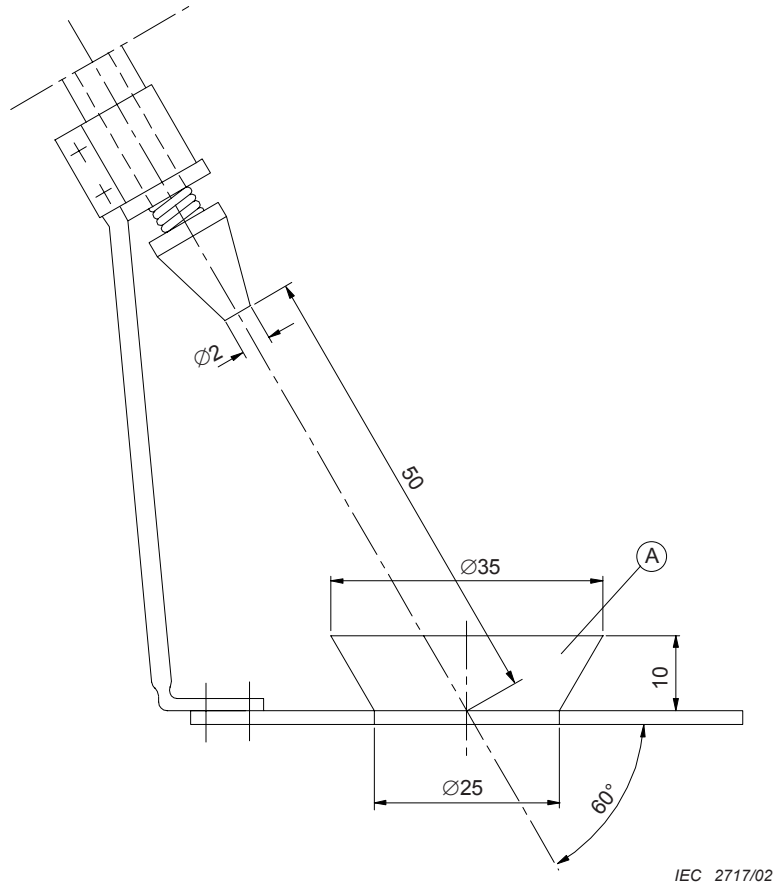
NOTE It may be necessary to support the specimen.

31 Resistance to rusting

This clause of Part 1 is applicable.

32 Radiation, toxicity and similar hazards

This clause of Part 1 is applicable.



Dimensions in millimetres

Key

A Bowl

Figure 101 ± Splash apparatus

A1



Minimum height: 30 mm

Form and colours in accordance with ISO 3864-1

Figure 102 ± Warning sign against danger of scalding **A1**

Annexes

The annexes of Part 1 are applicable except as follows.

Annex N (normative)

Proof tracking test

6.3 *Addition:*

Add 250 V to the list of specified voltages.

Annex ZE
(normative)

Specific additional requirements for appliances and machines with power driven moving parts and intended for commercial use

The following modifications to this standard are applicable for appliances and machines with power driven moving parts and intended for commercial use.

NOTE The additional paragraphs to Annex ZE of Part 1 are numbered starting with ZE.101.

Introduction

Replacement:

For the verification of compliance of appliances or machines intended for commercial use with the Essential Health and Safety Requirements (EHSR) of the Directive 2006/42/EC, the requirements in this Annex ZE shall apply.

1 Scope

Add the following:

This annex deals with additional requirements concerning appliances and machines intended to be used by experts or trained users for example in restaurants, canteens, hospitals and commercial enterprises such as bakeries, butcheries, etc and appliances and machines which are declared to be for commercial use by lay persons.

Products covered by this standard do not create a noise hazard, therefore no specific provisions concerning noise are given.

2 Normative references

Add the following normative reference

EN ISO 14159:2008, Safety of machinery - Hygiene requirements for the design of machinery (ISO 14159:2002)

3 Definitions

This clause of Annex ZE of Part 1 is applicable.

4 General requirement


This clause of Annex ZE of Part 1 is applicable.

7 Marking and instructions

This clause of Annex ZE of Part 1 is applicable except as follows:

7.12 Modification

Add following dashed items:

- the intended use of the appliance as covered by the scope of this standard;
- instructions regarding user maintenance and operation of the appliance and, if necessary, instructions for the training of operators;
- instructions designed to enable adjustment and maintenance to be carried out safely, including the protective measures that should be taken during these operations;
- the conditions under which the appliance is stable during use, dismantling when out of use, testing or foreseeable breakdowns;
- the operating method to be followed in the event of accident or breakdown to prevent unsafe actions;
- information regarding the use of personal protection equipment in case of spreading hot food stuff;
- warning concerning possible slippery floor adjacent to the appliance. 

C11 7.12.Z1 *Replace the sixth dashed item by the following:*

- on airborne noise emissions, the A-weighted sound pressure level is below 70 dB(A).

Add the following subclause:

7.12.ZE.101 The instructions shall include the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance. At least, it shall include the substance of the following.

WARNING: Appliances must be disconnected from their power supply during cleaning or maintenance and when replacing parts.

21 Mechanical strength

This clause of Annex ZE of Part 1 is applicable.

22 Construction

This clause of Annex ZE of Part 1 is applicable except as follows:

22.ZE.1

This clause of Annex ZE of Part 1 is not applicable.

22.ZE.5

Replace the second paragraph of the test specification by:

*The **guard** is opened at the extent needed to cause the interlocking to operate and is then closed. This operation is carried out for 5 000 cycles at a rate of 5 cycles per min.*

Add the following new subclauses:

22.ZE.101

Controls shall be

- clearly visible and identifiable,
- positioned within easy reach of the operator's hand,
- secured against accidental actuation, if their actuation could result in a hazard.

Compliance is checked by inspection and by manual test if necessary.

22.ZE.102

Appliances for permanent connected water supply shall withstand an allowable inlet water pressure of at least 600 kPa.

Compliance is checked as follows:

The appliance is subjected to a static pressure equal to twice the allowable inlet water pressure up to at least 1 200 kPa (12 bar), for a period of 5 min.

During the test, there shall be no leakage from any part of the appliance, including the inlet water hose.

22.ZE.103 Appliances shall comply with the hygiene requirements.

Compliance is checked by inspection and by the requirements of EN ISO 14159.

22.ZE.104 Appliances shall meet ergonomic principles.

Compliance is checked by inspection


NOTE Guidance may be found in EN 614-1 and EN 614-2. **C11**

Annex ZZ
(informative)

Coverage of Essential Requirements of EU Directives

This European Standard has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association and within its scope the standard covers all relevant essential requirements as given in Annex I of the EU Directive 2006/42/EC.

Compliance with this standard, including the requirements of Annex ZE, provides one means of conformity with the specified essential requirements of the Directive concerned.


WARNING: Other requirements and other EU Directives may be applicable to the products falling within the scope of this Standard. 

Bibliography

The bibliography of Part 1 is applicable except as follows.

Addition:

EN 614-1:2006 + A1:2009, *Safety of machinery – Ergonomic design principles – Part 1: Terminology and general principles*

EN 614-2:2000 + A1:2008, *Safety of machinery – Ergonomic design principles – Part 2: Interactions between the design of machinery and work tasks* 

IEC 60335-2-90, *Household and similar electrical appliances – Safety – Part 2-90: Particular requirements for commercial microwave ovens*

ISO 3864-1, *Graphical symbols – Safety colours and safety signs – Part 1: Design principles for safety signs in workplaces and public areas*

ISO 13732-1, *Ergonomics of the thermal environment – Methods for the assessment of human responses to contact with surfaces – Part 1: Hot surfaces* 

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services. It presents the UK view on standards in Europe and at the international level.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

Revisions

British Standards and PASs are periodically updated by amendment or revision. Users of British Standards and PASs should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using British Standards would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Similar for PASs, please notify BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers BSI Subscribing Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of British Standards and PASs.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001

Email: plus@bsigroup.com

Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website www.bsigroup.com/shop. In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

Email: orders@bsigroup.com

In response to orders for international standards, BSI will supply the British Standard implementation of the relevant international standard, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.

Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005

Email: knowledgecentre@bsigroup.com

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: membership@bsigroup.com

Information regarding online access to British Standards and PASs via British Standards Online can be found at

www.bsigroup.com/BSOL

Further information about British Standards is available on the BSI website at **www.bsigroup.com/standards**

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Department.

Tel: +44 (0)20 8996 7070

Email: copyright@bsigroup.com

BSI

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001

Fax +44 (0)20 8996 7001

www.bsigroup.com/standards