

BS EN 61255:2014



BSI Standards Publication

# Household electric heating pads — Methods for measuring performance

**bsi.**

...making excellence a habit.™

## National foreword

This British Standard is the UK implementation of EN 61255:2014. It is identical to IEC 61255:2014. It supersedes BS EN 61255:1995 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee CPL/59, Performance of household electrical appliances.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014.

Published by BSI Standards Limited 2014

ISBN 978 0 580 83328 1

ICS 97.100.10

## **Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2014.

## **Amendments/corrigenda issued since publication**

<b>Date</b>	<b>Text affected</b>
-------------	----------------------

---

EUROPEAN STANDARD

**EN 61255**

NORME EUROPÉENNE

EUROPÄISCHE NORM

September 2014

ICS 97.100.10

Supersedes EN 61255:1994

English Version

## Household electric heating pads - Methods for measuring performance (IEC 61255:2014)

Coussins chauffants électriques pour usage domestique -  
Méthodes de mesure des performances  
(CEI 61255:2014)

Elektrische Haushalt-Heizdecken - Prüfverfahren zur  
Bestimmung der Gebrauchseigenschaften  
(IEC 61255:2014)

This European Standard was approved by CENELEC on 2014-08-14. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels**

## Foreword

The text of document 59C/182/FDIS, future edition 2 of IEC 61255, prepared by SC 59C "Heating appliances" of IEC/TC 59 "Performance of household and similar electrical appliances" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61255:2014.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2015-05-14
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2017-08-14

This document supersedes EN 61255:1994.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

## Endorsement notice

The text of the International Standard IEC 61255:2014 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60335-2-17	NOTE	Harmonized as EN 60335-2-17.
ISO 3758	NOTE	Harmonized as EN ISO 3758.

## Annex ZA (normative)

### Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: [www.cenelec.eu](http://www.cenelec.eu).

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 62301 (mod)	2011	Household electrical appliances - Measurement of standby power	EN 50564	2011
ISO 2439	-	Flexible cellular polymeric materials - Determination of hardness (indentation technique)	EN ISO 2439	-

## CONTENTS

1	Scope .....	5
2	Normative references .....	5
3	Terms and definitions .....	5
4	Classification of heating pads .....	6
4.1	General.....	6
4.2	Means of temperature regulation.....	6
4.3	Type of supply .....	6
4.4	Application .....	6
4.5	Method of cleaning.....	6
4.6	Period of use .....	6
5	List of measurements .....	6
6	General conditions for measurements.....	7
7	Dimensions, mass and textile composition.....	7
7.1	Dimensions .....	7
7.2	Mass.....	8
7.3	Textile composition .....	8
8	Evenness of temperature.....	8
9	Heating-up time and energy consumption .....	9
10	Cyclic variation .....	10
11	Effect of laundering on dimensions .....	10
	Bibliography.....	11
	Figure 1 – Heated area showing the layout of the plates .....	8
	Figure 2 – Heated area showing the layout of the disks .....	9

# HOUSEHOLD ELECTRIC HEATING PADS – METHODS FOR MEASURING PERFORMANCE

## 1 Scope

This International Standard applies to electric **heating pads** for household use.

This International Standard defines the main performance characteristics of electric **heating pads** and specifies methods for measuring these characteristics, for the information of users.

This International Standard does not specify values for performance characteristics.

NOTE This International Standard does not deal with safety requirements that are covered by IEC 60335-2-17.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62301:2011, *Household electrical appliances – Measurement of standby power*

ISO 2439, *Polymeric materials, cellular flexible – Determination of hardness (indentation technique)*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1

#### **heating pad**

appliance comprising a **flexible part** having a **heated area** not exceeding 0,3 m<sup>2</sup> on each face and which is intended to heat part of the human body

Note 1 to entry: If the **pad** is constructed in a cylindrical or similar form, the limit for **heated area** is 0,6 m<sup>2</sup>.

### 3.2

#### **flexible part**

all layers of material forming the permanent enclosure of the appliance together with the heating element, thermostats and all other current-carrying parts contained within it

Note 1 to entry: The **flexible part** may be inside a detachable cover.

### 3.3

#### **heated area**

area of the **flexible part** enclosed within the outer perimeter of the **heating element** or **electro-conductive textile**

Note 1 to entry: The **heated area** includes a margin outside the perimeter that has a width equal to 0,5 times the average distance between adjacent runs of the **heating element**.

Note 2 to entry: The **heated area** includes the return length of the **heating element** if the average distance between this part and the adjacent **heating element** does not exceed the average distance between adjacent runs of the **heating element**.

Note 3 to entry: If the **heating pad** has two separate **heated areas**, the surface between the two areas is considered to be part of the **heated areas**, if at any place the distance between the two **heating elements** does not exceed 1,5 times the average distance between adjacent runs of the **heating element**.

## 4 Classification of heating pads

### 4.1 General

The classifications of the appliance are stated.

### 4.2 Means of temperature regulation

**Heating pads** are classified according to the means of temperature regulation:

- **heating pad** with a control having continuously variable settings;
- **heating pad** with a control having step settings.

### 4.3 Type of supply

**Heating pads** are classified according to the type of supply:

- **heating pad** for direct connection to the supply mains;
- extra low voltage **heating pad**.

NOTE An extra low voltage **heating pad** has a rated voltage not exceeding 24 V.

### 4.4 Application

**Heating pads** are classified according to their application:

- **heating pad** for dry application;
- **heating pad** for moist application including cosmetics.

### 4.5 Method of cleaning

**Heating pads** are classified according to the method of cleaning:

- washable by hand
- machine washable
- not washable

### 4.6 Period of use

**Heating pads** are classified according to the period of use:

- **heating pads** having a time-based operation
- **heating pads** for continuous use

## 5 List of measurements

Performance is determined by means of the following measurements:

- dimensions mass and textile composition (Clause 7);
- evenness of temperature (Clause 8);
- heating-up time and energy consumption (Clause 9);
- cyclic variation (Clause 10);
- effect of laundering (Clause 11).



## 6 General conditions for measurements

*Unless otherwise specified, measurements are made under the following conditions:*

a) Test room:

*The tests are carried out in a draught-free room in which the ambient temperature is maintained at  $20\text{ °C} \pm 5\text{ °C}$ .*

b) Supply voltage:

The supply voltage is maintained at the rated voltage  $\pm 1\%$ . When the **heating pad** is marked with a rated voltage range, the test report shall state the voltage used for the test.

NOTE 1 If the results obtained by testing the **heating pad** at rated voltage are considered to be misleading due to the national supply voltage, the **heating pad** can also be tested at a voltage corresponding to the nominal voltage of the national supply system.

c) Arrangement of the **heating pad**:

*The **flexible part** with any detachable cover fitted placed between sheets of thermal insulation, the size of which is such that the edges extend at least 100 mm beyond the out-line of the **heated area**.*

*The thermal insulation is made of open-cell polyether having*

- cell count 18 + 2 per cm;
- specific mass  $30\text{ kg/m}^3 + 10\%$ ;
- hardness between 120 N and 170 N at 40 % impression measured according to ISO 2439.

*The thermal insulation is supported over its entire area by a piece of plywood 20 mm thick, situated not less than 300 mm above the floor.*

*The thickness of the thermal insulation under the **heating pad** is approximately 72 mm and over the **heating pad** approximately 36 mm.*

NOTE 2 The specification of the thermal insulation is taken from IEC 60335-2-17.

## 7 Dimensions, mass and textile composition

### 7.1 Dimensions

#### 7.1.1 The areas of the **flexible part** and the **heated area** are determined.

*The **heating pad** is spread out without tension on a flat surface and the length and width are measured at five evenly distributed places. The average values of the area of the **flexible part** and the **heated area** are calculated.*

The areas are stated in squared metres ( $\text{m}^2$ ).

If the pad is not rectangular, its shape is stated.

#### 7.1.2 The lengths of flexible cords are determined.

*The measurements are made, as applicable, between*

- the cord-entry of the **flexible part** and the control or the transformer;
- the control or the transformer and the plug.

The lengths are stated in metres (m), rounded down to the nearest 0,05 m.

## 7.2 Mass

The mass of the **heating pad** and its cover, if any, is determined.

The mass of the **heating pad** and the cover, if any, are stated separately and are measured in grams (g), rounded up to the nearest 10 g.

## 7.3 Textile composition

The textile composition of the external surface of the **heating pad** and its cover, if any, is stated.


## 8 Evenness of temperature

The evenness of temperature of the **heated area** is determined.

*The temperature rise of the surface of the **flexible part** is measured by means of thermocouples attached to the centre of copper plates having dimensions of 65 mm × 65 mm × 0,5 mm.*

*The plates are placed over the flexible part as shown in Figure 1 so that as many plates as possible cover the surface.*


*If the length of the shortest side of the **heated area** is less than 100 mm, the temperature rise is measured instead by thermocouples attached to copper disks having a diameter of 15 mm and a thickness of 1,0 mm. The distance between the centres of adjacent disks is 25 mm. An example of layout is shown in Figure 2.*

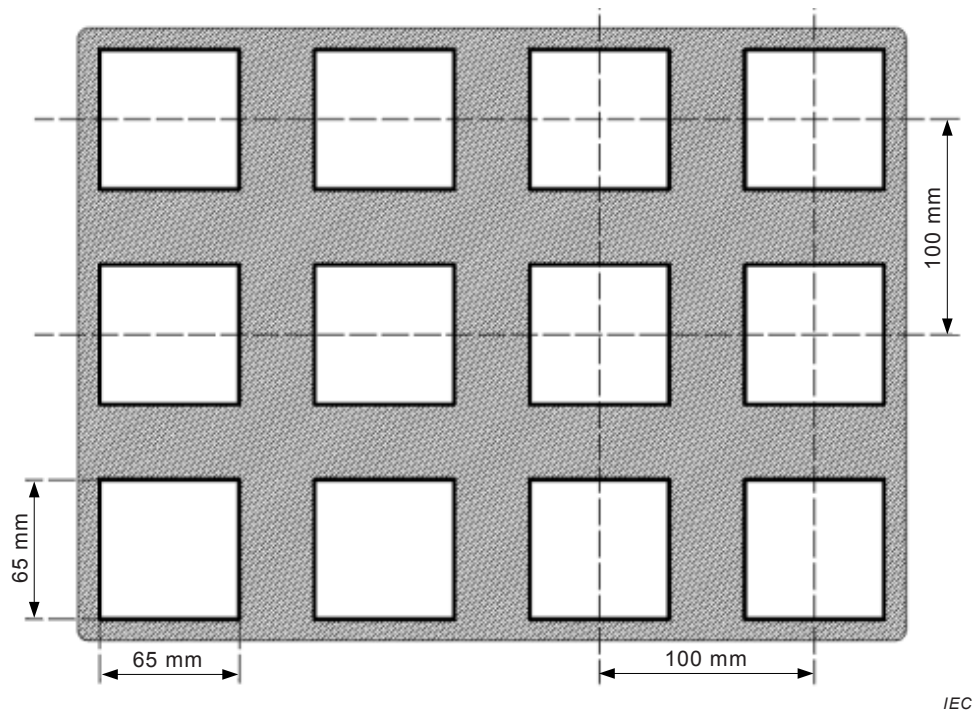

IEC

No part of any plate is to project outside of the **heated area**.

**Figure 1 – Heated area showing the layout of the plates**

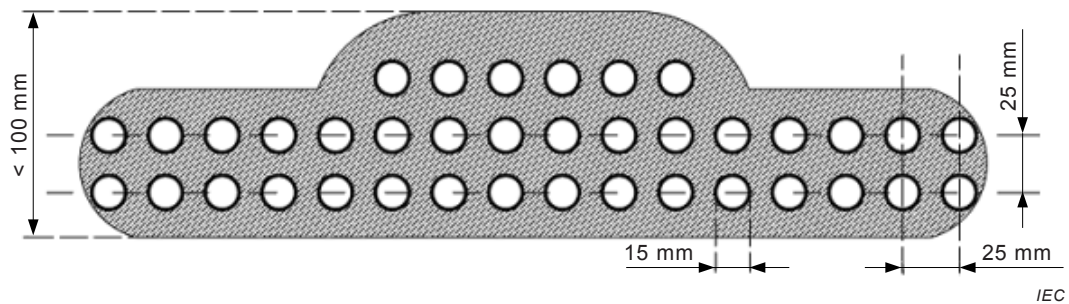

No part of any plate is to project outside of the **heated area**.

**Figure 2 – Heated area showing the layout of the disks**

*The test is carried out with the control adjusted to the maximum setting and the temperature rises are measured when steady conditions are established or at the end of a cycle of operation.*

*The average temperature rise is calculated from all the measurements. The difference between the maximum and minimum temperature rises is also calculated.*

NOTE If there is more than one **heated area**, the calculations are made for each **heated area** separately.

*The uniformity factor is calculated, being the percentage of the **heated area** which is within  $\pm 2\text{ K}$  of the average temperature rise.*

*The evenness of temperature is expressed as the difference between the maximum and minimum temperature rises, rounded to the nearest 1 K, and the uniformity factor, rounded to the nearest 1 %.*

## 9 Heating-up time and energy consumption

The time taken for the temperature rise of a representative measuring point to rise by 20 K during the test of Clause 8 is stated in minutes (min), rounded to the nearest 1 min, as the heating-up time.

*The ambient temperature is maintained at  $20^{\circ}\text{C} \pm 2^{\circ}\text{C}$  and the **heating pad** is conditioned for at least 24 h at this temperature before starting the test.*

*The temperature rise is measured by means of a thermocouple attached to the centre of a copper plate having dimensions of  $65\text{ mm} \times 65\text{ mm} \times 0,5\text{ mm}$ , which is placed in the centre of the **heated area**.*

*The control is adjusted to the maximum setting and the **heating pad** is operated. The time taken for the temperature of the measuring point to obtain a temperature rise of 20 K is measured. The energy consumption during the heating-up time is determined as well as the energy consumption during a period of operation.*

*The operation is continued and the energy consumption is measured. The test is terminated for **heating pads** having a time-based operation when it switches off. The energy consumed for **heating pads** for continuous use is measured after 90 min of operation and between the second and third hour of operation.*

The heating-up time is stated, rounded to the nearest minute. The energy consumption during the heating-up time is stated in Wh, rounded to one decimal place.

The total energy consumed over one cycle of operation by **heating pads** having a time-based operation is stated. The energy consumption of **heating pads** for continuous operation during the first 90 min of operation is stated. It is stated in Wh rounded to one decimal place.

The energy consumption between the second and third hours of operation of **heating pads** for continuous operation is stated in Wh/h rounded to one decimal place.

The power input when the appliance is in the standby mode is measured in accordance with Clause 5 of IEC 62301:2011.

The energy consumption during the heating-up time and for the complete cycle of operation is stated in Wh, rounded to the nearest Wh.

The standby power input is stated, if applicable, in accordance with Clause 6 of IEC 62301:2011.

## 10 Cyclic variation

The maximum difference in temperature during one cycle of the measuring point closest to the centre of the **heating pad**, as specified in Clause 8, is stated in Kelvin (K), rounded to the nearest 1 K. This is specified as the cyclic variation.

## 11 Effect of laundering on dimensions

The effect of laundering on dimensions is determined for washable **heating pads**.

The **heating pad** or its detachable cover is laundered three times in accordance with the manufacturer's instructions. The dimensions are then measured again in accordance with 7.1.1.

The percentage shrinkage  $S$  is calculated from the formula:

$$S = \frac{A_1 - A_2}{A_1} \times 100 \%$$

where

$A_1$  is the area of the **flexible part** or detachable cover;

$A_2$  is the area of the **flexible part** or detachable cover after laundering.

The shrinkage is stated rounded to the nearest 1 %.

NOTE If the result is negative, it is stated that the **flexible part** or detachable cover has stretched instead.

If the manufacturer recommends alternative cleaning methods, the effect of each method is determined on separate appliances.

## Bibliography

IEC 60335-2-17, *Household and similar electrical appliances – Safety – Part 2-17: Particular requirements for blankets, pads, clothing and similar flexible heating appliances*

ISO 3758, *Textiles – Care labelling code using symbols*

---





# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™