

Electromechanical all-or-nothing relays —

**Part 53: Blank detail specification —
Electromechanical all-or-nothing
telecom relays of assessed quality —
Two change-over contacts,
14 mm x 9 mm base**

The European Standard EN 61811-53:2002 has the status of a
British Standard

ICS 29.120.70

National foreword

This British Standard is the official English language version of EN 61811-53:2002. It is identical with IEC 61811-53:2002. It supersedes BS EN 116503:1996 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee EPL/94, General purpose relays and reed contact units, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

This British Standard, having been prepared under the direction of the Electrotechnical Sector Policy and Strategy Committee, was published under the authority of the Standards Policy and Strategy Committee on 19 September 2002

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 31 and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

© BSI 19 September 2002

ISBN 0 580 40374 2

EUROPEAN STANDARD

EN 61811-53

NORME EUROPÉENNE

EUROPÄISCHE NORM

May 2002

ICS 29.120.70

Supersedes EN 116503:1992 + A1:1995

English version

Electromechanical all-or-nothing relays
Part 53: Blank detail specification -
Electromechanical all-or-nothing telecom relays of assessed quality -
Two change-over contacts, 14 mm x 9 mm base
(IEC 61811-53:2002)

Relais électromécaniques de tout-ou-rien
Partie 53: Spécification particulière cadre -
Relais électromécaniques de tout-ou-rien
télécom soumis au régime
d'assurance de la qualité -
Deux contacts à deux directions,
surface d'encombrement de 14 mm x 9 mm
(CEI 61811-53:2002)

Elektromechanische Schaltrelais
Teil 53: Vordruck für Bauartspezifikation -
Elektromechanische Telekom-Relais
mit bewerteter Qualität -
2 Wechsler, 14 mm x 9 mm Grundfläche
(IEC 61811-53:2002)

This European Standard was approved by CENELEC on 2002-05-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of document 94/147/FDIS, future edition 2 of IEC 61811-53, prepared by IEC TC 94, All-or-nothing electrical relays, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 61811-53 on 2002-05-01.

This European Standard supersedes EN 116503:1992 + A1:1995.

The following dates were fixed:

- latest date by which the EN has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2003-02-01
- latest date by which the national standards conflicting with the EN have to be withdrawn (dow) 2005-05-01

Annexes designated "normative" are part of the body of the standard. In this standard, annex ZA is normative. Annex ZA has been added by CENELEC.

Endorsement notice

The text of the International Standard IEC 61811-53:2002 was approved by CENELEC as a European Standard without any modification.

CONTENTS

1	General	4
1.1	Scope.....	4
1.2	Normative references	4
1.3	Front page of the detail specification	6
2	Characteristic values of the relay.....	8
2.1	General data	8
2.2	Construction of IECQ type designation (ordering information).....	8
2.3	Coil data.....	9
2.4	Contact data.....	9
2.4.1	Electrical endurance and switching frequency.....	9
2.4.2	Static contact-circuit resistance	9
2.4.3	Mechanical endurance.....	9
2.4.4	Timing (without suppression device).....	10
2.5	Mounting	10
2.6	Environmental data	10
2.7	Package of relays for automatic handling (if applicable)	10
3	Qualification approval procedures	11
4	Quality conformance inspection	11
4.1	Formation of inspection lots.....	11
4.2	Intervals between tests.....	11
5	Marking and documentation.....	11
5.1	Marking of the relay.....	11
5.2	Marking of the package	12
5.3	Documentation	12
6	Annexes	12
7	Tests	12
7.1	Standard conditions for testing	12
7.2	Mounting of test specimens during the test.....	12
7.3	General conditions for testing.....	12
8	Ordering information.....	12
9	Relay reliability – Failure rate data (optional).....	12
	Table 1 – Dielectric test voltages	8
	Table 2 – Coil data	9
	Table 3 – Loads, contact-circuit resistance limits, switching cycles and frequencies for electrical endurance and overload tests.....	9
	Table 4 – Quality conformance inspection.....	13-26
	Table 5 – Qualification approval.....	27-29
	Table 6 – Industrial qualification	29
	Annex ZA (normative) Normative references to international publications with their corresponding European publications	30

ELECTROMECHANICAL ALL-OR-NOTHING RELAYS –

Part 53: Blank detail specification – Electromechanical all-or-nothing telecom relays of assessed quality – Two change-over contacts, 14 mm × 9 mm base

1 General

1.1 Scope

This part of IEC 61811 is a blank detail specification applicable to electromechanical all-or-nothing telecom relays of assessed quality. Relays according to this standard are provided for operation in telecommunication applications. However, as electromechanical all-or-nothing relays, they are also suitable for particular industrial and other applications.

This standard selects from IEC 61810-7 and other sources the appropriate methods of test to be used in detail specifications derived from this specification, and contains basic test schedules to be used in the preparation of such specifications in accordance with IEC 61811-1.

1.2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1:1988, *Environmental testing – Part 1: General and guidance*
Amendment 1 (1992)

IEC 60068-2-17:1994, *Environmental testing – Part 2: Tests: Test Q – Sealing*

IEC 60068-2-20:1979, *Environmental testing – Part 2: Tests: Test T – Soldering*
Amendment 2 (1987)

IEC 60068-2-47:1999, *Environmental testing – Part 2-47: Test methods – Mounting of components, equipment and other articles for vibration, impact and similar dynamic tests*

IEC 60255-14:1981, *Electrical relays – Part 14: Endurance test for electrical relay contacts – Preferred values for contact loads*

IEC 60695-2-2:1991, *Fire hazard testing – Part 2: Test methods – Section 2 – Needle-flame test*

IEC 61709:1996, *Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion*

IEC 61810-7:1997, *Electromechanical all-or-nothing relays – Part 7: Test and measurement procedures*

IEC 61811-1:1999, *Electromechanical non-specified time all-or-nothing relays of assessed quality – Part 1: Generic specification*

IEC 61811-50:2002, *Electromechanical all-or-nothing relays – Part 50: Sectional specification – Electromechanical all-or-nothing telecom relays of assessed quality*

QC 001002-2:1998, *Rules of Procedure of the IEC Quality Assessment System for Electronic Components (IECQ) – Part 2: Documentation*

QC 001002-3:1998, *Rules of Procedure of the IEC Quality Assessment System for Electronic Components (IECQ) – Part 3: Approval procedures*


QC 001005:1996, *Register of Firms, Products and Services approved under the IECQ System, including ISO 9000*

CECC 00802:1990, *Guidance document: CECC Standard Method for the Specification of Surface Mounting Components (SMDs) of Assessed Quality*

(National authorized institutions will complete this clause by making reference to any documents or specifications directly referred to in their national equivalent of this standard.)

1.3 Front page of the detail specification

The layout of the front page of the detail specification is as follows.

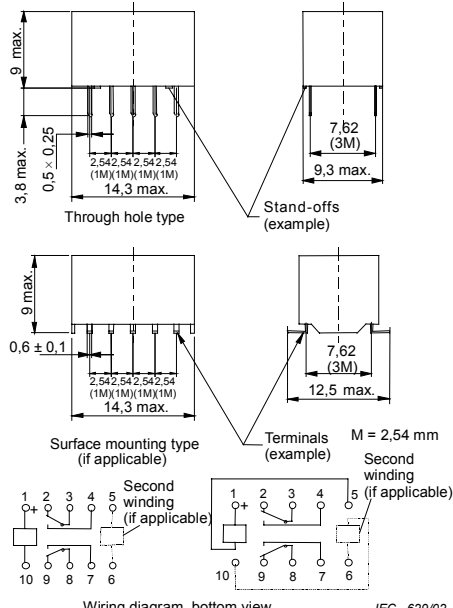(1)	QC xxxxxx Edition: 200X Page 1 of X	(2)
(3)	Electronic components of assessed quality in accordance with: IEC 61810-7:1997 IEC 61811-50:2002	(4)
Detail specification for electromechanical all-or-nothing telecom relays of assessed quality, dual-in-line, with 14 mm × 9 mm base, two change-over contacts		
Type: two change-over contacts		(5)
Construction: dual-in-line, with 14 mm × 9 mm base plastic sealed case, overall height of 9 mm max. relay properties RT III for conventional assembling techniques of printed circuit boards using mounting holes and soldering or for surface mounting technology (if applicable)		(6)
(7)	Outline drawing or wiring diagram Dimensions in millimetres  NOTE Drawings are examples; the maximum outer dimensions, the wiring diagram of one coil relay, the terminal arrangement and the same orientation of all rectangular terminals are mandatory.	(8)
Application: Relays according to this standard are provided for the operation in telecommunication applications. However, as printed circuit board relays, they are suitable also for control or switching functions in particular industrial and other applications.		(9)
Coil data Rated voltages:V d.c. Rated power:mW		(9)
Contact data Change-over break-before-make contacts Rated contact voltage: 110 V d.c. / 125 V a.c.* Rated contact current: 1,25 A max. Rated contact power: 30 W/50 VA* Limiting continuous current: 2 A max. * AC values mandatory only if stated in the detail specification.		(10)
Component climatic category according to IEC 60068-1: 25/70/21 Temperature range – operating ambient temperature: –25 °C to 70 °C – storage temperature: –40 °C to 85 °C		(11)
Information about manufacturers who have components qualified according to this detail specification is available in the current QC 001005.		

Key to front page

The numbers between brackets on the front page correspond to the following indications which should be given.

Identification of the detail specification

- (1) The name of the national standards organization under whose authority the detail specification is published and, if applicable, the organization from which the detail specification is available.
- (2) The IECQ symbol and the number allotted to the completed detail specification by the IECQ secretariat.
- (3) The number and the year of availability of the IEC standard concerning test and measurement procedures for electromechanical all-or-nothing relays and/or sectional specification; also national reference, if different.
- (4) If different from the IECQ number, the national number of the detail specification, date of issue and any further information required by the national system, together with any amendment numbers.

Identification of the relay

- (5) Type: monostable or bistable, non-polarized or polarized, two change-over contacts.
- (6) Construction: sizes, for example dual-in-line, base and overall height, type of relay, based upon environmental protection (RT III), mounting variants and other typical construction details.
- (7) An outline drawing with main dimensions which are of importance for interchangeability, and/or reference to the appropriate national or international document for outlines – see also note in box (7). Alternatively, this drawing may be given in an annex to the detail specification, but (7) should always contain an illustration of the general outer appearance of the component.

Location and dimensions of stand-offs (maximum relay height shall include stand-offs), position of terminal No. 1 relative to the outside shape, acceptable offset of the tip of a terminal relative to the nominal grid position, indication of the area on the top of the relay housing to enable automatic mounting using aspirators, suitable hole diameter for assembling on printed circuit board.

- (8) Typical field of applications.
- (9) Available rated coil voltages and rated power.
- (10) Available contact arrangements, defined special contact materials and contact voltage, current and power. The respective code digit for contact materials shall be listed in an annex, if applicable.
- (11) Component climatic category according to clause 8 and annex A of IEC 60068-1, and temperature range.

2 Characteristic values of the relay


2.1 General data

- Thermal resistance: max. ... K/W
- Contact application: CA 0, CA 1, CA 2 and CA 3
- Relay mass: max. ... g
- Finish of the terminals: presoldering; admissible non-presoldered part: max. 1 mm to the stand-offs' plane, if applicable
- Insulation resistance: 1 000 MΩ min. at 500 V d.c. initial value
- Dielectric strength: see table 1

Table 1 – Dielectric test voltages

	Dielectric test V a.c. min.	Impulse voltage test 10/700 μs and/or 1,2/50 μs V min.
Opened contact circuits	500	
Between adjacent contact circuits	500	
Coil to contact circuits	500	
Between separated windings (if applicable)		

2.2 Construction of IECQ type designation (ordering information)

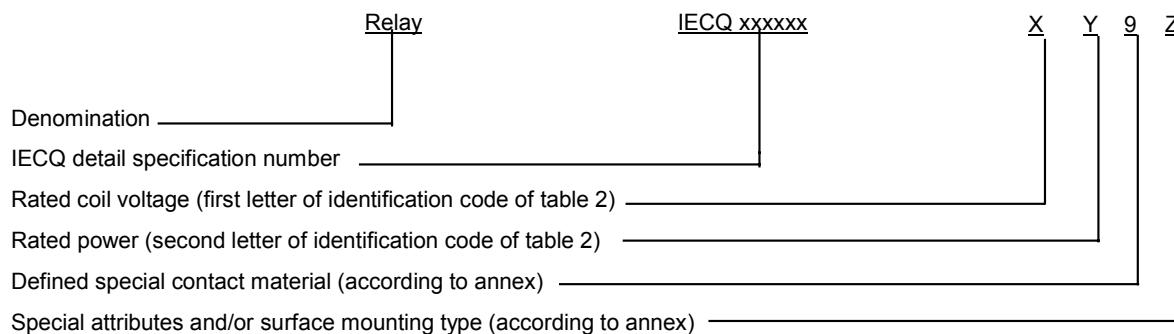

The coding of the monostable or bistable relay type shall be combined with the rated power of the coil, if applicable. The reference to two change-over contacts shall be given on the front page of the specification.

Use code 0 as the last digit if no special attributes apply. If one of the attributes in the example for a detail specification shall not be considered, the corresponding code number or letter shall be deleted; there shall be no special marks or open space for non-applicable attributes.

The manufacturer may use his own numbering system, provided that a conversion list with the IECQ type designations and the manufacturer's part numbers is given in an annex to the detail specification.

2.3 Coil data

Table 2 – Coil data

Identification code	Rated voltage V	Coil resistance at (23 ± 2) °C $\Omega \pm 10\%$	Must operate voltage V at coil temperature of			Maximum coil voltage V at	Must not release voltage V	Must release voltage V at coil temperature of			Rated power mW
			-25 °C	23 °C	70 °C			70 °C	23 °C	-25 °C	

2.4 Contact data

2.4.1 Electrical endurance and switching frequency

Contact failure: contact-circuit resistance of a closed contact higher than the value stated in 2.4.2, or resistance of an open contact circuit lower than 100 k Ω , both more than once per 10⁵ cycles or for the minimum number of switching cycles stated, calculated for each single contact.

Example: at a given endurance of 10⁶ operations, the total number of faults, as described above, shall not exceed 10.

Table 3 – Loads, contact-circuit resistance limits, switching cycles and frequencies for electrical endurance and overload tests

Loads	Contact-circuit resistance Ω max.	Number of switching cycles min.	Switching frequency cycles per s max.
Contact application 0	1	700 000	12,5
Resistive – max. contact voltage/max. power	1	100 000	3
Resistive – max. contact current/max. power	1	100 000	3
DC open-ended cable	1	1 000 000	12,5
Particular application-related, if required			
Overload	1 *	100	0,3

* Unless otherwise stated in the detail specification.

2.4.2 Static contact-circuit resistance

- 100 m Ω max. initial value at rated voltage;
- 10 m Ω max. difference of contact-circuit resistance at other coil voltages, (e.g. at must operate voltage for make contacts), initial value;
- 1 Ω max. during/after electrical endurance, mechanical endurance and environmental tests at rated voltage.

2.4.3 Mechanical endurance

10⁷ min. switching cycles.

2.4.4 Timing (without suppression device)

- Operate time: max. 5 ms
- Release time: max. 5 ms
- Bounce time when the contacts are closing: max. 5 ms
- Bounce time when the contacts are opening: max. 3 ms
- Transfer time on operation and release (last break contact opens before first make contact closes respectively last make contact opens before first break contact closes – each contact monitored): min. 0,1 ms

2.5 Mounting

The relay terminals are designed to be directly soldered onto the printed circuit board using conventional assembling techniques or for surface mounting technology (if applicable).

2.6 Environmental data

The relays shall withstand at least the following environmental stresses:

- shock, functional: 98,1 m/s² (10 g) half-sine acceleration, 11 ms duration;
- shock, survival: 294,3 m/s² (30 g) half-sine acceleration, 11 ms duration;
- vibration (sinusoidal): amplitude 0,75 mm or 98,1 m/s² (10 g), 10 Hz to 55 Hz;
- mechanical robustness of terminals
 - thrust: 1 N;
 - bending: 2 bends;
- soldering
 - if particular ageing is required, this shall be selected from procedure 1a, 1b, 2 or 3 of 4.2 of IEC 60068-2-20 and stated in the detail specification;
- Through-hole type:
 - solderability at 235 °C: 2 s;
 - resistance to soldering heat, terminal immersion time for 260 °C: 5 s or 10 s;
- surface mounting type:
 - class A1, CECC 00802, cl. 6.2 (i.e. 260 °C/5 s and 215 °C/40 s);
 - category 3, 6.2 of CECC 00802 (i.e. vapour phase soldering or infrared soldering, if the temperature stress is adequate);
- enclosure – leakage rate: max. 100 Pa cm³/s;
- resistance to cleaning solvents when rubbed with tissue paper
 - demineralized or distilled water at 55 °C: 5 min;
- fire hazard, needle flame: min. 10 s.

2.7 Package of relays for automatic handling (if applicable)

If stick magazines or tape and reel packaging for automatic handling (to facilitate automatic relay insertion) are used, their outline drawing (profile and length), storage capacity and possible marking shall be given in an annex.

3 Qualification approval procedures

- As stated in 3.1.4 a) of QC 001002-3, fixed sample.
- Sampling and test schedule are specified in table 5.
- The tests specified and their order are mandatory.
- Tests stated in table 6 are mandatory only if stated in the detail specification.

4 Quality conformance inspection

Quality conformance inspection contains the tests stated in table 4:

- groups A and B: lot-by-lot tests;
- group C: periodic tests.

Unless otherwise stated in this blank detail specification, all tests of table 4 are mandatory. Where a subgroup contains cumulative tests, the order of the tests is mandatory. Specimens subjected to tests denoted as destructive (D) shall not be released for delivery.

NOTE If a special level of AQL is required, the AQL value regarding subgroups A4, B1 and B2 in table 4 should be provided between the manufacturer and user of a relay.

4.1 Formation of inspection lots

According to 3.2.3 of QC 001002-3, the basis for determination of sample size for the quality conformance inspection is the relay quantity produced during one week.

4.2 Intervals between tests

- Subgroups A4, B1 and B2: minimum once a week.
- Subgroups C1 and C2: at least once a year.
- Subgroups C4 to C6: at least once every two years.

5 Marking and documentation

Relays and their package shall be marked as follows.

5.1 Marking of the relay

The marking shall be durable and easily legible, the following items shall be present:

- a) manufacturer's name, logo or trade mark;
- b) relay type and variant code;
- c) coded date of manufacture, in terms of year/week according to 1.5.3 of IEC 61811-50;
- d) IECQ in letters or IECQ mark of conformity;
- e) IECQ type designation (ordering information), if not implicit in b), see also 2.2;
- f) identification of terminal No. 1.

NOTE IECQ type designation in item e) may be omitted in an unavoidable case.

5.2 Marking of the package

- a) Manufacturer's name, logo or trade mark.
- b) Relay type and variant code.
- c) Manufacturer's batch identification code.
- d) IECQ in letters or IECQ mark of conformity.
- e) IECQ type designation (ordering information), if not implicit in b), see also 2.2.
- f) Detail specification reference if not marked on the relay.
- g) Quantity.

NOTE IECQ type designation in item e) may be omitted in an unavoidable case.

5.3 Documentation

For each delivery, a certificate of conformance according to 2.4 of QC 001002-2 shall be added.

6 Annexes

Annexes may be added if necessary, for example to show more details on relay mounting, terminal dimensions, etc.

7 Tests

7.1 Standard conditions for testing

If not otherwise stated, all tests shall be performed under standard conditions for testing according to 3.5 of IEC 61810-7.

7.2 Mounting of test specimens during the test

The following indications shall apply for mechanical-dynamic tests (shock and vibration): the relay shall be mounted by its normal mounting method to the test fixture where inherent resonances have been minimized so as not to invalidate the test (see also IEC 60068-2-47).

7.3 General conditions for testing

Unless otherwise stated, the rated coil voltage specified in table 2 and its suitable polarity (if applicable) shall be used for all tests and its application to the relay.

8 Ordering information

See 2.2.

9 Relay reliability – failure rate data (optional)

The evaluation and indication of reliability data is not mandatory.

However, if required in a detail specification, this optional clause shall refer to, and be in line with, clause 5 of IEC 61811-50 and give a concise description of the methods and the set of parameters applied. Details shall be given in an appropriate annex to the detail specification, preferably based upon the provisions of IEC 61709 as indicated in annex A of IEC 61811-50.

Table 4 – Quality conformance inspection

Group A
Subgroup A0

For all tests in this subgroup: 100 % test. Discard all failed relays. Tests in this subgroup shall be carried out as a screening or sorting function, possibly on-line, prior to the formation of lots from which samples for the other subgroups are taken. The lot shall be rejected in case of a failure rate of more than 10 % cumulative.

Test No.	Test	Test conditions according to IEC 61810-7	Performance requirements
A0 – 1	Coil resistance (ND)	Subclause 3.8.1	Values according to table 2
A0 – 2	Dielectric test (ND)	Subclause 3.9 Application points and test voltage: according to 2.1, table 1 of this specification Duration of test: 1 s NOTE A shorter test with a higher voltage can be stated in the detail specification if its equivalence is proved by the manufacturer.	No breakdown or flashover Maximum leakage current: 1 mA
A0 – 3	Contact-circuit resistance, static (ND)	Subclause 3.12 Application points: terminals of all closed contacts Test voltage max.: 30 mV d.c. or a.c. Test current max.: 10 mA	Initial value according to 2.4.2 for each contact closing
A0 – 4	Functional tests (ND)	Subclause 3.13 Order of steps for monostable non-polarized relays: 1) 1,5 × rated voltage for conditioning 2) zero voltage 3) must operate voltage 4) rated voltage 5) must not release voltage 6) must release voltage Order of steps for other relay types: analogous according to figures 2 to 5 One cycle: Contact voltage: max. 6 V Mounting: optional	Values according to table 2 Checking the relay function by monitoring the contacts
A0 – 5	Timing tests (ND)	Subclause 3.14 Coil voltage: rated voltage Application points: all contacts Contact voltage: max. 6 V Mounting: optional	Values according to 2.4.4 Checking of contact sequencing by measuring the transfer time (see 4.4, note 4 of IEC 61811-50)
A0 – 6	Sealing (ND)	Subclause 3.20.2 Procedure 1, 2 or 4 for RT III and RT IV	Value according to 2.6

Table 4 (continued)

Subgroup A4 (period: inspection lot refers to the production volume of not more than one week)

Test No.	Test	Test conditions according to IEC 61810-7	IL	AQL	Performance requirements
1	Visual inspection – relay marking (ND)	Subclause 3.6.4, items a) and b)	S4	1,0	Marking as specified in 5.1
2	Coil resistance (ND)	Subclause 3.8.1			Values according to table 2
3	Contact-circuit resistance, static (ND)	Subclause 3.12 Application points: terminals of all closed contacts Test voltage max.: 30 mV d.c. or a.c. Test current max.: 10 mA			Initial value and the difference according to 2.4.2 for each contact closing.
4	Functional tests (ND)	Subclause 3.13 Order of steps for monostable non-polarized relays: 1) 1,5 × rated voltage for conditioning 2) zero voltage 3) must operate voltage 4) rated voltage 5) must not release voltage 6) must release voltage Order of steps for other relay types: analogous according to figures 2 to 5 One cycle Contact voltage: max. 6 V Mounting: optional			Values according to table 2 Checking the relay function by monitoring the contacts
5	Timing tests (ND)	Subclause 3.14 Coil voltage: rated voltage Application points: all contacts Contact voltage: max. 6 V Mounting: optional			Values according to 2.4.4 Checking of contact sequencing by measuring the transfer time (see 4.4, note 4 of IEC 61811-50)
6	Sealing (ND)	Subclause 3.20 Procedure 1, 2 or 4 for RT III and RT IV			Value according to 2.6

Table 4 (continued)

Group B**Subgroup B1** (period: inspection lot refers to the production volume of not more than one week)

Test No.	Test	Test conditions according to IEC 61810-7	IL	AQL	Performance requirements
7	Visual inspection – check of dimensions of stick magazines (ND) *	Subclauses 3.6.1 and 3.6.4, items a) and d)	S3	2,5	According to 2.7
8	Visual inspection – other than marking, check of relay outside key dimensions (ND)	Subclauses 3.6.1 and 3.6.4, items c) and d) – correct housing – terminals – dimensions			Presoldering of terminals shall encircle the terminals without evidence of de-wetting or non-wetting; non-presoldered terminal part according to 2.1 Dimensions according to outline drawing on front page (1.3)
9	Contact dynamic dielectric test (ND)	Subclause 3.50 Contact voltage: 500 V d.c.			No pulse detected shall exceed 80 µs
10	Electrical endurance miss-free acceptance (ND)	Subclause 3.30.5 Coil voltage: rated voltage Number of cycles per s: 10 Test duration: 1 h No checking required during the test Final measurements: Test 3 – contact-circuit resistance			Values lower than 0,2 Ω
* Mandatory, if stated in detail specification.					

Subgroup B2 (period: inspection lot refers to the production volume of not more than one week)

Test No.	Test	Test conditions according to IEC 61810-7	IL	AQL	Performance requirements
11	Solderability (D)	<i>Through-hole type:</i> Subclause 3.25.3, test 1 Test method 1 (test Ta, method 1) Number of terminals to be tested: all Temperature: (235 ± 5) °C Duration: (2 ± 0,5) s Immersion: up to 1,5 mm from body <i>Surface mounting type:</i> Subclause 3.25.3, test 3 Temperature: (215 ± 3) °C Duration of the immersion: (3 ± 0,3) s Final measurements: Test 2 – coil resistance Test 17 – insulation resistance	S3	2,5	When inspected with a magnifying lens, the dipped surface shall be 95 % covered with new solder coating, the remaining 5 % may contain only small pinholes (magnification of the lens: 4 to 10 times) Values according to table 2 Value according to 2.1
M*					
M* if not tested in subgroup C1.					

Table 4 (continued)

Group C

Subgroup C1 (period: one year)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
32 R*	Magnetic interference (ND)	Subclause 3.37, method 1, 2 or 3 If required, test conditions shall be stated in the detail specification	20	0	Failure criteria according to the detail specification
11a M*	Solderability (D)	<i>Through-hole type:</i> Subclause 3.25.3, test 1 Test method 1 (test Ta, method 1) Number of terminals to be tested: all Temperature: (235 ± 5) °C Duration: (2 ± 0,5) s Immersion: up to 1,5 mm from body <i>Surface mounting type:</i> Subclause 3.25.3, test 3 Temperature: (215 ± 3) °C Duration of the immersion: (3 ± 0,3) s Final measurements: Test 2 – coil resistance Test 17 – insulation resistance	10	0	When inspected with a magnifying lens the dipped surface shall be 95 % covered with new solder coating, the remaining 5 % may contain only small pinholes (magnification of the lens: 4 to 10 times) Values according to table 2 Value according to 2.1
12	Electrical endurance cable load (D)	Subclause 3.30.3, method 1 Contact load: open-end cable, 10 m telephony cable n × 4 × 0,6 mm, one wire connected to the contact tested and the other three wires to ground, 48 V d.c. according to 4.5 of IEC 60255-14 Number of contacts loaded/tested: one change-over contact Coil voltage: rated voltage Number of cycles per s: 12,5 max. Duty factor: 1:1 Ambient temperature: 70 °C Test contact voltage: max. 6 V Test contact current max. 10 mA Monitoring period: 70 ms after coil (de)-energization Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests Test 5 – timing tests	20	0	Number of cycles according to table 3 Contact failure according to 2.4.1 Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts Values according to 2.4.4
M* for relays manufactured with automatic facilities only, if not tested in subgroup B2 and if stated in the detail specification.					

Table 4 (continued)

Subgroup C1 (concluded)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
13	Electrical endurance contact application 0 (D)	Subclause 3.30.4 Number of contacts loaded/tested: one change-over contact Coil voltage: rated voltage Number of cycles per s: 12,5 max. Duty factor: 1:1 Ambient temperature: 70 °C Test contact voltage: max. 30 mV Test contact current: max. 10 mA Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests Test 5 – timing tests	20	0	Number of cycles according to table 3 Contact failure according to 2.4.1 Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts Values according to 2.4.4
14	Electrical endurance, particular application related condition if required (D)	Subclause 3.30.3, method 1 Contact load and further conditions as specified in the detail specification Contact voltage: rated voltage Number of cycles per s: 3 Duty factor: 1:1 Ambient temperature: ...°C Test contact voltage: max. 6 V Test contact current: max. 10 mA Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests Test 5 – timing tests	20	0	Number of cycles according to table 3 Contact failure according to 2.4.1 Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts Values according to 2.4.4
R* recommended test.					

Table 4 (continued)

Subgroup C2 (period: one year)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
15	Dielectric test (ND)	Subclause 3.9 Application points and test voltage: according to 2.1, table 1 of this specification (± 15 V) Duration of test: 60 s	20	0	No breakdown or flashover Maximum leakage current: 1 mA
16	Impulse voltage test (ND)	Subclause 3.10 Application points and test voltage: according to 2.1, table 1 of this specification Consecutive pulses with the polarity reversed Frequency: 2 or 4 pulses/min Total number of pulses: 6 Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests Test 17 – insulation resistance	5	0	Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts Value according to 2.1
17	Insulation resistance (ND)	Subclause 3.11 Application points: all terminals as specified in subclause 3.11.2 Test voltage: according to 2.1 of this specification Duration of test: 60 s or when the steady value has been reached	20	0	Value according to 2.1
18	Sealing (ND)	Subclause 3.20.2 Procedure 1 (test Qc, method 2) Test liquid temperature: (73 ± 2) °C Immersion time: 1 min			Failure criteria according to 3.5.5 of IEC 60068-2-17

Table 4 (continued)

Subgroup C4 (period: two years)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
19	Electrical endurance, cable load, extended assessment (D)	<p>Subclause 3.30.6 or 3.30.3, method 1</p> <p>Contact load: open-ended cable, 10 m telephony cable $n \times 4 \times 0,6$ mm, one wire connected to the contact tested and the other three wires to ground, 48 V d.c. according to 4.5 of IEC 60255-14</p> <p>Number of contacts loaded/tested: one change-over contact</p> <p>Coil voltage: rated voltage</p> <p>Number of cycles per s: 12,5 max.</p> <p>Duty factor: 1:1</p> <p>Ambient temperature: 70 °C</p> <p>Test contact voltage: max. 6 V</p> <p>Test contact current: max. 10 mA</p> <p>Monitoring period: 70 ms after coil (de)-energization</p> <p>Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests</p> <p>Test 5 – timing tests</p>	20	0	<p>Number of cycles according to table 3</p> <p>Contact failure according to 2.4.1</p> <p>Value according to 2.4.2</p> <p>Values according to table 2 at 23 °C</p> <p>Checking the relay function by monitoring the contacts</p> <p>Values according to 2.4.4</p>
20	Electrical endurance, rated contact voltage, resistive load (D)	<p>Subclause 3.30.3, method 1</p> <p>Contact load according to 4.1 of IEC 60255-14: 125 V d.c./0,24 A</p> <p>Number of contacts loaded/tested: one change-over contact</p> <p>Coil voltage: rated voltage</p> <p>Number of cycles per s: 3</p> <p>Duty factor: 1:1</p> <p>Ambient temperature: 70 °C</p> <p>Test contact voltage: max 6 V</p> <p>Test contact current: max. 10 mA</p> <p>Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests</p> <p>Test 5 – timing tests</p>	5	1	<p>Number of cycles according to table 3</p> <p>Contact failure according to 2.4.1</p> <p>Value according to 2.4.2</p> <p>Values according to table 2 at 23 °C</p> <p>Checking the relay function by monitoring the contacts</p> <p>Values according to 2.4.4</p>

Table 4 (continued)

Subgroup C4 (concluded)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
21	Electrical endurance, rated contact current, resistive load (D)	<p>Subclause 3.30.3, method 1</p> <p>Contact load according to 4.1 of IEC 60255-14: 24 V d.c./1,25 A</p> <p>Number of contacts loaded/tested: one change-over contact</p> <p>Coil voltage: rated voltage</p> <p>Number of cycles per s: 3</p> <p>Duty factor: 1:1</p> <p>Ambient temperature: 70 °C</p> <p>Test contact voltage: max. 6 V</p> <p>Test contact current: max. 10 mA</p> <p>Final measurements:</p> <p>Test 3 – contact-circuit resistance</p> <p>Test 4 – functional tests</p> <p>Test 5 – timing tests</p>	5	1	<p>Number of cycles according to table 3</p> <p>Contact failure according to 2.4.1</p> <p>Value according to 2.4.2</p> <p>Values according to table 2 at 23 °C</p> <p>Checking the relay function by monitoring the contacts</p> <p>Values according to 2.4.4</p>
22	Electrical endurance, contact application 0, extended assessment (D)	<p>Subclauses 3.30.6 or 3.30.4</p> <p>Number of contacts loaded/tested: one change-over contact</p> <p>Coil voltage: rated voltage</p> <p>Number of cycles per s: 12,5 max.</p> <p>Duty factor: 1:1</p> <p>Ambient temperature: 70 °C</p> <p>Test contact voltage: max. 30 mV</p> <p>Test contact current: max. 10 mA</p> <p>Final measurements:</p> <p>Test 3 – contact-circuit resistance</p> <p>Test 4 – functional tests</p> <p>Test 5 – timing tests</p>	20	0	<p>Number of cycles according to table 3</p> <p>Contact failure according to 2.4.1</p> <p>Value according to 2.4.2</p> <p>Values according to table 2 at 23 °C</p> <p>Checking the relay function by monitoring the contacts</p> <p>Values according to 2.4.4</p>

Table 4 (continued)

Subgroup C5 (period: two years)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
23	Thermal endurance (D)	Subclause 3.32 Duration: 21 days Ambient temperature: 70 °C Coil voltage: not applied or rated voltage Recovery: 1 h Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests	5	0	Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts
24	Climatic sequence (D)	Subclause 3.15 Dry heat, subclause 3.15.2 Temperature: 70 °C Duration: 16 h Recovery: 4 h During the last 2 h of dry heat exposure monitoring contact-circuit resistance of all contacts Number of cycles per s: 2 Duty factor: 1:1 Test contact voltage: max. 6 V d.c. or a.c. Test contact current: max. 10 mA Before the end of dry heat exposure: Test 4 – functional tests Damp heat cyclic, subclause 3.15.3, one cycle Temperature: 55 °C Recovery: 4 h Cold, subclause 3.15.4 Temperature: -25 °C Duration: 2 h Before the end of cold exposure: Test 4 – functional tests Damp heat cyclic, subclause 3.15.6, one cycle Temperature: 55 °C Recovery: 4 h	10	0	Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts

Table 4 (continued)

Subgroup C5 (continued)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
24	Climatic sequence (continued)	Final measurements: Test 17 – insulation resistance Test 3 – contact-circuit resistance Test 4 – functional tests Test 8 – visual inspection, subclause 3.6.4, item d)			Value according to 2.1 Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contact No cracks or other deterioration
25	Damp heat, steady state (D)	Subclause 3.16 Conditioning time: 21 days Final measurements: Test 17 – insulation resistance Test 3 – contact-circuit resistance Test 8 – visual inspection, subclause 3.6.4 item d)	10	0	Value according to 2.1 Value according to 2.4.2 No cracks or other deterioration
26	Robustness of terminals (D)	Subclause 3.24 Procedure: test Ua ₂ – thrust; and test Ub – bending, method 1 Final measurements: Test 8 – visual inspection, subclause 3.6.4, item d) Test 2 – coil resistance Test 3 – contact-circuit resistance Test 4 – functional tests	10	0	Values according to 2.6 No breaking or loosening of terminals No cracks or other deterioration Values according to table 2 Value according to 2.4.2 (initial) Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts

Table 4 (continued)

Subgroup C5 (continued)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
27	Shock (D)	<p>Subclause 3.26, method 1, functional</p> <p>Pulse shape and acceleration according to 2.6 of this specification</p> <p>Application: three shocks each in operate and released condition in the two directions of the three main axes</p> <p>Test contact voltage: max. 6 V d.c.</p> <p>Test contact current: max. 10 mA</p> <p>Subclause 3.26, method 2, survival</p> <p>Pulse shape and acceleration according to 2.6 of this specification</p> <p>Application: three shocks each in operate and released condition in the two directions of the three main axes</p> <p>Test coil voltage: the rated voltage (operate) and zero (release).</p> <p>Final measurements:</p> <p>Test 8 – visual inspection, subclause 3.6.4, item d)</p> <p>Test 3 – contact-circuit resistance</p> <p>Test 4 – functional tests</p> <p>Test 5 – timing tests</p>	10	0	<p>No opening of any closed contact circuit or no closing of any opened contact circuit shall exceed 100 µs</p> <p>No cracks or other deterioration</p> <p>Value according to 2.4.2 (initial)</p> <p>Values according to table 2 at 23 °C</p> <p>Checking the relay function by monitoring the contacts</p> <p>Value according to 2.4.4</p>
28	Vibration (D)	<p>Subclause 3.28.2.1, method 1, functional</p> <p>Amplitude: 0,75 mm, 10 g</p> <p>Frequency: 10 Hz to 55 Hz</p> <p>Application: three directions</p> <p>Number of sweeps per direction: 3</p> <p>Sweep rate: 1 octave/min ± 10 %</p> <p>(Total duration: approx. 3 × 30 min)</p> <p>Test coil voltage: the rated voltage (operate) and zero (release).</p> <p>Test contact voltage: max. 6 V d.c.</p> <p>Test contact current: max. 10 mA</p> <p>Final measurements:</p> <p>Test 8 – visual inspection, subclause 3.6.4, item d)</p> <p>Test 3 – contact-circuit resistance</p> <p>Test 4 – functional tests</p> <p>Test 17 – insulation resistance</p>	10	0	<p>No opening of any closed contact circuit or no closing of any opened contact circuit shall exceed 10 µs</p> <p>No cracks or other deterioration</p> <p>Value according to 2.4.2 (initial)</p> <p>Values according to table 2 at 23 °C</p> <p>Checking the relay function by monitoring the contacts</p> <p>Value according to 2.1</p>

Table 4 (continued)

Subgroup C5 (continued)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
29	Mechanical endurance (D)	Subclause 3.31.3, method 2 Coil voltage: rated voltage Number of cycles per s: 10 Duty factor: 1:1 Ambient temperature: 70 °C Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests Test 5 – timing tests	20	1	Number of cycles according to 2.4.3 There shall be no broken parts or other deterioration Value according to 2.4.2 Value according to table 2 at 23 °C Checking the relay function by monitoring the contacts Value according to 2.4.4
30	Overload current (contact circuits) (D)	Subclause 3.34 Ambient temperature: 70 °C All contacts loaded Contact voltage: 24 V d.c. Contact current: 2,5 A Coil voltage: rated voltage Number of cycles per s: 0,3 max. duty factor: 1:1 Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests	5	0	Number of cycles according to table 3 Each operation shall be monitored There shall be no permanent deterioration Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts
31	Overload voltage (contact circuits) (D)	Subclause 3.34 Ambient temperature: 70 °C All contacts loaded Contact voltage: 250 V d.c. Contact current: 0,24 A Coil voltage: rated voltage Number of cycles per s: 0,3 max. Duty factor: 1:1 Final measurements: Test 3 – contact-circuit resistance Test 4 – functional tests	5	0	Number of cycles according to table 3 Each operation shall be monitored Value according to 2.4.2 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts
32	Magnetic interference (ND)	Subclause 3.37, methods 1, 2 or 3 Method 1: dimensions of the test coil as stated in the detail specification Method 2: mounting grid pattern as stated in the detail specification Method 3:* test conditions shall be stated in detail specification	5	0	Method 1, relay in critical position Deviation of: – operate voltage less than 20 % – release voltage less than 40 % Method 2: must operate and must release voltage according to table 2 Method 3: failure criteria according to detail specification

* Only if stated in the detail specification and not tested in C1.

Table 4 (continued)

Subgroup C5 (concluded)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
33	Resistance to cleaning solvents (D)	Subclause 3.47 Final measurements: Test 8 – visual inspection, subclause 3.6.4 item d) Test 17 – insulation resistance Test 4 – functional tests Test 18 – sealing	10	0	Absence of defects on markings or other deterioration Value according to 2.1 Value according to table 2 at 23 °C Checking the relay function by monitoring the contacts Failure criteria according to 3.5.5 of IEC 60068-2-17
34	Fire hazard (D)	Subclause 3.48 procedure according to IEC 60695-2-2 Mounting of the relay and position of flame application: critical position Duration of flame application: 10 s	10	0	Evaluation of test results according to clause 10 of IEC 60695-2-2

Table 4 (continued)

Subgroup C6 (period: two years)

Test No.	Test	Test conditions according to IEC 61810-7	Sample size	Acceptable number of defectives	Performance requirements
35	Weighing (ND)	Subclause 3.7.2	10	0	Relay mass according to 2.1
36	Thermal resistance (ND)	Subclause 3.17			Value according to 2.1
37	Rapid change of temperature (D)	Subclause 3.19 Upper temperature extreme: +85 °C Lower temperature extreme: -40 °C Duration at each extreme: 30 min Number of cycles: 5 Final measurements: Test 8 – visual inspection, subclause 3.6.4, item d) Test 17 – insulation resistance Test 4 – functional tests Test 3 – contact-circuit resistance	10	1	No cracks or other deterioration Value according to 2.1 Values according to table 2 at 23 °C Checking the relay function by monitoring the contacts Value according to 2.4.2
38	Resistance to soldering heat (D)	<i>Through-hole type:</i> Subclause 3.25.3, test 2 IEC 60068-2-20, test Tb, method 1A Ageing: not required Number of terminals to be tested: all Method 1A: duration of immersion at (260 ± 5) °C: (10 ± 1) s <i>Surface mounting type:</i> Subclause 3.25.3, test 4 Ageing: not required Duration of preheating at (110 ± 10) °C, if required: 5 min a) duration of immersion at (260 ± 5) °C: (5 ± 1) s b) duration of immersion at (215 ± 3) °C: (40 ± 1) s Final measurements: Test 2 – coil resistance Test 3 – contact circuit resistance Test 15 – dielectric test Test 17 – insulation resistance Test 18 – sealing	10	0	Values according to table 2 Value according to 2.4.2 No breakdown or flashover Maximum leakage current: 1 mA Value according to 2.1 Failure criteria according to 3.5.5 of IEC 60068-2-17
39	Contact-circuit resistance stability	Subclause 3.12.1 Coil voltage: rated voltage Number of cycles per s: 10 max. Duty factor: 1:1 Ambient temperature: 23 °C	500	1	The standard deviation of the contact resistance values measured during 100 successive cycles shall be maximally as high as the mean value, calculated for each single contact

Table 5 – Qualification approval

Sample size min. 160

Variants of samples: coil voltage

Relays tested in groups 2 to 17 have passed group 1. Relays tested in group 3 shall be used for group 8.

Test	Conditions and requirements of test				Sample size	Acceptable number of defectives
	Test conditions according to IEC 61810-7		Test No. and description in table 4	Subgroup in table 4		
	Subclause	Particular test conditions				

Group 0

Visual inspection of stick magazines *	–		7	B1	6	0
* Mandatory, if stated in the detail specification						

Group 1

Visual inspection	3.6		1	A4	160	0
Coil resistance	3.8.1		2	A4		
Contact-circuit resistance	3.12		3	A4		
Functional tests	3.13		4	A4		
Timing tests	3.14		5	A4		
Contact dynamic dielectric test	3.50		9	B1		
Sealing	3.20.2	Procedure 1, 2 or 4	A0-6	A0		

Group 2

Check of dimensions	3.6.1		8	B1	10	0
Solderability <i>Through-hole type</i> <i>Surface mounting type</i>	3.25.3	Test 1 Test 3	11	B2		

Group 3

Insulation resistance	3.11		17	C2	20	0
Dielectric test	3.9		15	C2		

Group 4

Weighing	3.7.2		35	C6	5	0
Thermal resistance	3.17		36	C6		
Robustness of terminals	3.24		26	C5		

Group 5

Impulse voltage test	3.10		16	C2	5	0
Fire hazard	3.48	IEC 60695-2-2	34	C5		

Table 5 (continued)

Test	Conditions and requirements of test				Sample size	Acceptable number of defectives
	Test conditions according to IEC 61810-7	Particular test conditions	Test No. and description in table 4	Subgroup in table 4		
Subclause						
Group 6						
Climatic sequence	3.15		24	C5	10	0
Resistance to soldering heat <i>Through-hole type</i> <i>Surface mounting type</i>	3.25.3	Test 2 Test 4	38	C6		
Resistance to cleaning solvents	3.47		33	C5		
Sealing	3.20.2	Procedure 1	18	C2		
Group 7						
Damp heat, steady state	3.16		25	C5	10	0
Sealing	3.20.2	Procedure 1	18	C2		
Group 8						
Magnetic interference	3.37	Methods 1, 2 or 3	32	C5	5	0
Magnetic interference R*	3.37	Method 3	32	C1 and C5		
Shock	3.26	Method 1	27	C5		
Vibration	3.28.2.1	Method 1	28	C5	5	10
Rapid change of temperature	3.19	Method 1	37	C6	10	
Sealing	3.20.2	Procedure 1	18	C2	20	
R* recommended. If stated in detail specification only.						
Group 9						
Electrical endurance, cable load	3.30.6/3.30.3	Method 1	19	C4	20	0
Group 10						
Electrical endurance, rated contact voltage	3.30.3	Method 1	20	C4	5	0
Group 11						
Electrical endurance, rated contact current	3.30.3	Method 1	21	C4	5	0

Table 5 (continued)

Test	Conditions and requirements of test				Sample size	Acceptable number of defectives
	Test conditions according to IEC 61810-7 Subclause	Particular test conditions	Test No. and description in table 4	Subgroup in table 4		
Group 12						
Electrical endurance, contact application 0	3.30.6/3.30.4		22	C4	20	0
Group 13						
Electrical endurance, particular application-related condition, if required	3.30.3	Method 1	14	C1	20	0
Group 14						
Mechanical endurance	3.31.3	Method 2	29	C5	10	1
Group 15						
Thermal endurance	3.32		23	C5	10	0
Group 16						
Overload current (contact circuits)	3.34		30	C5	5	0
Group 17						
Overload voltage (contact circuits)	3.34		31	C5	5	0

Table 6 – Industrial qualification

Test	Conditions and requirements of test				Sample size	Acceptable number of defectives
	Test conditions according to IEC 61810-7 Subclause	Particular test conditions	Test No. and description in table 4	Subgroup in table 4		
Group 18						
Electrical endurance, miss-free acceptance	3.30.5		10	B1	20	0
Group 19						
Contact-circuit resistance stability	3.12.1		39	C6	500	1

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60068-1 + corr. October + A1	1988 1988 1992	Environmental testing Part 1: General and guidance	EN 60068-1	1994
IEC 60068-2-17	1994	Part 2: Tests - Test Q: Sealing	EN 60068-2-17	1994
IEC 60068-2-20 + A2	1979 1987	Part 2: Tests - Test T: Soldering	HD 323.2.20 S3	1988
IEC 60068-2-47	1999	Part 2-47: Test methods - Mounting of components, equipment and other articles for vibration, impact and similar dynamic tests	EN 60068-2-47 + corr. June	1999 2000
IEC 60255-14	1981	Electrical relays Part 14: Endurance test for electrical relay contacts - Preferred values for contact loads	-	-
IEC 60695-2-2	1991	Fire hazard testing Part 2: Test methods - Section 2: Needle-flame test	EN 60695-2-2	1994
IEC 61709	1996	Electronic components - Reliability - Reference conditions for failure rates and stress models for conversion	EN 61709	1998
IEC 61810-7	1997	Electromechanical all-or-nothing relays Part 7: Test and measurement procedures	-	-
IEC 61811-1	1999	Electromechanical non-specified time all-or-nothing relays of assessed quality Part 1: Generic specification	EN 61811-1	1999
IEC 61811-50	2002	Part 50: Sectional specification - Electromechanical all-or-nothing telecom relays of assessed quality	EN 61811-50	2002

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC QC 001002-2	1998	Rules of Procedure of the IEC Quality Assessment System for Electronic Components (IECQ) Part 2: Documentation	-	-
IEC QC 001002-3	1998	Part 3: Approval procedures	-	-
IEC QC 001005	1996	Register of firms, products and services approved under the IECQ System including ISO 9000	-	-
CECC 00 802	1994	Guidance Document: CECC standard method for the specification of surface mounting components (SMDs) of assessed quality	-	-

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.