BS EN 62037-3:2012



BSI Standards Publication

Passive RF and microwave devices, intermodulation level measurement

Part 3: Measurement of passive intermodulation in coaxial connectors



BS EN 62037-3:2012 BRITISH STANDARD

National foreword

This British Standard is the UK implementation of EN 62037-3:2012. It is identical to IEC 62037-3:2012. Together with BS EN 62037-1:2012, BS EN 62037-2:2013, BS EN 62037-4:2012, BS EN 62037-5:2013 and BS EN 62037-6:2013, it supersedes BS EN 62037:2000, which will be withdrawn on 15 July 2015.

The UK participation in its preparation was entrusted to Technical Committee EPL/46, Cables, wires and waveguides, radio frequency connectors and accessories for communication and signalling.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2013.

Published by BSI Standards Limited 2013.

ISBN 978 0 580 58418 3

ICS 33.040.20

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2013.

Amendments issued since publication

Date Text affected

EUROPEAN STANDARD NORME EUROPÉENNE

EUROPÄISCHE NORM

EN 62037-3

September 2012

ICS 33.040.20

Supersedes EN 62037:1999 (partially)

English version

Passive RF and microwave devices, intermodulation level measurement - Part 3: Measurement of passive intermodulation in coaxial connectors (IEC 62037-3:2012)

Dispositifs RF et à micro-ondes passifs, mesure du niveau d'intermodulation - Partie 3: Mesure de l'intermodulation passive dans les connecteurs coaxiaux (CEI 62037-3:2012)

Passive HF- und Mikrowellenbauteile, Messung des Intermodulationspegels -Teil 3: Messung der passiven Intermodulation in koaxialen Steckverbindern (IEC 62037-3:2012)

This European Standard was approved by CENELEC on 2012-08-28. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization Comité Européen de Normalisation Electrotechnique Europäisches Komitee für Elektrotechnische Normung

Management Centre: Avenue Marnix 17, B - 1000 Brussels

Foreword

The text of document 46/417/FDIS, future edition 1 of IEC 62037-3, prepared by IEC TC 46 "Cables, wires, waveguides, R.F. connectors, R.F. and microwave passive components and accessories" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62037-3:2012.

The following dates are fixed:

•	latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement	(dop)	2013-05-28
•	latest date by which the national standards conflicting with the document have to be withdrawn	(dow)	2015-08-28

This document supersedes EN 62037:1999 (PART).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62037-3:2012 was approved by CENELEC as a European Standard without any modification.

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 62037-1	-	Passive RF and microwave devices, intermodulation level measurement - Part 1: General requirements and measuring methods	EN 62037-1	-
IEC 62037-4	-	Passive RF and microwave devices, intermodulation level measurement - Part 4: Measurement of passive intermodulation in coaxial cables	EN 62037-4	-

CONTENTS

1	Scop	e	.5
2			
2	Normative references		
3	Abbreviations		
4	Test	method	.5
	4.1	Samples for testing	.5
	4.2	Connection of unit	
	4.3	Setup 1 – Fixed frequency test considerations.	
	4.4	Setup 2 considerations	.6
	4.5	Impacts	
5	Repo	rt	.8
Fig	ure 1 -	- Impact test illustration	.7
		- Impact device.	
Tak	ole 1 –	Impact information for some popular connectors	.7

PASSIVE RF AND MICROWAVE DEVICES, INTERMODULATION LEVEL MEASUREMENT –

Part 3: Measurement of passive intermodulation in coaxial connectors

1 Scope

This part of IEC 62037 defines the impact test on coaxial connectors to evaluate their robustness against weak connections and particles inside the connector as independently as possible from the effects of cable PIM (passive intermodulation).

For other connectors (e.g. panel mounted connectors), the cable can be replaced by an adequate transmission-line (e.g. airline, stripline). In order to evaluate the effects of mechanical stresses on the connectors, a series of impacts is applied to the connectors while measuring the PIM.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62037-1, Passive r.f. and microwave devices, intermodulation level measurement – Part 1: General requirements and measuring methods¹

IEC 62037-4, Passive r.f. and microwave devices, intermodulation level measurement – Part 4: Measurement of passive intermodulation in coaxial cables 2

3 Abbreviations

DUT Device under test

IM Intermodulation

PIM Passive intermodulation

4 Test method

4.1 Samples for testing

One of two setups may be used.

NOTE Correct assembly methods and techniques are critical to the proper operation of the connector on the cable.

¹ To be published.

² To be published.

a) Setup 1 - Multi-port DUT

In order to minimize the effect of the transmission line, a short assembly should be tested. Identical connectors should be assembled to each end. An assembly, as short as physically practical, should be constructed.

b) Setup 2 - One port DUT

A single connector can be assembled on a length of transmission line for which it is designed, loss or low loss, that exhibits at least 10 dB of attenuation in one direction at the lowest frequency in the receive band.

4.2 Connection of unit

The unit should be connected as described in the IEC 62307-1 base document.

4.3 Setup 1 – Fixed frequency test considerations

Due to the phase interaction of the connectors and the length of the transmission line (configuration A) when measured in the reverse (reflected) mode, the frequency at which maximum PIM occurs within the band can vary and shall be determined.

An accepted method of sweeping is to fix F1 at the low end of the transmit band and step F2 down, starting at the top of the band for all combination of frequencies that result in IM in the receive band. If desired, this procedure can be reversed by fixing F1 at the highest frequency in the transmit band and then stepping F2 up, starting at the bottom of the band.

If fixed frequency is used, assemblies of varying lengths shall be made to ensure that the PIM adds in-phase. Assemble 2 additional DUTs. The first one is to be $\lambda/6$ longer and the second one is to be $\lambda/3$ longer at the receive frequency of test. The PIM of the three (3) assemblies is measured to determine which DUT exhibits maximum PIM. The impact test shall be performed on this DUT.

Multiple fixed frequency may be used in lieu of varying the cable length.

The impact test is to be conducted at the frequency where the maximum PIM is measured.

The cable used as a load should be verified as having suitable PIM performance prior to being used in testing as measured by IEC 62037-4.

4.4 Setup 2 considerations

The cable used as a load should be verified as having suitable PIM performance prior to being used in testing as measured by IEC 62037-4.

4.5 Impacts

Mount the DUT as shown in Figure 1. A minimum of five (5) impacts in accordance with Table 1 should be applied. (See Figure 1 for impact setup and Figure 2 for description of drop mass and tube.)

The tube should be vertical to the axis of the DUT to $\pm 3^{\circ}$.

The points of impact should cover as many different areas along the length of the connector as possible, but it is not necessary to rotate or otherwise disconnect and reposition the DUT.

The PIM is measured prior to, during, and after the impact.

Table 1 - Impact information for some popular connectors

Connector interface	Mass (min.)	Drop height (min.) mm
7-16	30	300
N	30	300
TNC	30	300
SMA	30	300

The length dimension of the brass rod shall be greater than its diameter.

The given values are guidelines, and other connectors can be used as determined between customer and supplier.

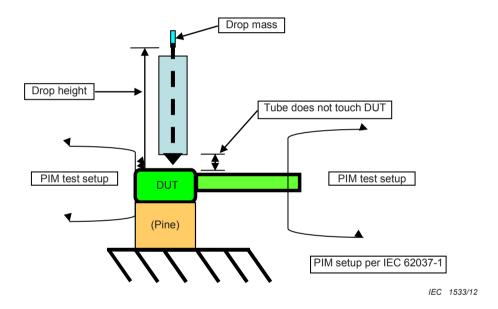


Figure 1 - Impact test illustration

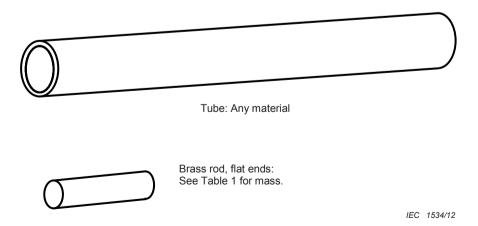


Figure 2 - Impact device

5 Report

The report should document the height, mass, and distance dropped if different from the table and the PIM values prior to each impact, during impact, and after impact.



British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards -based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com
Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070 Email: copyright@bsigroup.com

