

BS ISO 484-2:2015



BSI Standards Publication

Shipbuilding — Ship screw propellers — Manufacturing tolerances

Part 2: Propellers of diameter between 0,80
and 2,50 m inclusive

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 484-2:2015.

The UK participation in its preparation was entrusted to Technical Committee SME/32, Ships and marine technology - Steering committee.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.

Published by BSI Standards Limited 2015

ISBN 978 0 580 89504 3

ICS 47.020.20

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 December 2015.

Amendments/corrigenda issued since publication

Date	Text affected
-------------	----------------------

INTERNATIONAL
STANDARD

ISO
484-2

Second edition
2015-12-01

**Shipbuilding — Ship screw propellers
— Manufacturing tolerances —**

Part 2:
**Propellers of diameter between 0,80
and 2,50 m inclusive**

*Construction navale — Hélices de navires — Tolérances de
fabrication —*

Partie 2: Hélices de diamètre compris entre 0,80 et 2,50 m inclus



Reference number
ISO 484-2:2015(E)

© ISO 2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Field of application	1
4 Methods of measuring pitch	1
4.1.1 Use of marking gauges.....	1
4.1.2 Method with a graduated ring.....	1
4.1.3 Method using coordinate measuring machine.....	2
5 Methods of measuring the thickness of the section	2
6 Accuracy classes	3
7 Tolerances on the pitch	4
8 Tolerances on the extreme radius of the screw propeller	5
9 Tolerances on the thickness of the blade section	5
10 Checking and tolerances of the form of blade sections	6
11 Tolerances of the length of the blade sections	8
12 Tolerances on the location of blades, reference lines, and blade contours	8
12.1 Marking of lines of reference.....	8
12.2 Tolerances on the contour of the leading edge.....	9
12.3 Tolerances on the angular deviation between two consecutive blades.....	10
13 Tolerances on rake, axial position, and relative axial position of consecutive blades	10
14 Surface finish	11
15 Static balancing	11
16 Measuring equipment	12
Bibliography	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 8, *Ships and marine technology*, Subcommittee SC 3, *Piping and machinery*.

This second edition cancels and replaces the first edition (ISO 484-2:1981), which has been technically revised.

ISO 484 consists of the following parts, under the general title *Shipbuilding — Ship screw propellers — Manufacturing tolerances*:

- *Part 1: Propellers of diameter greater than 2,50 m*
- *Part 2: Propellers of diameter between 0,80 m and 2,50 m inclusive*

Introduction

The propeller manufacturer is at liberty to use any equipment and method that enables the tolerances to be verified to the required accuracy.

Shipbuilding — Ship screw propellers — Manufacturing tolerances —

Part 2: Propellers of diameter between 0,80 and 2,50 m inclusive

1 Scope

This part of ISO 484 defines manufacturing tolerances of ship screw propellers of a diameter between 0,80 m and 2,50 m.

NOTE Some deviations for the tolerance are permitted in certain cases subject to the discretion of the customer or of the designer and the customer.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1302, *Geometrical Product Specifications (GPS) — Indication of surface texture in technical product documentation*

ISO 1940-1:2003, *Mechanical vibration — Balance quality requirements for rotors in a constant (rigid) state — Part 1: Specification and verification of balance tolerances*

3 Field of application

This part of ISO 484 applies to monobloc, built-up, and controllable pitch propellers.

4 Methods of measuring pitch

4.1 The principle of one method of measurement consists in setting out along a helicoidal line of radius, r , a certain length, PQ, corresponding to the desired angle, α , and in measuring the difference, h , in the heights of the points P and Q with respect to a reference plane (see [Figure 1](#)).

The length PQ shall be set out using one of the methods described in [4.1.1](#), [4.1.2](#) or [4.1.3](#).

NOTE Other methods giving the required accuracy may be used if necessary.

4.1.1 Use of marking gauges

The length PQ shall be set out by means of marking gauges.

4.1.2 Method with a graduated ring


The length PQ shall be set out by means of angle, α , on a part of a graduated ring of suitable radius (see [Figure 1](#)).

4.1.3 Method using coordinate measuring machine

The height coordinates are taken at defined measuring points by means of coordinate measuring machine and they are related to each other (determination of height differences needed for pitch evaluation). Both cartesian coordinate system (x, y, z) and polar coordinate system (α, r, h) can be applied alternatively in order to define measuring points P and Q.

5 Methods of measuring the thickness of the section


5.1 The thickness of a cylindrical section at a point S shall be measured along direction SV (see [Figure 2](#)) on the plane tangent to the coaxial cylinder and perpendicular to the pitch line of the pressure side of the section (and only along direction SU perpendicular to the pressure side surface or direction S parallel to the propeller axis when defined in this way on the drawings).

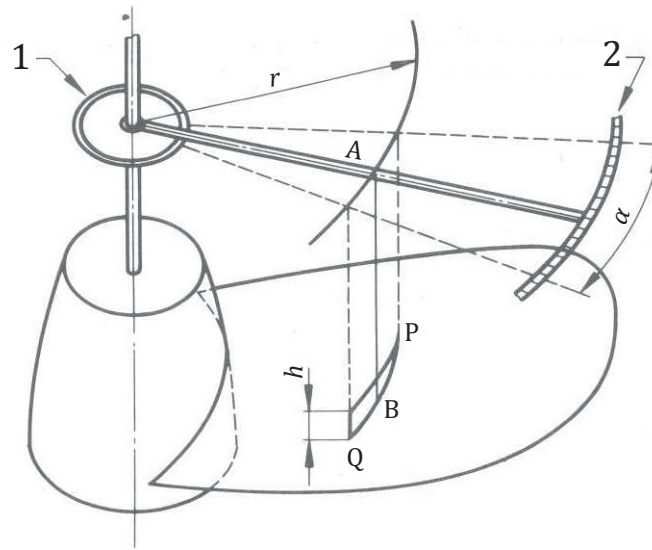

Key

- 1 small graduated ring
- 2 large graduated ring

Figure 1 — Pitch measurement

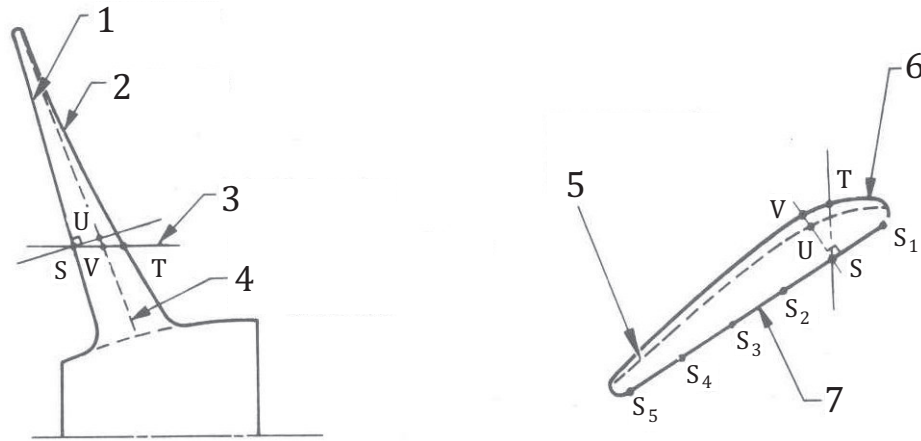

Key

- 1 pressure side
- 2 suction side
- 3 cylindrical section
- 4 line of maximum thickness of section perpendicular to the pressure side
- 5 developed section perpendicular to the pressure side
- 6 developed cylindrical section
- 7 pressure side

Figure 2 — Thickness measurement

5.2 The maximum thickness at each radius shall be determined by means of a pair of outside callipers or from the profile obtained by plotting the thickness at various points: S, S₁, S₂, S₃, etc.

6 Accuracy classes

The accuracy class shall be selected by the customer. The indications in [Table 1](#) serve as guidance in this choice.

Table 1 — Accuracy of manufacturing

Class	Manufacturing accuracy
S	Very high accuracy
I	High accuracy
II	Medium accuracy
III	Wide tolerances

7 Tolerances on the pitch

Table 2 — Pitch tolerances

Designation of pitch	Class			
	S	I	II	III
a) Local pitch with a minimum of	±1,5 % ±10 mm	±2 % ±15 mm	±3 % ±20 mm	—
b) Mean pitch per radius of each blade with a minimum of	±1 % ±7,5 mm	±1,5 % ±10 mm	±2 % ±15 mm	±5 % ±25 mm
c) Mean pitch per blade with a minimum of	±0,75 % ±5 mm	±1 % ±7,5 mm	±1,5 % ±10 mm	±4 % ±20 mm
d) Mean pitch for propeller with a minimum of	±0,5 % ±4 mm	±0,75 % ±5 mm	±1 % ±7,5 mm	±3 % ±15 mm

NOTE The tolerances of [Table 2](#) are expressed as percentages of the design pitch corresponding to the radius for designations a) and b) and the mean design pitch for designations c) and d).

7.1 Pitch shall be measured at least at the radii indicated in [Table 3](#). By agreement between the interested parties, different radii may be measured.

Table 3 — Pitch measurement locations

Class	Radii
S and I	A section near the hub – 0,4 R – 0,5 R – 0,6 R – 0,7 R – 0,8 R – 0,9 R – 0,95 R
II and III	A section near the hub – 0,5 R – 0,7 R – 0,9 R

7.2 The measurement of local pitches for Class S and Class I is further controlled as described in [Clause 10](#).

7.3 The tolerances on the local pitch and on the mean pitch of each radius of each blade given in [Table 2](#), a) and b) are increased by 50 % for sections at 0,4 R or less.

7.4 Should the propeller manufacturer wish to compensate for an error on the pitch (inside or outside the tabulated tolerances) by means of an alteration in the propeller diameter, he may do so only with the customer's agreement.

7.5 The design pitch is the pitch of the reference line as defined below.

The design pitch line of a section is a helical reference line for the section in question of which the section ordinates for the face and the back are given.

It could be a line joining the nose and tail of the section or any other conveniently placed helical line.

7.6 The local pitch at a point B ([Figure 1](#)) is determined by measuring the difference in height between two points, P and Q, situated at equal distances from point B and on either side of the latter (BP = BQ) and by multiplying the difference in height by $\frac{360}{\alpha}$. This shall be compared with the local pitch as calculated from the face offsets for the same points.

There shall be four pitch measurements for Class S, three for Class I, and two for Class II. These measurements shall be consecutive (the initial point of each measurement coinciding with the final

point of the adjacent measurement). Each measurement span shall be sufficiently long to maintain adequate accuracy in the pitch measurement in compliance with [Clause 16](#). Where necessary, the number of measurements may be reduced in order to comply with the latter requirement.

7.7 The pitch per radius and per blade is determined for each radius by multiplying the difference in height between the most distant measuring points at each radius by $\frac{360}{\alpha}$.

7.8 The average pitch per blade is defined as the arithmetic mean (average) of the measured pitches per radius for the blade in question.

7.9 The average pitch for the screw propeller is defined as the arithmetic mean of the average pitches per blade.

8 Tolerances on the extreme radius of the screw propeller

8.1 The tolerances in [Table 4](#) are expressed as percentages of screw propeller radius and as minimum absolute values.

Table 4 — Radius tolerance

Specification	Class			
	S	I	II	III
Tolerance	±0,2 %	±0,3 %	±0,4 %	±0,5 %
but not less than	1,5 mm	1,5 mm	2 mm	2,5 mm

8.2 In the case of a ducted propeller, these tolerances may need to be reduced.

9 Tolerances on the thickness of the blade section

Table 5 — Blade thickness tolerance

Specification	Class			
	S	I	II	III
Plus tolerances	+2 %	+2,5 %	+4 %	+6 %
but not less than	2 mm	2,5 mm	4 mm	6 mm
Minus tolerances	-1 %	-1,5 %	-2 %	-4 %
but not less than	-1 mm	-1,5 mm	-2 mm	-4 mm

9.1 The thickness shall be measured at the same radii as those at which the pitch is measured.

9.2 The tolerances in [Table 5](#) are expressed as percentages of the local thickness and as minimum absolute values.

9.3 The maximum thicknesses indicated on the drawing shall not be less, after deduction of the minus tolerance, than the thicknesses required by the Classification Society concerned.

10 Checking and tolerances of the form of blade sections

10.1 These apply only to propellers of Class S and Class I and to the same radii as those at which the pitch is measured.

In case of CNC-machining of blade and edges, it can be agreed between the manufacturer and the user to abstain from any further checking of the form of blade sections.

10.2 To avoid undue deviation in overall camber, the algebraic sum of the percentage deviations resulting from any two consecutive measurements of local pitch shall not be in excess of 1,5 times the allowable tolerance (for example, if the tolerance is $\pm 2\%$; the sum of consecutive deviations shall be within $\pm 3\%$, see [Figure 3](#)).

10.3 Alternatively, the satisfactory continuity of the cylindrical sections may be verified by the use of suitable flexible templates.


The leading and trailing edges shall be checked by templates, or equivalent devices, to demonstrate their accuracy to the drawing to within the following tolerances of the face and the back:

- Class S: $\pm 0,5$ mm;
- Class I: $\pm 0,75$ mm.

Alternatively, by agreement between the manufacturer and the user, the edges shall be checked by templates made in three parts for each edge (see [Figure 4](#)) a short nose template controlling the final edge detail and two fairing templates from the nose, one to the face and one to the back each covering about 20 % of the blade length but not necessarily more than 300 mm. These templates shall fit with a tolerance of 0,25 mm for Class S and 0,35 mm for Class I.

In case of large skew of the blades (skew angle more than 25°), LE templates (having a corresponding shape) may be attached perpendicular to the leading edge contour alternatively by agreement between the manufacturer and the user. This holds for the area from $0,7 R$ to the tip. The templates shall be attached at the cross points of blade outline and nominal test radii, and they shall overlap at least 2 test radii, at which pitch, thickness, etc. will be checked, but not necessarily more than 300 mm length.

The number of templates to be applied is the same as for the conventional procedure.

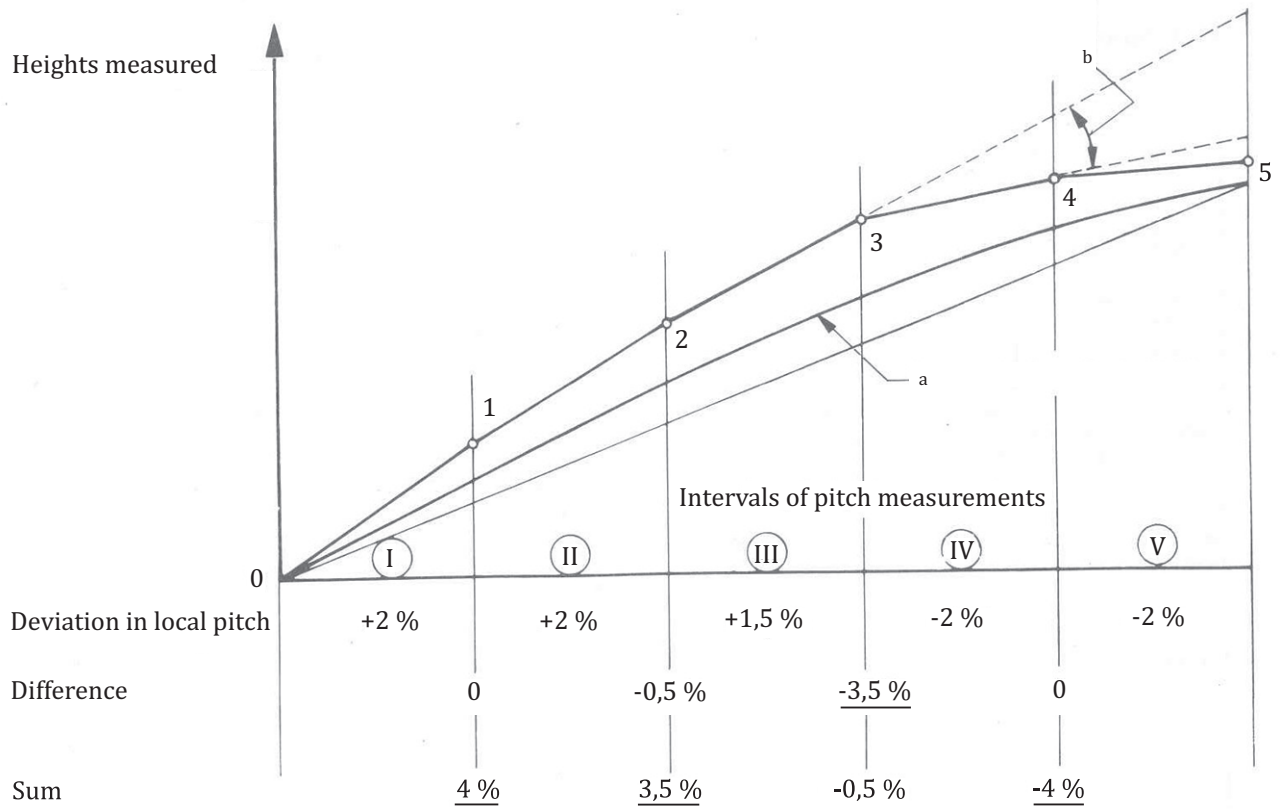


Key

- a Theoretical outline of blade section.
- b Pitch difference too high.

NOTE On [Figure 3](#), the deviations are multiplied by 20. The values which are too high are underlined.

Figure 3 — Measurement and verification of blade tolerances

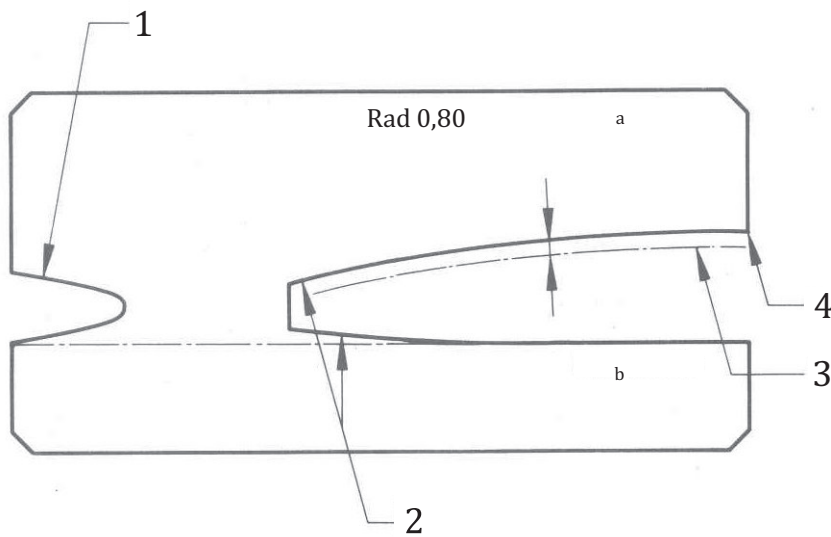

Key

- 1 short nose template made to size + max tolerance
- 2 form templates for pressure and suction sides separated by 6 mm for independent application
- 3 theoretical suction side profile
- 4 contact surface for suction side
- a Leading edge (+6 mm).
- b Pressure side.

Figure 4 — Measurement using template

11 Tolerances of the length of the blade sections

Table 6 — Blade length tolerances

Specification	Class			
	S	I	II	III
Tolerance	±1,5 %	±2 %	±3 %	±5 %
But not less than	7 mm	10 mm	13 mm	15 mm

11.1 The tolerances in [Table 6](#) are expressed as percentages of the values of the ratio: diameter by the number of blades (D/Z).

11.2 The lengths of the sections of each blade shall be measured at five radii at least for Class S (Example: $0,3 R - 0,5 R - 0,7 R - 0,8 R - 0,95 R$) and four radii for Class I, Class II, and Class III.

12 Tolerances on the location of blades, reference lines, and blade contours

12.1 Marking of lines of reference

The reference line is positioned as a straight line on the drawing by location of the point M on the pressure side of the blade and point O on the axis of the propeller.

This point M shall be marked on a cylindrical section at a radius outside $0,5 R$ and, if possible, near $0,7 R$.

In principle, it is selected in such a way that the line OM cuts the largest possible number of blade sections.

The ratio between the angles φ_E (leading edge) and φ_S (trailing edge) is indicated on the drawings (see [Figure 5](#)).

Point M' on the manufactured propeller shall be determined in such a way that a ratio φ_E/φ_S as found on the drawings can be obtained at the considered radius (see [Figure 6](#)).

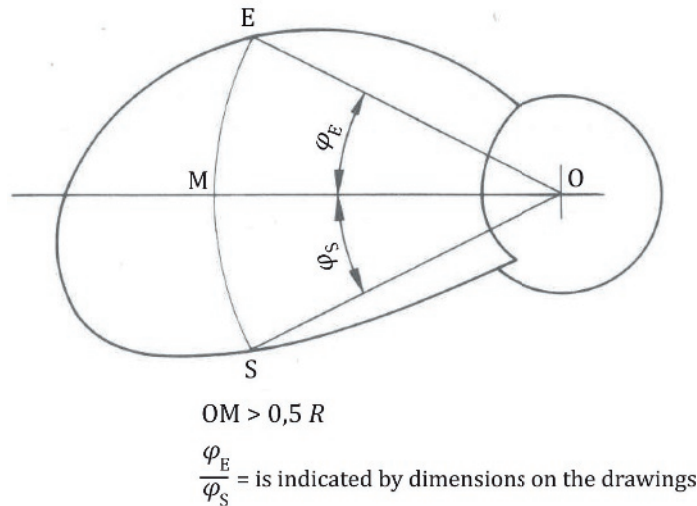


Figure 5 — Angles of blade leading and trailing edges

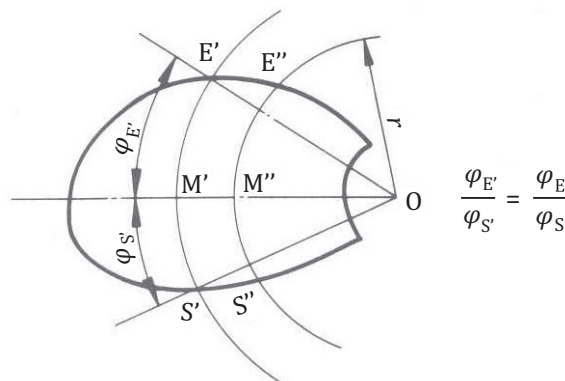


Figure 6 — Lines of reference

The reference planes through points M' are used to check the shape of the leading edge and skew back, as well as the blade angular deviation.

NOTE For skew back definition, see ISO 3715.

12.2 Tolerances on the contour of the leading edge

The tolerance shall be calculated on the radii according to [Table 3](#) on the corresponding arcs and are valid for the arc lengths E''M'' (see [Figure 6](#)). They are given in percentages of D/Z in [Table 6](#) (D = Diameter, Z = number of blades).

The tolerances for the distance E''M'' shall be double the values given in [Table 6](#), provided that the contours of the blade edges are fair.

12.3 Tolerances on the angular deviation between two consecutive blades

The tolerances shall be given by the following:

- Class S and I: $\pm 1^\circ$;
- Class II and III: $\pm 2^\circ$.

13 Tolerances on rake, axial position, and relative axial position of consecutive blades

The rake is characterized by the position of the reference line PP' [see [Figure 7](#), a)]. This is measured by the distance to a plane, W, perpendicular to the axis of rotation of the screw propeller at three points (at least). A, B, and C situated at $0,3 R$ or $0,4 R$, $0,6 R$ or $0,7 R$, $0,9 R$ or $0,95 R$.

Alternatively, the centre line of blade sections shall be used as reference line PP' [see [Figure 7](#), b)] for evaluation of rake in case of high-skewed propeller blades (skew angle $>25^\circ$).

[Table 7](#) gives the tolerances on these distances: $d(A)$, $d(B)$, and $d(C)$ expressed as a percentage of the propeller diameter, D , to control the axial position of the blades. The same tolerances (and not double tolerances) are applicable to differences such as $d(B) - d(C)$, for the same blade, to control the rake; and to differences such as $d_1(C) - d_2(C)$, for two consecutive blades, to control the relative axial position.

Table 7 — Rake tolerances

Specification	Class			
	S	I	II	III
Deviation of plottings on each blade at points A, B, and C (situated at $0,3 R$, $0,6 R$, and $0,95 R$) with respect to plane W perpendicular to the axis	$\pm 0,5 \%$	$\pm 1 \%$	$\pm 1,5 \%$	$\pm 3 \%$

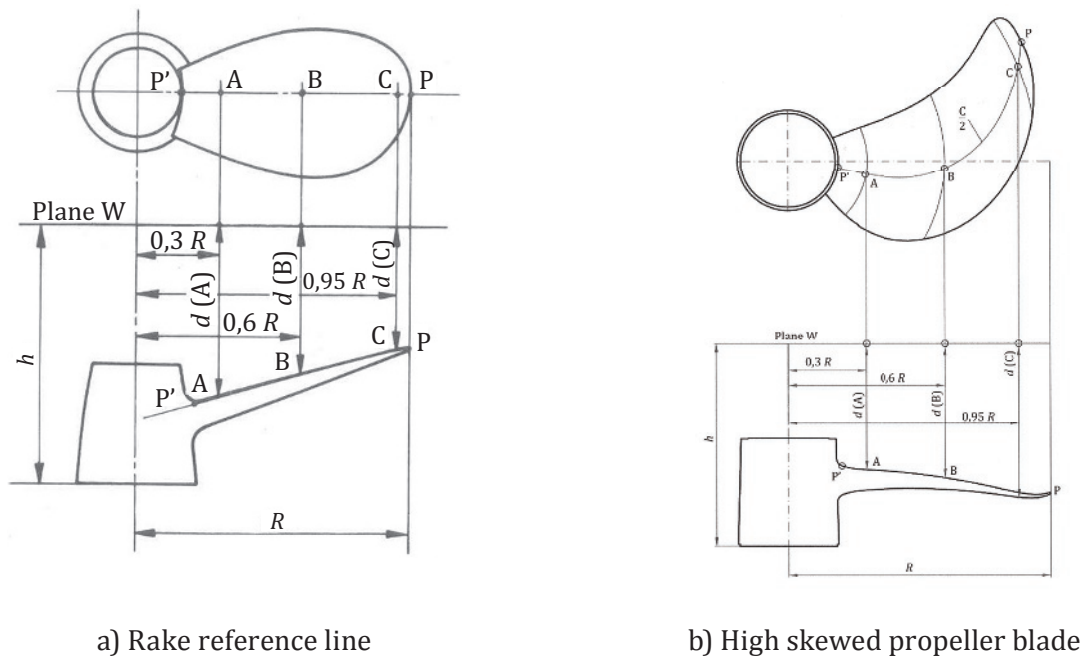


Figure 7 — Blade rake and reference line

14 Surface finish

The surface texture of the blades, expressed as an arithmetic mean deviation, R_a in micrometres, in accordance with ISO 1302, shall have a roughness not greater than the following:

- 2 from the hub for propellers of Class S;
- 3 from the radius $0,3 R$ for propellers of Class I;
- 5 from the radius $0,4 R$ for propellers of Class II;
- 8 from the radius $0,5 R$ for propellers of Class III.

15 Static balancing

15.1 When finished, all propellers shall be statically balanced.

The maximum permissible unbalance of the propeller is defined according to ISO 1940-1:2003, Table 1. The accuracy classes of this part of ISO 484 correspond to ISO 1940-1 balancing quality grades according to the following allocation given in [Table 8](#).

Table 8

Class	S	I	II	III
Balancing quality grade according to ISO 1940-1	G 6,3	G 16	G 25	G 40

15.2 In the case of a controllable pitch or built-up propeller, the manufacturer shall convince the user that the assembled propeller will be in accordance with the requirements of this Clause.

16 Measuring equipment

The maximum permissible inaccuracy of the measuring equipment shall not exceed half the tolerance on the dimension or quantity to be measured or, in the case of geometric measurements, 0,5 mm, whichever is greater.

Bibliography

- [1] ISO 484-1, *Shipbuilding — Ship screw propellers — Manufacturing tolerances — Part 1: Propellers of diameter greater than 2,50 m*
- [2] ISO 3715¹⁾, *Ships and marine technology — Propulsion plants for ships*

1) Withdrawn standard.

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™