

Bonded abrasive products — Dimensions —

Part 4: Grinding wheels for surface grinding/peripheral grinding

ICS 25.100.70

National foreword

This British Standard reproduces verbatim ISO 603-4:1999 and implements it as the UK national standard.

The UK participation in its preparation was entrusted to Technical Committee MTE/13, Grinding wheels, abrasive tools, paper, cloths and powder, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled "International Standards Correspondence Index", or by using the "Find" facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii and iii, a blank page, pages 1 to 16, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard, having been prepared under the direction of the Engineering Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 November 1999

© BSI 11-1999

INTERNATIONAL STANDARD

ISO 603-4

First edition
1999-07-15

Bonded abrasive products — Dimensions —

Part 4: Grinding wheels for surface grinding/peripheral grinding

Produits abrasifs agglomérés — Dimensions —

Partie 4: Meules pour rectification plane/meulage tangentiel



Reference number
ISO 603-4:1999(E)

Contents

Page

1 Scope	1
2 Normative references	2
3 Dimensions	3
3.1 Type 1: Straight grinding wheel	3
3.2 Type 5: Wheel recessed on one side	4
3.3 Type 7: Wheel recessed on both sides	6
3.4 Type 20: Wheel relieved on one side	8
3.5 Type 21: Wheel relieved on both sides	8
3.6 Type 22: Wheel relieved on one side and recessed on the other side	9
3.7 Type 23: Wheel relieved and recessed on one side	9
3.8 Type 24: Wheel relieved and recessed on one side and recessed on the other side	10
3.9 Type 25: Wheel relieved and recessed on one side and relieved on the other side	11
3.10 Type 26: Wheel relieved and recessed on both sides	12
3.11 Type 38: Hubbed wheel	13
3.12 Type 39: Double hubbed wheel	13
4 Designation	15
5 Specifications	15
5.1 Tolerances	15
5.2 Balancing	15
5.3 Marking	15
Bibliography	16

Licensed Copy: Institute Of Technology Tallaght, Institute Of Technology, Sat Sep 09 04:16:35 BST 2006, Uncontrolled Copy, (c) BSI

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 603-4 was prepared by Technical Committee ISO/TC 29, *Small tools*, subcommittee SC 5, *Grinding wheels and abrasives*.

This first edition, together with ISO 603-1:1999 to ISO 603-3:1999 and ISO 603-5:1999 to ISO 603-16:1999, cancels and replaces ISO/R 603:1967, ISO 603-2:1981, ISO 1117:1975, ISO 2220:1972, ISO 2933:1974, ISO 3290:1976 and ISO 3921:1976 as a technical revision of these standards.

ISO 603 consists of the following parts, under the general title *Bonded abrasive products — Dimensions*:

- *Part 1: Grinding wheels for external cylindrical grinding between centres*
- *Part 2: Grinding wheels for centreless external cylindrical grinding*
- *Part 3: Grinding wheels for internal cylindrical grinding*
- *Part 4: Grinding wheels for surface grinding/peripheral grinding*
- *Part 5: Grinding wheels for surface grinding/face grinding*
- *Part 6: Grinding wheels for tool and tool room grinding*
- *Part 7: Grinding wheels for manually guided grinding*
- *Part 8: Grinding wheels for deburring and fettling/snagging*
- *Part 9: Grinding wheels for high-pressure grinding*
- *Part 10: Stones for honing and superfinishings*
- *Part 11: Hand finishing sticks*
- *Part 12: Grinding wheels for deburring and fettling on a straight grinder*
- *Part 13: Grinding wheels for deburring and fettling on a vertical grinder*
- *Part 14: Grinding wheels for deburring and fettling/snagging on an angle grinder*
- *Part 15: Grinding wheels for cutting-off on stationary or mobile cutting-off machines*
- *Part 16: Grinding wheels for cutting-off on hand held power tools*

Bonded abrasive products — Dimensions —

Part 4:

Grinding wheels for surface grinding/peripheral grinding

1 Scope

This part of ISO 603 specifies the nominal dimensions, in millimeters, of:

- Type 1: Straight grinding wheel
- Type 5: Wheel recessed on one side
- Type 7: Wheel recessed on both sides
- Type 20: Wheel relieved on one side
- Type 21: Wheel relieved on both sides
- Type 22: Wheel relieved on one side and recessed on the other side
- Type 23: Wheel relieved and recessed on one side
- Type 24: Wheel relieved and recessed on one side and recessed on the other side
- Type 25: Wheel relieved and recessed on one side and relieved on the other side
- Type 26: Wheel relieved and recessed on both sides.
- Type 38: Hubbed wheel
- Type 39: Double hubbed wheel

These bonded abrasive products are intended to be used for the grinding of plane surfaces where the workpiece is secured to a reciprocating table. The workpiece and the grinding wheel are mechanically guided.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 603. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 603 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 525:1999, *Bonded abrasive products — General requirements.*

ISO 6103:1999, *Bonded abrasive products — Static balancing of grinding wheels — Testing.*

ISO 13942:—¹⁾, *Bonded abrasive products — Limit deviations and run-out tolerances.*

¹⁾ To be published.

Uncontrolled Copy, (c) BSI
Licensed Copy: Institute Of Technology Tallaght, Institute of Technology, Sat Sep 09 04:16:35 BST 2006

3 Dimensions

3.1 Type 1: Straight grinding wheel

See Figure 1 and Table 1.

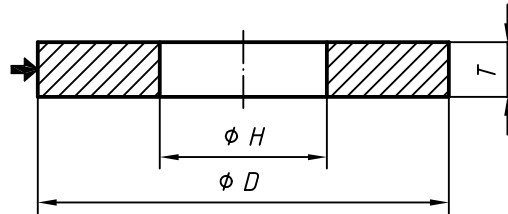


Figure 1 — Type 1

Table 1 — Dimensions of Type 1

D	T								H
	13	20	25	32	50	80	100	160	
150	X	—	—	—	—	—	—	—	32
180	X	—	—	—	—	—	—	—	
200	X	X	—	—	—	—	—	—	
	X	X	—	—	—	—	—	—	50,8
250	—	X	X	X	—	—	—	—	76,2
	—	X	X	X	—	—	—	—	
300	—	X	X	X	X	X	—	—	127
	—	X	X	X	X	X	—	—	
350/356	—	—	—	X	X	X	—	—	76,2
	—	—	—	X	X	X	—	—	
400/406	—	—	—	X	X	X	X	—	127
500/508	—	—	—	—	X	X	X	X	203,2
	—	—	—	—	X	X	X	X	
600/610	—	—	—	—	X	X	X	X	304,8
750/762	—	—	—	—	X	X	X	X	

3.2 Type 5: Wheel recessed on one side

See Figure 2 and Table 2.

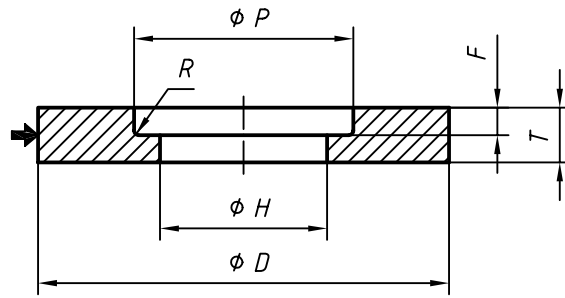


Figure 2 — Type 5

Licensed Copy: Institute Of Technology Tallaght, Institute of Technology, Sat Sep 09 04:16:35 BST 2006, Uncontrolled Copy, (c) BSI

Table 2 — Dimensions of Type 5

<i>D</i>	<i>T</i>	<i>H</i>	<i>P</i>	<i>F</i>	<i>R</i> _{max}
150	25	32	80	10	1
	32			13	
180	25		100	10	32
	32			13	
200	25	32	110	10	
	32			13	
200	25	50,8	110	10	
	32			13	
250	32	50,8	150	13	
	40				
250	32	76,2	150	13	
	40				
300	40	76,2	150	13	
	50				
300	40	127	190	13	
	50				
350/356	40	127	215	13	
	50				
400/406	40	127	215	13	
	50				
450/457	63	127	215	25	
	80				
450/457	40	203,2	280	13	
	50				
	63			25	
	80				
500/508	40	203,2	400	13	
	50				
	63			25	
	80				
500/508	40	304,8	400	13	
	50				
	63			25	
	80				
600/610	63	203,2	400	13	
	80			25	
	100			50	
600/610	63	304,8	400	13	
	80			25	
	100			50	
750/762	63	304,8	400	13	
	80			25	
	100			50	
900/914	63	304,8	450	13	
	80			25	
	100			50	

3.3 Type 7: Wheel recessed on both sides

See Figure 3 and Table 3.

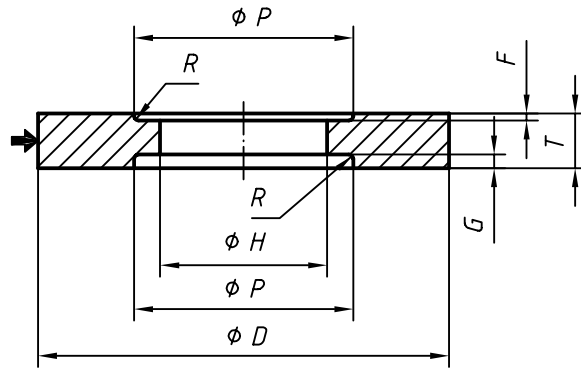


Figure 3 — Type 7

Table 3 — Dimensions of Type 7

<i>D</i>	<i>T</i>	<i>H</i>	<i>P</i>	<i>F</i>	<i>G</i>	<i>R</i> _{max}
300	40	76,2	150	6	6	3,2
	50			10	10	
300	40	127	190	6	6	5
	50			10	10	
350/356	40	127	215	10	10	
	50					
400/406	40	127	215	10	10	
	50					
450/457	63	127	215	13	13	
	80					
450/457	50	203,2	280	10	10	
	63			13	13	
	80					
500/508	40	203,2	400	10	10	
	50					
	63			13	13	
	80					
500/508	40	304,8	400	10	10	
	50					
	63			13	13	
	80					
600/610	50	203,2	400	10	10	
	63			13	13	
	80				25	
	100					
600/610	50	304,8	400	10	10	
	63			13	13	
	80				25	
	100					
750/762	80	304,8	400	13	13	
	100				25	
900/914	80	304,8	450	13	13	
	100				25	

3.4 Type 20: Wheel relieved on one side

See Figure 4 and Table 4.

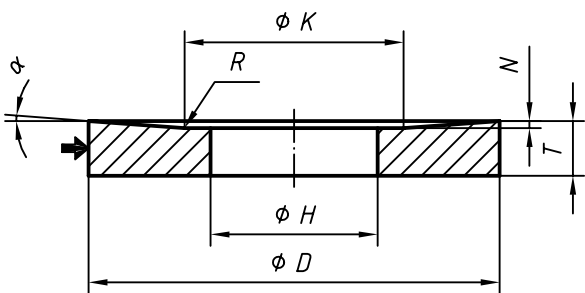


Figure 4 — Type 20

3.5 Type 21: Wheel relieved on both sides

See Figure 5 and Table 4.

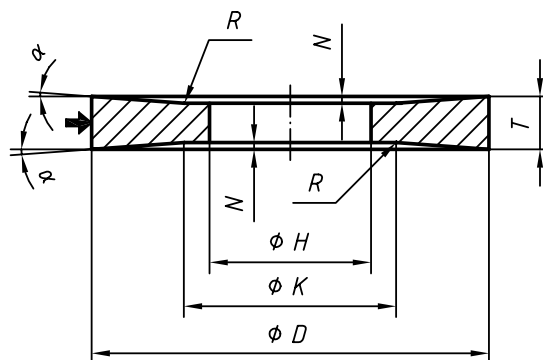


Figure 5 — Type 21

Table 4 — Dimensions of Type 20 and Type 21

D	T											H	K	N ^a		R _{max}
	13	16	20	25	32	40	50	63	80	100	125			α ≈ 2°	α ≈ 4°	
250	X	X	X	X	X	X	—	—	—	—	—	76,2	150	2	4	3,2
												127	190	1	2	5
300	X	X	X	X	X	X	X	—	—	—	—	76,2	150	3	5	3,2
												127	190	2	4	
300/356	—	—	X	X	X	X	X	X	—	—	—	127	215	2	5	5
400/406	—	—	X	X	X	X	X	X	X	—	—			3	7	
450/457	—	—	X	X	X	X	X	X	X	—	—	127	215	4	8	
												203,2	280	3	6	
500/508	—	—	X	X	X	X	X	X	X	—	—	203,2	400	2	4	8
												304,8				
600/610	—	—	—	—	X	X	X	X	X	X	—	203,2	400	4	7	
												304,8				
750/762	—	—	—	—	X	X	X	X	X	X	X	304,8	400	6	13	

^a The values N or 2N are taken less than or equal to half thickness T.

3.6 Type 22: Wheel relieved on one side and recessed on the other side

See Figure 6 and Table 5.

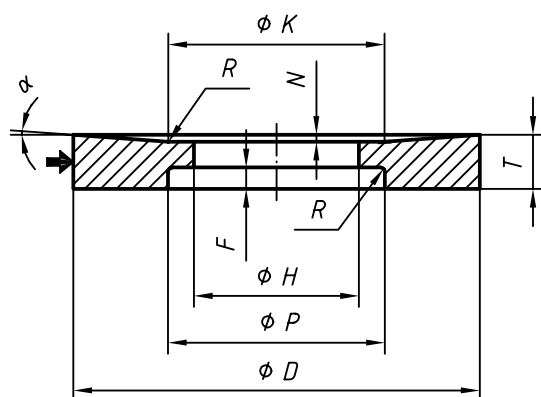


Figure 6 — Type 22

3.7 Type 23: Wheel relieved and recessed on one side

See Figure 7 and Table 5.

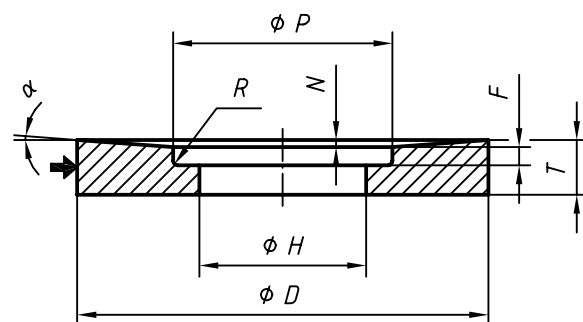


Figure 7 — Type 23

Table 5 — Dimensions of Type 22 and Type 23

D	T	H	$K = P$	F	N		R_{max}
					$\alpha \approx 2^\circ$	$\alpha \approx 4^\circ$	
300	40	76,2	150	13	3	5	3,2
	50				3	5	
300	40	127	190	13	2	4	5
	50				2	4	
350/356	40	127	215	13	2	5	
	50				2	5	
400/406	40	127	215	13	3	7	
	50				3	7	
450/457	63	127	215	25	4	8	
	80				4	8	
450/457	40	203,2	280	13	3	6	
	50				3	6	
	63			3	6		
	80			25	3	6	
500/508	40	203,2	400	13	2	4	
	50				2	4	
	63			2	4		
	80			25	2	4	
500/508	40	304,8	400	13	2	4	
	50				2	4	
	63			2	4		
	80			25	2	4	
600/610	63	203,2	400	13	4	7	8
	80			25	4	7	
	100			40	4	7	
600/610	63	304,8	400	13	4	7	
	80			25	4	7	
	100			40	4	7	
750/762	63	304,8	400	13	6	13	
	80			25	6	13	
	100			40	6	—	

3.8 Type 24: Wheel relieved and recessed on one side and recessed on the other side

See Figure 8 and Table 6.

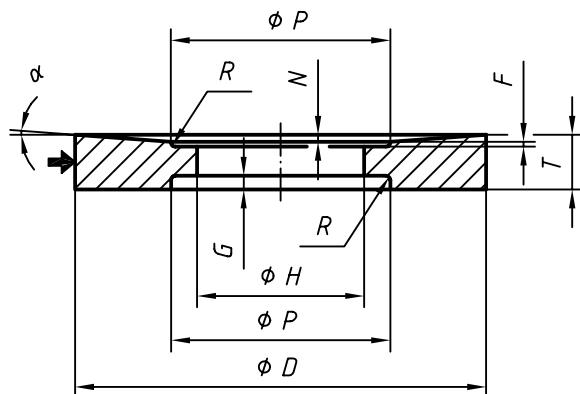


Figure 8 — Type 24

Table 6 — Dimensions of Type 24

<i>D</i>	<i>T</i>	<i>H</i>	<i>P</i>	<i>F</i> ^a	<i>G</i> ^a	<i>N</i> ^a		<i>R</i> _{max}
						$\alpha \approx 2^\circ$	$\alpha \approx 4^\circ$	
300	40	76,2	150	6	6	2	4	3,2
	50			10	10	3	—	
300	40	127	190	6	6	2	4	5
	50			10	10	3	—	
350/356	40	127	215	6	6	2	5	
	50					2	5	
400/406	40	127	215	10	13	3	7	
	50					3	7	
450/457	63	127	215	10	13	4	8	
	80			13		4	8	
450/457	50	203,2	280	6	13	3	6	
	63			3		6		
	80			3		6		
500/508	40	203,2	400	6	6	2	4	8
	50			2		4		
	63			2		4		
	80			2		4		
500/508	40	304,8	400	6	6	2	4	
	50			2		4		
	63			2		4		
	80			2		4		
600/610	50	203,2	400	6	6	4	7	
	63			4		—		
	80			4		7		
	100			4		7		
600/610	50	304,8	400	6	6	4	7	
	63			4		—		
	80			4		7		
	100			4		7		
750/762	80	304,8	400	13	13	6	13	
	100			6		—		

^a The values $N + F + G$ are taken less than or equal to half thickness T .

3.9 Type 25: Wheel relieved and recessed on one side and relieved on the other side

See Figure 9 and Table 7.

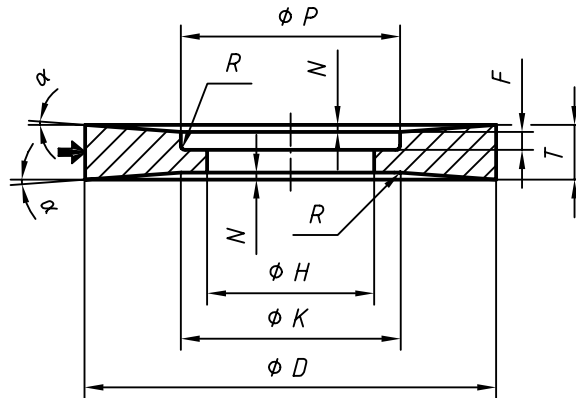


Figure 9 — Type 25

Table 7 — Dimensions of Type 25

D	T	H	$K = P$	F^a	N^a		R_{max}
					$\alpha \approx 2^\circ$	$\alpha \approx 4^\circ$	
300	40	76,2	150	13	3	—	3,2
	50				3	5	
300	40	127	190	13	2	—	5
	50				2	4	
350/356	40	127	215	13	2	—	
	50				2	5	
400/406	40	127	215	13	3	—	
	50				3	6	
450/457	63	127	215	13	4	8	
	80			25	4	7	
450/457	40	203,2	280	13	3	—	
	50				3	6	
	63			3	6		
	80			25	3	6	
500/508	40	203,2	400	13	2	—	
	50				2	4	
	63			2	4		
	80			25	2	4	
500/508	40	304,8	400	13	2	—	
	50				2	4	
	63			2	4		
	80			25	2	4	
600/610	63	203,2	400	13	4	7	
	80			25	4	7	
	100			40	4	—	
600/610	63	304,8	400	13	4	7	
	80			25	4	7	
	100			40	4	—	
750/762	63	304,8	400	13	6	—	
	80			25	6	—	
	100			40	5	—	

^a The values $2N + F$ are taken less than or equal to half thickness T .

3.10 Type 26: Wheel relieved and recessed on both sides

See Figure 10 and Table 8.

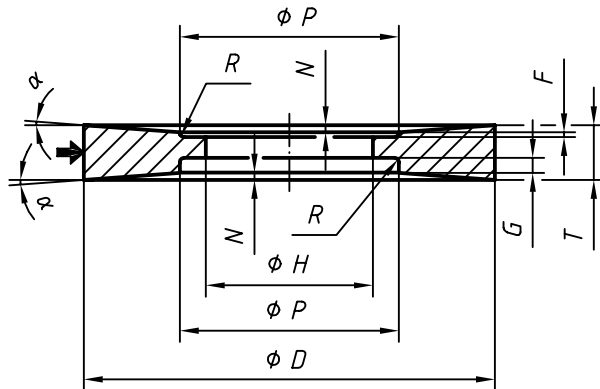


Figure 10 — Type 26


Table 8 — Dimensions of Type 26

D	T	H	P	F^a	G^a	N^a		R_{max}
						$\alpha \approx 2^\circ$	4°	
300	40	76,2	150	6	6	2	4	3,2
	50			10	10	2	—	
300	40	127	190	6	6	2	4	5
	50			10	10	2	—	
350/356	40	127	215	6	6	2	—	
	50			6	6	2	5	
400/406	40	127	215	6	6	3	—	
	50			6	6	3	6	
450/457	63	127	215	6	6	4	8	
	80			13	13	4	7	
450/457	50	203,2	280	6	6	3	6	
	63			13	13	3	6	
	80				3	6		
500/508	40	203,2	400	6	6	2	4	
	50			13	13	2	4	
	63				2	—		
	80				2	4		
500/508	40	304,8	400	6	6	2	4	
	50			13	13	2	4	
	63				2	—		
	80				2	4		
600/610	50	203,2	400	6	6	4	—	
	63			13	13	—	—	
	80				4	—		
	100				25	4	—	
600/610	50	304,8	400	6	6	4	—	
	63			13	13	—	—	
	80				4	—		
	100				25	4	—	
750/762	80	304,8	400	13	13	6	—	
	100			25	6	—		

^a The values $2N + F + G$ are taken less than or equal to half thickness T .

3.11 Type 38: Hubbed wheel

See Figure 11 and Table 9.

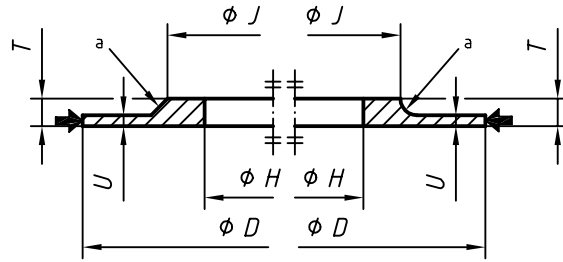


a Chamfer or radius left to the manufacturer's discretion.

Figure 11 — Type 38

3.12 Type 39: Double hubbed wheel

See Figure 12 and Table 9.

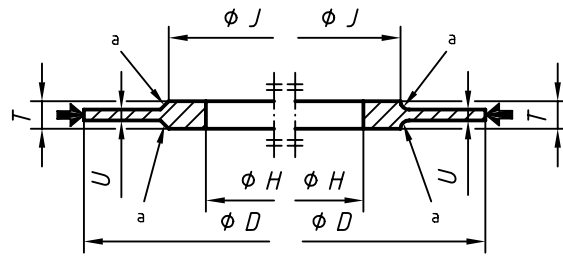

a Chamfer or radius left to the manufacturer's discretion.

Figure 12 — Type 39

Table 9 — Dimensions of Type 38 and Type 39

<i>D</i>	<i>J</i>	<i>T</i>	<i>U</i>								<i>H</i>	
			3	5	8	13	20	25	32	40		
250	180	13	X	X	X	—	—	—	—	—	76,2	
	190		—	—	—	—	—	—	—	—	127	
250	180	20	—	—	—	X	—	—	—	—	76,2	
	190		—	—	—	—	—	—	—	—	127	
300	180	13	—	X	X	—	—	—	—	—	76,2	
	220		—	—	—	—	—	—	—	—	127	
300	180	20	—	—	—	X	—	—	—	—	76,2	
	220		—	—	—	—	—	—	—	—	127	
350/356	245	20	—	—	X	—	—	—	—	—	127	
		25	—	—	—	X	X	—	—	—		
400/406	245	20	—	—	X	—	—	—	—	—	127	
		25	—	—	—	X	—	—	—	—		
		32	—	—	—	—	X	—	—	—		
450/457	245	20	—	—	X	—	—	—	—	—	127	
		25	—	—	—	X	—	—	—	—		
		32	—	—	—	—	X	X	—	—		
500/508	420	25	—	—	—	X	—	—	—	203,2		
500/508		32	—	—	—	—	X	X	—	304,8		
600/610	420	25	—	—	—	X	—	—	—	—	203,2	
600/610		32	—	—	—	—	X	—	—	—	304,8	
600/610		40	—	—	—	—	—	—	X	X	—	
750/762	420	32	—	—	—	X	X	—	—	—	304,8	
40		—	—	—	—	—	—	X	—	—		
50		—	—	—	—	—	—	—	—	X		X
900/914	550	32	—	—	—	X	X	—	—	—	304,8	
		40	—	—	—	—	—	—	X	—		—
		50	—	—	—	—	—	—	—	X		X
1 060/1 067	550	32	—	—	—	X	X	—	—	—	304,8	
		40	—	—	—	—	—	—	X	—		—
		50	—	—	—	—	—	—	—	—		X

4 Designation

A complete designation of a bonded abrasive product in accordance with this part of ISO 603 shall be consist of the following information:

- a) designation of the bonded abrasives, e.g. "Grinding wheel";
- b) reference of this part of ISO 603;
- c) type (shape);
- d) dimensions;
- e) specifications of an internal nature;
- f) the maximum operating speed.

} In accordance with ISO 525
and this part of ISO 603

EXAMPLE

A grinding wheel for surface grinding/peripheral grinding, Type 25, $D = 450$ mm, $K = 280$ mm, $T = 80$ mm, $N = 6$ mm, $H = 203,2$ mm, $P = 280$ mm, $F = 25$ mm, nature of abrasive A, grain size 46, grade I, structure 7, nature of bond V and a maximum operating speed of 32 m/s is designated as follows:

Grinding wheel ISO 603-4 - 25 - 450/280 × 80/6 × 203,2 - 280/25 - A 46 I7V - 32 m/s

5 Specifications

The specifications are left to the manufacture's discretion, see ISO 525.

5.1 Tolerances

Limit deviations and run-out tolerances in accordance with ISO 13942.

5.2 Balancing

Balancing is in accordance with ISO 6103.

5.3 Marking

Marking of bonded abrasive products is in accordance with ISO 525.

Bibliography

- [1] ISO 8486-1, *Bonded abrasives — Determination and designation of grain size distribution — Part 1: Macrogrits F4 to F220.*
- [2] ISO 8486-2, *Bonded abrasives — Determination and designation of grain size distribution — Part 2: Microgrits F230 to F1200.*

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.