

Information and documentation — Format for information exchange

ICS 01.140.20; 35.240.30

National foreword

This British Standard is the UK implementation of ISO 2709:2008. It supersedes BS ISO 2709:1996 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee IDT/2/7, Computer applications in information and documentation.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2008

© BSI 2008

ISBN 978 0 580 56057 6

Amendments/corrigenda issued since publication

Date	Comments

INTERNATIONAL STANDARD

ISO
2709

Fourth edition
2008-07-01

Information and documentation — Format for information exchange

Information et documentation — Format pour l'échange d'information



Reference number
ISO 2709:2008(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 2709 was prepared by Technical Committee ISO/TC 46, *Information and documentation*, Subcommittee SC 4, *Technical interoperability*.

This fourth edition cancels and replaces the third edition (ISO 2709:1996), which has been technically revised to incorporate specification of the use of ISO/IEC 10646 using 8-bit Unicode Transformation Format (UTF-8) encoding. Consequently, lengths are specified in terms of octets instead of characters.

Information and documentation — Format for information exchange

1 Scope

This International Standard specifies the requirements for a generalized exchange format which will hold records describing all forms of material capable of bibliographic description as well as other types of records. It does not define the length or the content of individual records and does not assign any meaning to tags, indicators or identifiers, these specifications being the functions of an implementation format.

This International Standard describes a generalized structure, a framework designed specially for communications between data processing systems and not for use as a processing format within systems.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 646:1991, *Information technology — ISO 7-bit coded character set for information interchange*

ISO/IEC 6429:1992, *Information technology — Control functions for coded character sets*

ISO/IEC 10646:2003, *Information technology — Universal Multiple-Octet Coded Character Set (UCS)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

character

member of a set of elements used for the organization, control, or representation of data

3.2

data field

characters recording the descriptive content of the record

3.3

directory

index to the location of the fields within a record

3.4

directory map

set of parameters specifying the structure of the entries in the directory

3.5

field

variable length portion of the record containing a particular category of data, following the directory and associated with one entry of the directory

NOTE A field can contain one or more subfields.

3.6

field separator

control character that terminates the directory, record identifier, reference fields and data fields

3.7

tag

three octets associated with a field and used to identify it

3.8

indicator

first data element, if present, associated with a field supplying further information about the contents of the field, about the relationship between the field and other fields in the record, or about the action required in certain data manipulation processes

3.9

octet

group of 8 consecutive bits also referred to as an 8-bit byte; it may represent one character or be part of a representation of a character

3.10

record

collection of fields, including a record label, a directory and data

NOTE If required, the linking of records and their division into subrecords is allowed and should be implemented as specified in the explicit exchange format.

3.11

record identifier field

characters identifying the record

3.12

record label

section occurring at the beginning of each record providing parameters for the processing of the record

3.13

record separator

control character that terminates the record

3.14

reference field

data that may be required for processing a record

3.15

separating character

control character used to separate and qualify units of data logically, and in some cases hierarchically

3.16

structure

arrangement of the parts constituting a record

3.17

subfield

part of a field containing a defined unit of information

3.18

identifier

data element of one or more characters immediately preceding and identifying a subfield

3.19

subrecord

group of fields within a record which may be treated as an entity

4 Structure of communication format for a record

4.1 General

The general structure of a record is shown schematically in Figure 1. A more detailed structure is shown schematically in Figure 2, which includes four alternatives for the data sections.

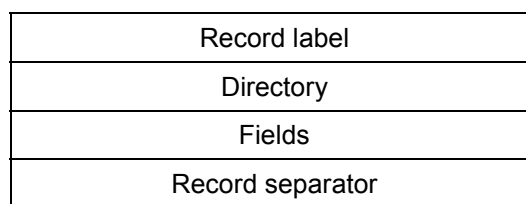


Figure 1 — General structure

A record contains the following fixed and variable-length elements in the sequence shown in Figure 2:

- a) record label (fixed length);
- b) directory (variable length);
- c) record identifier field (variable length);
- d) reference fields (variable length);
- e) data fields (variable length);
- f) field separator(s);
- g) record separator.

The directory, record identifier, reference fields and data fields shall each be terminated by a field separator, i.e. separator IS2 in accordance with ISO/IEC 646 or ISO/IEC 6429.

The record shall be terminated by the record separator, i.e. separator IS3 in accordance with ISO/IEC 646 or ISO/IEC 6429.

4.2 Basic character encoding

All data in the record label and directory, and the indicators, subfield identifiers, field separators, and record separators, shall be taken from the character repertoire of ISO/IEC 646, with one octet per character encoding as specified in ISO/IEC 646 or ISO 10646 with UTF-8 encoding.

4.3 Record label

4.3.1 General

The record label shown in Figure 2 shall be fixed in length to 24 octets, each representing one character and the octet positions shall be as defined in 4.3.2 to 4.3.9.

4.3.2 Record length (octets 0 to 4)

The record length shall be defined by the number of octets in the record, including the record label, directory, fields, and the record separator. The length is a five-digit decimal number, right-aligned with zero fill if necessary.

NOTE The record length described here is a logical record length. For practical reasons relating to machine processing of data, it is sometimes necessary to divide the information into blocks.

4.3.3 Record status (octet 5)

The record status shall be defined by a single character, to be defined in an implementation International Standard, describing the status of a record, for example new or amended. In the absence of an International Standard, special agreement should be reached between the interchange partners.

4.3.4 Implementation codes (octets 6 to 9)

The implementation codes are not defined in this International Standard. Special agreement should be reached between the interchange partners.

4.3.5 Indicator length (octet 10)

The indicator length shall be defined by one decimal digit giving the number of octets of the indicators. If indicators are not used, the indicator length shall be set to zero.

4.3.6 Identifier length (octet 11)

The identifier length shall be defined by one decimal digit giving the number of octets of the identifier. The first or only character of this identifier shall always be IS1 in accordance with ISO/IEC 646 or ISO/IEC 6429. If the identifier is not used, the identifier length shall be set to zero.

4.3.7 Base address of data (octets 12 to 16)

The base address of data shall be defined by five decimal digits, right-aligned with zero fill if necessary, equal to the combined length in characters of the record label and the directory, including the field separator at the end of the directory.

4.3.8 Positions defined by user systems (octets 17 to 19)

Octets positions 17 to 19 shall be defined by user systems.

4.3.9 Directory map

The directory map positions shall be defined by the following.

- a) Octet 20: one decimal digit equal to the length in characters of the length of field part of each entry in the directory.
- b) Octet 21: one decimal digit equal to the length in characters of the starting character position part of each entry in the directory.
- c) Octet 22: one decimal digit equal to the length in characters of the implementation-defined part of each entry in the directory.
- d) Octet 23: reserved for future use.

4.4 Directory

4.4.1 General

The directory shall consist of a variable number of entries, each corresponding to its respective field (record identifier, reference and data fields). The directory shall end with a field separator.

4.4.2 Directory entry

An entry shall consist of the following parts in the given order:

- a) a tag;
- b) the length of the field;
- c) the starting character position;
- d) the implementation-defined part.

The length of the tag shall be three octets. The length in octets of the other three parts in each directory entry shall be given by the directory map (octets 20 to 22 in the record label). All entries in a directory shall have the same structure.

4.4.3 Tag

The tag shall consist of three octets which specify, according to definition in an implementation International Standard, the name of any associated field.

In the absence of an International Standard, special agreement shall be reached between the interchange partners.

4.4.4 Length of field

This length shall be either

- a) the total number of octets [including indicator(s) and field separator] in the field indicated by the preceding tag, or
- b) zero, implying that the directory entry refers to a field whose total length is greater than the largest decimal number (n) which can be stored in the "length" of field part of a directory entry (see Note), or
- c) the number of octets (including field separator) in the final part of a field which has been treated as described in b).

NOTE In the case of b), the field is regarded as being divided into a number of parts, of which all but the last are of equal length (n). Each part has a corresponding directory entry containing the tag for the field and the starting character position of the part to which the directory entry refers. A length of zero indicates that the directory entry refers to a part of the field which is not the final part and that the length of this part is to be taken as (n).

In the cases described in b) and c), all directory entries which refer to parts of the same field shall be adjacent and in sequence.

4.4.5 Starting character position

The starting character position shall consist of a decimal number giving the position of the first octet of the field identified by the preceding tag, relative to the base address of data [i.e. the starting character position of the first field following the directory is 0 (zero)].

4.4.6 Implementation-defined part

The implementation-defined part of the entry, if present, shall contain control information relative to the field referenced by the entry.

4.5 Fields

4.5.1 General

All fields shall end with a field separator. There are three types of fields:

- a) record identifier field: tag 001 ("0" signifies zero);
- b) reference fields: tags 002 to 009 and 00A to 00Z as required (for alphabetic characters, use either capital or lower case letters);
- c) data fields: tags 010 to 999 and 0AA to ZZZ as required (for alphabetic characters, use either capital or lower case letters; any combination of numeric and alphabetic characters is permitted; when alphanumeric tags are used, they shall not start with 00 since only reference fields start with two zeros).

4.5.2 Record identifier field

The record identifier field shall consist of characters identifying the record and shall be assigned by the organization creating the record.

NOTE The record identifier field does not contain indicators or identifiers.

4.5.3 Reference fields

A reference field supplies data which may be required for the processing of the record.

NOTE Reference fields do not contain indicators or identifiers.

4.5.4 Data fields

Each data field shall consist of indicator(s) (optional), identifier(s) (optional), data and a field separator. The presence and length of the indicator(s) or identifier(s) are determined by the indicator length and identifier length, as defined in the record label, and shall be used consistently within each data field of the record.

Each data field in a record shall therefore be constructed according to one of the following alternatives:

- a) **data**: the indicator length and the identifier length in the record label are set to zero (see Figure 2, alternative 1);
- b) **identifier and data**: the indicator length in the record label is set to zero and the identifier length is set to "1" or more (see Figure 2, alternative 2);
- c) **indicator and data**: the indicator length in the record label is set to "1" or more and the identifier length is set to zero (see Figure 2, alternative 3);
- d) **indicator, identifier and data**: the indicator length and the identifier length in the record label are set to "1" or more (see Figure 2, alternative 4).

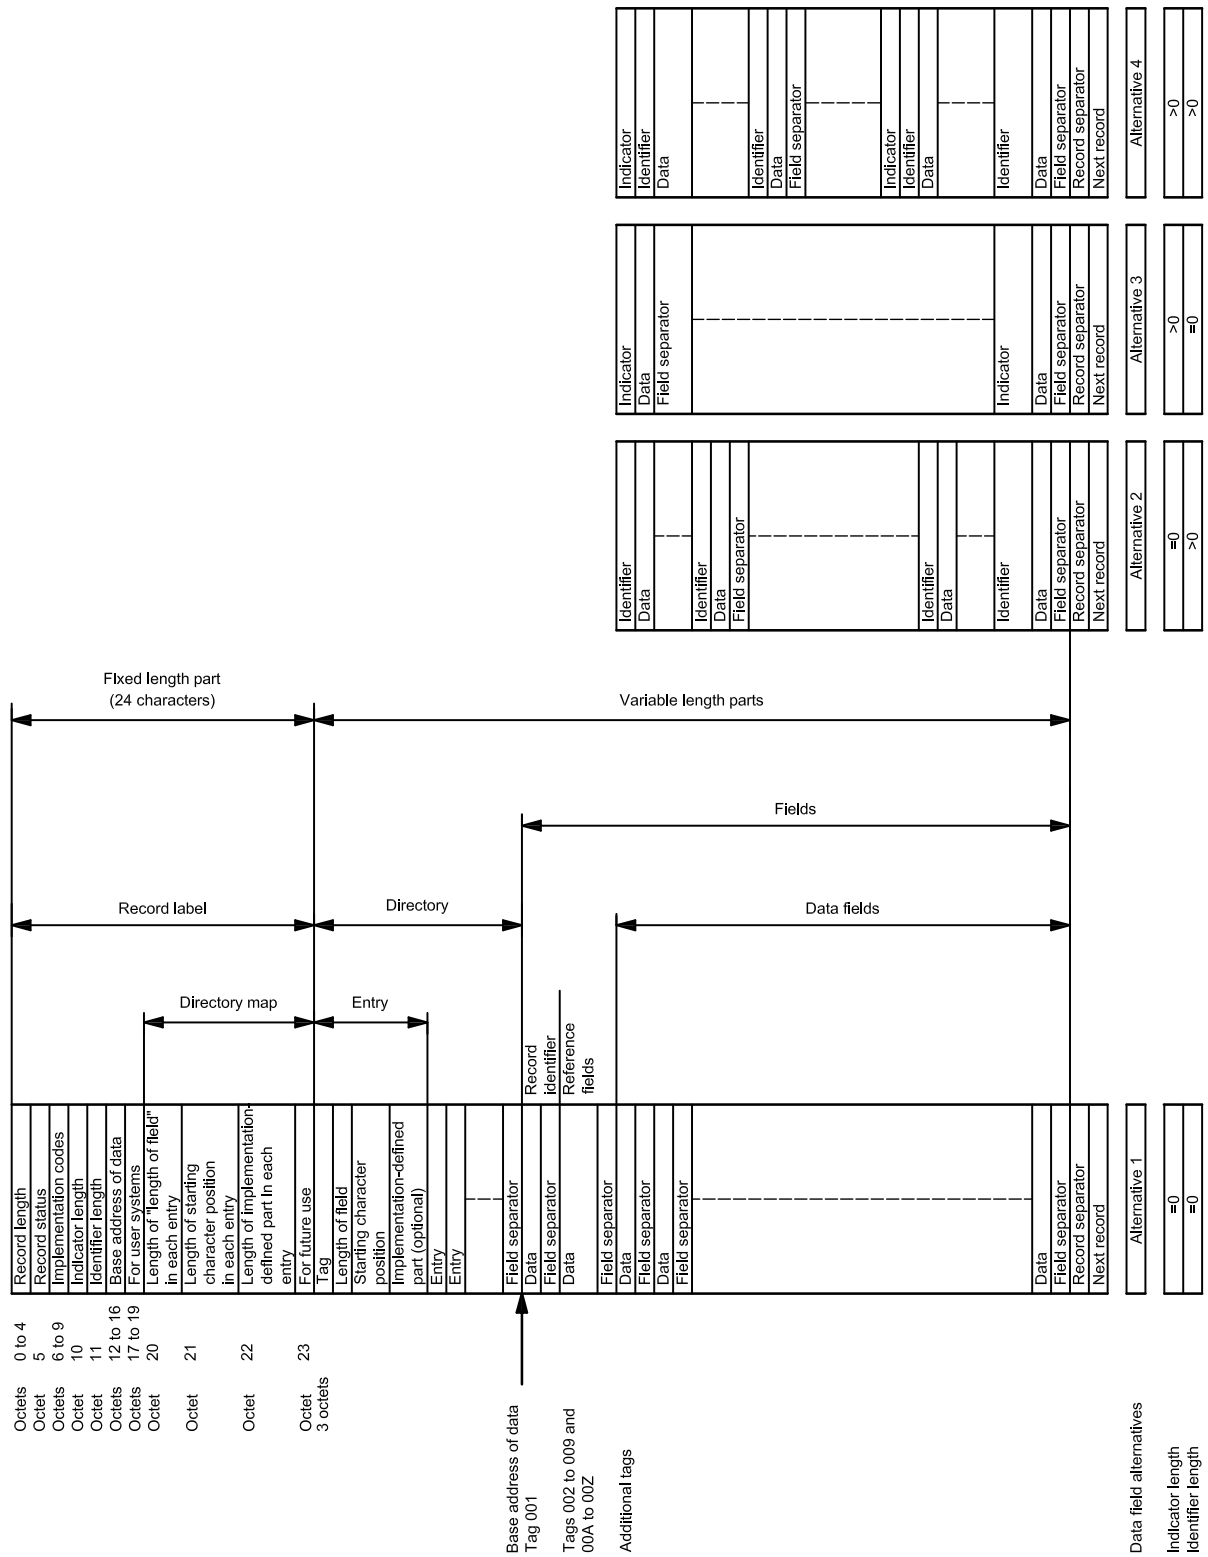


Figure 2 — Detailed record structure

BSI - British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: orders@bsigroup.com You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com