

Plain bearings — Wrapped bushes —

Part 1: Dimensions

Licensed Copy: :FULLNAME, : DATE, Uncontrolled Copy, (c) BSI

ICS 21.100.10

National foreword

This British Standard was published by BSI. It is the UK implementation of ISO 3547-1:2006. It supersedes BS ISO 3547-1:1999 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee MCE/12, Plain bearings.

A list of organizations represented on MCE/12 can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2006

© BSI 2006

ISBN 0 580 49523 X

Amendments issued since publication

Amd. No.	Date	Comments

INTERNATIONAL
STANDARD

ISO
3547-1

Second edition
2006-10-15

Plain bearings — Wrapped bushes —

Part 1:
Dimensions

Paliers lisses — Bagues roulées —

Partie 1: Dimensions



Reference number
ISO 3547-1:2006(E)

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and units	2
5 Dimensions	2
6 Design	10
7 Example for calculation of inside diameter, D_1	11
8 Designation	12
Bibliography	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3547-1 was prepared by Technical Committee ISO/TC 123, *Plain bearings*, Subcommittee SC 3, *Dimensions, tolerances and construction details*.

This second edition cancels and replaces the first edition (ISO 3547-1:1999), which has been technically revised.

ISO 3547 consists of the following parts, under the general title *Plain bearings — Wrapped bushes*:

- *Part 1: Dimensions*
- *Part 2: Test data for outside and inside diameters*
- *Part 3: Lubrication holes, grooves and indentations*
- *Part 4: Materials*

The following parts are under preparation:

- *Part 5: Checking the outside diameter*
- *Part 6: Checking the inside diameter*
- *Part 7: Measurement of wall thickness of thin-walled half-bearings and thin-walled bushes*

Plain bearings — Wrapped bushes —

Part 1: Dimensions

1 Scope

This part of ISO 3547 specifies the dimensions and designations of cylindrical and flanged wrapped bushes made of solid and multi-layer bearing material for plain bearing applications.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3547-2:2006, *Plain bearings — Wrapped bushes — Part 2: Test data for outside and inside diameters*

ISO 3547-4, *Plain bearings — Wrapped bushes — Part 4: Materials*

ISO 4378-1, *Plain bearings — Terms, definitions and classification — Part 1: Design, bearing materials and their properties*

ISO 12301, *Plain bearings — Quality control techniques and inspection of geometrical and material quality characteristics*

ISO 13715, *Technical drawings — Edges of undefined shape — Vocabulary and indication*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4378-1 apply.

4 Symbols and units

See Table 1.

Table 1 — Symbols and units

Symbol	Description	Unit
B	Width of the bush	mm
C_i	Inside chamfer	mm
C_o	Outside chamfer	mm
D_i	Inside diameter of the bush	mm
$D_{i, ch}$	Inside diameter of the bush in the ring gauge	mm
D_{fl}	Flange diameter	mm
D_H	Housing bore diameter	mm
D_o	Outside diameter of the bush	mm
D_S	Shaft diameter	mm
$d_{ch, 1}$	Diameter of the checking block or ring gauge	mm
r	Flange radius	mm
Ra	Surface roughness	μm
s_1	Thickness of the backing layer ^a	mm
s_2	Thickness of the bearing material layer ^a	mm
s_3	Wall thickness ^a	mm
s_{fl}	Flange thickness	mm

^a For bushes which are made of a single material $s_1 = s_3$ or $s_2 = s_3$.

5 Dimensions

See Figure 1 and Tables 2 to 4.

The largest dimension of the inside diameter of the bush in its pressed-in condition is obtained from the largest dimension of the bore in the housing minus twice the smallest dimension of the wall thickness, s_3 . The smallest dimension of the inside diameter of the bush in its pressed-in condition can be obtained from the smallest dimension of the bore in the housing minus twice the greatest dimension of the wall thickness, s_3 . This assumes that there is no expansion of the bore in the housing caused by pressing in the bush. In reality, the expansion depends on several factors, such as the stiffness of the housing and the bush. An example of the calculation is given in Clause 7.

The wall thickness limit deviation depends on whether or not there is a machining allowance in the bush bore and on the material type, as specified in ISO 3547-4. The preferred limit deviation series (A to E) is specified in Table 5.

Instead of the wall thickness, the inside diameter, $D_{i, ch}$, of the bush may be specified. $D_{i, ch}$ is the inside diameter of the bush, when this is pressed into a ring gauge (Test C — gauging — in accordance with ISO 3547-2:2006, see also ISO 3547-6).


For bushes which are supplied with a machined bore (Series W), the limit deviations of the inside diameter of the bush, $D_{i, ch}$, checked in a ring gauge, are given in Table 6.

In no case shall wall thickness and inside diameter be given at the same time as the dimensions that are to be checked.



The tolerance for the inside diameter, $D_{i, ch}$, of the bush in the ring gauge is given in Table 6. The tolerance of the inside diameter of a bush pressed into a housing is found from the sum of the tolerance for, $D_{i, ch}$, and the tolerance of the housing bore. As in the case of the calculation of the inside diameter from the wall thickness, it is assumed that there is no expansion of the housing bore.

Dimensions for the outside diameter, D_o , of the bush are given in Table 7.

Dimensions in millimetres

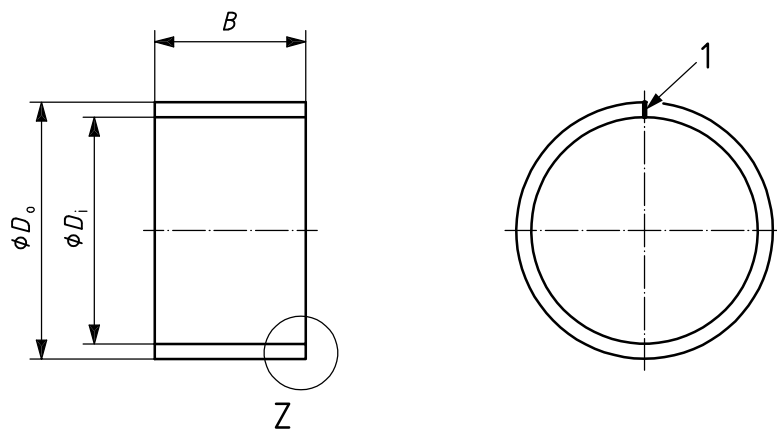

Type C cylindrical bush

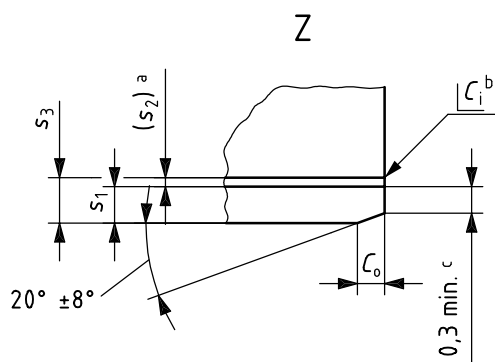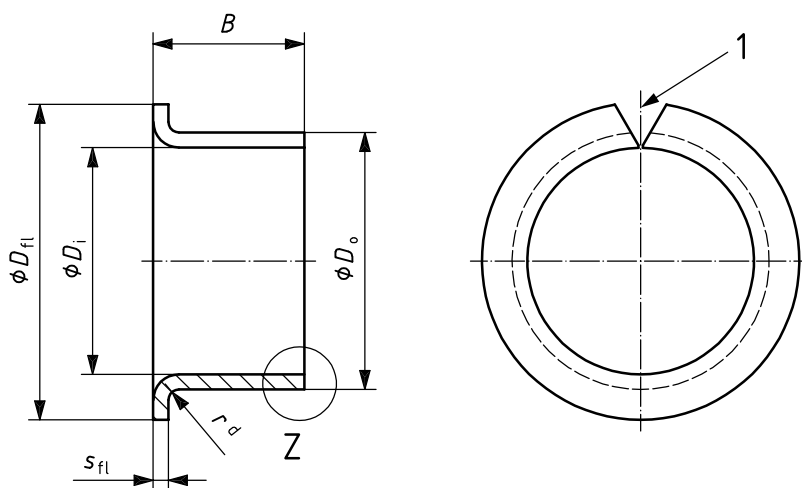

Type F flanged bush

Key

- 1 split
- a Thickness of the bearing material layer: only valid as a basis for calculation in accordance with ISO 3547-2.
- b C_i may be a chamfer or break edge, in accordance with ISO 13715.
- c 0,2 mm min. for nominal wall thickness 0,5 mm.
- d $r_{max} = s_3$

Figure 1 — Cylindrical and flanged bush

Table 2 — Preferred nominal dimensions for inside diameter, D_i , outside diameter, D_o , wall thickness, s_3 , and bush width, B

Dimensions in millimetres

$s_3 = 0,5$													
D_i	D_o	s_3	B										
			3	4	5	6	8	10	12				
2	3	0,5	a		a								
3	4	0,5	a		a	a							
4	5	0,5	a	a		a							
5	6	0,5			a			a	a				
6	7	0,5		a			a	a	a				
8	9	0,5					a	a	a	a		a	
10	11	0,5							a	a	a	a	
$s_3 = 0,75$													
D_i	D_o	s_3	B										
			3	4	5	6	7	8	10				
2	3,5	0,75	a		a								
3	4,5	0,75	a		a	a							
4	5,5	0,75	a	a		a						a	
$s_3 = 1,0$													
D_i	D_o	s_3	B										
			3	4	5	6	7	8	10	12	15	20	25
3	5	1,0	a	a	a	a							
4	6	1,0	a	a		a							
6	8	1,0			a	a	a	a	a				
7	9	1,0			a		a		a	a			
8	10	1,0			a	a	a	a	a	a			
9	11	1,0							a				
10	12	1,0				a	a	a	a	a	b	b	
12	14	1,0				a	a	a	a	a	b	b	b
13	15	1,0							a		b	b	
14	16	1,0							a	a	b	b	b
15	17	1,0							a	a	b	b	b
16	18	1,0							a	a	b	b	b
17	19	1,0									b	b	
18	20	1,0							a		b	b	b

Table 2 (continued)

$s_3 = 1,5 \text{ mm}$													
D_i	D_o	s_3	B										
			8	10	12	15	20	25	30	40			
8	11	1,5		b	b								
10	13	1,5		a	a	a	a						
12	15	1,5		b	b	b							
13	16	1,5		b	b	b	b						
14	17	1,5		b	b	b	b						
15	18	1,5		a	a	a	a	a					
16	19	1,5		a	a	a	b	a					
18	21	1,5				a	b	b					
20	23	1,5			a	a	b	b	b				
22	25	1,5				a	b	b	b				
24	27	1,5				a	b	b	b				
25	28	1,5				a	b	b	b				
28	31	1,5					b	b	b				
$s_3 = 2 \text{ mm}$													
D_i	D_o	s_3	B										
			15	20	25	30	40	50	60	70	80		
28	32	2,0	a	a	a	b		b					
30	34	2,0	a	a	a	b	b						
32	36	2,0		a		b	b						
35	39	2,0		a		b	b	b					
37	40	2,0		a		b	b						
38	42	2,0		a		b	b						
40	44	2,0		a		b	b	b					
$s_3 = 2,5 \text{ mm}$													
D_i	D_o	s_3	B										
			20	25	30	40	50	60	70	80	100	115	
45	50	2,5	a		a	b	b						
50	55	2,5	a	a	a	b	b	b					
55	60	2,5	a		a	b		b					
60	65	2,5	a		a	b	b		c				
65	70	2,5			a		b		c				
70	75	2,5			a		b		c				
75	80	2,5				b		b		c			
80	85	2,5				b		b		c	c		
85	90	2,5				b		b		c	c		

Table 2 (continued)

D_i	D_o	s_3	B									
			20	25	30	40	50	60	70	80	100	115
90	95	2,5				b		b			c	
95	100	2,5						b			c	
100	105	2,5					b	b			c	c
105	110	2,5						b			c	c
110	115	2,5						b			c	c
115	120	2,5					b	b	b		c	
120	125	2,5					b	b			c	
125	130	2,5						b			c	
130	135	2,5						b			c	
135	140	2,5						b		b	c	
140	145	2,5						b			c	
150	155	2,5						b		b	c	
160	165	2,5						b		b	c	
170	175	2,5									c	
180	185	2,5									c	
200	205	2,5									c	
220	225	2,5									c	
250	255	2,5									c	
300	305	2,5									c	

Limit deviations for B :

a $\pm 0,25$

b $\pm 0,5$

c $\pm 0,75$

Bush widths B outside the tolerance ranges a, b or c should be agreed between the manufacturer and user and stated after the nominal sizes in the standard designation.

If it is necessary to use non-standard widths B , then these should be arranged to have an end figure of 2, 5 and 8 up to $D_i = 50$ mm, and an end figure of 5 over $D_i = 50$ mm. Check bush width B in accordance with ISO 12301.

Table 3 — Preferred nominal dimensions and limit deviations for wrapped flanged bushes

Dimensions in millimetres

D_i	D_o	s_3	D_{fl}		S_{fl}	r_{max}	B																				
			nominal	limit deviation			4	5,5	7	7,5	8	9	9,5	11,5	12	16	16,5	17	21,5	22	26						
6	8	1	12	+0,5 -0,8	1,05 0,80	1	a				a																
8	10	1	15			1		a		a			a														
10	12	1	18			1			a			a			a					b							
12	14	1	20			1			a			a			a					b							
14	16	1	22			1									a					b							
15	17	1	23			1						a			a					b							
16	18	1	24			1									a					b							
18	20	1	26			1									a					b				b			
20	23	1,5	30	+1 -0,8	1,6	1,5							a				a		b								
25	28	1,5	35		1,3	1,5								a				a		b							
30	34	2	42	+2 -0,8	2,1	2										a							b				
35	39	2	47			1,8	2										a							b			
40	44	2	52		1,8	2										a							b				
45	50	2,5	58		2,6 2,3	2,5											a							b			

Limit deviations for B :

a $\pm 0,25$

b $\pm 0,5$

Table 4 — Outside, C_o , and inside, C_i , chamfers

Dimensions in millimetres

Wall thickness s_3 Nominal dimension	Chamfer		C_i
	C_o machined	rolled	
0,5	0,2 \pm 0,1		-0,05 -0,30
0,75	0,5 \pm 0,3	0,5 \pm 0,3	-0,1 -0,4
1	0,6 \pm 0,4	0,6 \pm 0,4	-0,1 -0,6
1,5	0,6 \pm 0,4	0,6 \pm 0,4	-0,1 -0,7
2	1,2 \pm 0,4	1,0 \pm 0,4	-0,1 -0,7
2,5	1,8 \pm 0,6	1,2 \pm 0,4	-0,2 -1,0

For bushes which have to be machined to size in the bush bore, C_i should be made correspondingly bigger.

C_o may be machined or rolled at the option of the manufacturer.

C_i may be a chamfer or break edge in accordance with ISO 13715.

Table 5 — Nominal dimensions and limit deviations for wall thickness, s_3

Dimensions in millimetres

Nominal dimension	Limit deviations for s_3					
	No machining allowance in bush bore			Machining allowance in bush bore		
	Series A	Series B	Series D	Series C	Series E	
0,5	0 -0,015	0 -0,030	—	—	—	
0,75	0 -0,015	0 -0,020	—	+ 0,25 + 0,15	—	
1	0 -0,015	+ 0,005 -0,020	- 0,020 -0,045	+ 0,25 + 0,15	+ 0,11 + 0,07	
1,5	0 -0,015	+ 0,005 -0,025	- 0,025 -0,055	+ 0,25 + 0,15	+ 0,11 + 0,07	
2	0 -0,015	+ 0,005 -0,030	- 0,030 -0,065	+ 0,25 + 0,15	+ 0,11 + 0,07	
2,5	$D_o \leq 80$	0 -0,020	+ 0,005 -0,040	- 0,040 -0,085	+ 0,30 + 0,15	+ 0,14 + 0,07
	$80 < D_o \leq 120$	0 -0,025	- 0,010 -0,060			
	$D_o > 120$	0 -0,030	- 0,035 -0,085			

Depending on the manufacturing process used, the back of bushes can show isolated slight depressions. The thickness of the walls shall, therefore, be measured at places away from these depressions.

Table 6 — Series W — Limit deviations for inside diameter, $D_{i, ch}$, of bush in ring gauge in accordance with ISO 3547-2

Dimensions in millimetres

D_i nominal		Limit deviations for $D_{i, ch}$
	≤ 10	+ 0,036 0
> 10	≤ 18	+ 0,043 0
> 18	≤ 30	+ 0,052 0
> 30	≤ 50	+ 0,062 0
> 50	≤ 80	+ 0,074 0
> 80	≤ 120	+ 0,087 0
> 120	≤ 175	+ 0,100 0

The concentricity of the inside and outside diameters of the bush should be 0,05 mm, unless otherwise agreed.

Table 7 — Dimensions and limit deviations for outside diameter, D_o

Dimensions in millimetres

D_o nominal		Limit deviations for bushes made of	
		steel, steel/backed material	aluminium alloys, copper alloys, aluminium alloy backed material, copper alloy backed material
	≤ 10	+ 0,055 + 0,025	+ 0,075 + 0,045
> 10	≤ 18	+ 0,065 + 0,030	+ 0,080 + 0,050
> 18	≤ 30	+ 0,075 + 0,035	+ 0,095 + 0,055
> 30	≤ 50	+ 0,085 + 0,045	+ 0,110 + 0,065
> 50	≤ 80	+ 0,100 + 0,055	+ 0,125 + 0,075
> 80	≤ 120	+ 0,120 + 0,070	+ 0,140 + 0,090
> 120	≤ 180	+ 0,170 + 0,100	+ 0,190 + 0,120
> 180	≤ 305	+ 0,255 + 0,125	+ 0,245 + 0,145

6 Design

In its free state, a wrapped bush might not be perfectly cylindrical and its split can be open. After it has been pressed into its housing, in general, a wrapped bush is round and its split is closed. Wrapped bushes can be closed by an interlocked split. The design of the split is left at the discretion of the manufacturer.

Wrapped bushes are supplied with or without a machining allowance in the bore. Bushes supplied with a machining allowance are finish-machined to the desired dimensions by the customer after they have been pressed into their housings. Such bushes cannot be supplied in all materials.

Wrapped bushes which comply with this part of ISO 3547 are supplied in the limit deviations series A to E, as specified in Table 5, and Series W, as specified in Table 6.

Lubrication holes, lubrication grooves or lubrication indents should preferably be designed such that they can be stamped or punched. Distortion caused by the wrapping operation is permissible. All edges and corners shall be free from loose burrs. Burrs which do not affect installation or function are permissible.

ISO 3547-2:2006, Test B, does not stipulate any figure for outside diameter, D_o . In order to obtain a sufficiently tight fit of the bush in the housing bore when using test B, experimentally determined gauge inside diameters are used. These depend on the method of manufacture and cannot therefore apply in every single case. Specification of a maximum and minimum pressing in force increases the safety of this test method. The details of test should be agreed for each individual case.

The tolerance class of the housing bore diameter is given in Table 8.

Table 8 — Tolerance class of the housing bore diameter, D_H

Dimensions in millimetres

D_i Nominal		Tolerance class of housing bore D_H
	≤ 4	H 6
> 4	≤ 75	H 7
> 75		H 7

Selection of the tolerance class of the shaft will depend on the material type and application

The recommended surface roughness of the housing bore is Ra 1,6 to 3,2 μm and of the shaft Ra 0,2 to 0,4 μm .

Surface roughness values are given in accordance with Table 9.

Table 9 — Surface roughness, Ra , for bushes (in accordance with ISO 4288)

Surface	Ra μm				
	A	B	Series C/E	D	W
Bearing bore, D_i	0,8	1,6 ^a	6,3	1,6	1,6
Back of bearing, D_o	1,6	1,6	1,6	1,6	1,6
Other surfaces	25	25	25	25	25

^a For bushes made of B1 and P1 material according to ISO 3547-4, $Ra \leq 6,3 \mu\text{m}$.

7 Example for calculation of inside diameter, D_i

Calculation of the size limits of inside diameter, D_i , in the pressed in condition of a bush of nominal outside diameter of 34 mm and nominal wall thickness of 2 mm:

$$\text{bore diameter of housing} \quad D_H = \left(34 \begin{smallmatrix} +0,025 \\ 0 \end{smallmatrix} \right) \text{ mm}$$

$$\text{outside diameter of bush} \quad D_o = \left(34 \begin{smallmatrix} +0,085 \\ +0,045 \end{smallmatrix} \right) \text{ mm}$$

$$\text{wall thickness of bush} \quad s_3 = \left(2 \begin{smallmatrix} 0 \\ -0,015 \end{smallmatrix} \right) \text{ mm}$$

$$D_{i,\max} = 34,025 - (2 \times 1,985) = 30,055 \text{ mm}$$

$$D_{i,\min} = 34,000 - (2 \times 2,000) = 30,000 \text{ mm}$$

As a result of interference fit there will be a small expansion of the housing bore diameter, D_H , after assembly of the bush. This will depend on the rigidity of the housing.

For rigid housing bores (steel), a figure of approximately one sixth of the difference between the mid-limit of the bush outside diameter, D_o , and the mid-limit of the diameter of the housing bore may be taken for the expansion of the housing bore due to the pressing in of the bush.

8 Designation

The following are examples of the designation of bushes conforming to ISO 3547.

EXAMPLE 1 A wrapped cylindrical bush (Type C) of inside diameter $D_i = 30$ mm, wall thickness deviation limit Series A, having an outside diameter $D_o = 34$ mm and width $B = 20$ mm, made of a multi-layer material, code S5, in accordance with ISO 3547-4, with a lubrication hole and a circumferential groove of design M1A, and with lubrication indentations of design N1B, in accordance with ISO 3547-3, and where ISO 3547-2:2006, test A, and wall thickness measurements are specified, is designated as follows:

Bush ISO 3547 — C30 A 34 × 20 — S5 — M1A N1B — AS

NOTE "S" signifies the required wall thickness measurement in accordance with ISO 3547-7.

EXAMPLE 2 A wrapped flanged bush (Type F) of inside diameter $D_i = 30$ mm, wall thickness deviation limit Series B, having an outside diameter $D_o = 34$ mm and width $B = 16$ mm, made of a multi-layer material, code P1, in accordance with ISO 3547-4, and where ISO 3547-2:2006, Tests A and C, are specified, is designated as follows:

Bush ISO 3547 — F30 B 34 × 16 — P1 — AC

EXAMPLE 3 A wrapped cylindrical bush (Type C) of inside diameter $D_i = 30$ mm, wall thickness deviation limit Series W, having an outside diameter $D_o = 34$ mm and width $B = 20$ mm, made in a single material, code Y1, in accordance with ISO 3547-4, and where ISO 3547-2:2006, Tests A and C, are specified, is designated as follows:

Bush ISO 3547 — C30 W 34 × 20 — Y1 — AC

Bibliography

- [1] ISO 4288, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Rules and procedures for the assessment of surface texture*

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.