

BS ISO 3676:2012



BSI Standards Publication

# Packaging — Complete, filled transport packages and unit loads — Unit load dimensions

**bsi.**

...making excellence a habit.™

**National foreword**

This British Standard is the UK implementation of ISO 3676:2012.

The UK participation in its preparation was entrusted to Technical Committee PKW/0, Packaging.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012. Published by BSI Standards Limited 2012

ISBN 978 0 580 66511 0

ICS 55.020

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2012.

**Amendments issued since publication**

Date	Text affected
------	---------------

---

INTERNATIONAL  
STANDARD

**ISO**  
**3676**

Second edition  
2012-10-15

---

---

**Packaging — Complete, filled  
transport packages and unit loads —  
Unit load dimensions**

*Emballages — Emballages d'expédition complets et pleins et charges  
unitaires — Dimensions d'unité de charge*



Reference number  
ISO 3676:2012(E)

© ISO 2012



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3676 was prepared by Technical Committee ISO/TC 122, *Packaging*.

This second edition cancels and replaces the first edition (ISO 3676:1983), which has been technically revised.

## Introduction

A single overall system based on a common module is unlikely to cover all packaged goods in the world, because of substantial differences in the sizes, shapes, and densities of the products, great variety in handling devices, regional government legislation, etc.

However, the application of such a system is a long-term policy goal, assuming that this does not lead to the exclusion of commodity dimensions and goods which are compatible with the modular system.

A standardized unit-load dimension is intended to prevent inadvertent over-sizing, and thus jamming against internal walls, or under-sizing, and thus wasting cargo vehicle space and/or rendering the load susceptible to transit damage.


Determining acceptable deviations in dimensions of unit loads is a complex matter, since the dimensions of the transport package, and thus the load itself, tend to change during filling, handling, warehousing, and transport. See Figure 1.

One factor affecting the measurement of the unit load is load bulge (filling, compression, and settling bulge). Factors influencing the load bulge are transport package materials, nature of contents, length of time in storage, moisture and temperature conditions, and transit conditions.

Another cause of unit load enlargement is stacking irregularity (unitizing inefficiency, out-of-line stacking, and out-of-square stacking) which occurs frequently and particularly in manual formation of the transport package layers in a unit load.

Such factors, which tend to change the plan dimensions of the unit load, cannot always be avoided but they are to be controlled by providing a dimensional deviation for the standardized unit loads.

When choosing transport package materials and when adding subsequent layers of transport packages to complete the unit load, it is to be ensured that the resulting overall length and width dimensions do not exceed the referenced plan dimensions of the unit load, at any stage of the distribution chain.

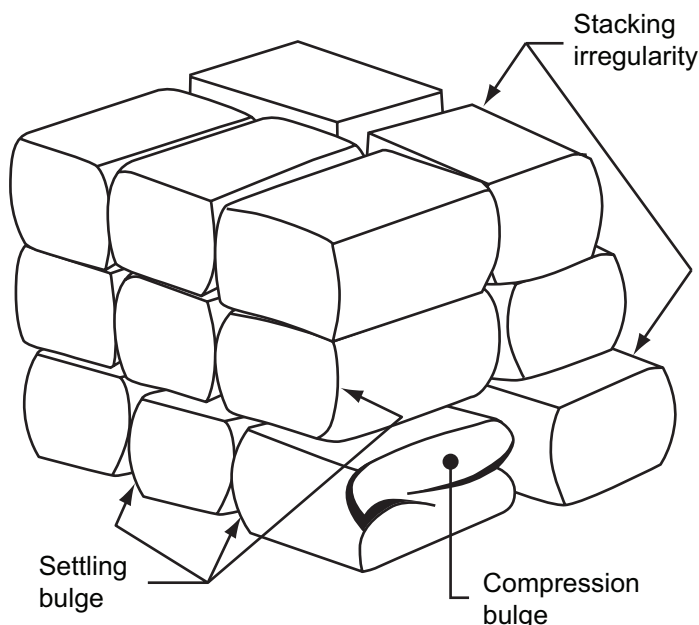

**Figure 1 — Dimensional deviations for unit loads**

# Packaging — Complete, filled transport packages and unit loads — Unit load dimensions

## 1 Scope

This International Standard is based on the concept of a modular system and specifies the plan dimensions for unit loads suitable for the distribution of goods, which comprises all activities for the movement of products from their origin to their destination.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1496-1, *Series 1 freight containers — Specification and testing — Part 1: General cargo containers for general purposes*

ISO 21067, *Packaging — Vocabulary*

EN 284, *Swap bodies — Non-stackable swap bodies of class C — Dimensions and general requirements*

EN 452, *Swap bodies — Swap bodies of Class A — Dimensions and general requirements*

CEN/TS 13853, *Swap bodies for combined transport — Stackable swap bodies type C 745-S16 — Dimensions, design requirements and testing*

CEN/TS 14993, *Swap bodies for combined transport — Stackable swap bodies type A 1371 — Dimensions, design requirements and testing*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21067 and the following apply.

### 3.1

#### **distribution of goods**

movement of products from their point of origin to their destination and consisting of the following basic elements: packaging, unit loads, material-handling systems, storage facilities and means of transportation

### 3.2

#### **system**

entity consisting of interdependent components

### 3.3

#### **modular system**

system consisting of components which are related to the module

### 3.4

#### **plan dimensions**

dimensions of the rectangle defined on a horizontal surface by the four vertical planes intersecting at right angles which enclose a unit load free-standing on that surface

NOTE See Figure 2.

**3.5**  
**module**

reference measurement to which the dimensions of the components of the distribution system can be related arithmetically

**3.6**  
**unit load**

items or packages held together by one or more means and shaped or fitted for handling, transporting, stacking and storing as a unit

NOTE The term is also used to describe a single large item suitable for the same purpose.

## **4 Plan dimensions**

### **4.1 Dimensions: 1 200 mm × 1 000 mm**

The plan dimensions of the preferred modular unit load shall be 1 200 mm × 1 000 mm. This unit load is derived from the basic 600 mm × 400 mm module, and as such it is an element of the modular distribution system.

### **4.2 Dimensions: 1 200 mm × 800 mm**

This International Standard also recognizes the plan dimensions of 1 200 mm × 800 mm for a unit load.

### **4.3 Dimensions: 1 100 mm × 1 100 mm**

This International Standard also recognizes the plan dimensions of 1 100 mm × 1 100 mm for square unit loads.

### **4.4 Dimensions: 1 219 mm × 1 016 mm**

The International Standard also recognizes the plan dimensions of 1 219 mm × 1 016 mm for a unit load.



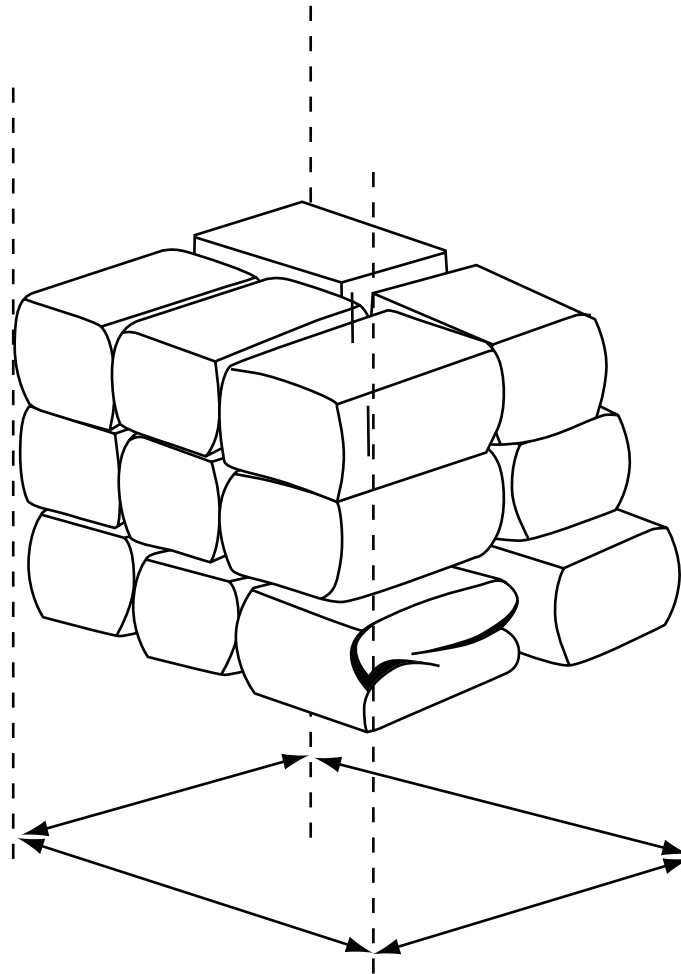


Figure 2 — Plan dimensions

## 5 Dimensional deviations

### 5.1 Nominal dimensions

The plan dimensions of the modular unit load outlined in 4.1 and the other two unit loads specified in 4.2, 4.3, and 4.4 are nominal dimensions.

### 5.2 Maximum dimensions

The permissible maximum dimensions, as the deviation from the nominal dimensions defined in 4.1, 4.2, 4.3, and 4.4, shall be defined considering the width of the road vehicle, freight container, etc.

The permissible maximum dimensions of the unit load shall be based on ISO 1496-1, EN 284, EN 452, CEN/TS 13853 and CEN/TS 14993. See Annex A for an example.

## Annex A (informative)

### Example of the way to define the maximum unit load dimensions

#### A.1 How to define the maximum unit load dimensions

Table A.1 shows how to define the maximum unit load dimensions based on 5.2.

**Table A.1 — Example of how to define the maximum unit load dimensions**

All units expressed in millimetres

Area using wide type container and road vehicle. For example, the width of container and/or road vehicle is about 2,55 m <sup>a</sup> .	Area using ISO series 1 freight container and road vehicle whose width is maximum 2,5 m <sup>b</sup> .
Based on EN 284, EN 452, CEN/TS 13853, CEN/TS 14993.	Based on ISO 1894, which was withdrawn and replaced by ISO 1496-1.
1 200 × 1 000 1 200 × 800	1 240 × 1 040 <sup>c</sup> 1 140 × 1 140
<sup>a</sup> The area is assumed to use the containers and road vehicles, in order to put the unit load of 1 200 mm inside in parallel.	
<sup>b</sup> The area is assumed to use the ISO series 1 freight containers and road vehicles. The total width of the unit loads, which were put in two lines inside of the series 1 freight container, is 2 280 mm (i.e. work allowance is 50 mm), in order to fit the minimum inside width of 2 330 mm of an ISO series 1 freight container.	
<sup>c</sup> It is assumed that 1 240 mm and 1 040 mm are combined and equal to 2 280 mm and loaded inside of the container and road vehicle. It is necessary to set the maximum dimension of 1 200 mm × 1 000 mm when unit loads are transported to areas using wide type containers and road vehicles.	

## Bibliography

- [1] ISO 1894<sup>1)</sup>, *General purpose series 1 freight containers — Minimum internal dimensions*
- [2] ISO 3394, *Packaging — Completed, filled transport packages and unit loads — Dimensions of rigid rectangular packages*
- [3] ISO 6780, *Flat pallets for intercontinental materials handling — Principal dimensions and tolerances*

---

1) Withdrawn and replaced by ISO 1496-1:1990.





# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™