

Hydrometry — Echo sounders for water depth measurements

ICS 17.120.20

National foreword

This British Standard was published by BSI. It is the UK implementation of ISO 4366:2007.

The UK participation in its preparation was entrusted by Technical Committee CPI/113, Hydrometry, to Subcommittee CPI/113/5, Measuring instruments and equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 29 June 2007

© BSI 2007

ISBN 978 0 580 52947 4

Amendments issued since publication

Amd. No.	Date	Comments

INTERNATIONAL
STANDARD

ISO
4366

Second edition
2007-05-15

**Hydrometry — Echo sounders for water
depth measurements**

*Hydrométrie — Sondeurs à écho pour le mesurage de la profondeur de
l'eau*



Reference number
ISO 4366:2007(E)

Contents

	Page
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Units of measure	1
5 Principles of operation	1
5.1 General	1
5.2 Theory of operation	2
5.3 System components	2
5.4 Non-recording echo sounders	3
5.5 Analog recording echo sounders	3
5.6 Digital echo sounders	4
6 Selection of instrument	6
6.1 General	6
6.2 Effect of operating frequency	6
6.3 Effect of beamwidth	7
6.4 Type of data display	8
6.5 Accuracy	8
6.6 Type of transducer system	8
7 Instruments performance criteria	9
7.1 General	9
7.2 Information to be specified by the user	9
7.3 Information to be specified by the manufacturer	9
7.4 Housing	10
7.5 Additional features	10
8 Field use of echo sounders	11
8.1 Calibration	11
8.2 Interpretation of data	12
8.3 Precautions	12
9 Operations manual	12
Bibliography	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4366 was prepared by Technical Committee ISO/TC 113, *Hydrometry*, Subcommittee SC 5, *Instruments, equipment and data management*.

This second edition cancels and replaces the first edition (ISO 4366:1979), which has been technically revised.

Hydrometry — Echo sounders for water depth measurements

1 Scope

This International Standard provides information concerning the principles of operation, selection and performance criteria for echo sounders used in depth measurements for open-channel flow (and related) measurements. The use of standard terminology is promoted.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 772, *Hydrometric determinations — Vocabulary and symbols*

ISO 6420, *Liquid flow measurement in open channels — Position fixing equipment for hydrometric boats*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 772 and the following apply.

3.1

tracking window

vertical distance of limited size that follows and automatically centres itself on the depth indicated by the last received echo

NOTE If the next echo falls within the window, the signal is accepted as correct; if it does not, the signal is rejected. The purpose of a tracking window is to screen out erroneous readings caused by reflecting materials in the water (fish, debris, etc.).

4 Units of measure

The units of measurement used in this International Standard are SI units and decibels.

5 Principles of operation

5.1 General

The state-of-the-art of echo sounders is well advanced, and sounders have been put into widespread use for many different applications. Consequently, a variety of specialized echo sounders have evolved to best meet the specific requirements of the application. A digital echo sounder with an integrated analog chart generated by a thermal or inkjet print head is the most common echo sounder used for open-channel applications. Multiple-transducer systems are in common use by many professional surveyors and the use of single-transducer, multibeam-swath systems is expanding rapidly.

5.2 Theory of operation

The echo sounder is an electroacoustic instrument that determines the depth of water by measuring the time required for a burst of acoustic energy to travel from a transducer to the streambed and reflect back to the transducer (Figure 1). The travel time of the reflected wave can be converted to distance by use of the following equation:

$$d = \frac{vt}{2} + k + d_r \quad (1)$$

where

d is the distance from the reference water surface to the streambed;

v is the average velocity of sound in the water column;

t is the travel time of the acoustic energy from the transducer to the bottom and back to the transducer;

k is the system index constant;

d_r is the distance from the reference water surface to the transducer (draft).

NOTE All distance units are consistent.

The velocity of sound varies with the density and elastic properties of the water, which are primarily a function of the water temperature and suspended or dissolved constituents (i.e. salinity). Large variations in temperature and/or salinity with depth are not uncommon. For practical depth measurement with an echo sounder, the velocity of sound is usually determined by calibration (see 8.1), since measuring and correcting for the actual variation at each depth interval is difficult.


The travel time of the acoustic energy is recorded either electronically by a digital echo sounder or graphically by an analog chart echo sounder. The shape, or sharpness, of the reflected acoustic energy pulse plays a significant role in the accuracy of a depth measurement (Figure 1). The shape and magnitude of the reflected energy pulse is a function of the acoustic attenuation, background noise and acoustic reflectivity characteristics of the target.

The system index constant (k) contains all electrical and/or mechanical delays inherent in the measuring system, including return signal threshold detection variations. The system index constant also contains any constant correction due to the change in the velocity of sound between the upper surface level and the average velocity used for the site. Therefore, the draft (d_r), set during calibration, is not necessarily the actual draft of the transducer that would be obtained by a physical measurement from the water surface to the transducer, but also includes corrections for the system index constant determined during on-site calibration.

5.3 System components

The echo sounder consists of two elements: the electronic assembly, which usually includes a display and/or recording device, and the acoustic assembly commonly called the transducer. The electronic circuitry generates high frequency electrical energy and provides regulated bursts of this energy to the transducer. When a burst of energy is released, time is measured until the reflected energy is received, then Equation (1) is solved and the depth is displayed or recorded.

The transducer is an electroacoustic assembly that acts as a two-way energy conversion device. During transmission, it converts pulses of electrical energy into pulses of acoustic energy that travel through the water to the bottom. During reception, it receives the reflected acoustic energy (echo) from the streambed and converts it into electrical energy for processing by the electronic circuits.

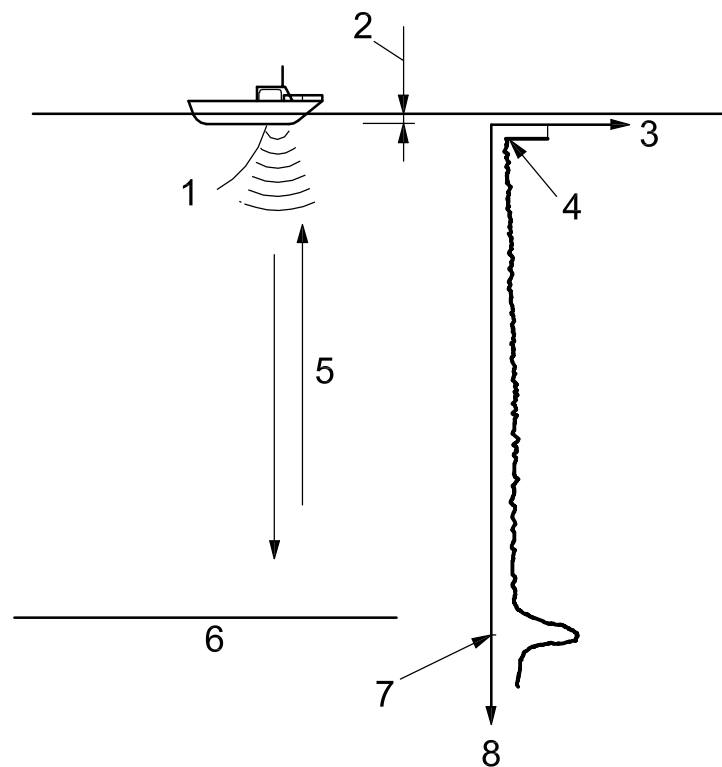

Key

- 1 depthsounder transducer
- 2 draft
- 3 signal
- 4 time acoustic pulse is transmitted
- 5 reduced energy
- 6 acoustically reflective bottom
- 7 time reflected pulse is received, $(\frac{2}{v})(\text{depth} - k - d_r)$
- 8 time

Figure 1 — Illustration of an acoustic depth measurement [2]

5.4 Non-recording echo sounders

The most common type of non-recording echo sounder has a liquid crystal display (LCD) that displays the depth numerically. Many of these echo sounders also display the return echo graphically and are commonly used as fish finders by fishermen. The numerical depth determination requires the same processing as a digital echo sounder (see 5.6). The non-recording echo sounders typically have wider beamwidth transducers and no calibration adjustments, resulting in a lower accuracy than survey-grade digital echo sounders. Some of the non-recording echo sounders digitally output the depth to an external device through a serial communications port.

5.5 Analog recording echo sounders

Traditionally, analog recording echo sounders have used an electric timing motor to rotate a stylus at a constant speed across heat-sensitive paper. When the stylus passes over the zero contact, it burns a mark on the paper and simultaneously triggers the release of acoustic energy. The stylus continues to move until reflected acoustic energy is received at the transducer generating an electrical current that is applied to the stylus to cause it to burn a mark on the chart again. The stylus continues to rotate until it reaches the zero contact and the cycle is repeated. As the stylus rotates, the chart is being moved by another motor and the resulting succession of

marks made by the stylus creates a time-time graph. The stylus speed is adjusted through calibration to equal the speed at which the acoustic energy travels to the streambed and back, thus the distance between the zero mark and other marks on the chart are proportional to the distance between the transducer and the streambed. The speed at which the chart moves is arbitrary so that the chart transit does not necessarily indicate the distance the boat travelled.

Modern analog recorders, which are often combined with a digital display and output (see 5.6), use a fixed thermal or inkjet printing head in place of the rotating stylus. This helps reduce the potential synchronization error and allows electronic filters and processing algorithms to be applied to the data to compensate for the velocity of sound and allows electronic annotation of the chart. The mass, dimensions and power consumption of the fixed-head recorders are less than the rotating stylus design.

5.6 Digital echo sounders

5.6.1 General


In the digital echo sounder, acoustic pulses are released at set intervals. When an acoustic pulse is released, a counter is started and counts the output of an oscillator. When the reflected acoustic energy is received, the oscillator counts are used to measure the elapsed time and the depth is computed using Equation (1). The accuracy of the depth measurement is highly dependent on the digitization techniques and filters that are used to determine what oscillator count represents the streambed.

Digital echo sounders are the most common echo sounders available. They range from non-recording LCD units to survey-grade echo sounders that usually combine an analog recorder with a numerical display and digital output.

5.6.2 Digitization techniques

Two digitization techniques are commonly used to screen erroneous data and improve the reliability of the acoustic data. The most common technique is threshold detection. Threshold detection measures the time from transmission of the acoustic signal until the energy of the reflected energy exceeds a predetermined threshold or strength. The remaining acoustic energy is not analysed. The threshold value may be adjusted by the user on advanced echo sounders, but it is often fixed and not user selectable. A more robust technique, employed on some survey-grade echo sounders, is peak value detection. Peak value detection analyses all of the reflected energy and computes the time from acoustic release to the peak of the reflected energy or strongest signal. Figure 2 illustrates the difference between the two techniques on a sloping bed. The peak value detection technique produces a measured depth more representative of the centre of the acoustic footprint of the transducer. The peak value technique can significantly reduce the effective beamwidth of the transducer, providing a more accurate representation of the streambed directly below the transducer.

Any material such as fish, debris or air bubbles between the transducer and the streambed can reflect acoustic energy. Peak value detection is less sensitive to these unwanted reflections than threshold detection; however, nearly all survey-grade echo sounders employ techniques to reduce or eliminate erroneous readings caused by reflectors in the water column. A tracking window that rejects all signals except those within a given tolerance of the preceding depth is commonly provided. These reflections from objects in the water column are recorded on the analog chart in addition to the bottom echo. The analog chart is very valuable for verifying the accuracy of the digitized depth. Despite the techniques employed in digital echo sounders, erroneous readings are still common, particularly around obstructions such as bridge piers and sea walls. Depth measurement in such areas without an analog presentation of the data is not recommended.

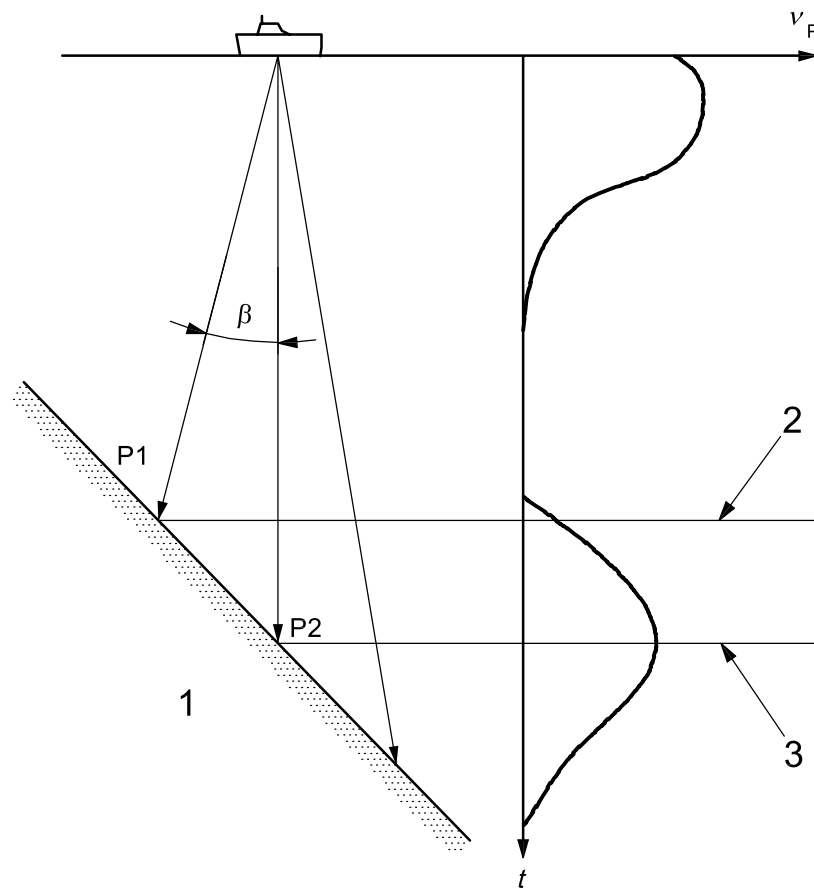**Key**

- 1 sea bottom
- 2 threshold point, v_{P1}
- 3 peak point, v_{P2}
- t time
- β beamwidth


Figure 2 — Illustration comparing threshold and peak value detection techniques

5.6.3 Multiple-transducer systems

A variety of multiple-transducer channel sweep systems have been used since the mid-1970s. These systems are designed to provide a broad area of coverage, rather than a single line, for each pass of the vessel. Channel sweep systems are simply a series of standard transducers mounted on a vessel and/or on booms attached to the vessel. Sweep systems may use any number of transducers. The spacing between the transducers is determined by the nominal water depth, transducer beamwidth, and desired overlap of the transducers' acoustic footprints. The sweep width is determined by the type of vessel. The sweep width must be optimized with vessel manoeuvrability; wide sweeps are difficult to control. Both analog and digital data may be collected. When more than eight transducers are employed, digital terrain modelling display techniques are helpful for interpreting the large amount of data collected.

5.6.4 Single-transducer swath systems

Single-transducer swath survey technology was developed in the early 1960s for deep-water bathymetric mapping. Recently, this technology has been developed and marketed for shallow-water applications. These systems employ scanning or phased-array techniques to generate a series of measurements over a given arc (Figure 3).

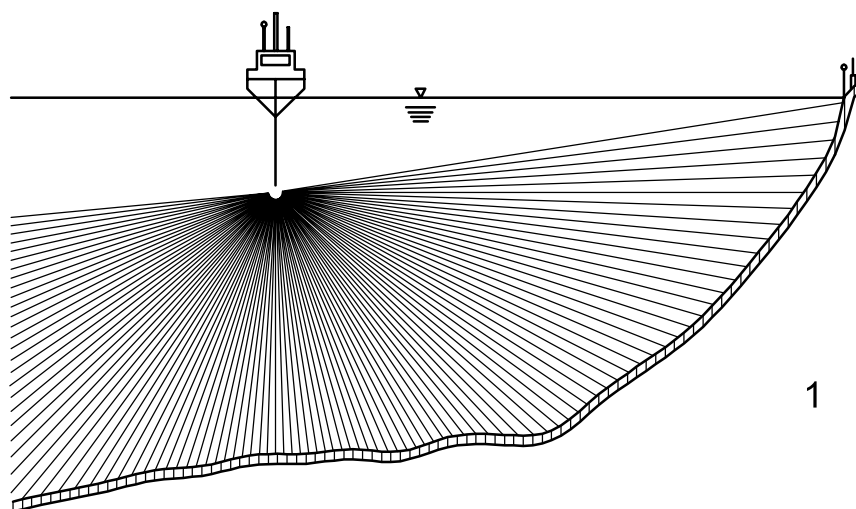

Key

1 revetment mat

Figure 3 — Illustration of measurements made in an arc by a single-transducer swath system [2]

The scanning system physically rotates a single transducer through an arc and takes measurements at specified intervals. A complete scan may take up to 40 s, but the actual time is dependent on the resolution and accuracy specified. Scanning systems that rotate about two axes are available and allow a complete circular area of the streambed to be mapped from a single location.

Phased-array systems eliminate the time lapse required by scanning systems to complete a swath because there are no moving parts. These systems typically contain up to 120 simultaneous sonar beams to form a geometrically correct cross-section profile through an arc of up to 180°. A complete cross section is sounded in a single pulse. They are capable of updating a sonar image of the cross section 30 times per second and can output a complete 120-sounding cross-section profile at a rate of over 15 profiles per second.

Single-transducer swath systems generate an enormous amount of data requiring high-speed computers and storage devices for operation. Several software and/or hardware systems are available to support bathymetric mapping with single-transducer swath systems.

6 Selection of instrument

6.1 General

There are a number of characteristics of echo sounders that must be considered in selecting an echo sounder to measure water depth. Without proper consideration of these characteristics, the data collected may not provide an accurate representation of the streambed or lakebed.

6.2 Effect of operating frequency

The frequencies commonly used for echo sounders lie in the range from 5 kHz to more than 1 000 kHz. Transmission losses associated with frequency generally restrict the maximum depth range of high frequency sounders (300 kHz) to 100 m or less. Depths encountered in open-channel flow measurements are almost always less than 100 m. High frequency echo sounders offer three advantages for open-channel work:

- a) better discrimination of abrupt changes;
- b) finer resolution of depth; and
- c) sharper definition of the bed.

In general, transducers designed for the higher frequencies have a much narrower beamwidth and therefore, better discriminate abrupt changes in the streambed.

The limiting resolution of a measurement is dependent on the spacing of the sound waves. Therefore, a higher frequency system is capable of much finer resolution than a lower frequency system. Furthermore, for flow-measuring work, the depth of the water above the top of the unconsolidated material is the desired information. Low frequency sound can penetrate unconsolidated material. Higher frequency sound is reflected from the unconsolidated bed material instead of penetrating it, thus giving a sharper, more clearly defined echo and a more distinct water-depth measurement.

6.3 Effect of beamwidth

The beamwidth of a transducer typically ranges from 3° to 20° . A beamwidth less than 8° is recommended. The beamwidth can be approximated for a circular transducer and a given frequency as:

$$\beta = \frac{65\lambda}{d_t} \quad (2)$$


where

β is the beamwidth, in degrees;

λ is the wavelength of the acoustic frequency;

d_t is the diameter of the transducer expressed in the same units as λ .

The acoustic footprint is directly related to the beamwidth. A wide beamwidth results in a large footprint and less accurate measurements on steep slopes or rapidly changing bottom (Figure 4). A narrow beamwidth is desired for measuring channel bathymetry to ensure that all the streambed features are accurately measured. A narrow beam also concentrates the energy and allows operation over a greater range than with a wide beamwidth transducer for the same energy expenditure.

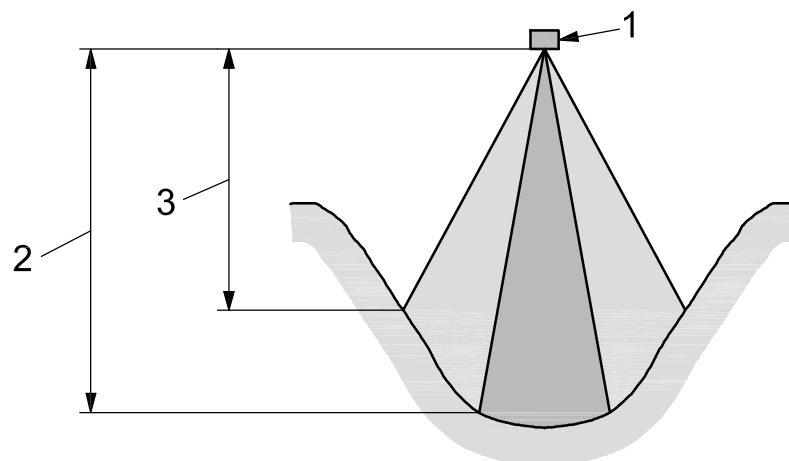

Key

- 1 transducer
- 2 depth measured by narrow-angle transducer
- 3 depth measured by wide-angle transducer

Figure 4 — Illustration of the effect of transducer beamwidth on the acoustic footprint and the potential errors resulting from wide beamwidths

6.4 Type of data display

6.4.1 Non-recording echo sounders

Normally, non-recording echo sounders have no provisions to correct for changes in the velocity of sound and overall system index. This class of echo sounder frequently comes standard with a 20° beamwidth transducer. In general, this type of sounder is not satisfactory for most data collection purposes because the accuracy is low. Such sounders can sometimes be useful for preliminary surveys.

6.4.2 Analog recording echo sounders

Provision for the correction of changes in the velocity of sound is made on the better quality recording sounders, and the accuracy of the depth measurement can be improved in comparison to non-recording devices if proper and frequent calibrations are made. If the marks on the chart of an analog recording echo sounder are sharp and if the scale of the chart is adequate, it is possible to interpret the depths to a resolution of about $\pm 0,15$ m or better.

6.4.3 Digital echo sounders

The resolution of the numerical display of a digital echo sounder should be $\pm 0,05$ m or better. If provision is made for correcting for changes in the velocity of sound and if proper and frequent calibration is performed, accuracy can be very high.

The tracking window described in 5.6.2 is a costly but necessary item for most hydrographic surveys. Digital echo sounders without this feature are not as reliable because false readings can occur frequently. To determine the validity of the digitized depth an analog chart is necessary. Nearly all survey-grade echo sounders have an analog chart in addition to the numerical display and digital output. Electronic filtering by a tracking window or other algorithms may be effective in many situations but the chart should be used to verify all digital information to avoid erroneous data. Thus, for high accuracy work, both digital and analog data should be recorded.

6.5 Accuracy

The accuracy of depths measured by echo sounders depends on a number of factors. Among these factors are readability, calibrations to correct for changes in the velocity of sound, calibration to correct for the system index, and the beamwidth and frequency of the transducer. It is impossible to determine the accuracy of echo sounders for general situations. Under ideal conditions, accuracy can approach the readability or resolutions presented in 6.4. When the accuracy required of an echo sounder is better than 1 % of the measured depth, the user should be familiar with and consider the factors described in Clause 7.

6.6 Type of transducer system

The level of detail desired, the size of the area to be surveyed, the vessel size, and cost are important factors in selecting a single-transducer, multiple-transducer, or single-transducer swath system. The single-transducer systems are roughly a tenth the cost of the single-transducer swath system, but can require considerable time to obtain detailed coverage of a large area. The multiple-transducer and single-transducer swath systems require larger vessels, typically with an environmentally controlled cabin where equipment and computers can be permanently mounted. These multiple-transducer and single-transducer swath systems also require real-time measurements of the heave, pitch, roll, and yaw of the vessel because the vessel attitude can significantly affect the data collected. The high cost of implementing a swath-type system can be offset by the reduced time required to survey a large area.

7 Instruments performance criteria

7.1 General

It is evident from the previous clauses that no one type of echo sounder can meet all potential operational requirements. Therefore, no single specification can be written for such an instrument. Nonetheless, what can be specified is the information that a prospective user should give to an instrument manufacturer and in return, the information which a manufacturer shall supply to the user, to enable the equipment to meet, as nearly as practical, the user's requirements.

7.2 Information to be specified by the user

The user should specify the following information:

- a) range of depth to be measured;
- b) anticipated characteristics of the streambed;
- c) anticipated characteristics and extent of suspended matter, if known;
- d) anticipated pollution, salinity, or other factors that might affect the velocity of sound in water;
- e) desired accuracy of the depth measurement;
- f) environmental conditions affecting instrument performance (temperature, humidity, etc.);
- g) available electrical power;
- h) distance between transducer and recorder;
- i) size and type of survey vessel;
- j) size of area to be surveyed;
- k) desired density of the depth measurements over the survey area.

7.3 Information to be specified by the manufacturer

The manufacturer should supply the following specifications:

- a) frequency or frequencies at which the equipment operates;
- b) transducer beamwidth;
- c) practical resolution of depth measurements;
- d) maximum and minimum depths the instrument will sound;
- e) frequency at which measurements are updated, the data rate;
- f) requirements for vessel attitude compensation;
- g) computer and interface requirements for data logging;
- h) anticipated accuracy of the depth measurement with regard to all of the factors listed above.

In addition, the manufacturer should provide documentation on the installation of the equipment with full instructions adequately illustrated, operation and calibration procedures, maintenance requirements, and special instructions for control of equipment environment.

7.4 Housing

Portable echo sounders are often used in open boats; thus, the electronics and display and/or chart should be housed in a splash-proof container for protection from spray and inclement weather. For multiple-transducer and single-transducer swath systems, an environmentally controlled cabin is usually required and the equipment is usually supplied in rack mountable enclosures. Transducers should be housed to minimize air entrainment.

7.5 Additional features

7.5.1 Non-recording instruments

A sensitivity control should be provided so that adjustments can be made to produce the most reliable indication of depth under varying conditions.

7.5.2 Recording instruments

7.5.2.1 Chart readability

The recorder unit should have a sufficiently wide chart so that the desired readability can be achieved. The stylus or print head should produce a clearly readable trace. Two or more selectable chart speeds should be provided so that the trace can be produced at a speed appropriate for the application. It is desirable that the recorder indicate "zero" or the initial point of signal transmission.

7.5.2.2 Viewing window

A viewing window should be provided so that the record can be monitored with the case closed.

7.5.2.3 Depth-range selector switch

The echo sounder should provide multiple depth-range settings within the maximum range of the echo sounder. The ability to set the range of the chart to a range close to the maximum depth in the study area is important to optimize the resolution and readability of the chart.

7.5.2.4 Event marker

A mark switch should be incorporated so that the operator can insert a reference mark on the record.

7.5.2.5 Sensitivity control

A sensitivity control should be provided so that changes in sensitivity of signal gain can be made in order to produce the most readable trace as water conditions and/or depths change.

7.5.2.6 Draft adjustment

The sounder should be equipped with a draft adjustment control. Such adjustment is to provide a means of correcting for the distance the transducer is placed below the water surface and to assist in calibrating the instrument.

7.5.2.7 Velocity of sound adjustment

A control should be provided for correcting for changes in the velocity of sound in water.

7.5.3 Digital instruments

7.5.3.1 Data display

The digital display should be clear and distinct. For swath-type systems, an external computer may be required to view the data.

7.5.3.2 Velocity of sound adjustment

A control shall be provided to correct for changes in the velocity of sound in water.

7.5.3.3 Tracking window

A tracking window should be provided to reject all signals except those within a given tolerance of the preceding depth.

7.5.3.4 Analog chart

Except for swath-type and some multiple-transducer systems, an analog chart should be an integral part of the digital echo sounder to provide validation of the digital data and provide feedback in setting the tracking window and sensitivity controls.

8 Field use of echo sounders

8.1 Calibration

The velocity of sound is a function of the water density and elasticity, which vary with changes in temperature, pressure, suspended solids and dissolved solids.

Therefore, since the measured depth is directly proportional to the velocity of sound, calibration of echo sounders is absolutely critical in assuring the accuracy of depth measurements.

The standard calibration method is to adjust the echo sounder to reproduce depths measured by an independent reference. The primary reference is the bar check. The bar check does not directly measure the velocity of sound, but effectively measures the comprehensive effect of the following systematic errors inherent in depth recording systems: instrument error — index, mechanical, and electrical; velocity of sound errors due to temperature, salinity, or other suspended or dissolved constituents; and static draft fluctuations resulting from varying vessel displacement caused by fuel and personnel loads. A bar check is performed by lowering a flat bar or plate, suspended by two precisely marked lines, to known depths below the transducer. Static bar comparisons should be made at 1 m to 2 m intervals throughout the range of depths at the site. Bar checks should be completed at the beginning and end of each day. More frequent calibration may be necessary if there are suspected changes in the water density or elasticity.

As a vessel's velocity increases, it generally settles ("squats") into a lower profile in the water, causing an error in depth measurement that should be corrected. A squat test determines the relation between boat speed and transducer height above or below the static sounding reference plane. A squat test is performed by using a level located on shore to sight a level rod located on the boat in the vicinity of the transducer. The boat is driven at different velocities and the rod readings recorded at each velocity to generate a boat speed to squat relation.

Stage/tidal corrections, vessel squat corrections, draft loading variances, calibration line graduation errors, or any other correction should never be entered into the depth recording device. These corrections should always be applied off-line (manually or automatically) or in the data reductions software on an onboard processor. Depth data should only be recorded relative to the bar check calibration process.

8.2 Interpretation of data

Comparing the depth from the chart with the digital record is the primary objective. Since the duration of the burst of acoustic energy is of a finite time, the stylus prints a broad mark at the zero or initial release point. The echo mark, usually a broader mark, is caused by returning acoustic energy from all distances within the acoustically illuminated area of the bed. The depth reading is obtained by reading the distance from the top (leading edge) of the zero mark to the top of the echo mark. When using a digital echo sounder, it is important to verify the digital data with the chart to ensure that the digital data accurately portray the channel bottom that is indicated on the chart and not a side echo from an object in the water column.

In addition to the depth information, the width and intensity of the echo mark provide some insight into the type of bed material. A wide trace indicates unconsolidated material while a narrow and intense trace indicates a firm bed.

Charts produced by echo sounders operating in the lower frequencies may, under some site conditions, indicate penetrations sufficiently to define both the depth and the underlying bedrock.

8.3 Precautions

Echo sounders should be used with caution where the suspended sediment concentration is high enough to cause doubt that the return signal received is from the bed. The same is true where the amount of entrained air is high, such as downstream from spillways or hydroelectric plants. Digital data should always be questioned when surveying near obstructions as these obstructions may produce side echoes strong enough to trigger the digitizer, causing erroneous water-depth measurements. Ideally, digital data should be validated by an analog chart.

The horizontal position of the depth measurement is as important as measuring the depth accurately. Errors in horizontal positioning result in an effective error in the depth of water at a given location. Therefore, selection of a positioning system is as important as the selection of an echo sounder. (See ISO 6420.)

9 Operations manual

A comprehensive operations manual should be supplied with the echo sounder. The manual should include guidance for the installation of the equipment with full instructions (adequately illustrated), operation and calibration procedures, trouble-shooting information, and maintenance requirements. It should also include special instructions for control of the equipment's environment. A list of recommended spare parts should be provided.

Bibliography

- [1] International Hydrographic Organization. *IHO Standards for Hydrographic Surveys*, Special Publication No. 44, 4th Edition, 1998
- [2] U.S. Army Corps of Engineers. *Hydrographic Surveying*, EM 1110-2-1003, 2002

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.